


D-ATIS 126.030	Apt Elev 40	Alt Set: hPa Trans level: By ATC 1. RNAV 1 2. If flying GPS D. or unable RNAV 1, inform ATC by using phraseology 'UNABLE RNAV STAR'. 3. Specified minimum level at waypoints must be adhered to unless specifically canceled by ATC. 4. If the airborne RNAV equipment fails, inform ATC as soon as possible. RADAR vectors will be provided. 5. On downwind EXPECT vectors to final.
-------------------	----------------	--

QUEEN 1D [QUEE1D], ENDER 3D [ENDE3D], INDEX 1D [INDE1D]
SPACE 2D [SPAC2D], SETHR 1D [SETH1D]
RNAV (DME/DME or GNSS) ARRIVALS
(RWY 07)

SPEED: MAX 250 KT BELOW FL030 UNLESS OTHERWISE INSTRUCTED

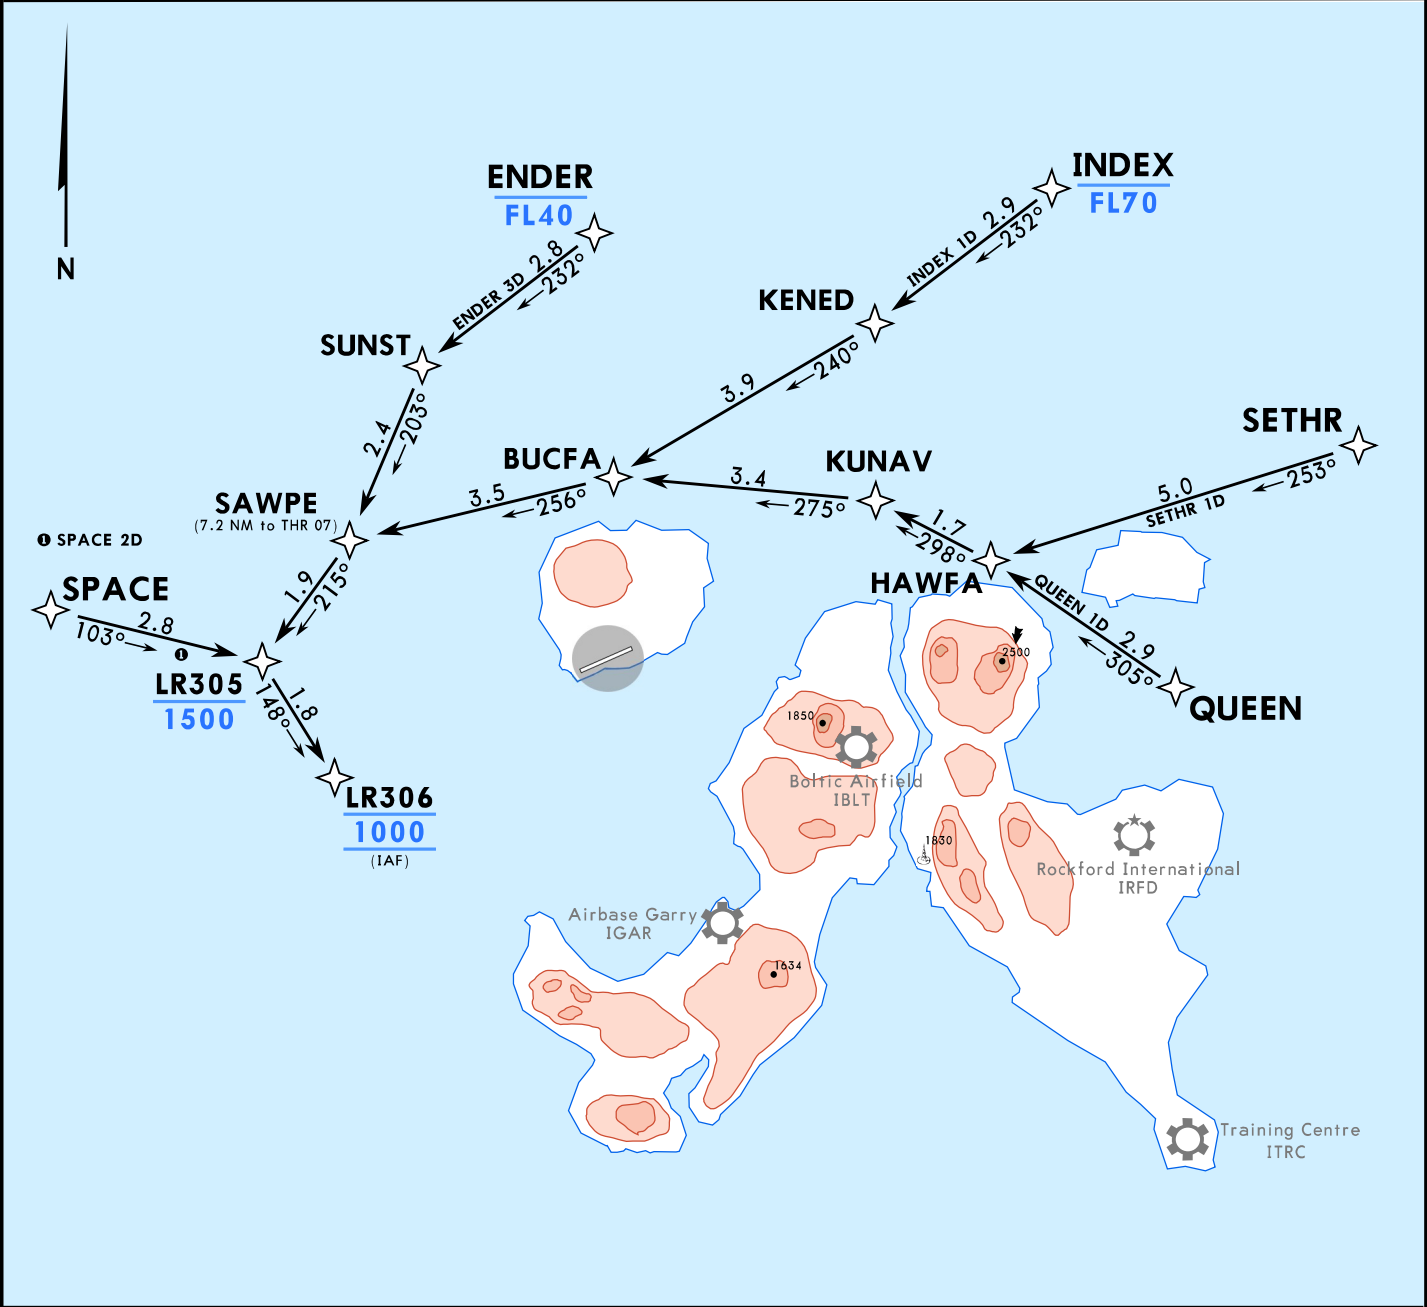

STAR	ROUTING
QUEEN 1D	QUEEN - HAWFA - KUNAV - BUCFA - SAWPE - LR305 (1500-) - LR306 (1000).
ENDER 3D	ENDER (FL40-) - SUNST - SAWPE - LR305 (1500-) - LR306 (1000).
INDEX 1D	INDEX (FL70-) - KENED - BUCFA - SAWPE - LR305 (1500-) - LR306 (1000).
SPACE 2D	SPACE - LR305 (1500-) - LR306 (1000).
SETHR 1D	SETHR - KUNAV - BUCFA - SAWPE - LR305 (1500-) - LR306 (1000-).