


D-ATIS 126.030	Apt Elev 40	Alt Set: hPa Trans level: By ATC 1. RNAV 1 2. If flying GPS D. or unable RNAV 1, inform ATC by using phraseology 'UNABLE RNAV STAR'. 3. Specified minimum level at waypoints must be adhered to unless specifically canceled by ATC. 4. If the airborne RNAV equipment fails, inform ATC as soon as possible. RADAR vectors will be provided. 5. On downwind EXPECT vectors to final.
-------------------	----------------	--

QUEEN 2K [QUEE2K], ENDER 1K [ENDE1K], INDEX 3K [INDE3K]
SPACE 2K [SPAC2K], SETHR 1K [SETH1K]
RNAV (DME/DME or GNSS) ARRIVALS
(RWY 25)

SPEED: MAX 250 KT BELOW FL030 UNLESS OTHERWISE INSTRUCTED

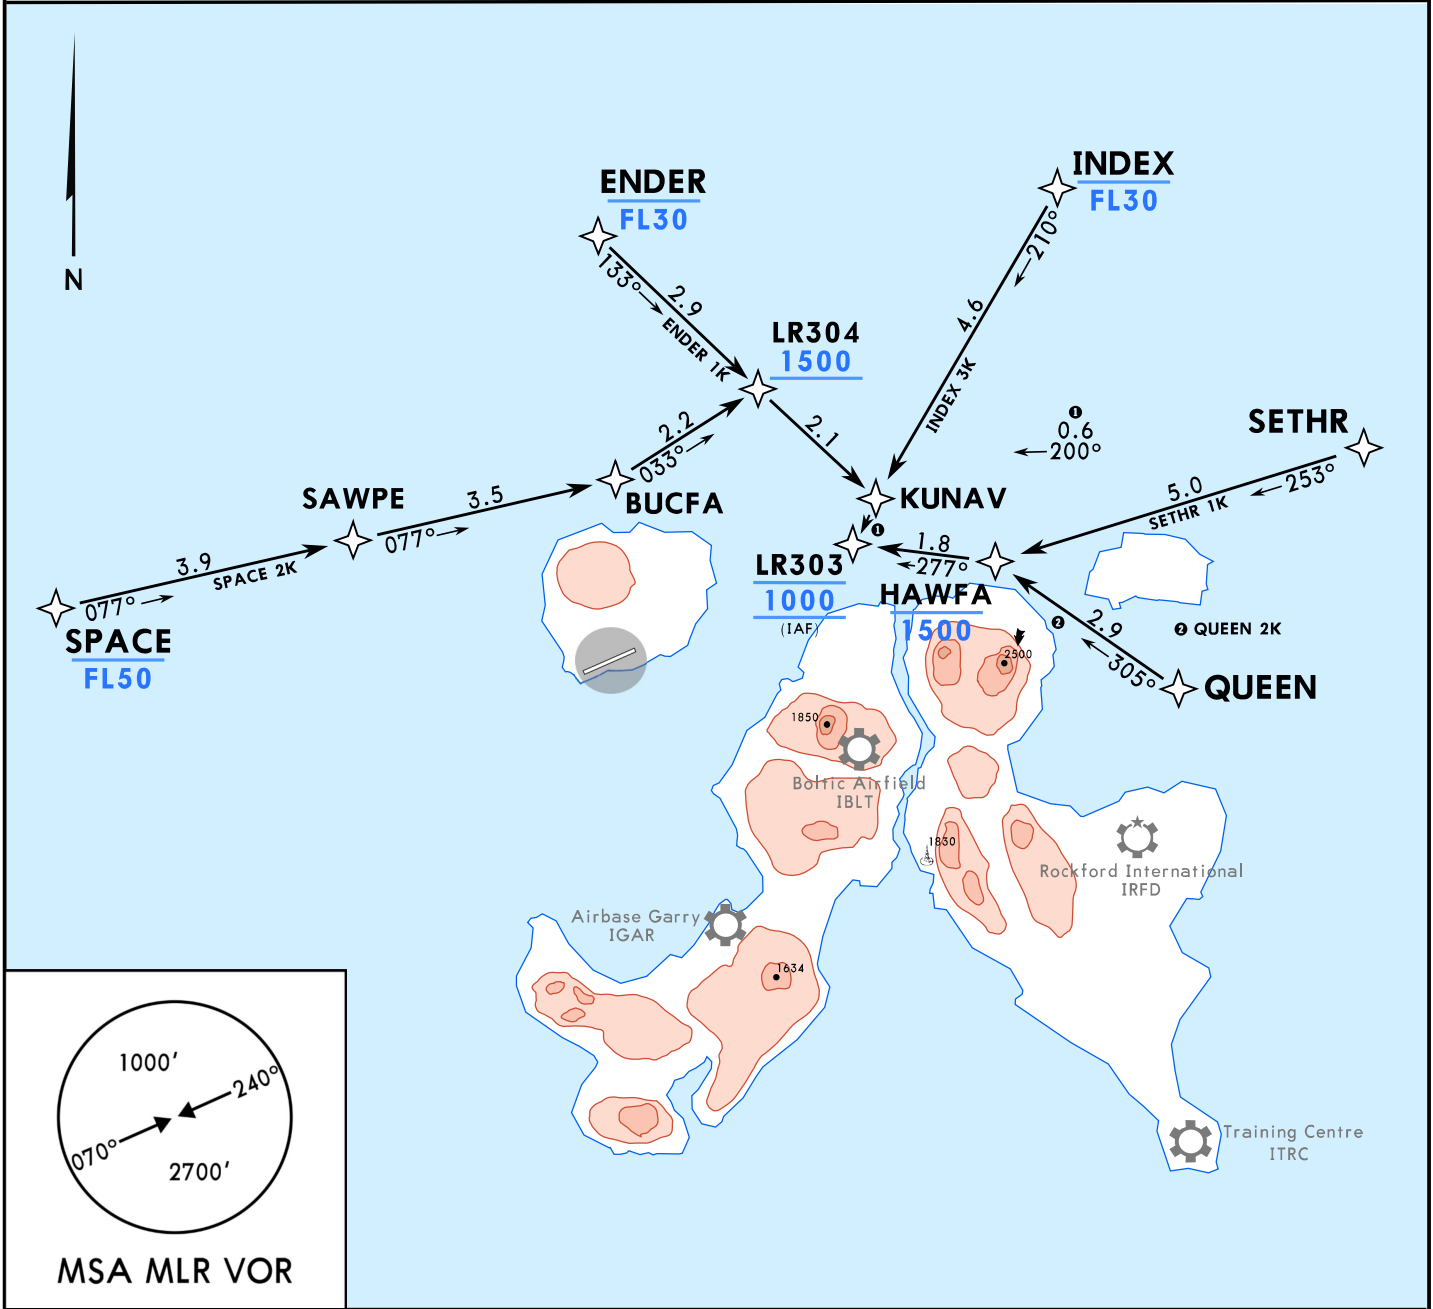

STAR	ROUTING
QUEEN 2K	QUEEN - HAWFA (1500-) - LR303 (1000).
ENDER 1K	ENDER (FL30-) - LR304 (1500+) - KUNAV - LR303 (1000).
INDEX 3K	INDEX (FL30-) - KUNAV - LR303 (1000).
SPACE 2K	SPACE (FL50-) - SAWPE - BUCFA - LR304 (1500+) - KUNAV - LR303 (1000).
SETHR 1K	SETHR - HAWFA (1500-) - LR303 (1000).