


D-ATIS
126.550

Apt Elev
1

Alt Set: hPa Trans level: By ATC
1. RNAV 1 2. If flying GPS D. or unable RNAV 1, inform ATC by using phraseology 'UNABLE RNAV STAR'. 3. Specified minimum level at waypoints must be adhered to unless specifically canceled by ATC. 4. If the airborne RNAV equipment fails, inform ATC as soon as possible. RADAR vectors will be provided. 5. On downwind EXPECT vectors to final.

CLR 1W [CLR1W], JUSTY 1W [JUST1W]
JAMSI 3W [JAMS3W], ODUKO 2W [ODUK2W]
RNAV (DME/DME or GNSS) ARRIVALS
(RWY 06)

SPEED: MAX 250 KT BELOW FL030 UNLESS OTHERWISE INSTRUCTED

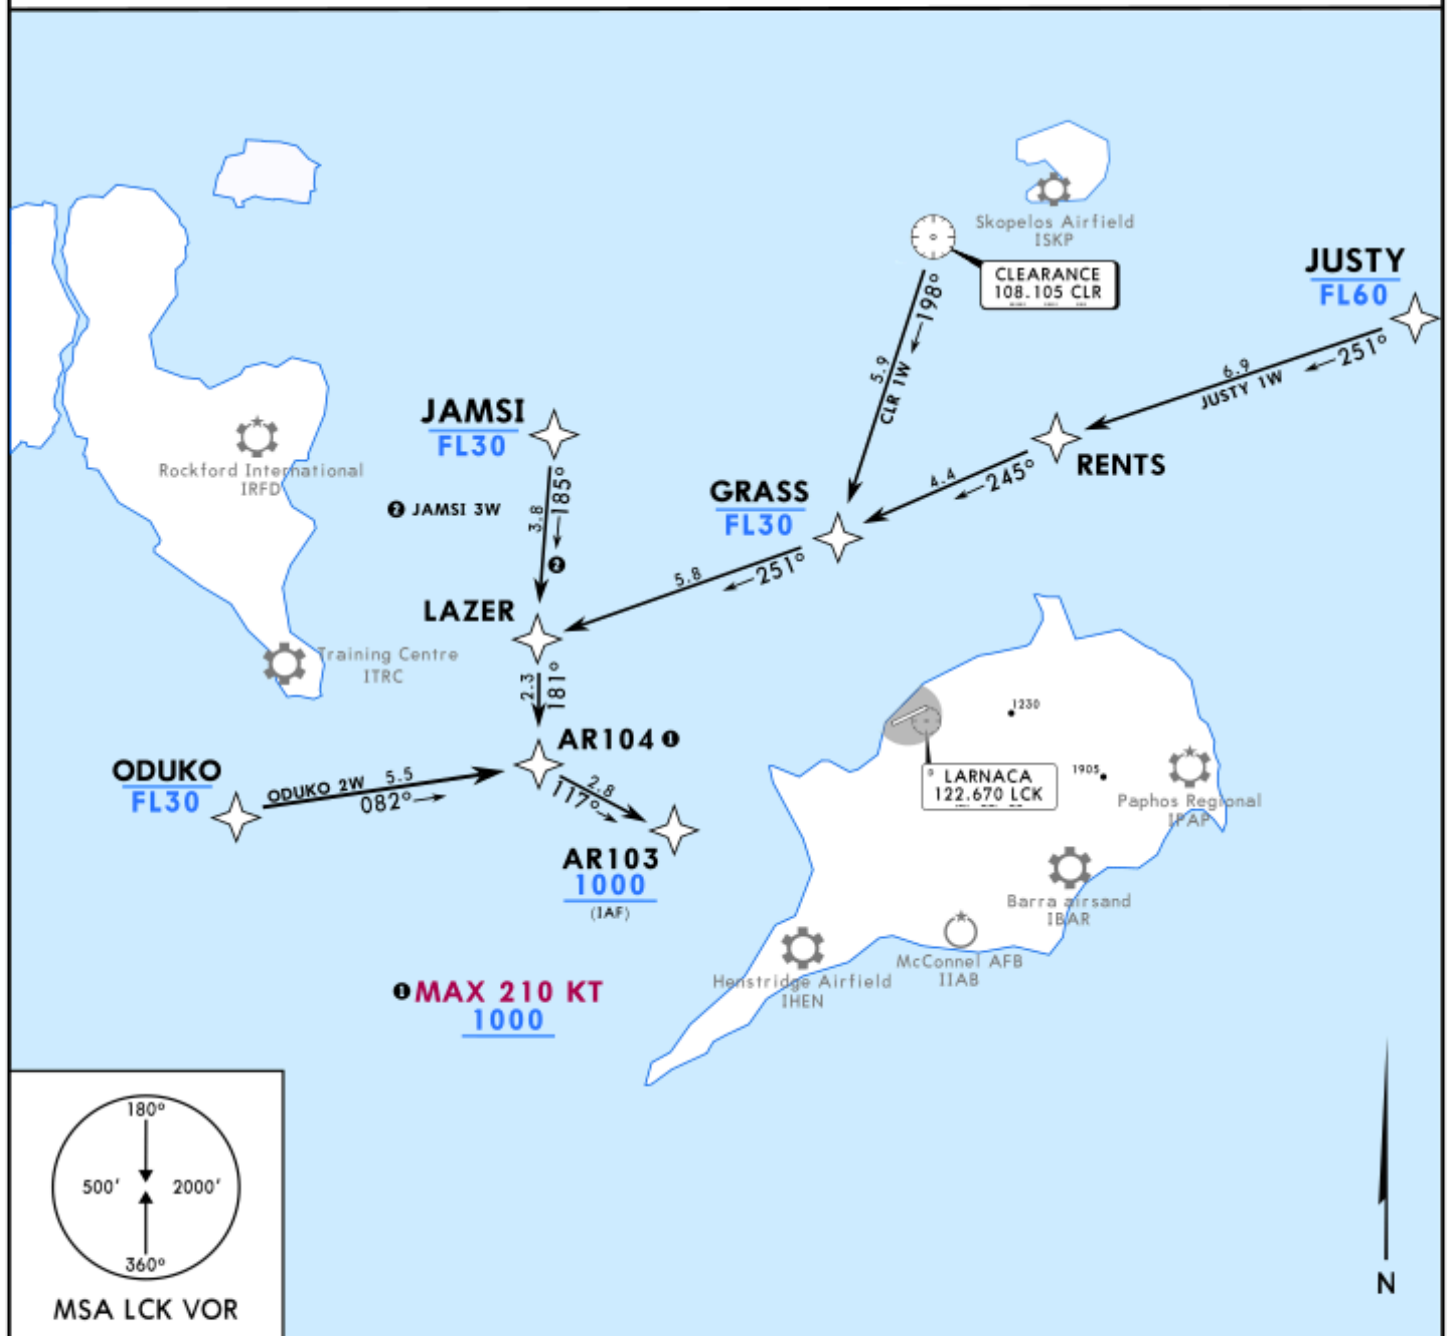

STAR	ROUTING
CLR 1W	CLR - GRASS [FL30-] - LAZER - AR104 [1000+; K210-] - AR103 [1000+].
JUSTY 1W	JUSTY [FL60-] - RENTS - GRASS [FL30-] - LAZER - AR104 [1000+; K210-] - AR103 [1000+].
JAMSI 3W	JAMSI [FL30-] - LAZER - AR104 [1000+; K210-] - AR103 [1000+].
ODUKO 2W	ODUKO [FL30-] - AR104 [1000+; K210-] - AR103 [1000+].