


D-ATIS <b>126.550</b>	Apt Elev <b>1</b>	Alt Set: hPa Trans level: By ATC 1. RNAV 1 2. If flying GPS D. or unable RNAV 1, inform ATC by using phraseology 'UNABLE RNAV STAR'. 3. Specified minimums level at waypoints must be adhered to unless specifically canceled by ATC. 4. If the airborne RNAV equipment fails, inform ATC as soon as possible. RADAR vectors will be provided 5. On downwind EXPECT vectors to final.
--------------------------	----------------------	--

CLR 2V [CLR2V], JUSTY 2V [JUST2V]  
JAMSI 1V [JAMS1V], ODUKO 3V [ODUK3V]  
RNAV (DME/DME or GNSS) ARRIVALS  
(RWY 24)

**SPEED: MAX 250 KT BELOW FL030 UNLESS OTHERWISE INSTRUCTED**

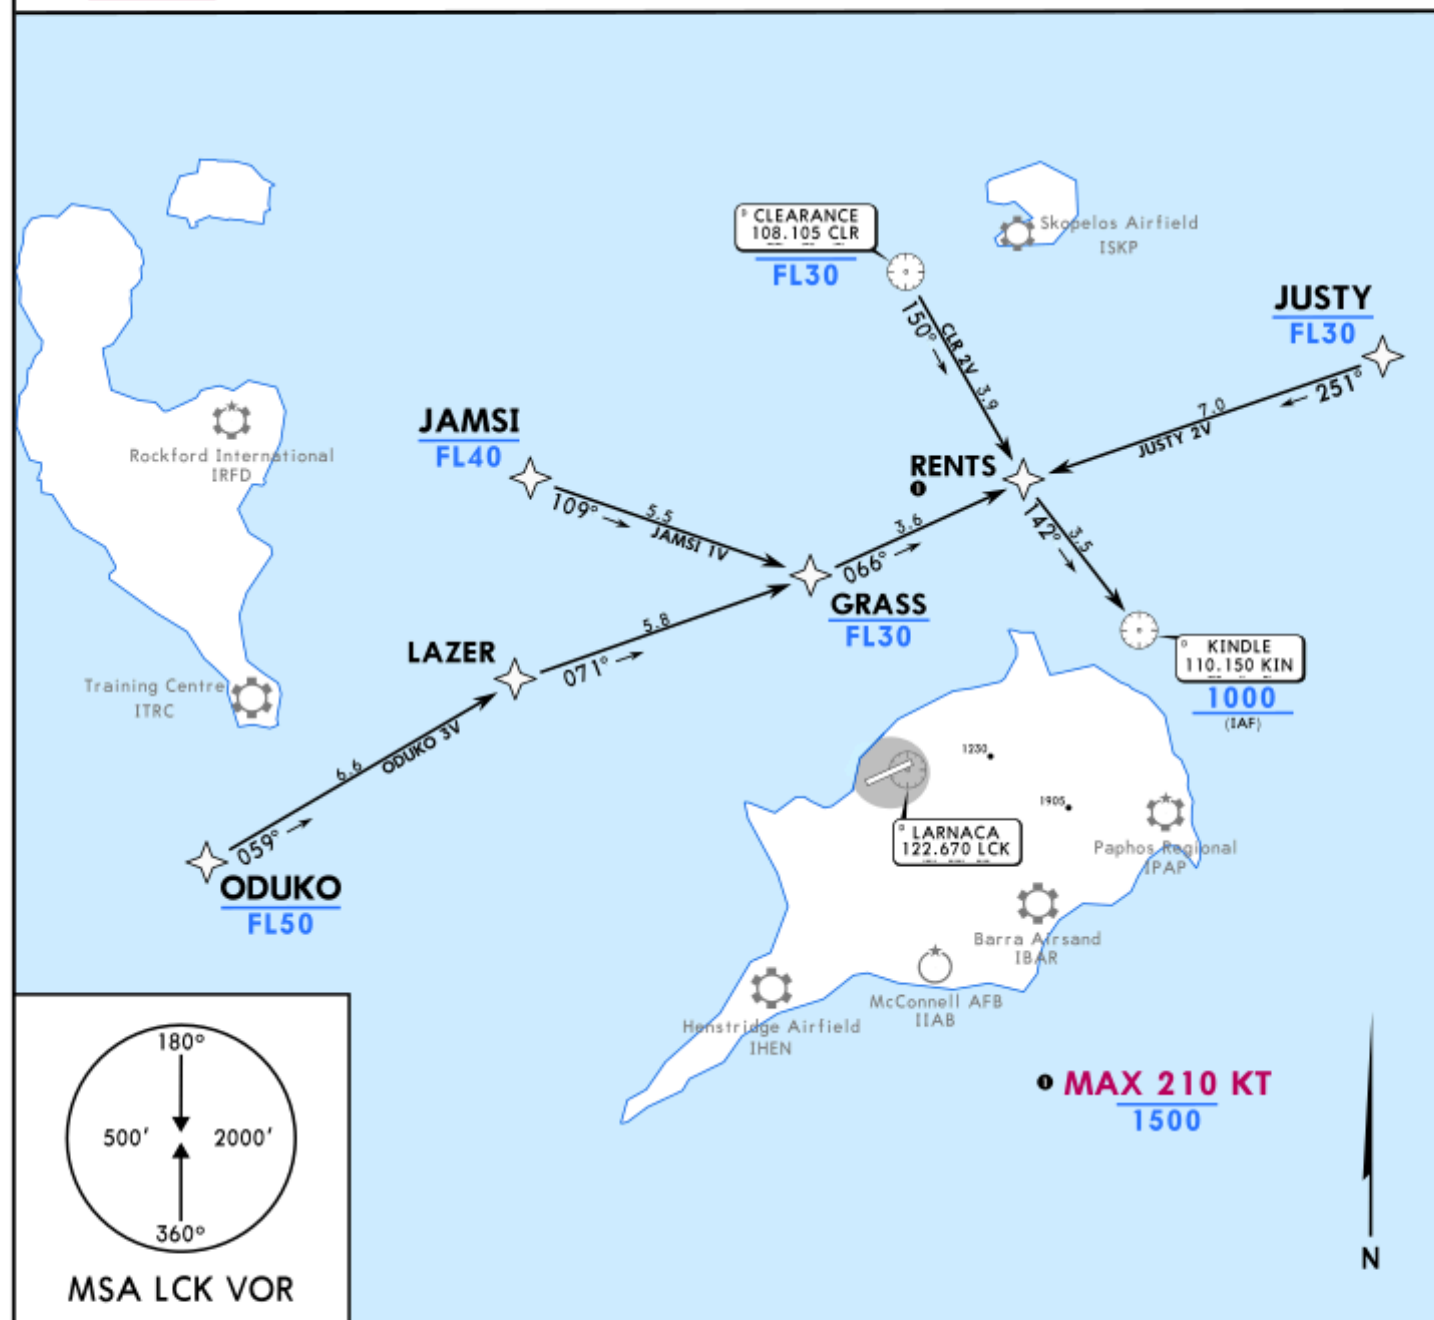

STAR	ROUTING
CLR 2V	CLR [FL30-] - RENTS [1500-; K210] - KIN [1000+].
JUSTY 2V	JUSTY [FL30-] - RENTS [1500-; K210] - KIN [1000+].
JAMSI 1V	JAMSI [FL40-] - GRASS - RENTS [1500-; K210] - KIN [1000+].
ODUKO 3V	ODUKO [FL50-] - LAZER - GRASS - RENTS [1500-; K210] - KIN [1000+].