

D-ATIS  
**128.8**

Apt Elev  
**1**

Alt Set: hPa (inHg on req)    Trans level: by ATC  
1. RNAV 1.  
2. DME/DME/IRU or GNSS required.  
3. RADAR service required.

**BLANK 1N [BLAN1N]  
EURAD 1N [EURAD1N]**

**BLANK 1S [BLAN1S]  
EURAD 1S [EURAD1S]**

**ARRIVALS  
(RWY 20)**

BY ATC


**HOLDINGS OVER**

**BLANK**




MAX 230 KT  
(At or below FL60)  
MAX 240 KT  
(Above FL60)  
MHA 2000

**EURAD**



MAX 230 KT  
(At or below FL60)  
MAX 240 KT  
(Above FL60)  
MHA 2500

LOST COMMS ▼ LOST COMMS ▼  
For LOST COMMS refer  
to 10-1P pages  
LOST COM ▲ LOST COMMS ▲ LOST COM

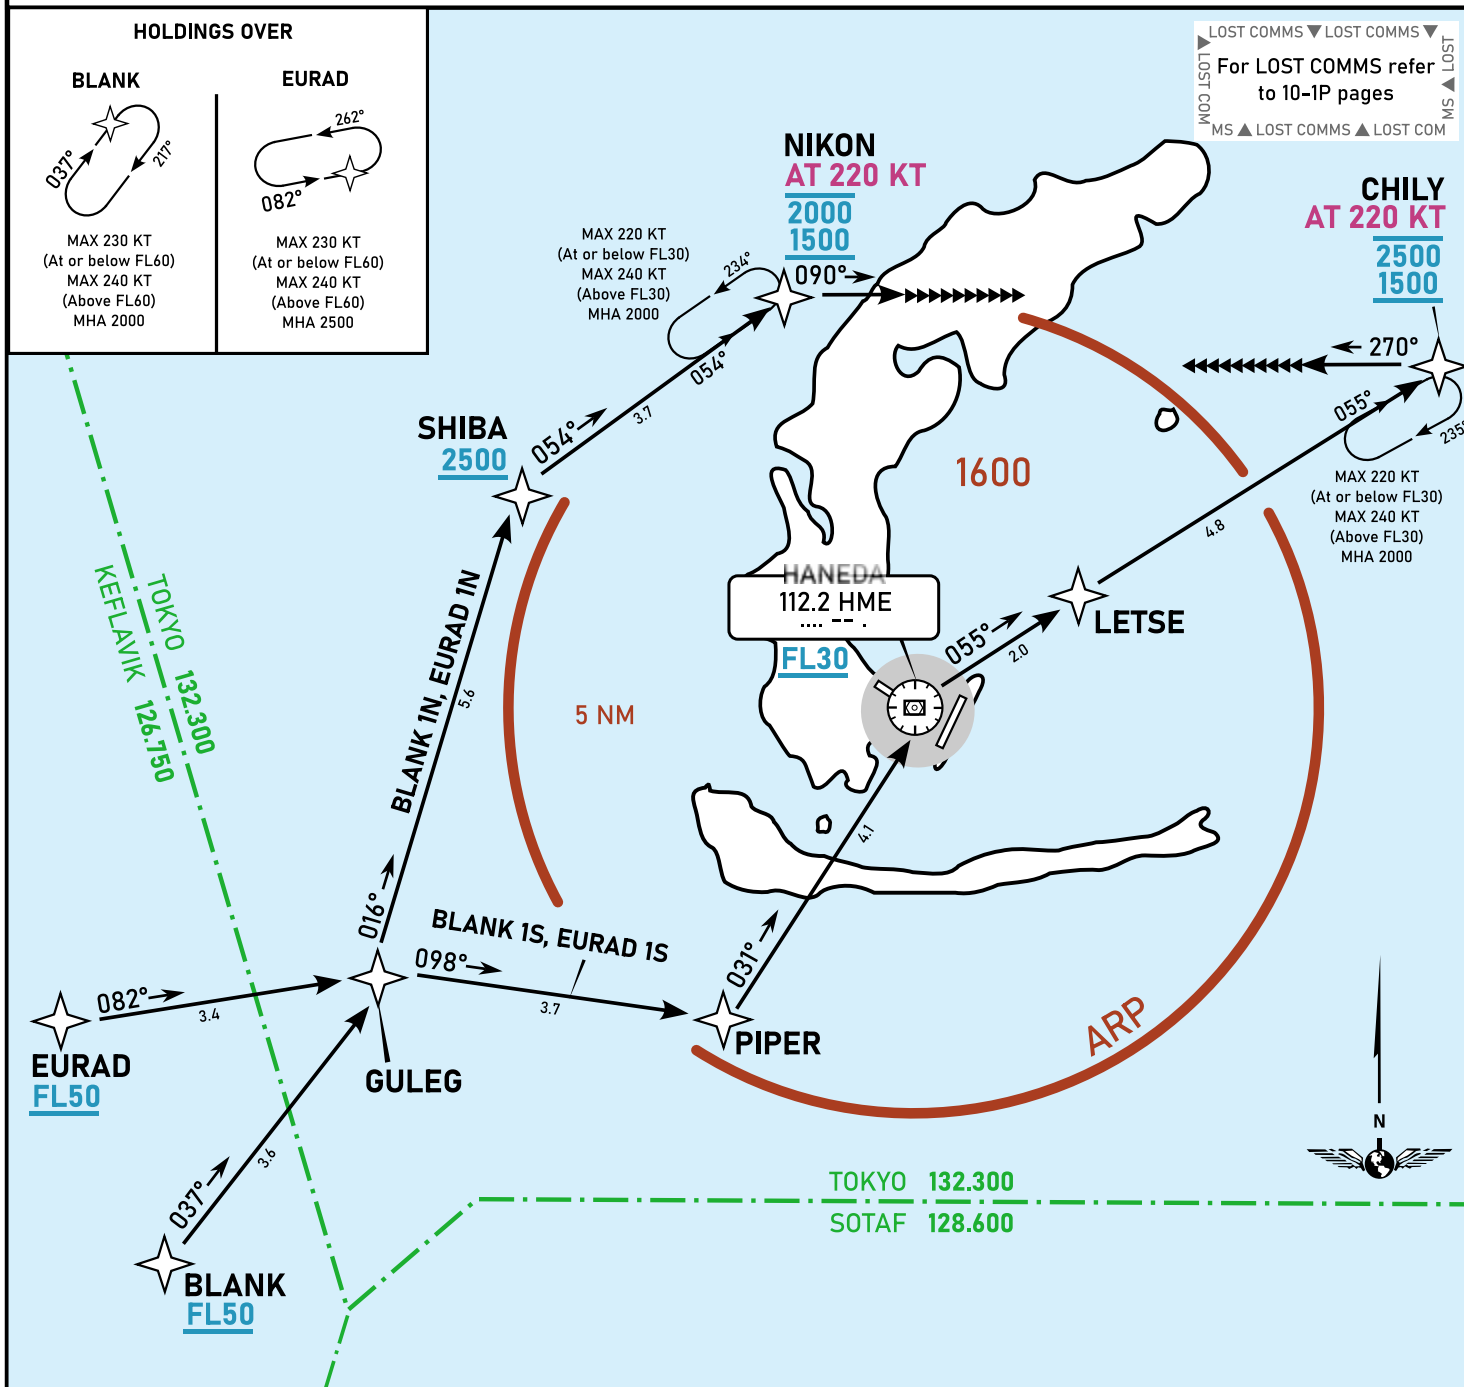

STAR	ROUTING
BLANK 1N	BLANK (FL50+) - GULEG - SHIBA (2500+) - NIKON (K220; 2000-, 1500+) - RADAR vectoring.
BLANK 1S	BLANK (FL50+) - GULEG - PIPER - HME VOR (FL30+) - LETSE - CHILY (K220; 2500-, 1500+) - RADAR vectoring.
EURAD 1N	EURAD (FL50+) - GULEG - SHIBA (2500+) - NIKON (K220; 2000-, 1500+) - RADAR vectoring.
EURAD 1S	EURAD (FL50+) - GULEG - PIPER - HME VOR (FL30+) - LETSE - CHILY (K220; 2500-, 1500+) - RADAR vectoring.