

Electrifying a Bus Network

A UVX Case Study

Hayden Atchley

13 December 2022

Introduction

Recently, electric vehicles (EVs) have gained significant public awareness and various levels of support. Generally the adoption of EVs is seen as a good thing, as there are many clear benefits over internal combustion engine (ICE) vehicles. Perhaps the most obvious is that EVs have no emissions, since they are driven entirely by electric motors. Another important advantage is efficiency: while an ICE vehicle will convert around 20% of the fuel's stored energy into motion (Department of Energy 2022b), EVs are around 90% efficient (Department of Energy 2022a). Electric motors are also efficient over a large range of rotational speeds, whereas ICEs are only efficient at a much narrower range of speeds. Because of these reasons, several transit agencies have deployed battery-electric (BE) buses in their fleets <><><>.

However, EVs are not always universally superior to ICE vehicles. One major consideration is that the range of EVs is lower than may be practical in certain applications. Though EVs are more efficient at converting stored energy into motion, gasoline and diesel are more energy-dense than batteries, and so that energy becomes harder to store in an EV by comparison. What truly makes this a concern is the time required to recharge an EV's battery compared to the time to refuel an ICE vehicle's tank. Though there are relatively fast charging standards available, as of now none of them are nearly as fast as refueling at a gas pump (Environmental Protection Agency 2022), especially for a vehicle as large as a bus.

Another major consideration is the source of electricity used to power EVs. While EVs themselves have no emissions, electricity generation often does. In fact, in areas such as Utah where coal is the major source of electricity <><><>, the per-mile emissions of EVs (accounting for electricity generation) can be higher than of hybrid vehicles <><><>. However, especially with recent legislation such as the Infrastructure Investment and Jobs Act <><> and the Inflation Reduction Act <><>, electricity generation is on the path to becoming greener overall.

This paper, therefore, is not focused on comparing vehicles based on emissions. Rather, the focus is to provide a list of considerations that a transit agency should take into account when migrating to a BE bus fleet. Additionally, this paper presents an application of these considerations to Utah Transit Authority's (UTA's) Utah Valley Express (UVX) bus line as a case study.

Background

Any transit agency operating a bus network will need to take into account several considerations. -fuel cost -fleet size -routing -fleet rotation? (add'l for ev buses) -charging

Both electric and fuel-powered vehicles have limited range, but it is generally much faster to add fuel than to recharge a battery. Because of this, charging considerations become paramount in any deployment of BE buses. There are currently several options available for EV charging. Level 1 and 2 charging as well as DC fast charging use a plug-in connector to transfer power (Environmental Protection Agency 2022), and other options such as wireless inductive charging exist and are being developed upon (Klontz et al. 1993; Panchal, Stegen, and Lu 2018). Perhaps somewhat unique to buses are overhead chargers, where a rail on the bus extends to make contact with an overhead power supply at a bus stop (or vice versa, as in the OppCharge standard <><><>).

While the level 1 and level 2 EV charging standards work well for personal vehicles, which sit idle for large parts of the day, these are relatively slow standards. A personal vehicle can expect about 25 miles of range per hour of level 2 charging (Environmental Protection Agency 2022). A bus, which weighs several times that of a personal vehicle (Nealon and Kempken 2022), would get a fraction of that range. Many bus routes run for most of the day, and even with an 8-hour daily level 2 charge a bus may only gain about 50 miles of daily range. A city bus running for 12 hours per day with an average speed of 12mph would need more than double that. Exclusively using level 2 charging would in many cases necessitate at least a doubling of fleet size to maintain those routes, which is impractical.

DC fast charging, on the other hand, can charge vehicles on the order of 10 times as fast as level 2 charging (Environmental Protection Agency 2022). Depending on the implementation, this standard can charge as fast as 350kW. This is certainly fast enough to fully recharge an electric bus overnight, so seems to be a viable way to solve the charging problem. However, standard plug-in DC fast charging overnight may not be enough on its own due to battery sizes. EV range is directly a function of battery pack size, and so a larger pack will provide more range. A typical electric bus with a battery pack size of 350kWh and energy consumption of about 3kWh per mile would have around 100 miles of range (Schabert 2022). This may be sufficient for many routes, but depending on

the fleet size it may not be viable to install enough charging stations to fully recharge every vehicle every day.

Overhead charging allows chargers to be installed almost anywhere, so buses would potentially be able to charge mid-route. While this could also be accomplished with plug-in charging, the additional burden on the driver in exiting the vehicle to access the charger adds delay. By contrast, the OppCharge overhead charging standard is automatic and charges at up to 450kW <><><>, so 6 minutes of charging can add 10–20 miles of range to a 3kWh per mile bus. For a local bus route, this could enable short charging sessions at each end of the route during the day, reducing the need for overnight charging.

Wireless inductive charging has the potential to obviate the need for “charging breaks” entirely. This technology involves installing.... Inductive charging tends to be much slower than the other options at around 80kW <><><>, but the ability to charge while in operation can mitigate this concern.

Methods

Based on these considerations....

The UVX is a bus rapid transit service operated by UTA and running through Provo and Orem, Utah. The service uses New Flyer XDE 60 model vehicles, so to make as close of a comparison as possible, I used the New Flyer XE 60 as the electric bus model for my calculations. This model is nearly identical to the XDE 60, with the main difference being that the XE is BE powered and the XDE is diesel-electric <><><>. Table 1 lists information about the current UVX route, and Table 2 lists details of the XE 60. Note that the current UVX fleet size is estimated based on vehicle tracking services, and several numbers are estimated from scheduling information.

Table 1: UVX Route Information

Utah Valley Express (830X)		
Route Length	11.0	miles
Traversal Time	42.0	minutes
Avg. Speed	15.7	mph
Daily Off-Service Time	3.0	hours
Fleet Size	22.0	vehicles
Service Level	127.0	buses/stop/day
Daily Travel Distance	132.0	miles/vehicle

Based on these values, each BE bus would need about an hour of overhead charging at 450kW per day or about 1.3 hours of 350kW plug-in charging per day. With only overnight (off-service) charging, a plug-in charger for every two vehicles or an overhead charger for every three vehicles would be needed. However, overhead charging is

Table 2: New Flyer XE 60 Information

New Flyer XE 60		
Battery Capacity	525.0	kWh
Range	153.0	miles
Efficiency	3.4	kWh/mi
Daily Travel Distance	132.0	miles/vehicle
Daily Energy Usage	449.0	kWh/vehicle

much easier to use during service hours. Traversing 11 miles at 3.4 kWh/mi requires 38 kWh, which at 450 kW would take 5.1 minutes of charging. If each vehicle spent this amount of time charging at each end of the route, then no off-service charging would be needed. Though this could theoretically be accomplished with only one charger at each end of the route, ... I am assuming there are two (four total). I am assuming as well that plug-in charging would be used mainly overnight, so 11 chargers would be required.

In order to use inductive lane charging, the charge rate would need to provide 11 miles of range for every 42 minutes of charging. This is about 16 miles of range per hour, which at an efficiency of 3.4 kWh/mi requires a 55 kW effective charge rate. Assuming a relatively constant travel speed, 80 kW lane charging would need to be installed on 68% of the UVX route, or 15.1 miles, to achieve this overall rate.

A cost comparison of these charging solutions is given in Table 3. Many of these values are estimated based on available information. It is worth noting that these costs can significantly vary depending on the specific implementation, but the numbers presented represent a rough average cost. Note also that the expected life span of this equipment (including the vehicles) is about 10–14 years.

Table 3: Fleet Costs

	Capital Cost (USD)	Maintenance Cost (USD/yr)
XE 60 Bus	750000	7000
XDE 60 Bus	1000000	50000
Plug-in Charger	20000	400
Overhead Charger	40000	800
Inductive Lanes (per mile)	322000	6400

In addition to these costs, I am estimating the fuel cost at \$0.60/mi for diesel-electric vehicles and \$0.10/mi for BE vehicles <><>. Based on these costs, I analyzed several BE bus adoption strategies. The first is a baseline, with the existing fleet and no migration to BE buses. I also analyzed both a 100% and 50% strategy, in which BE buses instantly replace 100% and 50% of the current fleet respectively. Finally I analyzed a “Gradual” strategy, in which UTA replaces 2 vehicles in the current fleet with BE buses annually. Each of these strategies were analyzed with overhead charging, plug-in charging, and inductive lane charging.

Results

An interesting result I immediately found is that given the specific scenario specifications, plug-in charging and overhead charging had nearly identical costs. Because of this, I averaged the cost of the two options and created a “Site Charging” scenario, as opposed to the “Inductive Lanes” scenario. Figures 1 and 2 show the cumulative cost over time of each BE bus adoption strategy. The shaded area represents the typical lifespan of the buses and charging equipment (10–14 years), so after this time the costs increase due to the need for equipment replacement. While in reality equipment would be replaced gradually rather than all at once, the cumulative effect on cost would be similar enough to not significantly affect the conclusions of this analysis.

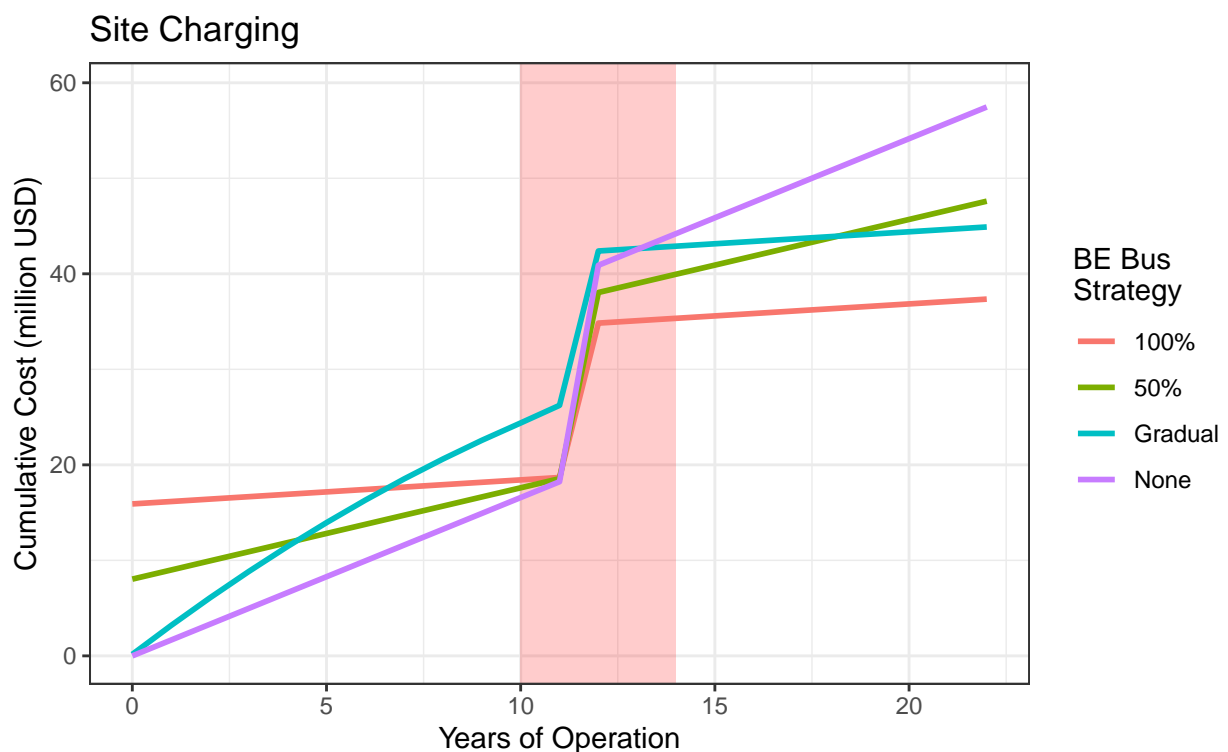


Figure 1: Cumulative cost based on site charging. The shaded area indicates the typical lifespan of equipment and vehicles, so replacement costs are added at this time.

Firstly, as inductive lanes are significantly more expensive than site chargers, it takes a longer time for any BE adoption strategy to save money compared to the baseline. In fact, no strategy is cheaper than the baseline before the estimated life span of the vehicles in the inductive lanes scenario. Though even the current diesel-electric buses would need to be replaced at that time, so ultimately the inductive lanes provide a reasonable solution after 15–20 years. The “Site Charging” scenario pays itself off much more quickly (11–13 years), especially in the 100% replacement strategy.

It is important to note that UTA already has a fleet of diesel-electric buses, so capital costs are only incurred

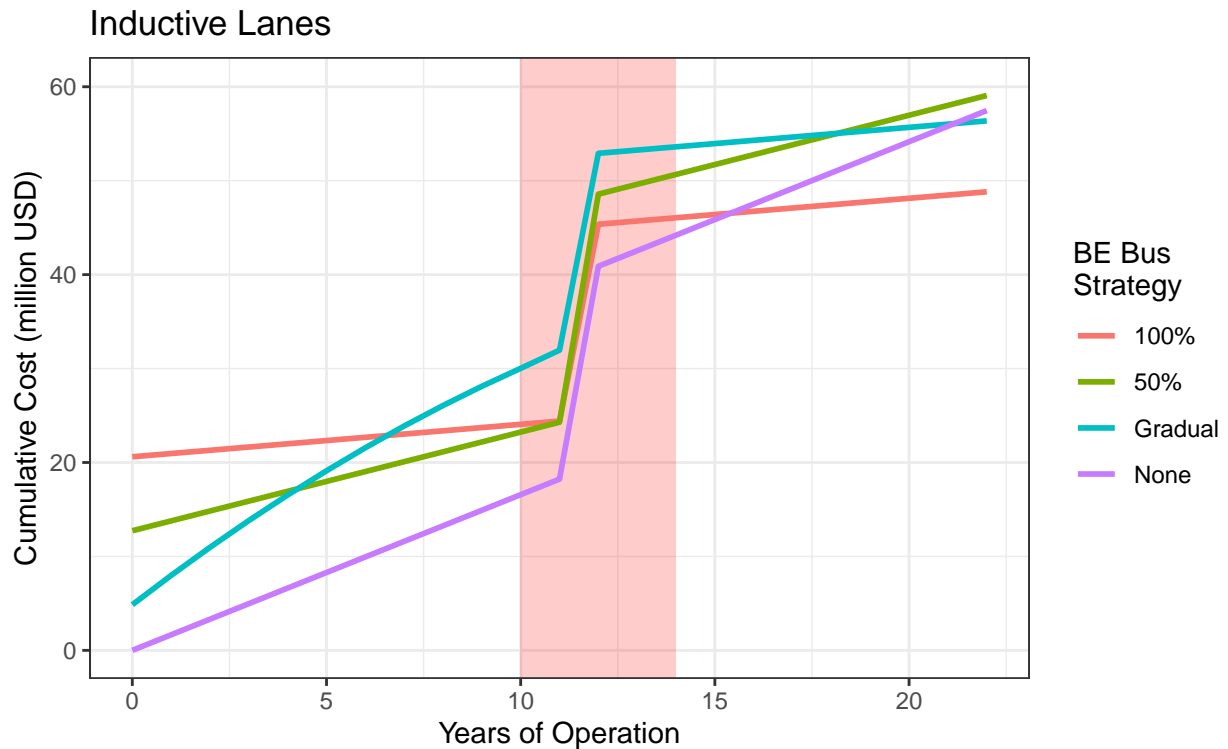


Figure 2: Cumulative cost based on inductive lane charging. The shaded area indicates the typical lifespan of equipment and vehicles, so replacement costs are added at this time.

for new BE buses and charging infrastructure. This is why the “Gradual” strategy increases in cost so quickly; new buses are being purchased each year, but a large portion of the fleet still has a high fuel cost per mile and maintenance cost until most of the vehicles are replaced.

Limitations and Conclusions

This analysis shows that the adoption of BE buses is economically viable, even when non-EV buses are already in service. (evidenced as well by agencies adopting ev buses, UTA as well)

However, several significant limitations apply to this research. -variable costs -estimates -only UVX

Conclude that even with these limitations, transit agencies should look at BE buses. Also emissions. - site charging > lanes (for UVX) - economically viable

References

- Department of Energy. 2022a. "Where the Energy Goes: Electric Cars." 2022. <https://fueleconomy.gov/feg/atv-ev.shtml>.
- . 2022b. "Where the Energy Goes: Gasoline Vehicles." 2022. <https://fueleconomy.gov/feg/atv.shtml>.
- Environmental Protection Agency. 2022. "Plug-in Electric Vehicle Charging | US EPA." 2022. <https://www.epa.gov/greenvehicles/plug-electric-vehicle-charging>.
- Klontz, K. W., A. Esser, R. R. Bacon, D. M. Divan, D. W. Novotny, and R. D. Lorenz. 1993. "An Electric Vehicle Charging System with 'Universal' Inductive Interface." *Proceedings of Power Conversion Conference - Yokohama 1993*, 227–32. <https://doi.org/10.1109/PCCON.1993.264219>.
- Nealon, Lizzie, and Maggie Kempken. 2022. "Average Car Weight." 2022. <https://www.bankrate.com/insurance/car/average-car-weight/>.
- Panchal, Chirag, Sascha Stegen, and Junwei Lu. 2018. "Review of Static and Dynamic Wireless Electric Vehicle Charging System." *Engineering Science and Technology, an International Journal* 21 (October): 922–37. <https://doi.org/10.1016/J.JESTCH.2018.06.015>.
- Schabert, Alexander. 2022. "Electric Bus Range, Focus on Electricity Consumption." 2022. <https://www.sustainable-bus.com/news/electric-bus-range-electricity-consumption/>.