

**WaveNxT Technologies**  
**Ultrasonic Spray Nozzle**  
**120 KHz Nozzle**  
**(Conical/ Flat / Torch)**



## Target Spray on Specific Area and of Specific Type



Ultrasonic spray nozzle : Flat  
OPERATING FREQUENCY 60KHz 120KHz 180KHz



Ultrasonic spray nozzle : Conical  
OPERATING FREQUENCY 60KHz 120KHz 180KHz



Ultrasonic spray nozzle : Torch  
OPERATING FREQUENCY 60KHz 120KHz 180KHz

### Specifications

Sr. No.	Description	Figures
1	Operating frequency	180 KHz
2	Median drop diameter	14µm
3	Maximum flow rate (Water)	3 ml / min.
4	Maximum power consumption	20 watts
5	Normal power consumption (Subject to flow rate and solution viscosity)	2 to 7 watts
6	Weight	1000 gm
7	Operating temperature Range	15°C to 55°C
8	Transducer material	Titanium
9	Transducer enclosure	SS316
10	Liquid inlet	SS316
11	RF Input ( output from enozzle drive system)	BNC connector
12	O ring (Isolate transducer from external environment)	Viton®

### Specifications



Sr. No.	Description	Figures
1	Operating frequency	180 KHz ±10%
2	Maximum power drive	20 watts
3	Maximum operating temperature	85°C
4	Enclosure (Schneider Electric President Systems Ltd.)	S42 2U/42T/245
5	RF output	Bulk head BNC connector female
6	Technology	Digital synthesis
7	LCD display	Alphanumeric 16 X 2
8	Parameter set and menu navigation	Menu switches
9	Power on switch	16 Amps, Elcom®
10	AC power source operating voltage range	90 to 270 Volts
11	Fuse slow blow	1 Amps + extra 1.5 amps
12	3 Pin Mains chord	5 Amps, Elcom®
13	Power pack	±12 volts, 3 Amps, with EMI filter Surge protection
14	RS 232C serial communication port	Optional
15	RF coaxial cable (BNC to BNC)	RG316, 50Ω, 2 meters
16	Power pack to eNozzle drive system 3 core DC cable	15 Amps, 1 meter
17	Weight	1.2Kg

## eNozzle drive system



**WaveNxT**  
Technologies Pvt. Ltd.

- Office: 2823/15, B Ward,  
Mahalaxmi Nagar, Kolhapur, 416012
- Works: 1243/8, Shivaji Udyamnagar,  
Kolhapur, 416008
- info@wavenxd.com
- <https://www.wavenxd.com>
- +91 9881233102

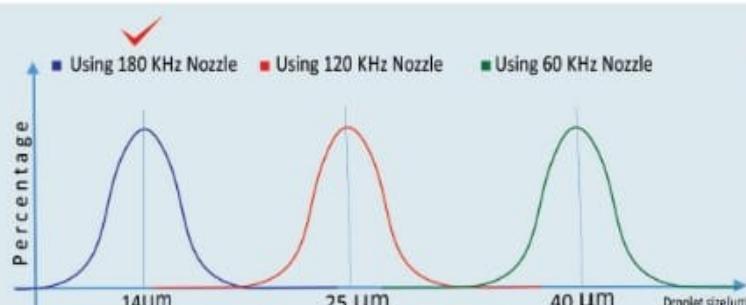

Nano Coating/Spray Pyrolysis



Ultrasonic Atomizer spray drying



PCB Spray Fluxing

The Nozzle operating frequency of 180 KHz gives average droplet size of 14 µm, 120 KHz gives average droplet size of 25 µm and 60 KHz gives average droplet size of 40 µm. With eNozzle drive system you enjoy power of deriving droplet sizes matching to your research/ process/ production needs.

+91 9881233102 For Online Product Demonstration

YouTube <https://www.youtube.com/@wavenxd>