




PERFECT FIT ROLLER TECHNICAL DRAWING

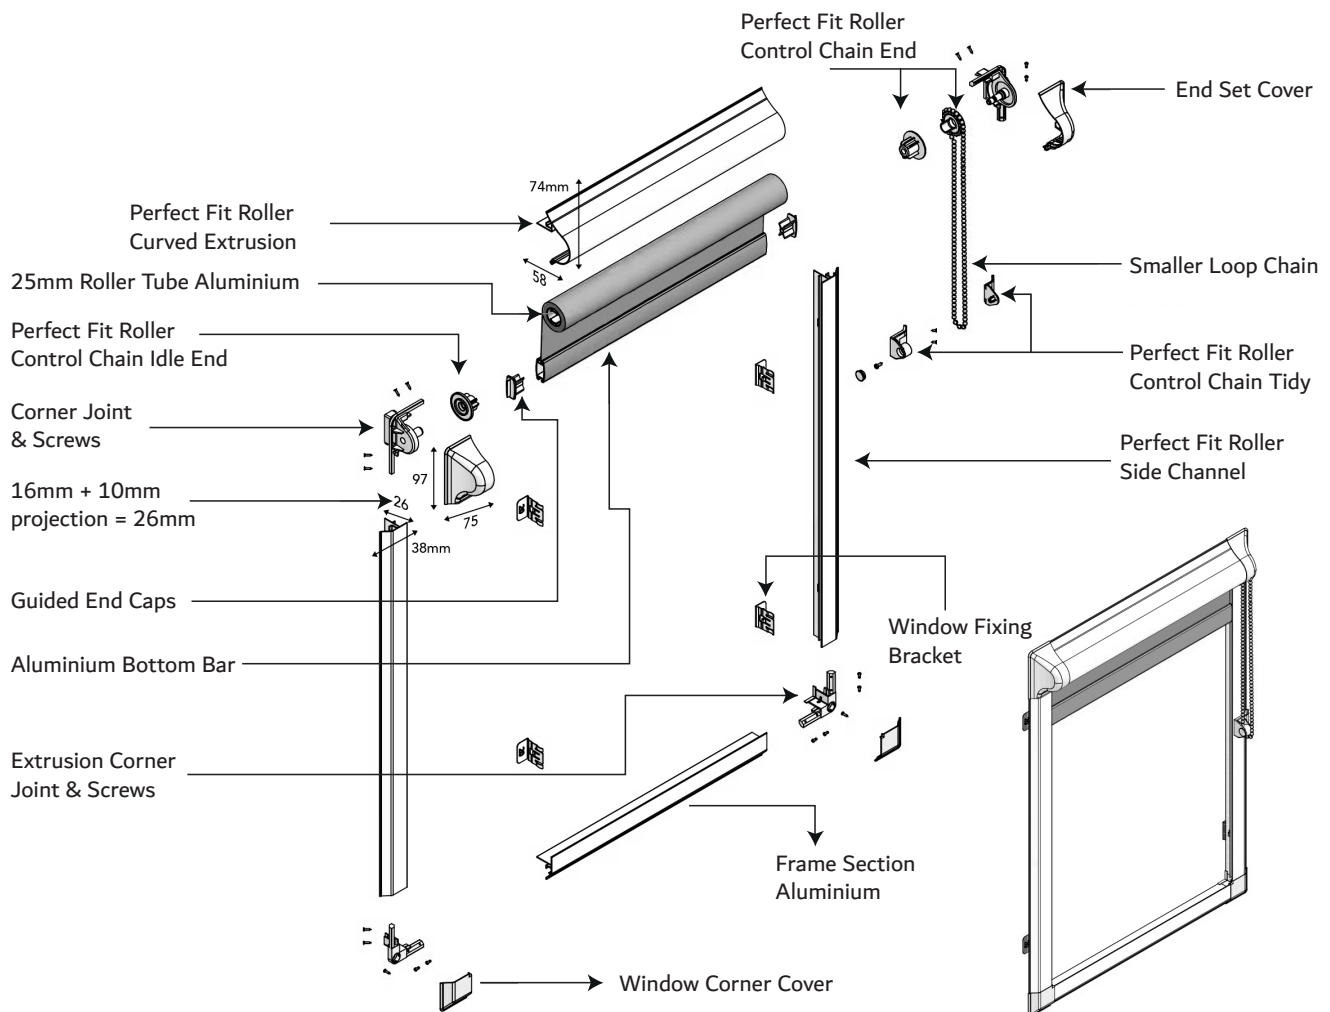

- Designed and manufactured in the UK, all Louvolite systems are 10 year life cycle tested to ensure long lasting performance.
- The blind is housed within a neat frame that clicks into uPVC windows and doors and moves with them when they are opened, tilted or closed.
- No drilling or screwing needed for installation, the frames just click on using the window fixing brackets and can easily be removed for cleaning.
- Reduces the gaps and light strike at the edge of the blind.
- The looped chain, available as left or right hand, is attached to the Perfect Fit frame with a simple, screwed in cord tidy.
- Chain operation is good for doors or hard to reach windows.
- 18, 20, 22, 24, 30 and 38mm brackets to suit most window bead depths.
- End caps with fins keep the bottom bar located in the side channel and away from the window pane.
- Manufactured using high quality engineering grade polymer and aluminium.
- For blinds up to 1.4m wide, with a 21b maximum holding weight.
- Can be motorised using Louvolite One Touch® Perfect Fit motor (R4045), see reverse.
- Colours available: Extrusion, side channel and frame section: white, brown, anthracite grey, golden oak, mahogany and grey; Endset and window corner cover: white, brown, anthracite grey, tan and grey; Chain: white, brown, anthracite grey and grey; Cord Tidy: white, brown and anthracite grey.


HARDWARE SPECIFICATION

System 25® Perfect Fit Roller System Our roller blinds are manufactured using the louvolite System 25® roller blind mechanism with specifically designed grooved 25mm aluminium tubing. The specified fabrics are formed and held into the tube with locking tape. The side control units are made from glass filled Nylon 6, with an acetal sprocket and sprocket guard, and includes a locking spring. The operating chain, No. 10 size in metal or plastic, ensures reliable performance.

The mild steel window fixing brackets are zinc plated and powder coated. An idle end mechanism is positioned at the opposite end to the control unit, providing a more secure fit of the blind and smooth operation. Performance To ensure a positive performance, all louvolite System units are designed and manufactured in the UK using prime quality plastic materials and a dedicated steel locking spring.

10 year life cycle testing is done to ensure long lasting performance. Operation All blinds must be compliant with the child safety elements of BS EN13120. Where children may be present, the chain must be fitted with a cord tidy. Bottom Bar Oval, made of aluminium, can be single or double wrapped in fabric or left exposed. All fabric is formed and held into place with locking tape.

Dedicated guide end caps keep the bottom bar in the Perfect Fit side channels and away from the window pane. Maintenance All of the System 25® Perfect Fit roller blind system components are manufactured using aluminium, treated steel and plastic. They do not present any corrosion problems in normal environments. The system has been designed for a smooth operation, together with a rigidity to prolong the window blind's working life.

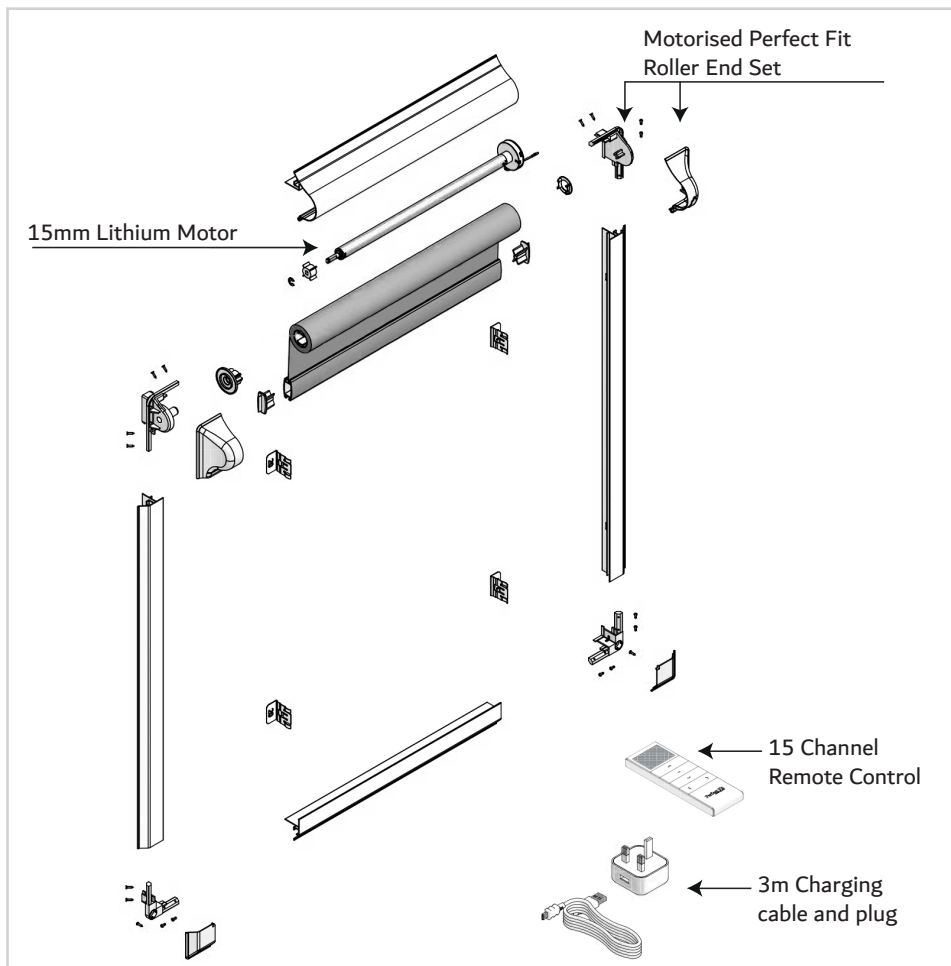

15mm LITHIUM MOTOR FOR PERFECT FIT

PARAMETERS	
Rated Torque	0.3Nm
Rated RPM	30rpm
Motor Diameter	15mm
Rated Voltage	DC5V
Rated Power	5W
Rated Current	0.6A
IP Class	IP20
Inbuilt Receiver	No

FEATURES	
Min Blind Width	400mm
Weight Capacity	1kg
Power Source	Re-chargeable (3m USB cable/ plug charger)

PERFECT FIT ROLLER MAXIMUM DROP

RANGE	MAX DROP	RANGE	MAX DROP	RANGE	MAX DROP	RANGE	MAX DROP
Admiral	See AnyColour	Cuba	1050	Matrix	900	Saloni	950
Affinity	print	Dahlia	See AnyColour	Mesh	1350	Savoy	2200
Alma	1550	Davos	1100	Minerals	1750	Sea Leaves	See AnyColour
Anycolour Chelsea	2000	Derwent Flint	See AnyColour	Monsoon	1330	Serene	See AnyColour
AnyColour Essen	1100	Eden	1000	Mosaic	1800	Shadow	1550
AnyColour Porto	1200	Eldon	1100	Myola Avocado	See AnyColour	Shanghai	2500
AnyColour Riga 5%	1200	Essen	1100	Nandu	1150	Silica	1850
Aquarelle	See AnyColour	Eucalyptus	See AnyColour	Natura	See AnyColour	Sloane	1200
Aurora	See AnyColour	Expo 5%	1000	Nexus	1300	Solace	1100
Balloons	See AnyColour	Feathers	See AnyColour	Niagra	1450	Solar	1900
Bange	1000	Finches	See AnyColour	Novaro	1220	Space	See AnyColour
Baubles	See AnyColour	Flame	2000	Nyla	2500	Stars	See AnyColour
Bick	920	Flora	See AnyColour	Orchard	1150	Straw	850
Blossom	2500	Giraffes	See AnyColour	Oxford Arctic	See AnyColour	Summer Meadow	See AnyColour
Breno	1100	Glitter	1100	Palmyra	See AnyColour	Sunflowers	See AnyColour
Brix	1700	Harmony	See AnyColour	Pearl	1700	Symmetry	See AnyColour
Brushstrokes	See AnyColour	Henley	See AnyColour	Peony	See AnyColour	Thicket	See AnyColour
Cacatua	See AnyColour	Honey	2500	Porto	1200	Thistle	See AnyColour
Carland	1550	Humming Vines	See AnyColour	Prism	See AnyColour	Umbra	See AnyColour
Cascade	1100	Kittens	See AnyColour	Puppies	See AnyColour	Vector	1700
Charlton	1200	Lalita	1120	Radiance	See AnyColour	Verdure	1030
Charm	See AnyColour	Lattice	2200	Rainbows	See AnyColour	Visco	2150
Chelsea	2000	Laurel	See AnyColour	Rayfest	See AnyColour	Wave	2000
Citronelle	See AnyColour	Lava	1130	Regency	2500	Wild Bloom	See AnyColour
Clarence	1200	Luminous	1950	Riga 3%	1050	Wilderness	See AnyColour
Cordelia	1200	Maple	1120	Riga 5%	1200	Windsor	See AnyColour
Country Garden	See AnyColour	Marble	1050	Rowan	1200		

Blindtex **UAE**

Area M6-10

SAIF Zone Sharjah – United Arab Emirates

Tel: +971 65578051

Email: sales@blindtex.com

Blindtex **UK**

4B Wigan Road

Bolton

Lancashire

BL3 5PZ

Phone: 0120 495 4999

www.blindtex.com



A BRAND OF **INNOV8** PRODUCTS