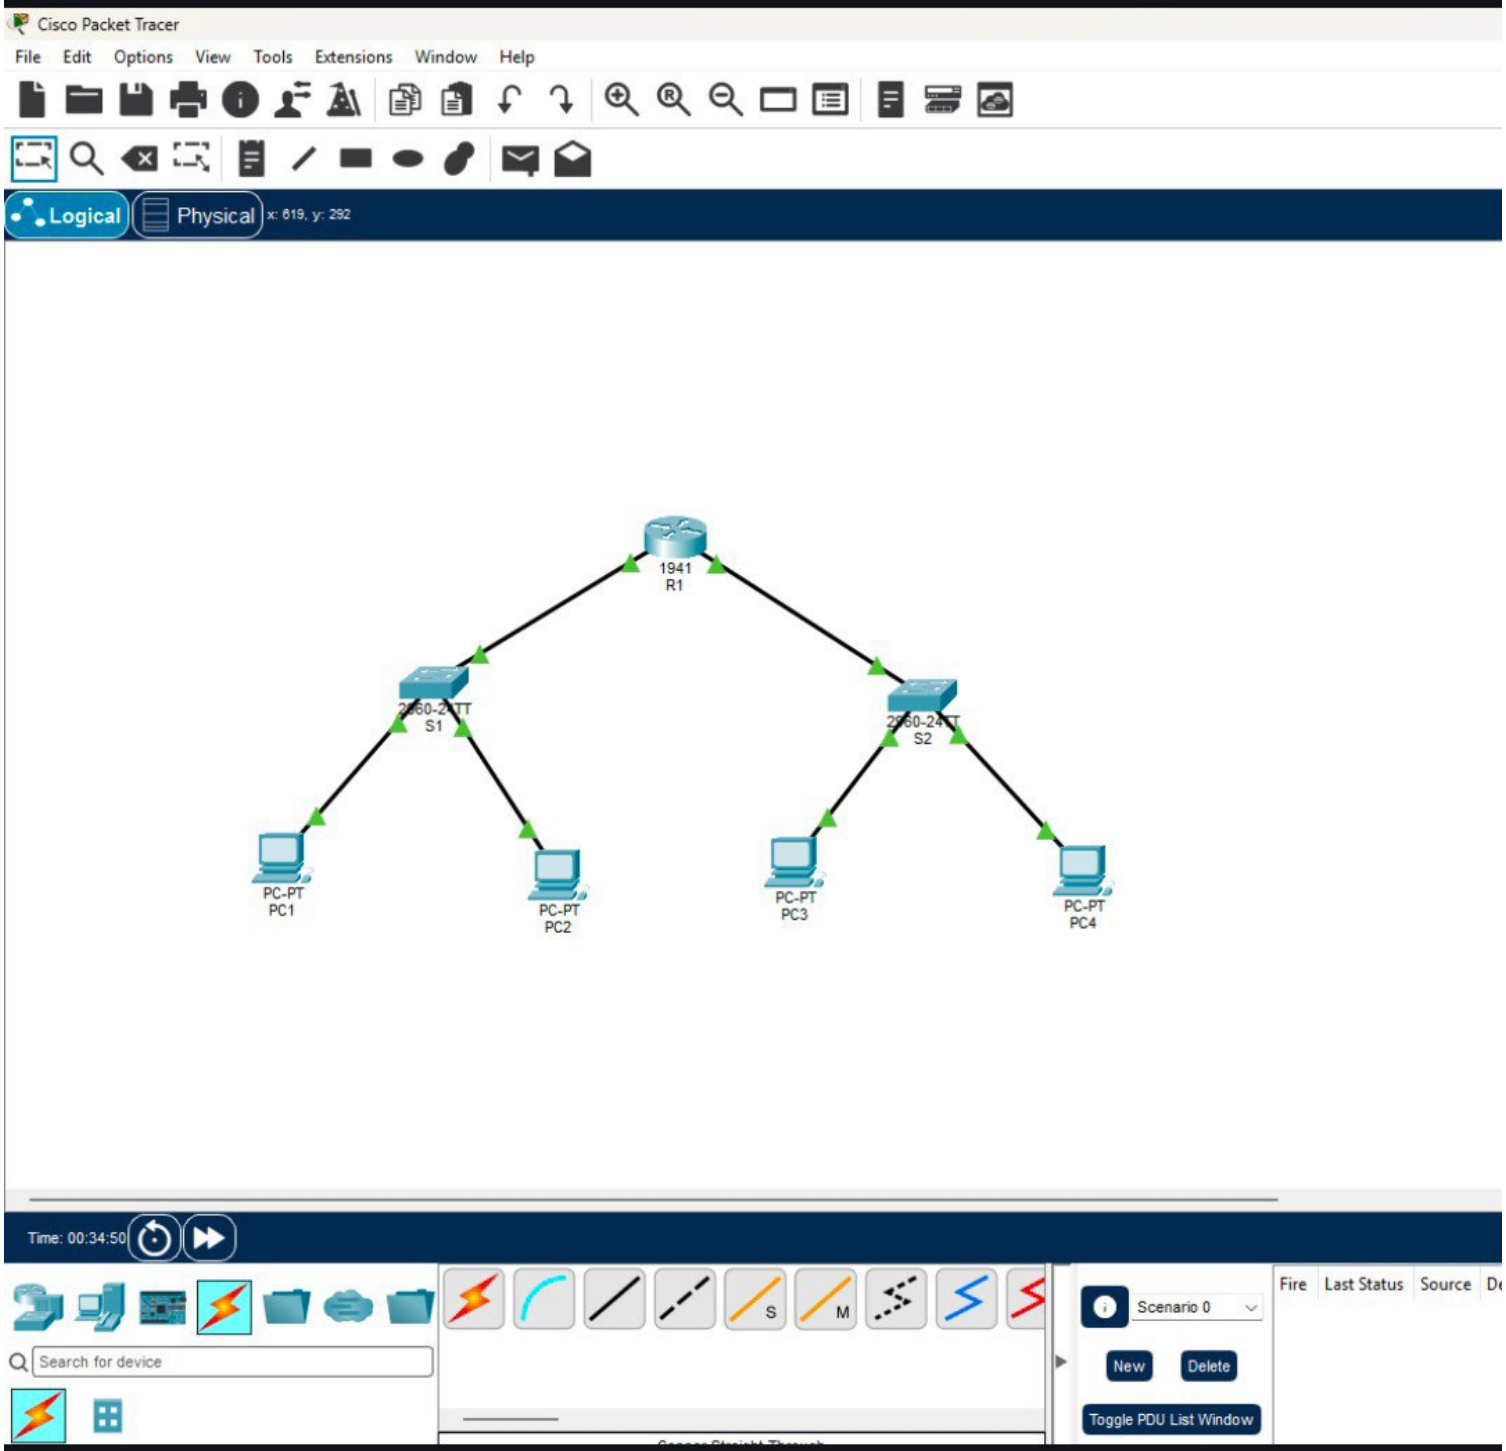
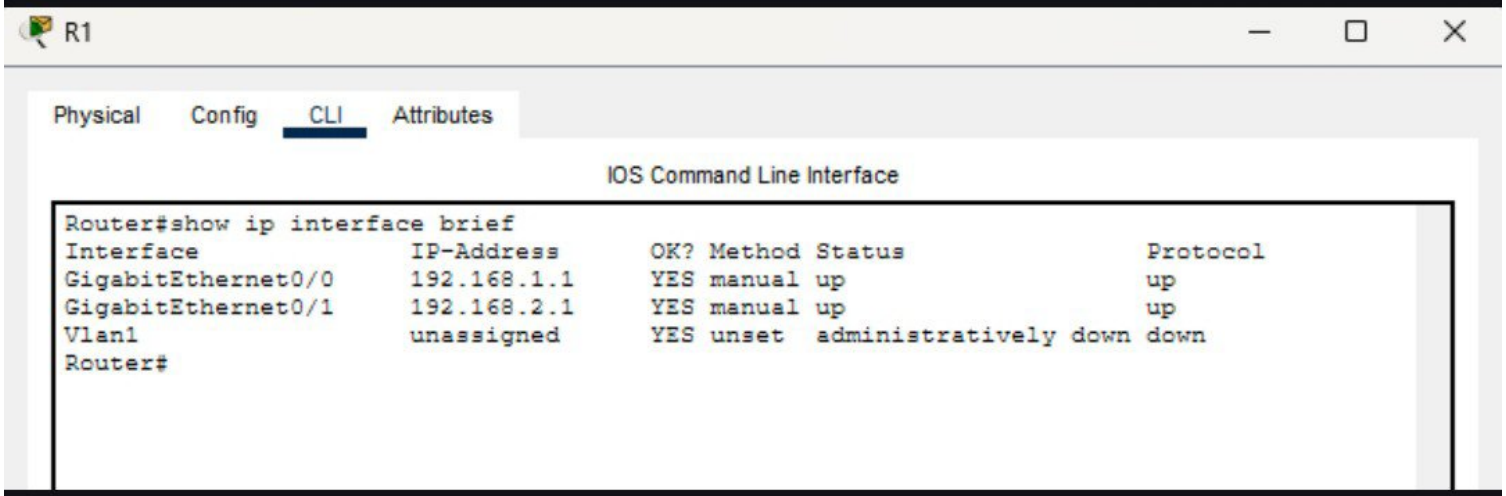


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 619, y: 292
1941
R1
S1
S2
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
PC-PT
PC4
Time: 00:34:50
Search for device
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source


R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router#show ip interface brief
Interface IP-Address OK? Method Status Protocol
GigabitEthernet0/0 192.168.1.1 YES manual up up
GigabitEthernet0/1 192.168.2.1 YES manual up up
Vlan1 unassigned YES unset administratively down down
Router#



```
C:\>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 192.168.1.10: bytes=32 time=5ms TTL=128
Reply from 192.168.1.10: bytes=32 time=3ms TTL=128
Reply from 192.168.1.10: bytes=32 time=3ms TTL=128
Reply from 192.168.1.10: bytes=32 time=2ms TTL=128

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 5ms, Average = 3ms

C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127
Reply from 192.168.2.10: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Top