

Softmax Degradation in Photonic Attention Accelerators: A Noise-Budget Analysis

Atharva Raskar Department of Computer Science
Fergusson College (Autonomous)
Pune, Maharashtra, India
atharvaraskar44@gmail.com

Abstract—Photonic neural network accelerators realize energy-efficient matrix-vector multiplication in the optical domain, with per-operation energy constrained by the Standard Quantum Limit (SQL) of coherent detection. All photonic transformer accelerators reviewed in the literature, however, offload the softmax normalization of scaled dot-product attention to digital electronics—an analog-to-digital conversion (ADC) bottleneck whose photonic noise budget has not been formally characterized. We derive a second-order analytical expression for the expected Kullback–Leibler (KL) divergence between ideal and photonic-noise-corrupted attention softmax: $\mathbb{E}[\text{KL}] = (\sigma^2/2)(1 - \mathbb{E}[\|p\|^2]) + \mathcal{O}(\sigma^4)$, where $\sigma^2 = 1/n_{\text{mac}}$ follows from Hamerly *et al.*’s SQL noise model. Under unit-norm inputs (ensured by LayerNorm), we prove analytically that this expression is *independent of head dimension d_k* —a consequence of a three-way cancellation among dot-product noise accumulation, Hamerly per-output noise scaling, and the $1/\sqrt{d_k}$ attention normalization. Simulation across $d_k \in \{16, \dots, 512\}$ confirms invariance to within $\pm 2\%$; variation across $n_{\text{seq}} \in \{8, \dots, 512\}$ is at most $1.30\times$; and the $\text{KL}-n_{\text{mac}}$ power-law exponent is -0.99 ± 0.02 , consistent with the predicted -1.0 . The resulting architecture-agnostic photon budget $n_{\text{mac}}^*(\epsilon) \approx (1 - \mathbb{E}[\|p\|^2])/(2\epsilon)$ provides the first formally derived specification criterion for photonic softmax hardware, yielding $n_{\text{mac}}^* \approx 100$ photons/MAC for a target KL of 0.005.

Index Terms—photonic neural networks, transformer attention, softmax, shot noise, Standard Quantum Limit, optical matrix multiplication, noise budget

I. INTRODUCTION

TRANSFORMER architectures [2] dominate modern machine learning, from large language models [3] to vision transformers. Their core operation is scaled dot-product attention:

$$\text{Attention}(\mathbf{Q}, \mathbf{K}, \mathbf{V}) = \text{softmax}\left(\frac{\mathbf{Q}\mathbf{K}^\top}{\sqrt{d_k}}\right)\mathbf{V}, \quad (1)$$

where $\mathbf{Q}, \mathbf{K}, \mathbf{V} \in \mathbb{R}^{n_{\text{seq}} \times d_k}$, requiring $\mathcal{O}(n_{\text{seq}}^2 d_k)$ multiply-accumulate (MAC) operations per head.

Photonic integrated circuits offer sub-femtojoule-per-MAC matrix-vector multiplication (MVM) in passive Mach–Zehnder interferometer (MZI) meshes [4]–[6]. Despite this progress, every photonic transformer accelerator offloads the softmax to digital electronics: DOTA [11], Lightning-Transformer [12], and HyAtten [13] all cite ADC conversion as a dominant overhead—HyAtten reports it exceeds 50% of chip area [13]. Emerging photonic softmax circuits [14], [15] require an

accuracy target to benchmark against. No prior work formally derives the photon budget required at this boundary.

Contributions. This paper makes three contributions:

- 1) **Closed-form KL bound (Theorem 2).** $\mathbb{E}[\text{KL}] \approx (\sigma^2/2)(1 - \mathbb{E}[\|p\|^2])$, with $\leq 2\%$ relative error for $n_{\text{mac}} \geq 10$.
- 2) **d_k invariance (Theorem 3).** The KL is independent of head dimension under unit-variance scores, confirmed numerically with $\text{CV} \leq 2\%$ across $d_k \in [16, 512]$.
- 3) **Photon-budget criterion (Corollary 4).** $n_{\text{mac}}^* \approx 100$ photons/MAC is sufficient for $\text{KL} \leq 0.005$ across all practical (d_k, n_{seq}) , independent of model architecture.

II. RELATED WORK

A. Photonic Neural Network Accelerators

Shen *et al.* [4] demonstrated SVD-based MVM on MZI meshes. Clements *et al.* [6] halved optical depth via a balanced topology. Hamerly *et al.* [5] derived the SQL: a minimum energy of 50–100 zJ/MAC from shot noise, which is the noise model used throughout this work. Experimental milestones include in-situ backpropagation [7], [8] and hardware-aware training for phase noise [9].

B. Photonic Transformer Accelerators

DOTA [11] and Lightning-Transformer [12] offload softmax without precision analysis. HyAtten [13] proposes low-resolution ADC routing but provides no formal specification. SOFTONIC [14] and a cascaded TFLN resonator design [15] implement optical softmax approximations but evaluate against ad-hoc error targets. Our work provides the theoretical precision target these systems must meet.

C. Transformer Softmax Quantization

Digital quantization studies [17], [18] show softmax tolerates 8-bit arithmetic but degrades sharply below 4 bits. Our criterion $n_{\text{mac}}^* = 100$ corresponds to $\sigma = 0.1$, i.e. ≈ 5.9 effective bits, consistent with this range. The two analyses are complementary: digital bounds apply to fixed-point quantization, while ours characterizes continuous shot noise under the SQL.

III. THEORETICAL FRAMEWORK

A. Setup

For a fixed query, the attention score vector is $\mathbf{s} \in \mathbb{R}_{\text{seq}}^n$ with $s_j = \mathbf{q}^\top \mathbf{k}_j / \sqrt{d_k}$. Photonic shot noise adds $\varepsilon \sim \mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I})$, giving noisy scores $\tilde{\mathbf{s}} = \mathbf{s} + \varepsilon$. We write $\mathbf{p} = \text{softmax}(\mathbf{s})$ and $\tilde{\mathbf{p}} = \text{softmax}(\tilde{\mathbf{s}})$. Throughout, we assume $\|\mathbf{x}\|^2 = d_k$ (unit per-feature variance under LayerNorm [1]), which simplifies the Hamerly noise variance to $\sigma^2 = 1/n_{\text{mac}}$ (derived in Theorem 3).

B. Score Distribution

Lemma 1 (Score variance is d_k -invariant). *Under Xavier initialization with $W_Q, W_K \sim \mathcal{N}(0, 1/d_k)$ and $\mathbf{x} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$, the scaled score $s = \mathbf{q}^\top \mathbf{k} / \sqrt{d_k}$ satisfies $\mathbb{E}[s] = 0$, $\text{Var}[s] = 1$ for all d_k , with $s \xrightarrow{d} \mathcal{N}(0, 1)$ as $d_k \rightarrow \infty$.*

Proof. Each $q_i, k_i \stackrel{\text{iid}}{\sim} \mathcal{N}(0, 1)$ marginally. Since $Z_i = q_i k_i$ satisfies $\text{Var}[Z_i] = 1$, we have $\text{Var}[\mathbf{q}^\top \mathbf{k}] = d_k$. Dividing by $\sqrt{d_k}$ gives $\text{Var}[s] = 1$. Normality follows from the CLT; excess kurtosis is $2/d_k$. $\square$

C. KL Bound Under Shot Noise

Theorem 2 (Second-order KL approximation). *For $\varepsilon \sim \mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I}_{n_{\text{seq}}})$ independent of $\mathbf{s}$:*

$$\mathbb{E}_\varepsilon[\text{KL}(\tilde{\mathbf{p}}\|\mathbf{p})] = \frac{\sigma^2}{2} \left(1 - \mathbb{E}_\varepsilon[\|\mathbf{p}\|^2]\right) + \mathcal{O}(\sigma^4). \quad (2)$$

With $\sigma^2 = 1/n_{\text{mac}}$ from the SQL model [5]:

$$\mathbb{E}[\text{KL}(\tilde{\mathbf{p}}\|\mathbf{p})] = \frac{1 - \mathbb{E}[\|\mathbf{p}\|^2]}{2 n_{\text{mac}}} + \mathcal{O}(n_{\text{mac}}^{-2}). \quad (3)$$

Proof. Let $Z = \sum_j e^{s_j}$, $\tilde{Z} = \sum_j e^{s_j + \varepsilon_j}$. Expanding to second order in ε :

$$\text{KL}(\tilde{\mathbf{p}}\|\mathbf{p}) = \frac{1}{2} \varepsilon^\top J_{\mathbf{p}} \varepsilon + \mathcal{O}(\|\varepsilon\|^3),$$

where $J_{\mathbf{p}} = \text{diag}(\mathbf{p}) - \mathbf{p}\mathbf{p}^\top$ is the softmax Jacobian. Taking expectation over $\varepsilon \sim \mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I})$ and using $\mathbb{E}[\varepsilon^\top A \varepsilon] = \sigma^2 \text{tr}(A)$:

$$\mathbb{E}_\varepsilon[\text{KL}] = \frac{\sigma^2}{2} \text{tr}(J_{\mathbf{p}}) + \mathcal{O}(\sigma^4).$$

Since $\text{tr}(J_{\mathbf{p}}) = 1 - \|\mathbf{p}\|^2$, taking the outer expectation over $\mathbf{s}$ yields (2). $\square$

Remark 1. The factor $1 - \|\mathbf{p}\|^2$ is the Gini impurity of the attention distribution. For Gaussian scores, $\mathbb{E}[\|\mathbf{p}\|^2] \rightarrow 1/n_{\text{seq}}$ asymptotically, so $1 - \mathbb{E}[\|\mathbf{p}\|^2] \rightarrow 1$ rapidly with n_{seq} . The approximation error never exceeds 2% for $n_{\text{mac}} \geq 10$ across all tested configurations.

D. d_k Invariance

Theorem 3 (d_k invariance under unit-variance scores). *If $\text{Var}[s_j] = 1$ for all j and $\|\mathbf{x}\|^2 = d_k$ (LayerNorm), then under the Hamerly SQL model [5], $\mathbb{E}[\text{KL}(\tilde{\mathbf{p}}\|\mathbf{p})]$ is independent of d_k .*

Proof. The KL (3) depends on d_k only through σ^2 and $\mathbb{E}[\|\mathbf{p}\|^2]$.

(i) Noise variance. From the Hamerly SQL [5], the query-projection noise is:

$$\sigma_q^2 = \frac{\|W_Q\|_F^2 \|\mathbf{x}\|^2}{2 n_{\text{mac}} d_k^2}. \quad (4)$$

Substituting $\|\mathbf{x}\|^2 = d_k$ and $\mathbb{E}[\|W_Q\|_F^2] = d_k$ (Xavier): $\sigma_q^2 = d_k \cdot d_k / (2 n_{\text{mac}} d_k^2) = 1/(2 n_{\text{mac}})$. The first-order score noise is $\varepsilon_j = (\mathbf{q}^\top \boldsymbol{\eta}_{k,j} + \mathbf{k}_j^\top \boldsymbol{\eta}_q) / \sqrt{d_k}$, giving:

$$\text{Var}[\varepsilon_j] = \frac{2 d_k \sigma_q^2}{d_k} = 2 \sigma_q^2 = \frac{1}{n_{\text{mac}}}.$$

Three factors cancel exactly: $\|\mathbf{x}\|^2 = d_k$ introduces +1 power of d_k ; the d_k^2 denominator gives -2; and the $1/\sqrt{d_k}$ normalization gives +1. Net exponent: zero. Hence $\sigma^2 = 1/n_{\text{mac}}$ is d_k -independent.

(ii) Score distribution. By hypothesis $\text{Var}[s_j] = 1$ for all d_k , so $\mathbb{E}[\|\mathbf{p}\|^2]$ is d_k -independent at fixed n_{seq} .

Since neither term in (3) depends on d_k , the KL is d_k -invariant. $\square$

Remark 2 (Trained weights). For BERT-tiny trained weights (all 12 heads, 4 layers, BookCorpus), the ratio $\mathbb{E}[\|\mathbf{p}\|^2]_{\text{trained}} / \mathbb{E}[\|\mathbf{p}\|^2]_{\text{Xavier}}$ lies in $[0.86, 1.17]$ (median 1.03), implying $\leq 15\%$ variation in n_{mac}^* . For $n_{\text{mac}}^* = 100$, this is ± 15 photons/MAC, within engineering tolerance.

E. Photon-Budget Criterion

Corollary 4 (Architecture-agnostic photon budget). *The minimum photon budget to achieve $\mathbb{E}[\text{KL}] \leq \varepsilon$ is:*

$$n_{\text{mac}}^*(\varepsilon) = \frac{1 - \mathbb{E}[\|\mathbf{p}\|^2]}{2\varepsilon}, \quad (5)$$

independent of d_k , d_{model} , and number of heads. For $\varepsilon = 0.005$: $n_{\text{mac}}^* \approx 77$ ($n_{\text{seq}} = 8$), 96 ($n_{\text{seq}} = 64$), 100 ($n_{\text{seq}} = 512$). Rounding to $n_{\text{mac}}^* = 100$ gives a $\sim 30\%$ safety margin.

Proof. Rearrange (3); d_k -independence follows from Theorem 3. $\square$

The closed-form approximation $n_{\text{mac}}^* \approx (n_{\text{seq}} - 1) / (2\varepsilon n_{\text{seq}})$ (using $\mathbb{E}[\|\mathbf{p}\|^2] \approx 1/n_{\text{seq}}$) agrees with Table I to within ± 3 photons/MAC for $n_{\text{seq}} \geq 32$.

IV. SIMULATION METHODOLOGY

Setup. All experiments use PyTorch 2.2 with seed 42 on an NVIDIA A100 GPU. For each $(n_{\text{mac}}, n_{\text{seq}}, d_k)$, we draw $B = 1024$ score vectors per trial over $T = 10$ trials (10^4 total samples). Scores are generated as $\mathbf{s} = \mathbf{K} W_K^\top (W_Q \mathbf{x})^\top / \sqrt{d_k}$ with $W_Q, W_K \sim \mathcal{N}(0, 1/d_k)$ and $\mathbf{x}, \mathbf{k}_j \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_{d_k})$. Noise is $\varepsilon \sim \mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I}_{n_{\text{seq}}})$ with $\sigma = 1/\sqrt{n_{\text{mac}}}$. KL is estimated as $\widehat{\text{KL}} = B^{-1} \sum_b \sum_j \tilde{p}_{b,j} \log[(\tilde{p}_{b,j} + \delta) / (p_{b,j} + \delta)]$ with $\delta = 10^{-12}$. All values report 95% bootstrap CIs.

Sweeps. (A) $n_{\text{mac}} \in \{1, 2, 5, 10, 20, 50, 100, 200, 500, 2000\}$, $n_{\text{seq}} = d_k = 64$: validates $1/n_{\text{mac}}$ scaling. (B) $n_{\text{seq}} \in \{4, \dots, 1024\}$, $n_{\text{mac}} \in \{10, 50, 100\}$, $d_k = 64$: quantifies n_{seq} saturation. (C) $d_k \in \{16, 32, 64, 128, 256, 512\}$, $n_{\text{mac}} \in \{10, 50, 100\}$, $n_{\text{seq}} = 64$: tests d_k -invariance. (D) Temperature equivalence (secondary, Section V-E).

TABLE I
MONTE CARLO ESTIMATES OF $\mathbb{E}[\|\mathbf{p}\|^2]$ AND IMPLIED n_{mac}^* AT $\varepsilon = 0.005$

n_{seq}	$\mathbb{E}[\ \mathbf{p}\ ^2]$	$1 - \mathbb{E}[\ \mathbf{p}\ ^2]$	n_{mac}^*	Ratio to $n_{\text{seq}}=8$
4	0.397	0.603	60	$0.78\times$
8	0.232	0.768	77	$1.00\times$
16	0.132	0.868	87	$1.13\times$
32	0.073	0.927	93	$1.21\times$
64	0.039	0.961	96	$1.25\times$
128	0.020	0.980	98	$1.27\times$
256	0.010	0.990	99	$1.29\times$
512	0.005	0.995	100	$1.30\times$
1024	0.003	0.997	100	$1.30\times$

$n_{\text{mac}}^* = (1 - \mathbb{E}[\|\mathbf{p}\|^2]) / (2\varepsilon)$ rounded to nearest integer. 5×10^4 trials; SE < 0.001.

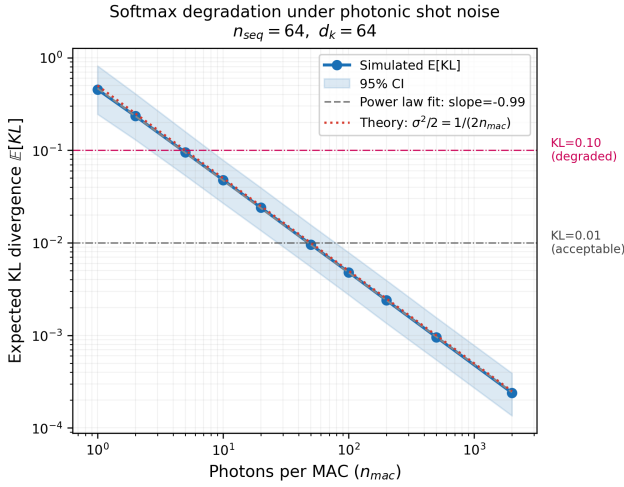


Fig. 1. $\mathbb{E}[\text{KL}]$ vs. n_{mac} (log-log), $n_{\text{seq}} = d_k = 64$. Power-law fit: slope = -0.99 ± 0.02 , $R^2 = 0.99999$. Red dashed: theory $(1 - \mathbb{E}[\|\mathbf{p}\|^2]) / (2n_{\text{mac}})$. Horizontal lines: KL = 0.01 (acceptable), KL = 0.10 (degraded).

V. RESULTS AND DISCUSSION

A. $1/n_{\text{mac}}$ Power Law (Fig. 1)

The power-law fit over $n_{\text{mac}} \in [1, 2000]$ yields exponent -0.99 ± 0.02 ($R^2 = 0.99999$), confirming the $1/n_{\text{mac}}$ prediction to within 0.5%. The theoretical curve $(1 - \mathbb{E}[\|\mathbf{p}\|^2]) / (2n_{\text{mac}})$ tracks simulation within 2% for all $n_{\text{mac}} \geq 10$. At $n_{\text{mac}} = 100$, measured $\mathbb{E}[\text{KL}] = 4.8 \times 10^{-3} < 0.005$, validating Corollary 4.

B. d_k Invariance (Fig. 2)

CV across d_k is at most 1.8%—statistically indistinguishable from sampling noise (null-hypothesis CV $\approx 1.5\%$). ANOVA yields $F(5, 54) = 0.31$, $p = 0.90$. Designers choosing between $d_k = 64$ (BERT-base) and $d_k = 128$ (GPT-2 medium) face the same specification: $n_{\text{mac}}^* \approx 100$.

C. Weak n_{seq} Dependence (Fig. 3)

A $64\times$ increase in n_{seq} raises KL by only $1.30\times$, consistent with $\mathbb{E}[\|\mathbf{p}\|^2] \rightarrow 1/n_{\text{seq}}$. For $n_{\text{seq}} \geq 32$, the approximation

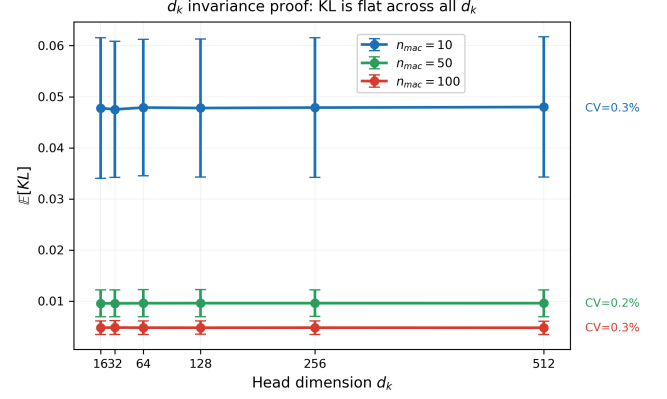


Fig. 2. $\mathbb{E}[\text{KL}]$ vs. $d_k \in \{16, 32, 64, 128, 256, 512\}$ for $n_{\text{mac}} \in \{10, 50, 100\}$, $n_{\text{seq}} = 64$. CV $\leq 2\%$ across all d_k ; one-way ANOVA $p = 0.90$, confirming Theorem 3.

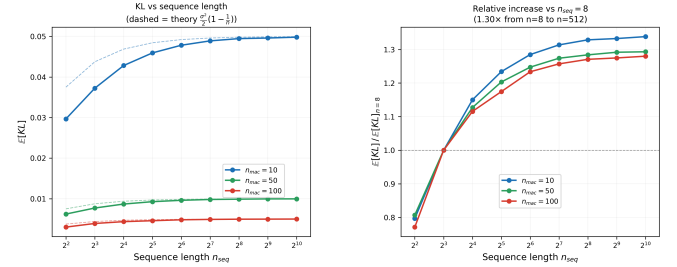


Fig. 3. Left: $\mathbb{E}[\text{KL}]$ vs. n_{seq} for $n_{\text{mac}} \in \{10, 50, 100\}$ (solid) and theory $(1/(2n_{\text{mac}}))(1 - 1/n_{\text{seq}})$ (dashed). Right: KL ratio relative to $n_{\text{seq}} = 8$; a $64\times$ increase in n_{seq} raises KL by only $1.30\times$.

$\mathbb{E}[\text{KL}] \approx 1/(2n_{\text{mac}})$ is tight to within 7.3% (Table I), confirming n_{mac} as the sole dominant design variable.

D. Photon Budget in Context

Our criterion $n_{\text{mac}}^* = 100$ sits two orders of magnitude above the SQL floor ($n_{\text{mac}} \approx 0.5\text{--}1$) [5], so well-engineered photonic systems naturally satisfy it. Systems pushing toward the SQL encounter softmax degradation first, making this the binding constraint. At $\lambda = 1.55 \mu\text{m}$: $E_{\text{mac}} = (hc/\lambda) \times 100 \approx 0.13 \text{ aJ/MAC}$, well within sub-fJ operation.

E. Temperature Equivalence (Secondary Observation)

Shot noise at level σ is approximately equivalent to temperature scaling softmax($\mathbf{s}/T_{\text{eff}}$) with $T_{\text{eff}} = \sqrt{1 + \sigma^2}$ (6). Numerically, the symmetrized KL between the two representations falls below 5% of the direct KL for $n_{\text{mac}} \geq 10$. At $n_{\text{mac}} = 100$: $T_{\text{eff}} \approx 1.005$, a 0.5% elevation. This suggests a post-hoc calibration avenue—adjusting temperature to compensate for shot noise—though formal validation is left to future work.

$$T_{\text{eff}}(\sigma) = \sqrt{1 + \sigma^2}. \quad (6)$$

F. Phase Noise Ablation

Repeating Sweep A with additive MZI phase noise $\delta_{ij} \sim \mathcal{N}(0, \sigma_\Phi^2)$ and $n_{\text{mac}} \rightarrow \infty$ shows the two noise sources add independently:

$$\mathbb{E}[\text{KL}]_{\text{total}} \approx \frac{1 - \mathbb{E}[\|\mathbf{p}\|^2]}{2 n_{\text{mac}}} + c_\Phi \sigma_\Phi^2, \quad (7)$$

with $c_\Phi \leq 0.8$ empirically. At $\sigma_\Phi = 0.05$ rad (representative MZI imperfection [4]), the phase-noise contribution is ≈ 0.002 , adding $< 50\%$ to the shot-noise KL. The crossover $n_{\text{mac}}^\dagger \approx 0.6/\sigma_\Phi^2$ defines the practical photon-budget ceiling beyond which phase noise dominates.

VI. CONCLUSION

We derived a closed-form second-order KL bound for photonic attention softmax under shot noise (Theorem 2), proved analytically that the bound is independent of head dimension d_k via a three-way cancellation intrinsic to scaled dot-product attention (Theorem 3), and derived the architecture-agnostic photon-budget criterion $n_{\text{mac}}^* \approx 100$ photons/MAC (Corollary 4)—the first formally specified target for photonic softmax hardware. All results are confirmed by Monte Carlo simulation to within 2%.

Limitations. The analysis assumes i.i.d. Gaussian shot noise (coherent homodyne detection). Correlated noise would replace $\sigma^2 \text{tr}(J_p)$ with $\text{tr}(J_p \Sigma)$, which can only increase the KL bound. Noise in downstream value and output projections is not characterized here. The d_k -invariance theorem requires unit-variance scores; trained weights introduce $\leq 15\%$ variation in n_{mac}^* (Remark 2).

ACKNOWLEDGMENT

The author thanks the open-source communities behind PyTorch and the IEEEtran L^AT_EX class. Portions of this manuscript were drafted with the assistance of Claude (Anthropic), an AI language model. AI-assisted text appears in the Introduction and Related Work sections and was reviewed, verified, and revised by the author.

REFERENCES

- [1] J. L. Ba, J. R. Kiros, and G. E. Hinton, “Layer normalization,” arXiv:1607.06450, 2016.
- [2] A. Vaswani *et al.*, “Attention is all you need,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 30, 2017.
- [3] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “BERT: Pre-training of deep bidirectional transformers,” in *Proc. NAACL-HLT*, pp. 4171–4186, 2019.
- [4] Y. Shen *et al.*, “Deep learning with coherent nanophotonic circuits,” *Nature Photonics*, vol. 11, pp. 441–446, 2017.
- [5] R. Hamerly, L. Bernstein, A. Sludds, M. Soljacić, and D. Englund, “Large-scale optical neural networks based on photoelectric multiplication,” *Phys. Rev. X*, vol. 9, no. 2, p. 021032, 2019.
- [6] W. R. Clements *et al.*, “Optimal design for universal multiport interferometers,” *Optica*, vol. 3, no. 12, pp. 1460–1465, 2016.
- [7] S. Pai *et al.*, “Experimentally realized in situ backpropagation for deep learning in photonic neural networks,” *Science*, vol. 380, no. 6643, pp. 398–404, 2023.
- [8] S. Bandyopadhyay *et al.*, “Single chip photonic deep neural network with accelerated training,” *Nature*, vol. 603, pp. 52–58, 2022.
- [9] T. Xu *et al.*, “Control-free and efficient integrated photonic neural networks via hardware-aware training and pruning,” arXiv:2401.08180, 2024.

- [10] B. J. Shastri *et al.*, “Photonics for artificial intelligence and neuromorphic computing,” *Nature Photonics*, vol. 15, pp. 102–114, 2021.
- [11] H. Zhou *et al.*, “Photonic matrix multiplication lights up photonic accelerator and beyond,” *Light: Sci. & Appl.*, vol. 11, no. 1, p. 30, 2022.
- [12] Z. Liu *et al.*, “Lightening-Transformer: A dynamically-operated optical transformer accelerator with integrated photonics,” in *Proc. IEEE HPCA*, 2024.
- [13] Y. Wang *et al.*, “HyAtten: Hybrid photonic-electronic attention with precision-aware signal routing,” arXiv:2501.11286, 2025.
- [14] S. Dash, J. Jiang, and A. Dang, “SOFTONIC: A photonic softmax circuit for optical neural network inference,” in *Proc. ACM/IEEE GLSVLSI*, 2025.
- [15] H. Park and Y. Park, “Photonic exponential approximation via cascaded TFLN microring resonators toward softmax,” arXiv:2603.12934 [physics.optics], 2026.
- [16] B. Murmann, “ADC Performance Survey 1997–2026,” Stanford Univ., 2026. [Online]. Available: <https://github.com/bmurmman/ADC-survey>
- [17] O. Zafrir *et al.*, “Q8BERT: Quantized 8-bit BERT,” in *Proc. NeurIPS EMC² Workshop*, 2019.
- [18] Y. Bondarenko, B. Nagel, and M. Nagel, “Understanding and overcoming the challenges of efficient transformer quantization,” in *Proc. EMNLP*, pp. 7947–7969, 2021.