
AtiNAMatiC-Mono — User Manual

Version 1.0.0 · ATIJ STUDIO · Windows · macOS · Linux · VST3 · CLAP · LV2 · AU (macOS) · Free and open source (GPL v3)

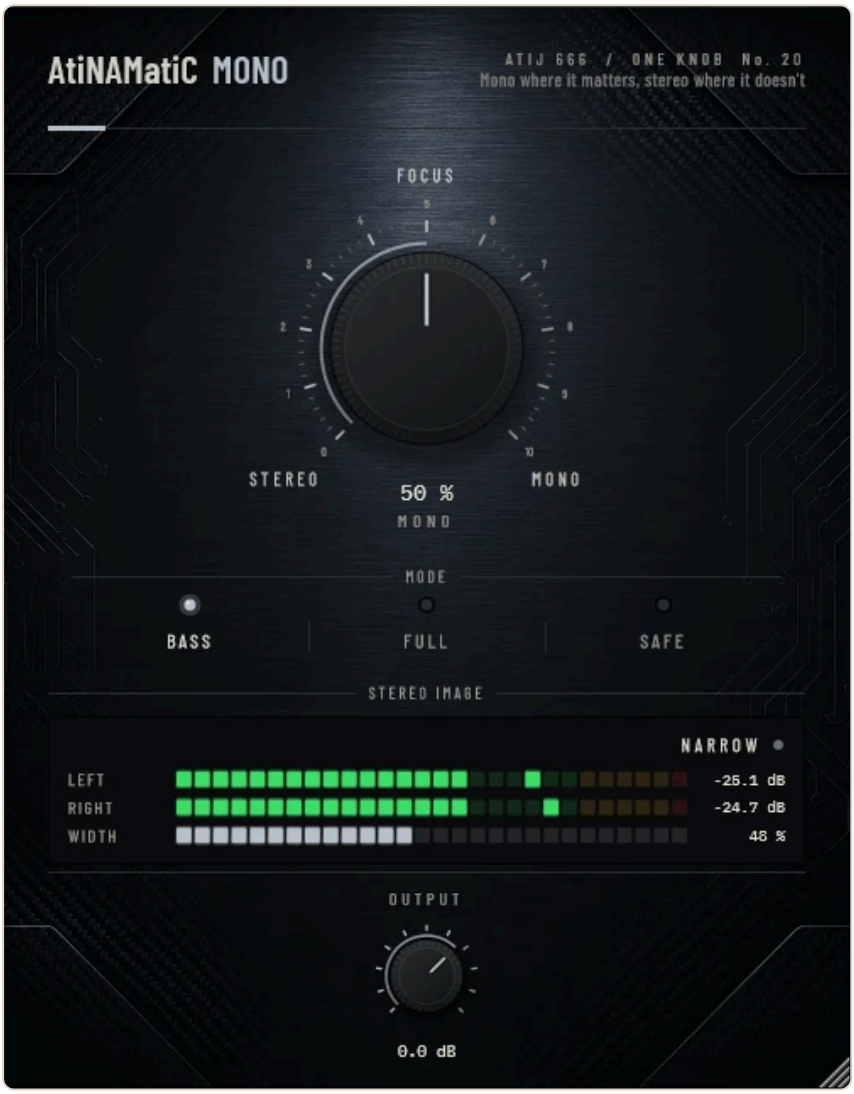

What's new in v1.0.0

- First public release, now **free and open source** (GPL v3).
- New look, shared across the whole ONE KNOB Series.
- **Every plug-in format:** VST3, CLAP and LV2 on Windows, macOS and Linux, plus AU on macOS. (The standalone app has been retired: these work best inside your DAW.)
- New **ONE KNOB Series installers** for Windows and macOS: tick the plug-ins and formats you want, skip the rest. Linux gets an install script that asks the same questions.

1. What it is

Stereo amp sims, doublers and wideners are great until the low end gets wide and woolly, or the mix is played on a phone or a club PA in mono. AtiNAMatiC-Mono puts stereo where it helps and mono where it matters, with one knob.

- **Bass:** the low end becomes mono below a crossover you set; the rest of the image is untouched.
- **Full:** narrows the whole image from full stereo to mono.
- **Safe:** like Full, but the lows are always mono and the loudness is held as the image narrows.
- Watches left/right correlation and shows **PHASE ISSUE** when the input would partly cancel in mono.
- Zero latency.

2. Signal chain placement

Anywhere after something that makes stereo:

```
Amp sim -> Cab -> Double / Reach / Air -> [AtiNAMatiC-Mono] -> Squash / Level
```

3. Controls

MONO (big knob, 0–100 %, default 50 %)

- **Bass:** the crossover frequency, 40 Hz (0 %) to 400 Hz (100 %), on a log scale. 50 % ≈ 126 Hz.
- **Full / Safe:** how narrow the image is; 0 % = untouched stereo, 100 % = mono.

MODE (switch)

Mode	What MONO does	Loudness
Bass	side removed below the crossover (LR4 high-pass on the side only)	unchanged
Full	whole image narrowed	drops a little as wide content is removed
Safe	lows below 120 Hz always mono + whole image narrowed	held (compensated)

OUTPUT (-24 to +12 dB)

Final trim.

4. Meters

- **LEFT / RIGHT** — peak level of each side.
- **WIDTH** — side-to-mid energy of the output (0 % = mono).
- Status: **STEREO**, **NARROW**, **MONO**, or **PHASE ISSUE** (input correlation below -0.1).

Measured on a wide doubled guitar: Bass at 50 % removes the side below ~60 Hz by 13 dB and at 100 % below ~200 Hz by 25 dB, leaving the upper image and the centre untouched; Full and Safe reach true mono at 100 %, Safe within 0.1 dB of the original loudness.

5. Installation

Windows (64-bit)

- **Easiest:** run `ONE-KNOB-Series-v1.0.0-Windows-x64-Setup.exe`, tick the plug-ins and formats you want and untick the rest.
- **Just this plug-in:** unzip `AtiNAMatiC-Mono-v1.0.0-Windows-x64.zip` and copy:

File	Copy to
`AtiNAMatiC-Mono.vst3`	`C:\Program Files\Common Files\VST3\`
`AtiNAMatiC-Mono.clap`	`C:\Program Files\Common Files\CLAP\`
`AtiNAMatiC-Mono.lv2`	`C:\Program Files\Common Files\LV2\`

macOS 10.15 or later (Apple Silicon and Intel)

- **Easiest:** open `ONE-KNOB-Series-v1.0.0-macOS-Installer.pkg`, click **Customize** and tick the plug-ins and formats you want.
- **Just this plug-in:** unzip `AtiNAMatiC-Mono-v1.0.0-macOS.zip` and copy:

File	Copy to
`AtiNAMatiC-Mono.vst3`	`/Library/Audio/Plug-Ins/VST3/`
`AtiNAMatiC-Mono.component` (AU)	`/Library/Audio/Plug-Ins/Components/`
`AtiNAMatiC-Mono.clap`	`/Library/Audio/Plug-Ins/CLAP/`
`AtiNAMatiC-Mono.lv2`	`/Library/Audio/Plug-Ins/LV2/`

The plug-ins aren't signed by Apple. If macOS blocks the installer, right-click it and choose **Open**. If you copied files from the zip, clear the quarantine flag in Terminal, e.g. `xattr -cr /Library/Audio/Plug-Ins/VST3/AtiNAMatiC-Mono.vst3`.

Linux (x86_64 and ARM64)

- **Easiest:** extract `ONE-KNOB-Series-v1.0.0-Linux-x86_64.tar.gz` (or `-Linux-ARM64`) and run `./install.sh`. It asks which plug-ins and formats to install. Use `./install.sh --system` to install for all users.
- **Just this plug-in:** unzip `AtiNAMatiC-Mono-v1.0.0-Linux-x86_64.zip` (or `-Linux-ARM64`) and copy the `.vst3` folder to `~/.vst3/`, the `.clap` file to `~/.clap/` and the `.lv2` folder to `~/.lv2/`.

Then rescan plug-ins in your DAW.

6. Tips

- After **Double** or **Reach**, Bass at 30–50 % keeps palm mutes centred and tight.
- Use Full at 100 % as a quick mono check of your whole guitar sound.
- Double-click any knob to reset it; hold Shift while dragging for fine control.

AtiNAMatiC-Mono v1.0.0 · Atij 666 Studio