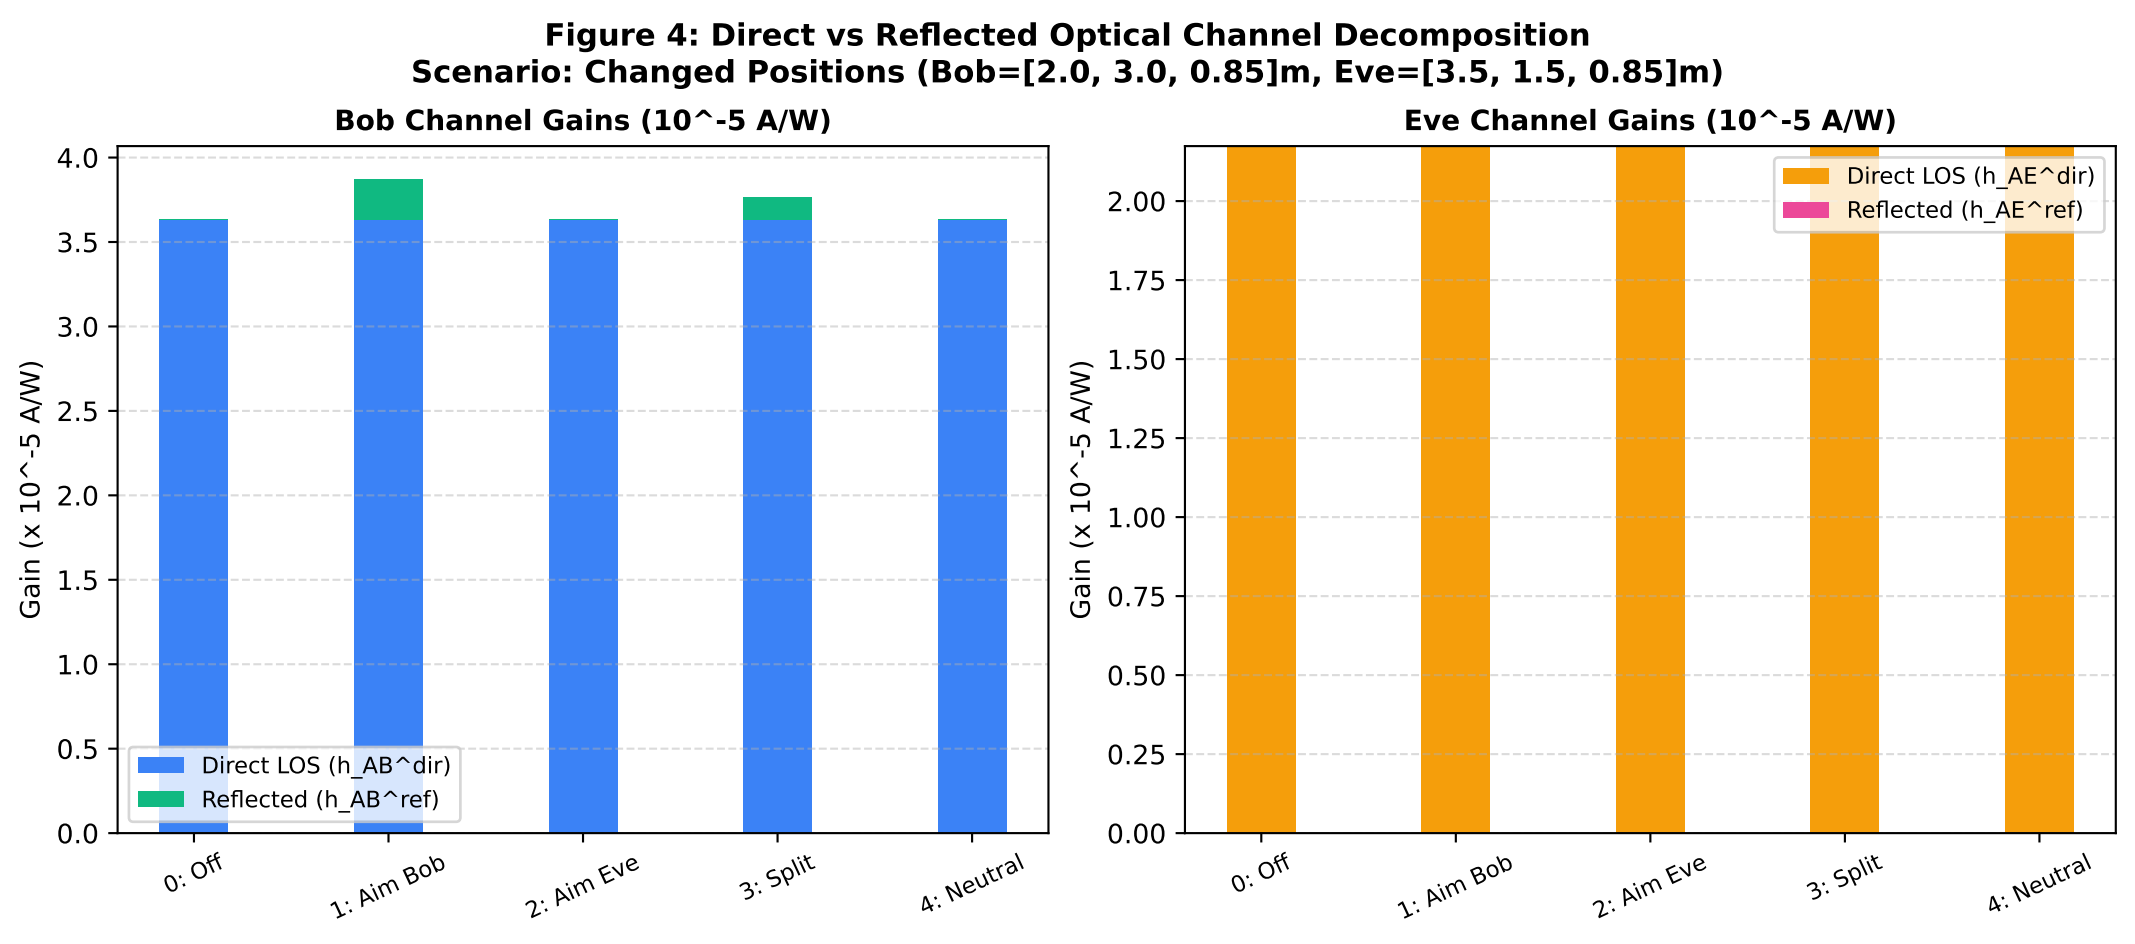
Figure 4: Direct vs Reflected Optical Channel Decomposition
Scenario: Changed Positions (Bob=[2.0, 3.0, 0.85]m, Eve=[3.5, 1.5, 0.85]m)
Bob Channel Gains (10^-5 A/W)
Gain (x 10^-5 A/W)
Direct LOS (h_AB^dir)
Reflected (h_AB^ref)
0: Off
1: Aim Bob
2: Aim Eve
3: Split
4: Neutral
Eve Channel Gains (10^-5 A/W)
Gain (x 10^-5 A/W)
Direct LOS (h_AE^dir)
Reflected (h_AE^ref)
0: Off
1: Aim Bob
2: Aim Eve
3: Split
4: Neutral