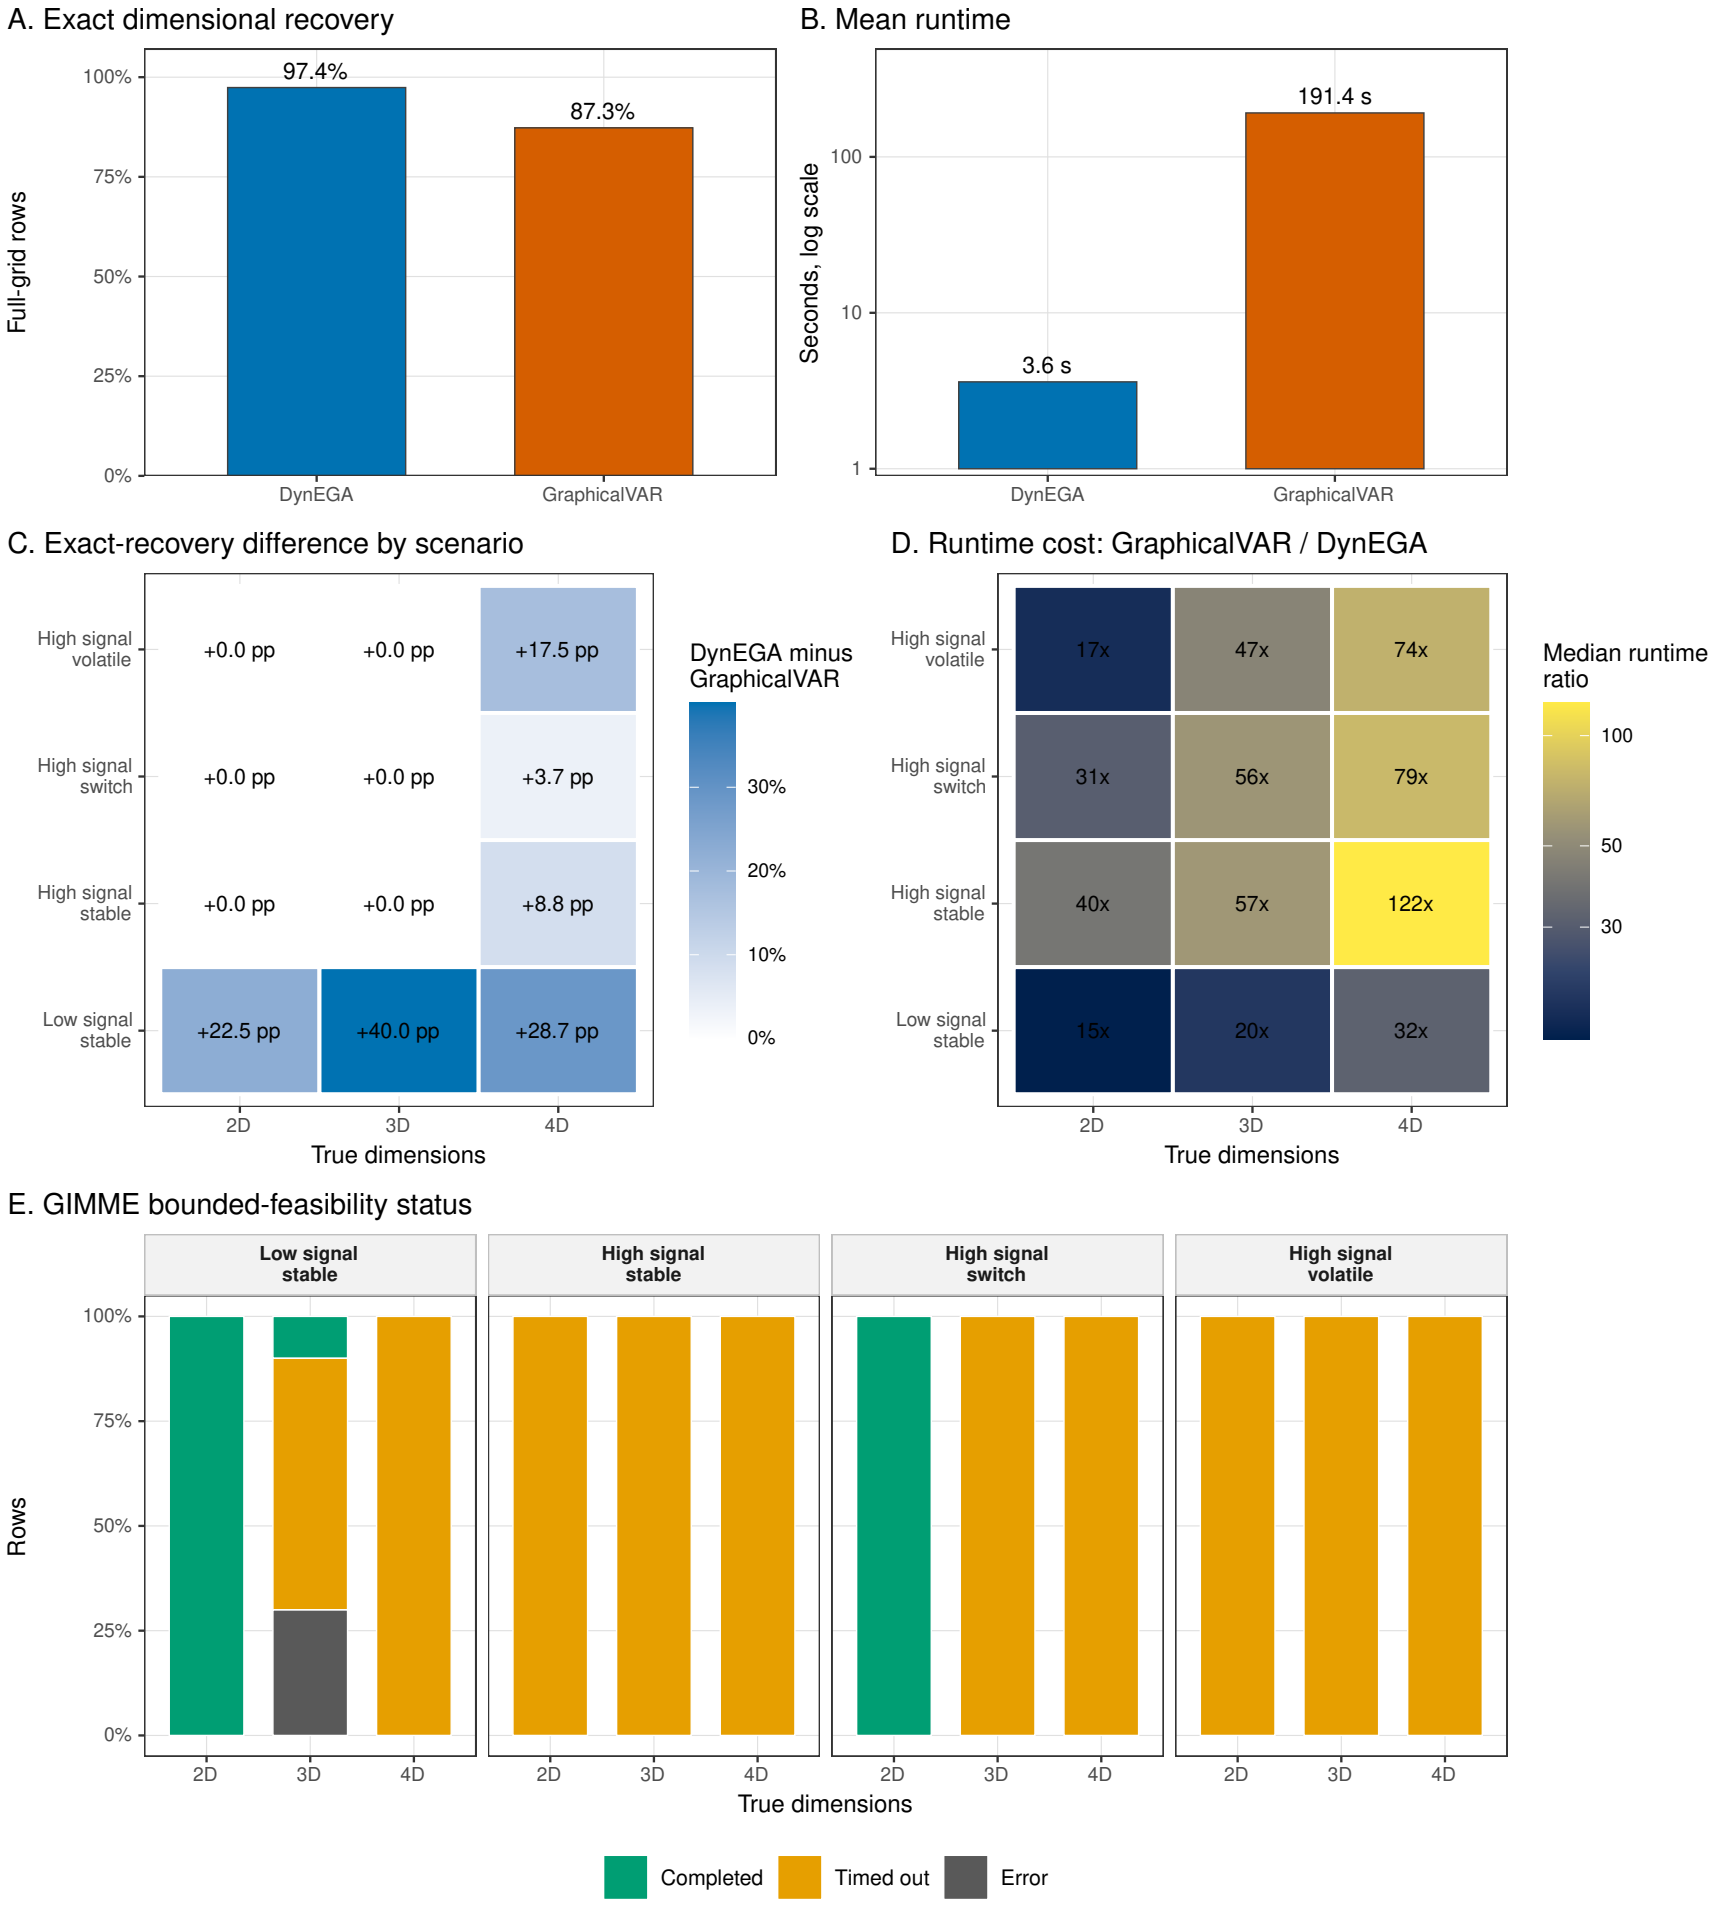
A. Exact dimensional recovery
Full-grid rows
100%
75%
50%
25%
0%
97.4%
87.3%
DynEGA
GraphicalVAR
B. Mean runtime
Seconds, log scale
100
10
1
3.6 s
191.4 s
DynEGA
GraphicalVAR
C. Exact-recovery difference by scenario
High signal volatile
High signal switch
High signal stable
Low signal stable
+0.0 pp
+0.0 pp
+17.5 pp
+0.0 pp
+0.0 pp
+3.7 pp
+0.0 pp
+0.0 pp
+8.8 pp
+22.5 pp
+40.0 pp
+28.7 pp
2D
3D
4D
True dimensions
DynEGA minus GraphicalVAR
30%
20%
10%
0%
D. Runtime cost: GraphicalVAR / DynEGA
17x
47x
74x
31x
56x
79x
40x
57x
122x
15x
20x
32x
Median runtime ratio
100
50
30
E. GIMME bounded-feasibility status
Low signal stable
High signal stable
High signal switch
High signal volatile
Rows
Completed
Timed out
Error