


to be switched off or must have a shutdown pin.


- Low noise interfaces on sensor inputs.


- High frequency lines should be adequately blocked

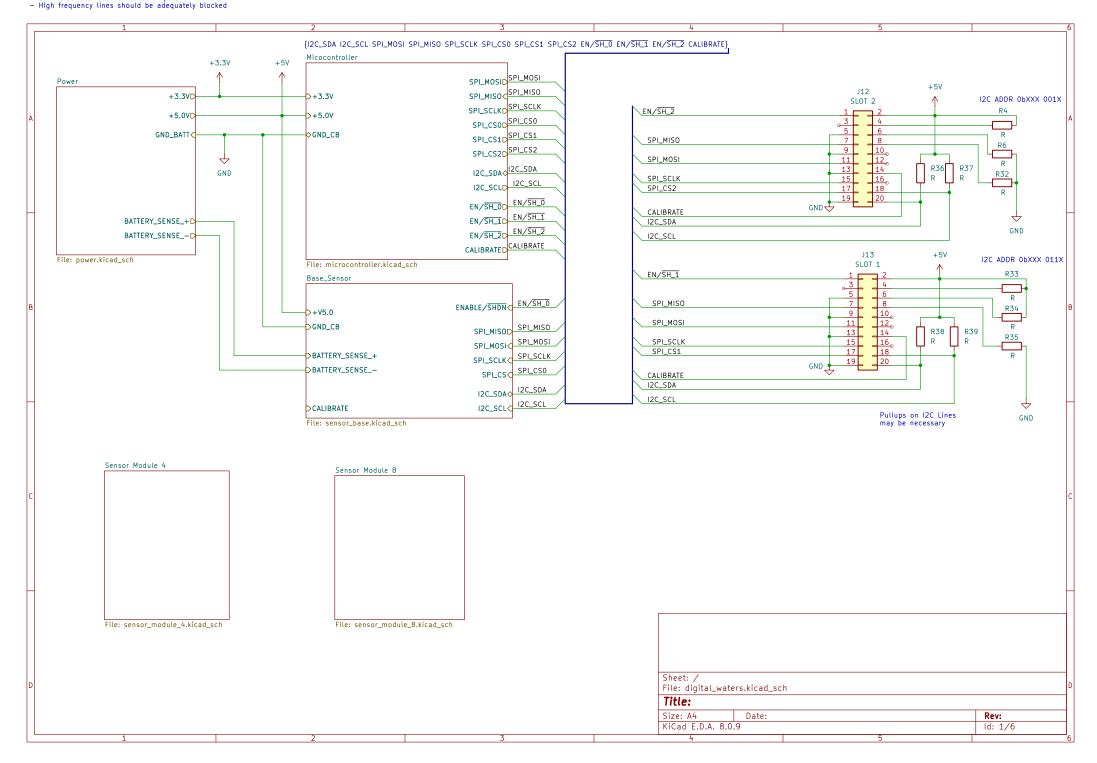

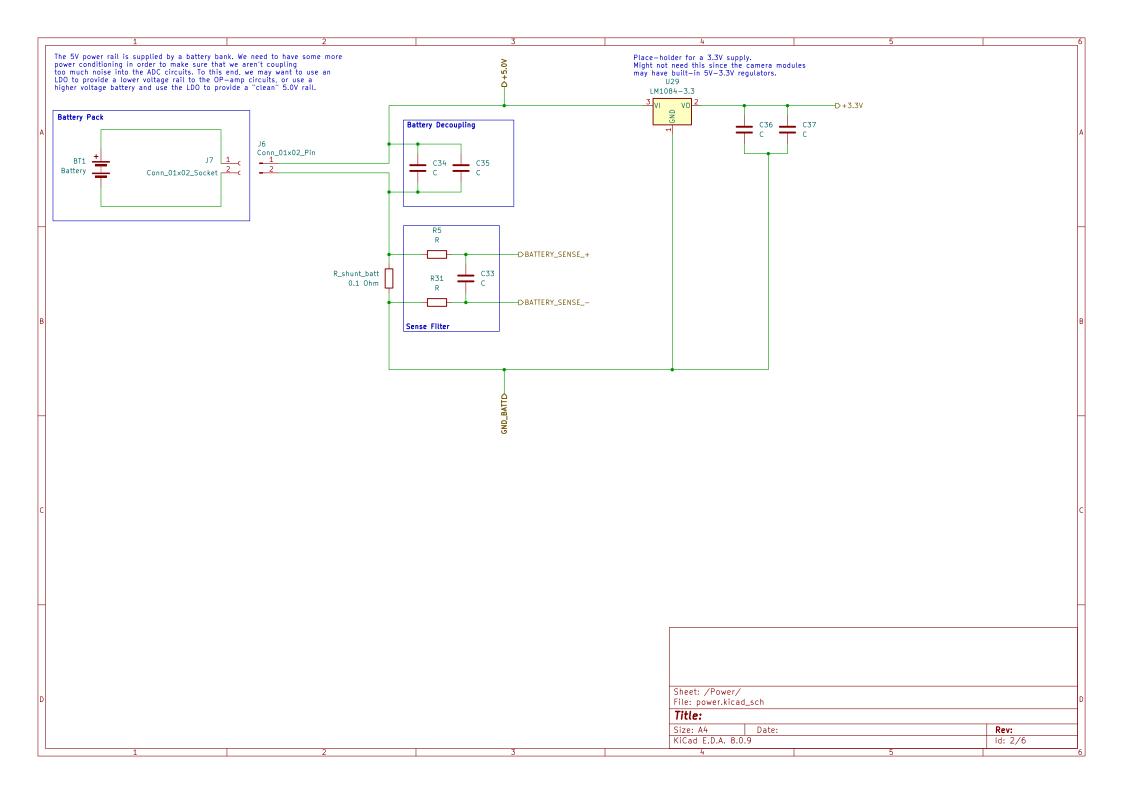

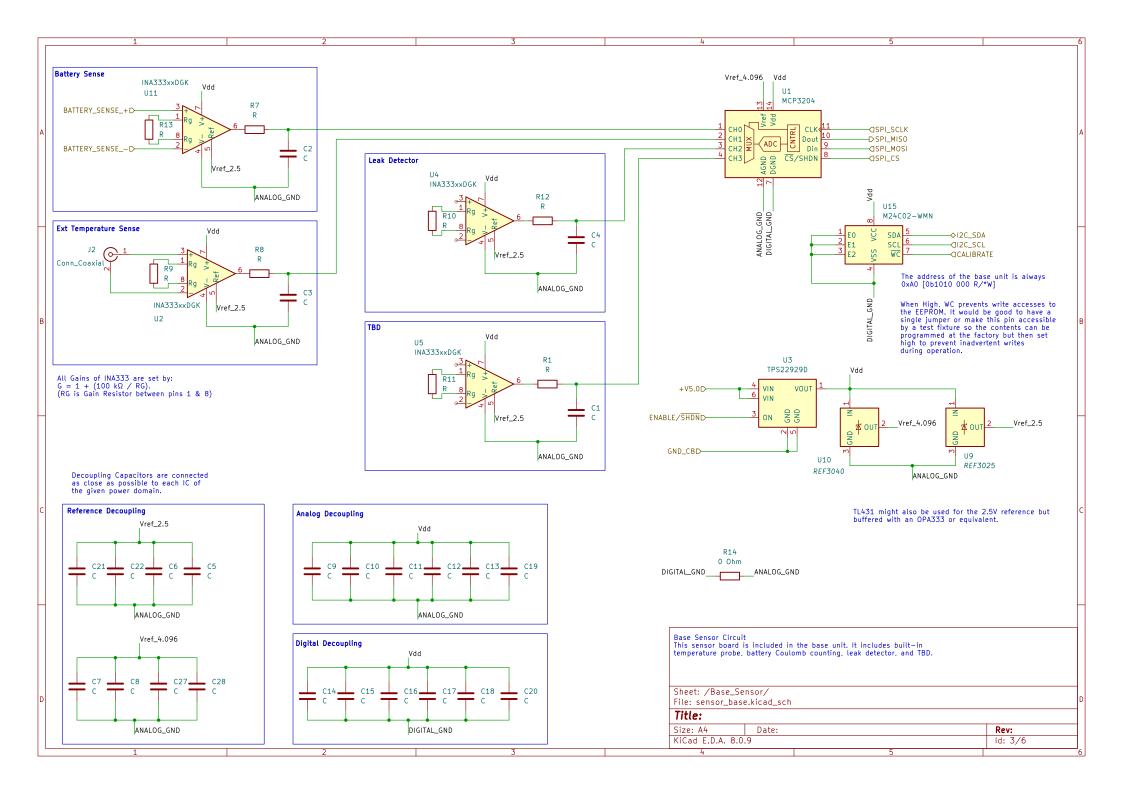

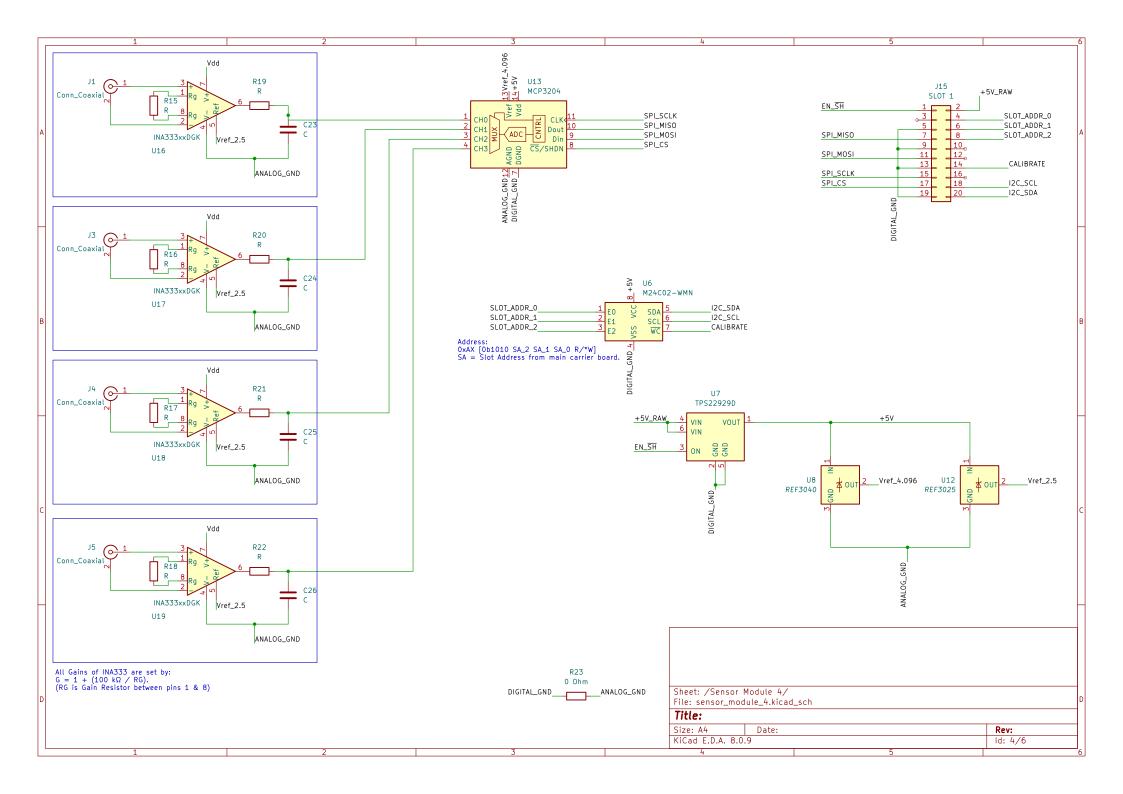

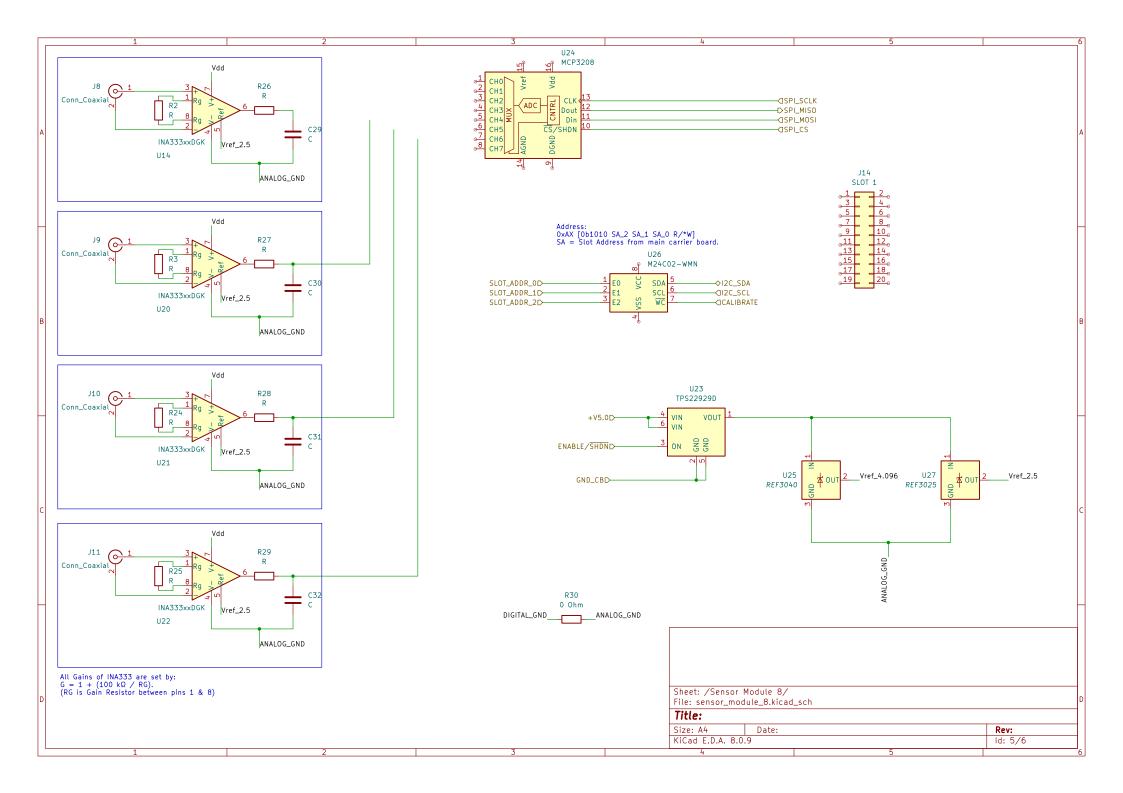

	1	_	<u> </u>		7		In the second se	T .		1 6
	±	1 2	2	<u> </u>	<u> </u>		4		J	°
 ^										
									♦12C_SDA	
									O12C_SUA	
									D12C_SCL	
П										
									△SPI_MISO	
									DSPI_MOSI	
									DSPI_SCLK	
									DSPI_CS0	
									DSPI_CS1	_
В										E
									DSPI_CS2	
									5.500	
									□+5.0V	
Н									→ 3.3V	-
									Q+3.3V	
									♦GND_CB	
									DEN/SH_0	
									DEN/SH_1	
C										c
									DEN/SH_2	
									D CALIDDATE	
									DCALIBRATE	
Н										
						_				
						<u> </u>	Sheet: /Micocontroller/			
D							Sheet: /Micocontroller/ File: microcontroller.kicad_s	sch		D
						-	Title:			
							nue:			
							Size: A4 Date: KiCad E.D.A. 8.0.9			Rev: ld: 6/6
							KiCad E.D.A. 8.0.9			ld: 6/6
L	1	2	2		3		4			T 6