

Style
M8 Socket, shielded
4 pin
A-coding

Ratings
Voltage: 30 V
Current: 3 A

Operating Temperature Range
-40 ~ 105 °C



Materials
① Insulator: PA66, UL 94 HB, black
② Pin: C3604 brass, gold flashing
③ Nut: C3604 brass, nickel plated
④ Shell: C3604 brass, nickel plated
⑤ O-ring: Silicone rubber
⑥ Epoxy: Epoxy resin

Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less


Mechanical Requirements
Life cycle: 1000 mating cycles minimum

Environmental Requirements
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.
Waterproof: IP67


Assembly Info
Wire gauge: 24 AWG max

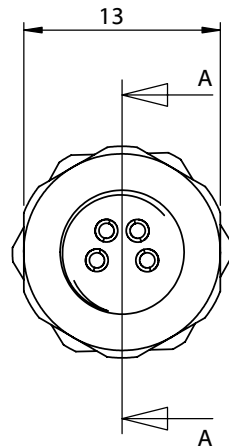



Panel Cut-Out

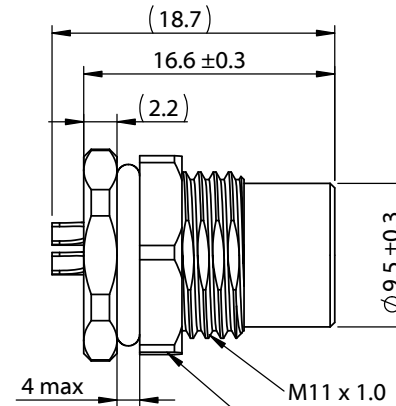

Install from inside the panel, attach nut and tighten from the outside.

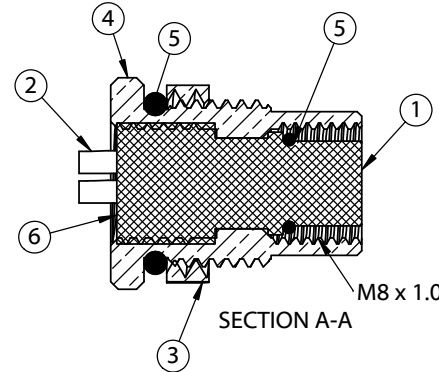

SECTION A-A



Front View
Not to Scale

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	8/25/21	Initial Release	CR Digitally signed by CR Date: 2026.07.08 12:21:29 -07'00'	RoHS compliant			
			Verified: KW Digitally signed by KW Date: 2026.07.28 16:13:08 -07'00'	Function test: no open, no short circuit, no intermittent	Size:	Part number:	
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M8 A-code socket, 4 pin, 8xL18.7 mm, panel mount, solder cup, gold plated, IP67	A	54-00293	
					Scale: 2:1		Sheet 1 of 1

5

4

3

2

1