

APPLICATIONS

CAST ELASTOMERS

Unilink® 1030 is designed to provide delayed “snap cures” in polyester polyol elastomers, allowing molds to be filled while the mixture remains relatively low in viscosity. When gelling begins, it takes place rapidly, allowing the casting to be removed from the mold quickly for maximum productivity.


Unilink® 1030 is a proprietary zirconium chelate in a reactive diol solvent. It features a sharp viscosity increase profile that is very similar to mercury, but without the exposure risks or environmental hazards.

Because the diol solvent reacts into the polyurethane it works without leaving any residue. In addition, Unilink® 1030 is selective towards the gelling reaction, so it exhibits very low “blow” or water reactivity, and its low color makes it particularly suitable for color-critical formulations.

Elastomers cured with Unilink® 1030 have excellent physical properties that are comparable, and in some cases superior to their mercury-cured equivalents.


Reaction Profile

UNILINK® 1030 vs. Mercury

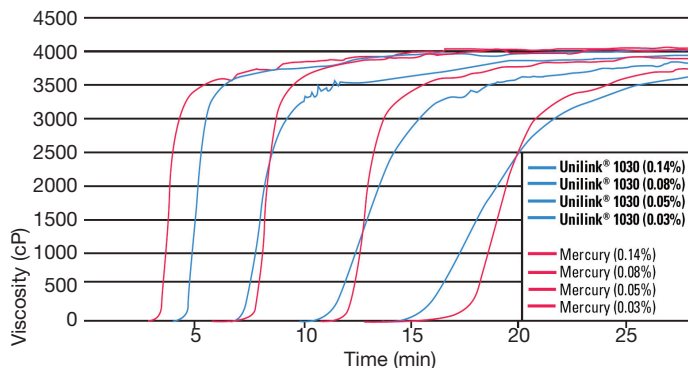

Physical Property Comparison

UNILINK® 1030 vs. Mercury Catalyst

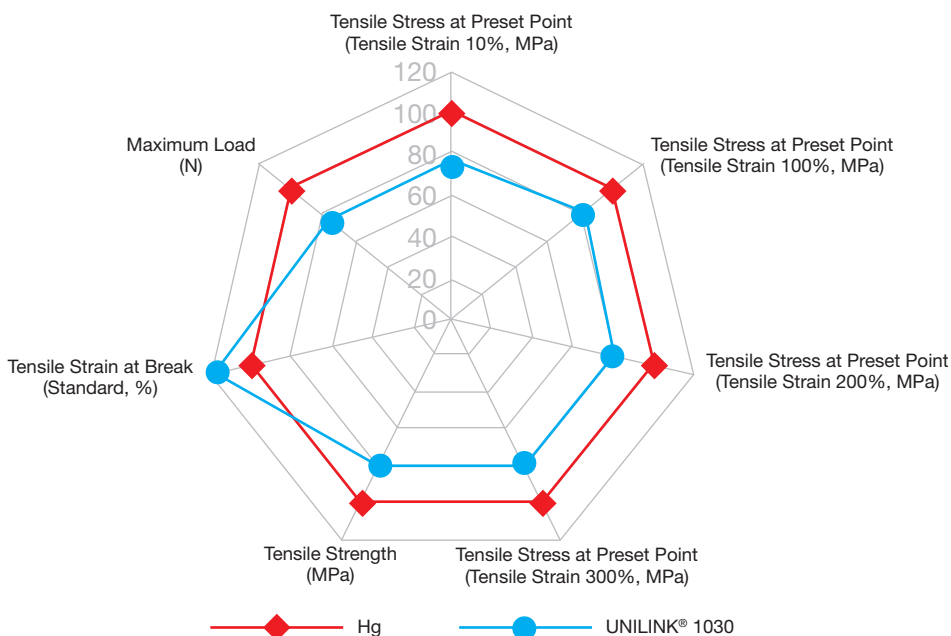

HOW TO USE	Typical Unilink® 1030 application rates range from 0.03-3.0 wt% on polyol depending on the application and desired reaction time.																	
DESCRIPTION	Unilink® 1030 is a reactive proprietary zirconium chelate dissolved in a reactive diol. It is sensitive to moisture. Unilink® 1030 dissolves to form clear, pale-yellow solutions in most organic solvents.																	
TYPICAL PROPERTIES	<table><tr><th>PROPERTY</th><th>TYPICAL VALUE</th></tr><tr><td>Appearance</td><td>Pale red liquid</td></tr><tr><td>Zirconium, wt%,</td><td>11.1</td></tr><tr><td>OH value (mg KOH/g)</td><td>< 40</td></tr><tr><td>Flash point, PMCC, °C (°F), min</td><td>> 80 (176)</td></tr><tr><td>Specific gravity @ 26.7 °C (80 °F)</td><td>1.07</td></tr><tr><td>Viscosity @ 25 °C, cPs</td><td>280</td></tr><tr><td>Solubility</td><td>Miscible with most esters, ketones and glycols</td></tr></table>		PROPERTY	TYPICAL VALUE	Appearance	Pale red liquid	Zirconium, wt%,	11.1	OH value (mg KOH/g)	< 40	Flash point, PMCC, °C (°F), min	> 80 (176)	Specific gravity @ 26.7 °C (80 °F)	1.07	Viscosity @ 25 °C, cPs	280	Solubility	Miscible with most esters, ketones and glycols
PROPERTY	TYPICAL VALUE																	
Appearance	Pale red liquid																	
Zirconium, wt%,	11.1																	
OH value (mg KOH/g)	< 40																	
Flash point, PMCC, °C (°F), min	> 80 (176)																	
Specific gravity @ 26.7 °C (80 °F)	1.07																	
Viscosity @ 25 °C, cPs	280																	
Solubility	Miscible with most esters, ketones and glycols																	
PACKAGING AND SHIPPING	Not regulated for transportation by US DOT																	
SAFETY AND HANDLING	Please refer to the current Material Safety Data Sheet for detailed safety, handling and toxicity information.																	
TYPICAL SHELF LIFE	1 year																	



Dorf Ketal Speciality Catalysts LLC
11200 Westheimer Road – Suite 400
Houston, Texas 77042
USA

Tel: +1-713-343-2377
E-mail: queries.northamerica@dorketal.com
www.dorketal.com

The information contained in this sheet is provided free of charge and is based on technical data that Dorf Ketal believes to be correct and reliable. It is intended for use by persons having technical skill and at their own discretion and risk. We make no warranties, express or implied, and assume no liability in connection with any of this information as the conditions of use are outside our control. In addition, none of the contents of this publication should be taken as a license to operate under, or a recommendation to infringe any patent.