

Chain Extender for Elastomeric Coatings


APPLICATIONS

COATINGS

Unilink® 4200 cures TDI and MDI coating compounds at ambient temperatures. Depending on the catalysts and co-curing agents used, the resulting compounds can be applied by spray or pour-and-spread techniques. Relatively low viscosity makes formulations cured with UNILINK 4200 easy to handle and helps to improve surface wetting, adhesion and surface finish.

Tensile Strength, Modulus and Gel Time

Aromatic Isocyanate Quasi-prepolymer and Aliphatic Polyamines

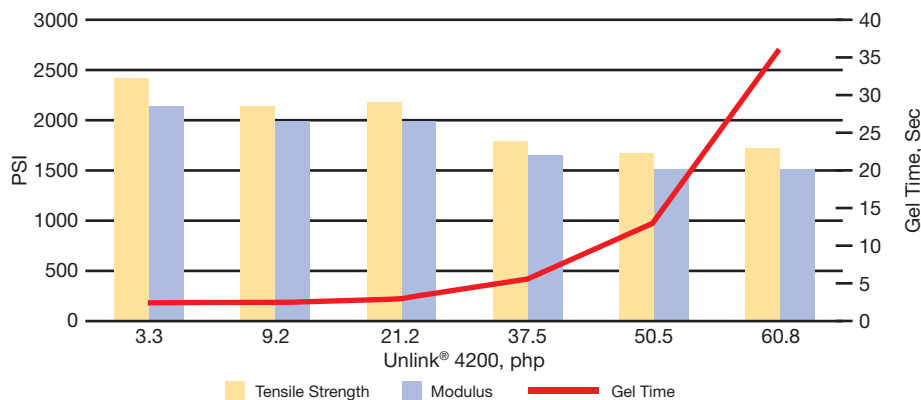

Unilink® 4200 Use Levels (php) and Gel Time in Polyurea Spray Coatings

A Side

Rubinate LF168	100	100	100	100	100	100
Texox PPG-2000 (60:40)						

B Side

Jeffamine T-5000	39.3	37.9	34.5	30.0	26.4	23.5
Jeffamine D-2000	26.2	25.3	23.0	20.0	17.6	15.7
DETDA	31.2	27.6	1.2	12.5	5.5	---
UNILINK® 4200	3.3	9.2	21.2	37.5	50.5	60.8
Gel Time (sec)	2.3	2.5	3.0	5.5	13.0	36.0
Tack Free (sec)	2.5	3.0	3.5	11.5	36.0	70.0

Physical Properties

Tensile Strength (psi)	2425	2153	2195	1798	1695	1724
Elongation (%)	145	135	144	138	155	145
Tear Strength (psi)	494	459	466	406	383	419
Shore D Hardness	65	62	61	57	56	56
Modulus (100%)	2158	1982	2000	1669	1526	1529

HOW TO USE

Typical use levels in coatings range from 3 to 60 parts per hundred polyol (php).

DESCRIPTION

Unilink® 4200 is a unique di-functional aromatic diamine that builds linear polymer networks, allowing the polyurethane formulator to control the degree of cross-linking by adding higher-functioning polyols. It is an easy-to-handle liquid that is low in toxicity (Ames negative) and relatively insensitive to moisture, and it is compatible with a wide range of co-curable and other components.

TYPICAL PROPERTIES

PROPERTY	TYPICAL VALUE
Appearance	Clear light to dark brown liquid
Specific gravity @ 26.7 °C (80 °F)	0.98 – 0.99
Density, g/cm ³ (lb/gal)	0.99 (8.3)
Flash point, PMCC, °C (°F), min	161 (321.8)
Water content, ppm, max	500
Molecular weight	310
Equivalent weight, min	153
Hydroxyl number	362

PACKAGING AND SHIPPING

Not regulated for transportation by US DOT

SAFETY AND HANDLING

Please refer to the current Material Safety Data Sheet for detailed safety, handling and toxicity information.

TYPICAL SHELF LIFE

1 year



Dorf Ketal Speciality Catalysts, LLC
3727 Greenbriar Dr., Suite 114
Stafford, TX 77477
USA

Phone: +1-281-491-3700
E-mail: unilink@dorketal.com
www.dorketal.com

The information contained in this sheet is provided free of charge and is based on technical data that Dorf Ketal believes to be correct and reliable. It is intended for use by persons having technical skill and at their own discretion and risk. We make no warranties, express or implied, and assume no liability in connection with any of this information as the conditions of use are outside our control. In addition, none of the contents of this publication should be taken as a license to operate under, or a recommendation to infringe any patent.