

PTFE Replacements

Specialty Wax Additives and Fine Powders



Micro Powders

100% Performance. Zero PTFE.


Micro Powders offers the most comprehensive portfolio of PTFE replacement surface modifiers available in the industry.

With multinational approvals and global food contact compliance, these commercially proven powders and dispersions give formulators an arsenal of multi-functional ingredients that meet the industry's highest performance standards.

Our best-in-class engineered composite and nanocomposite additives combine natural and synthetic waxes with advanced materials including aluminum oxide and ceramic, delivering results equal to or better than conventional PTFE and PTFE combination additives.


Abrasion Resistance After 2500 Cycles

ASTM D4060

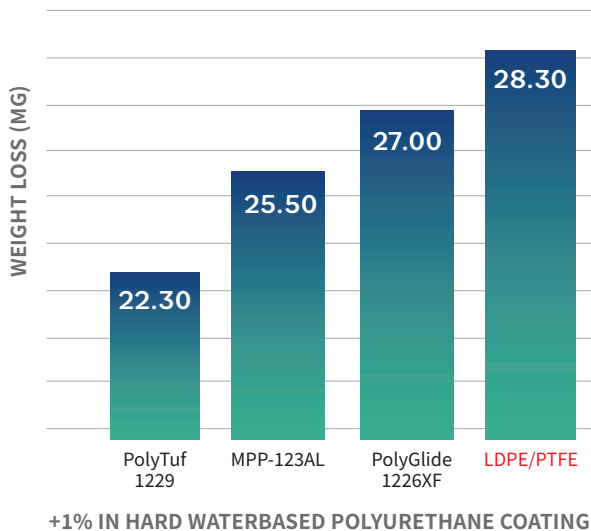


Coefficient of Friction

ASTM D1894

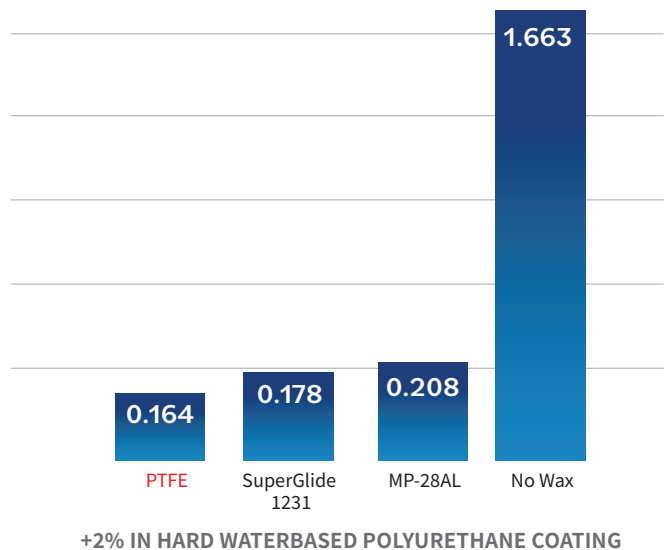


Pencil Hardness (Scratch)

ASTM D3363

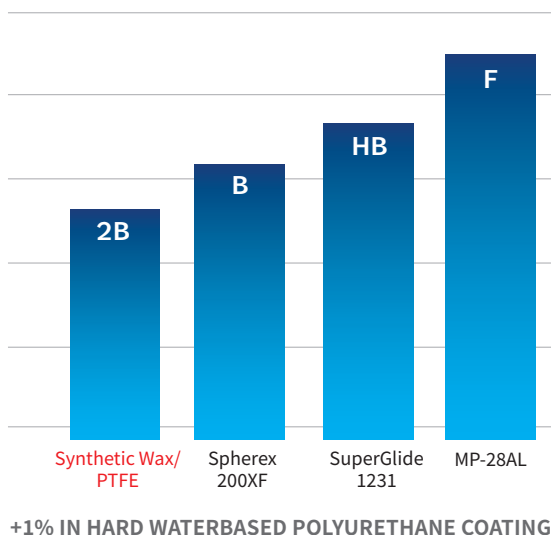

Heat Resistance

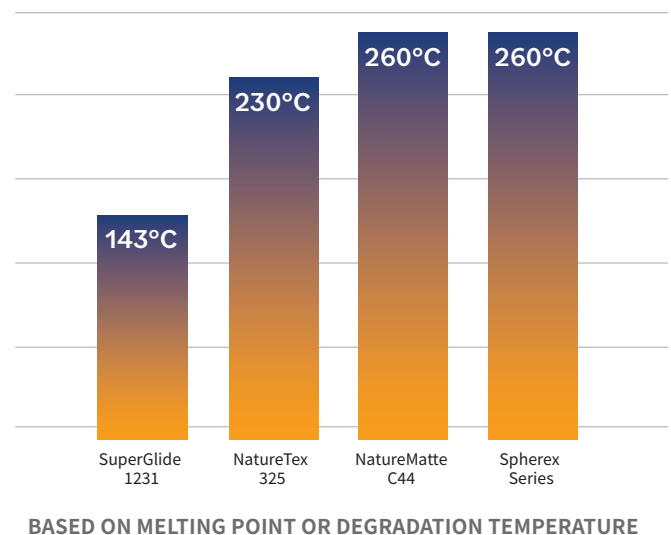

PTFE REPLACEMENT SURFACE MODIFIERS

Products	Wax Type	Melting Point °C	Density g/cm ³	Particle Size (µm)		Benefits
				Mean	Maximum	
MicroKlear 116	Carnauba wax/HDPE	107-113	0.98	4.0-5.25	15.56	Slip, clarity, scratch
MicroKlear 116AL	Carnauba wax/HDPE/ aluminum oxide	107-113	1.01	3.5-5.5	15.56	Slip, scratch
MicroKlear 418AL 	Carnauba wax/aluminum oxide	81-86	1.04	6.0-8.0	22.0	Scratch, clarity, natural
MicroTex® 950	Modified polyolefin	-	1.22	-	74.0	Fine texture in powder coatings
MicroTex® 975 	Modified polyolefin	-	2.13	-	74.0	Fine texture in powder coatings
MP-28AL-XF 	Synthetic wax/aluminum oxide	104-118	0.99	4.0-6.0	15.56	Scratch, slip, gloss retention
MP-28AL  	Synthetic wax/aluminum oxide	104-110	0.99	6.0-8.0	22.0	Scratch, slip, anti-block
MP-28AL-G 	Synthetic wax/aluminum oxide	104-118	0.99	10.0-14.0	44.00	Scratch, slip, gloss reduction
MPP-123AL 	LDPE/aluminum oxide	110-113	0.97	9.5-12.5	31.0	Scratch, minimal slip
MPP-611AL  	HDPE/aluminum oxide	110-116	0.99	4.0-6.0	15.56	Scratch, slip, gloss
MPP-620AL-XF 	HDPE/aluminum oxide	120-124	0.99	3.5-5.5	15.56	Scratch, slip, gloss
MPP-635VF 	HDPE	123-125	0.97	6.0-8.0	22.0	Scratch, abrasion, anti-block
NatureMatte® C44 	Cellulose	>260	1.46	10.0-15.0	44.0	Slip, heat resistance
NatureTex®325 	Cellulose acetate	>230	1.30	10.0-15.0	44.0	Slip, heat resistance
PolyGlide 1226XF 	HDPE/ceramic	116-120	0.99	3.5-5.5	15.56	Abrasion, slip, gloss
PolyTuf® 1229 	LDPE/ceramic	110-113	0.97	9.0-12.0	31.0	Abrasion, burnish
Spherex 200 	Acrylic	>260	1.2	18.5-21.5	24.0	Stain resistance, burnish
Spherex 200XF 	Acrylic	>260	1.2	5.5-6.6	8.0	Moisture resistance, low gloss
SuperGlide 1231 	EBS/ceramic	141-146	1.00	5.0-8.0	22.0	Abrasion, slip, anti-block
Superslip 6515AL  	HDPE/amide/aluminum oxide	139-145	0.99	3.5-5.5	15.56	Scratch, slip, heat release
Superslip 6515AL-EZ	Surface treated HDPE/EBS/ aluminum oxide	139-145	0.99	3.5-5.5	15.56	Scratch, slip, heat release, easy to disperse
Superslip 6530	HDPE/EBS	124-135	0.97	6.0-7.5	22.0	Scratch, abrasion, slip

 Available as a UV dispersion  Available as a waterbased dispersion  Natural or naturally derived

[Request test samples 24/7 on micropowders.com](#)



PTFE REPLACEMENTS SELECTOR GUIDE

Products	Description	Suggested Use Level	Scratch Resistance	Abrasion Resistance	Heat Resistance	Rub Resistance	COF Reduction	Gloss Retention	Biodegradable
MicroKlear116	Carnauba wax/ HDPE	1.0-3.0%	●	●		●	●	●	
MicroKlear116AL 	Carnauba wax/ HDPE/ aluminum oxide	0.5-1.5%	●	●		●	●	●	
MicroKlear418AL 	Carnauba wax/ aluminum oxide	0.5-1.5%	●	●		●	●	●	✓
MP-28AL-XF  NEW	Synthetic wax/ aluminum oxide	0.5-1.5%	●	●		●	●	●	✓
MP-28AL 	Synthetic wax/ aluminum oxide	0.5-1.5%	●	●		●	●	●	✓
MP-28AL-G NEW	Synthetic wax/ aluminum oxide	0.5-1.5%	●	●		●	●		✓
MPP-123AL 	LDPE/aluminum oxide	0.5-1.5%	●	●		●	○	○	
MPP-611AL  	HDPE/aluminum oxide	0.5-1.5%	●	●		●	●	●	
MPP-620AL-XF NEW	HDPE/aluminum oxide	0.5-1.5%	●	●		●	●	●	
MPP-635VF 	HDPE	1.0-3.0%	●	●		●	●	●	
NatureMatte® C44 	Cellulose	2.0-5.0%	●	○	●	●	●	○	✓
NatureTex® 325 	Cellulose acetate	2.0-5.0%	●	○	●	●	●	○	✓
PolyGlide 1226XF 	HDPE/ceramic	0.5-1.5%	●	●		●	●	●	
PolyTuf® 1229 	LDPE/ceramic	0.5-1.5%	●	●		●	●	○	
Spherex 200 NEW	Acrylic	0.5-8.0%	○		●	○			
Spherex 200XF NEW	Acrylic	0.5-8.0%	●		●	○			
SuperGlide 1231 	EBS/ceramic	0.5-1.5%	●	●	●	●	●	●	
Superslip 6515AL  	HDPE/amide/ aluminum oxide	0.5-1.5%	●	●	●	●	●	●	
Superslip 6515AL-EZ	Surf.treated HDPE/ amide/aluminum oxide	0.5-1.5%	●	●	●	●	●	●	
Superslip 6530	HDPE/EBS	1.0-3.0%	●	●	●	●	●	●	

● Extremely Effective ● Very Effective ○ Effective  Available as a UV dispersion  Available as a waterbased dispersion  Natural or naturally derived

NEW For Powder Coating Texture: MicroTex® 950 & MicroTex® 975

Modified polyolefin | 4.0-6.0% suggested use level | fine texturing with matting

Choosing the best PTFE replacement additive doesn't have to be intimidating. We are always available to provide technical assistance either directly or through one of our certified distribution partners around the globe.



Micro Powders | 580 White Plains Road | Tarrytown, NY 10591 | info@micropowders.com | micropowders.com

