



艾特克(中国)

AIRTEKPOWER

Green-Energy Saving Ventilation Fans



产 品 手 册

Product Manual

No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com

V.2024

>> 公司介绍 Company Introduction



Airtek Power Solution (Suzhou) Co., Ltd.

Airtek Power Solution (Suzhou) Co., Ltd. was established in 2005 and located in Suzhou, Jiangsu Province, China. It is a high-tech enterprise dedicated to the design, manufacture, sales, and technical services of fans. The company is equipped with advanced production equipment and a professional technical team, committed to providing customers with high-quality centrifugal fans, axial fans, motors, and impellers, which are widely used in industrial, commercial, and residential applications. The company boasts a research and development team composed of several senior engineers who continuously innovate and optimize products to ensure they maintain a leading position in performance and quality within the industry. We have introduced internationally advanced production and testing equipment and strictly adhere to the ISO 9001 quality management system to ensure that every product meets high standards. We offer comprehensive pre-sales, mid-sales, and after-sales services, including technical support, on-site installation and commissioning, regular maintenance, and more, ensuring our customers are worry-free.



Address: No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China


Phone: 008613588151265

Email: sales@airtekpower.com

Website: www.airtekpower.com



Product Model

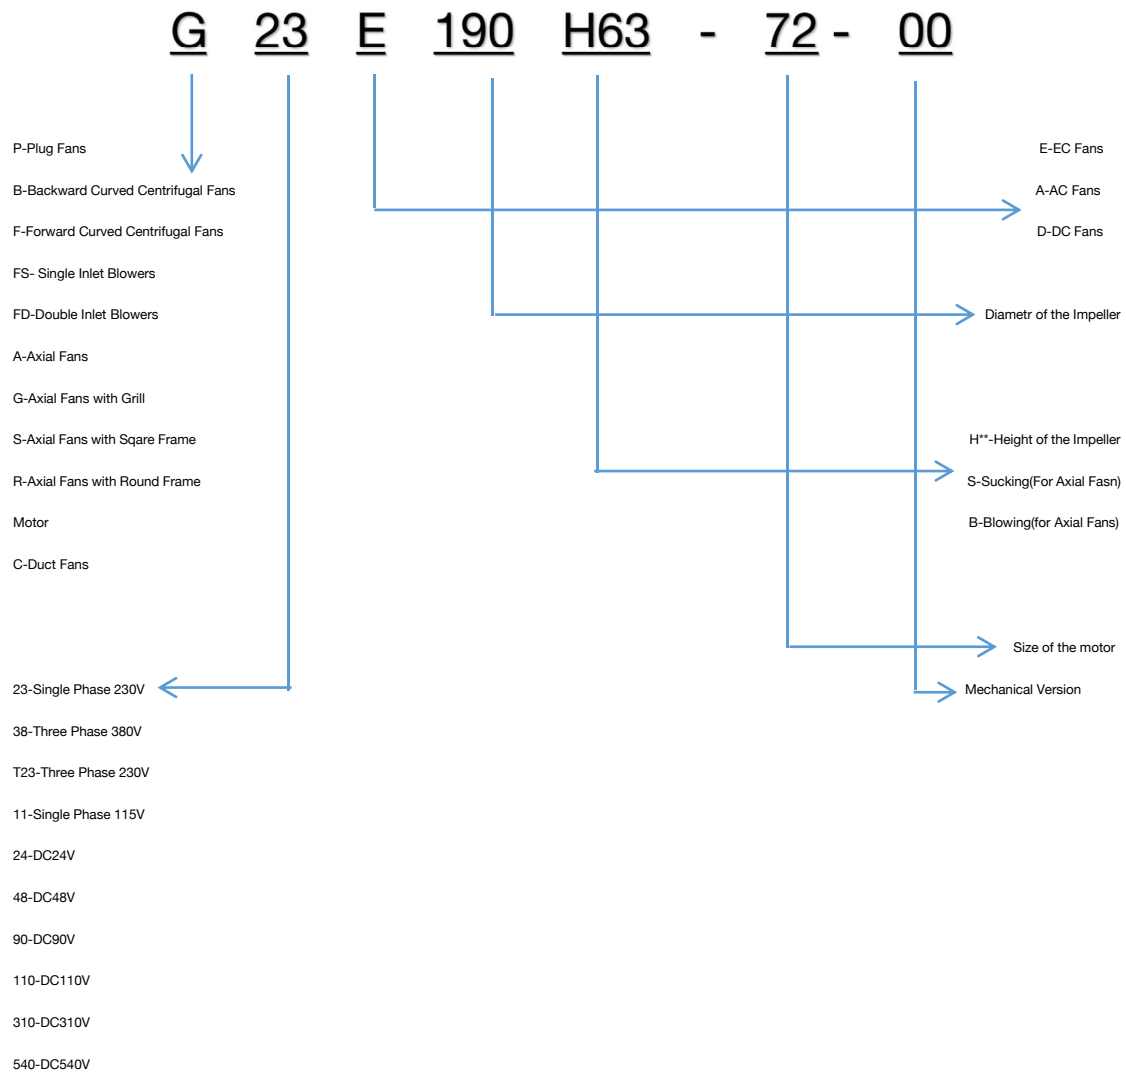

In the face of the significant challenges posed by global climate change, the pursuit of a low-carbon and green lifestyle has become a universal human goal. An increasing number of countries have elevated "carbon neutrality" to a national strategy, envisioning a future free from carbon emissions. China has pledged to peak its carbon dioxide emissions before 2030 and achieve carbon neutrality by 2060.

To enhance the quality of life with better, more convenient, and comfortable air conditioning, fan efficiency and noise reduction are critical performance indicators within the industry. To meet the demands for high efficiency and low noise, our technical experts have developed various control modes tailored to different customer needs, including constant speed, constant torque, and constant flow options. Additionally, our EC fans feature stepless speed regulation through external circuit pulse modulation, 0-10V voltage regulation, and 4-20mA current regulation. For even smarter control, we introduced EC fans that support centralized operation and monitoring of multiple units via RS485. These EC fans are equipped with comprehensive safety features, such as current limiting, locked rotor soft start, phase failure detection, over-temperature protection, and over/under voltage safeguards, ensuring reliable and stable performance. We remain committed to energy conservation, intelligent control solutions, and supporting the global initiative toward carbon neutrality.

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China
 Email: sales@airtekipower.com Website: www.airtekipower.com



Content

EC Backward Curved Centrifugal Fan_____	P1-P49
AC Backward Curved Centrifugal Fan_____	P55-P141
EC Forward Curved Centrifugal Fan_____	P142-P152
AC Forward Curved Centrifugal Fan_____	P153-P168
EC Single Inlet Blower_____	P169-P186
AC Single Inlet Blower_____	P187-P202
EC Double Inlet Blower_____	P203-P221
AC Double Inlet Blower_____	P222-P245
EC Axial Fans Axial Fan_____	P246-P308
AC Axial Fans Axial Fan_____	P309-P333
EC Duct Fan_____	P334-P341
AC Duct Fan_____	P342-P349




EC Backward Curved Centrifugal Fan






EC Backward Curved Centrifugal Fans 133mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

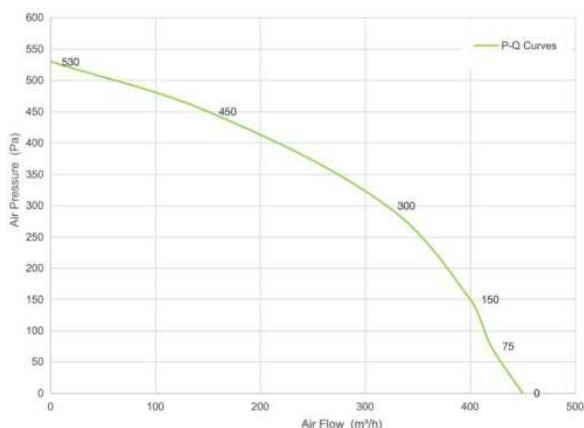

Pa	m³/h	rpm	W
200	380	5230	83
240	360	5230	85
295	330	5235	86
350	300	5225	88

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E133H54-72-00	230	50/60	5220	88	450	68

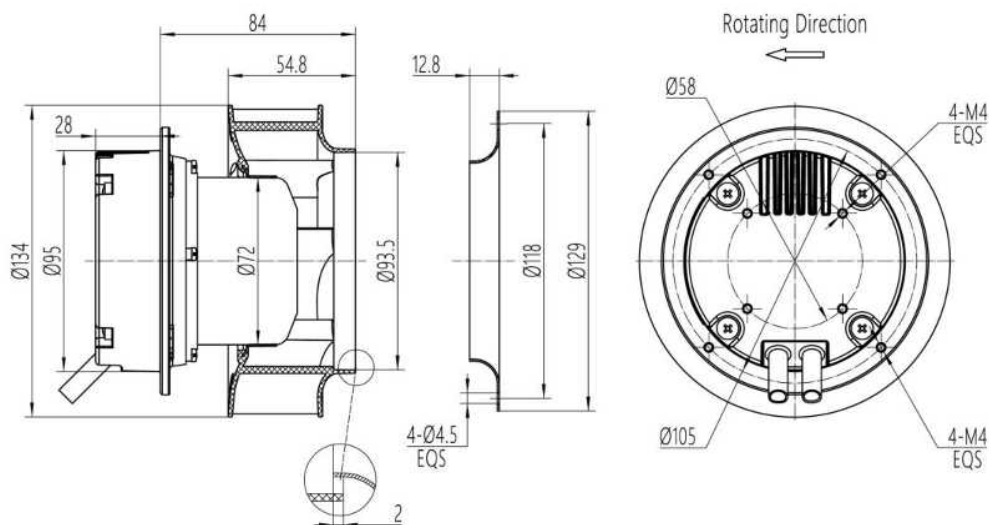


EC Backward Curved Centrifugal Fans 155mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com

Website: www.airtekipower.com

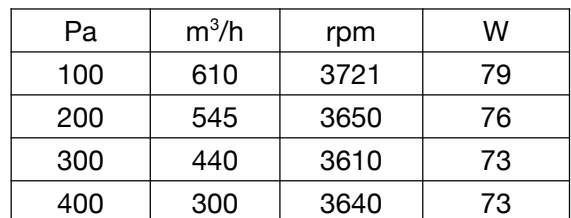


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E175H62-72-A0	230	50/60	3650	80	670	74




Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

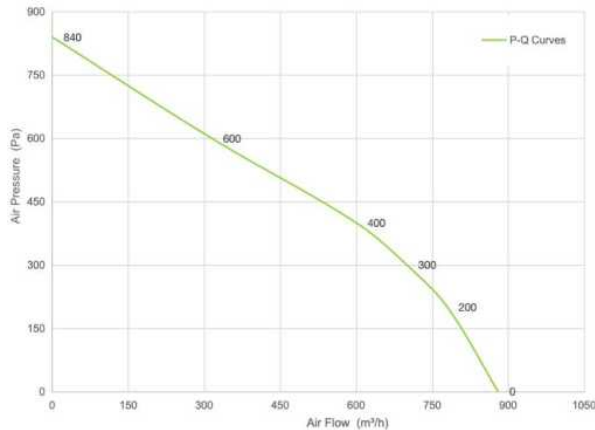

Pa	m³/h	rpm	W
300	710	4980	166
400	610	4810	160
500	515	4770	160
560	440	4775	160

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E175H63-72-00	230	50/60	5030	166	880	68

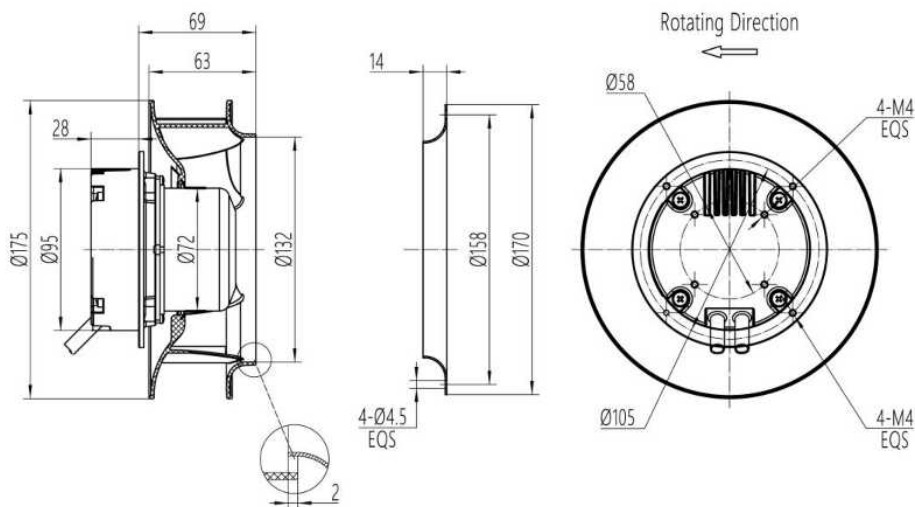


EC Backward Curved Centrifugal Fans 190mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

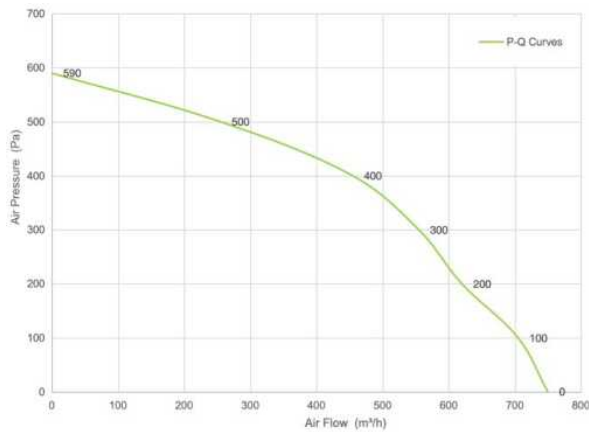

Pa	m³/h	rpm	W
200	615	3620	96
300	550	3586	93
400	455	3521	90
500	240	3522	89

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E190H63-72-A0	230	50/60	3570	95	750	76

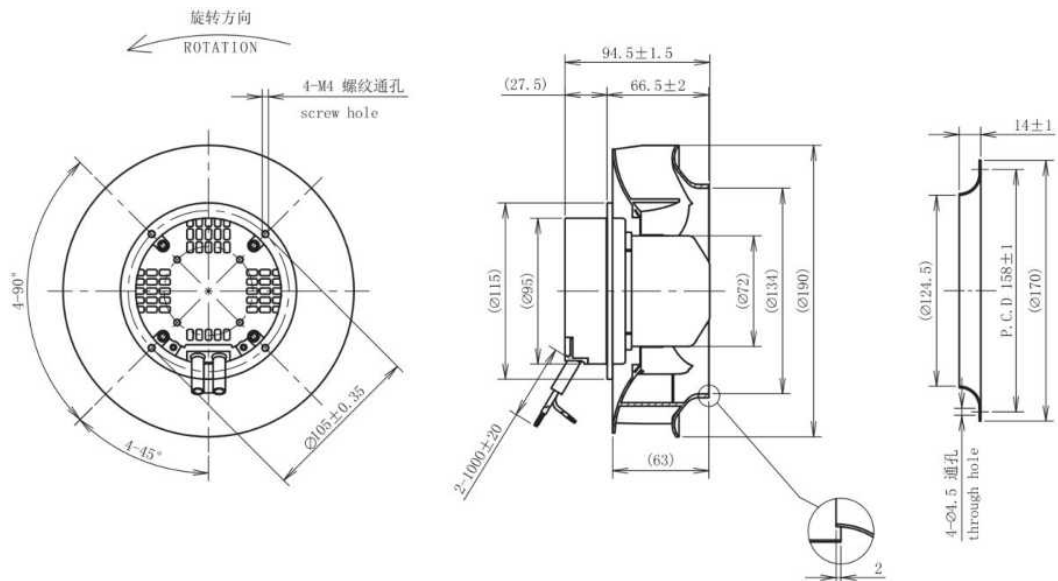


EC Backward Curved Centrifugal Fans 190mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

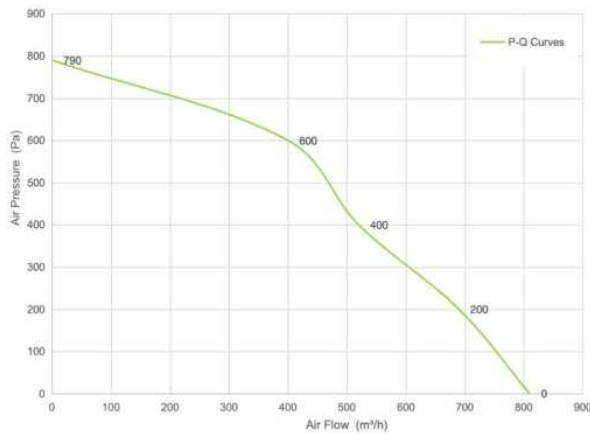

Pa	m³/h	rpm	W
300	615	4200	129
400	550	4205	142
445	505	4205	146
505	445	4215	150

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E190H63-72-00	230	50/60	4230	150	810	70

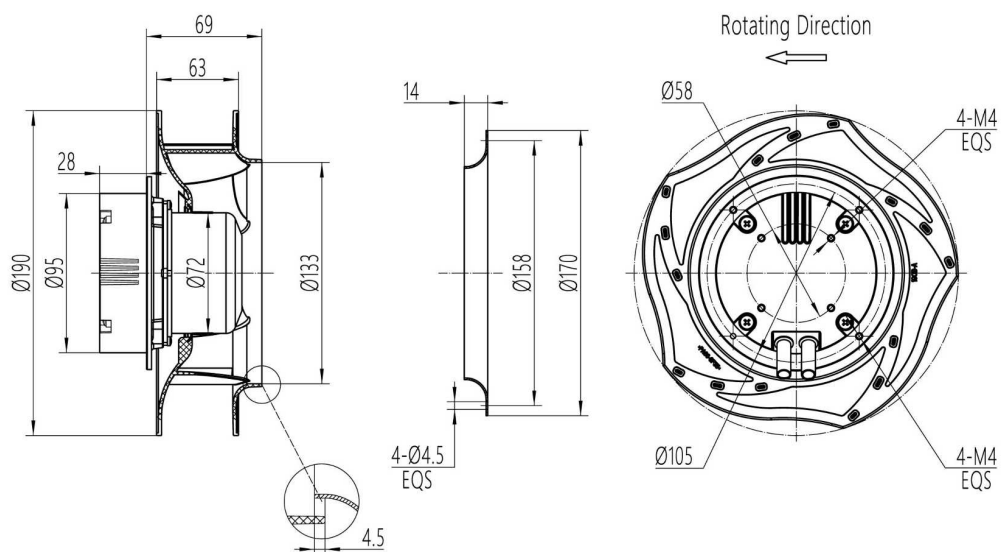


EC Backward Curved Centrifugal Fans 220mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

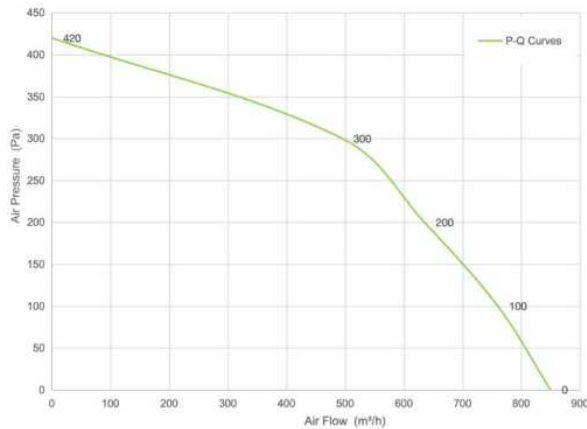

Pa	m³/h	rpm	W
350	305	2320	68
250	575	2360	69
150	700	2412	71
100	764	2452	72

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E220H64-72-A0	230	50/60	2600	75	850	71

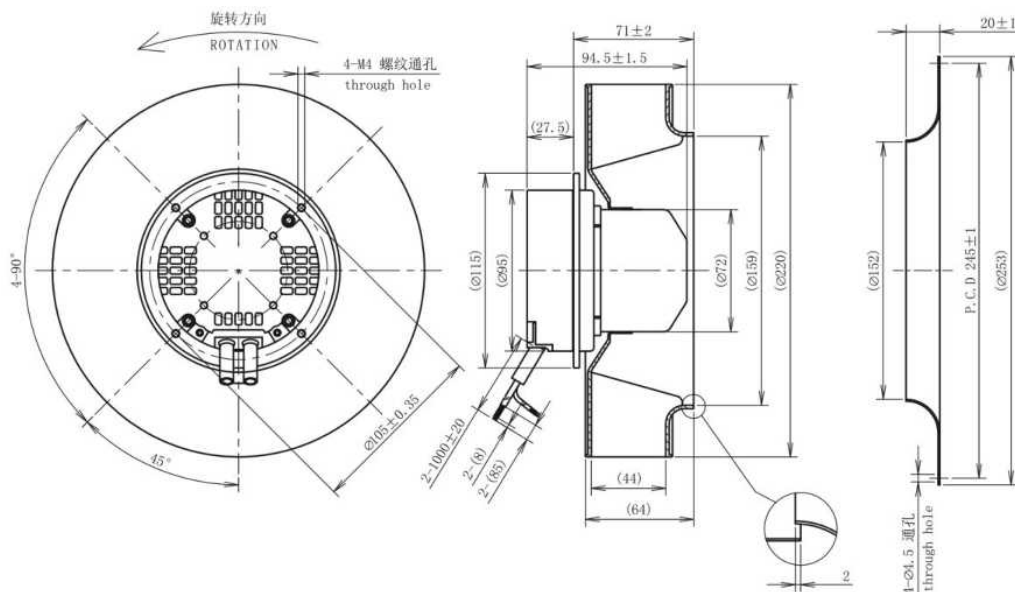


EC Backward Curved Centrifugal Fans 220mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com




Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

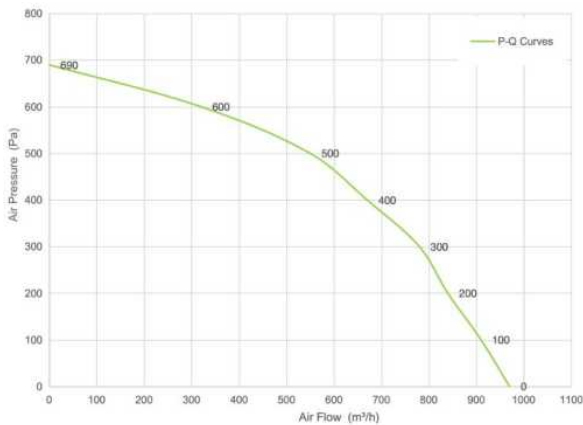

Pa	m³/h	rpm	W
350	305	2320	68
250	575	2360	69
150	700	2412	71
100	764	2452	72

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E220H64-92-A1	230	50/60	3310	145	970	74

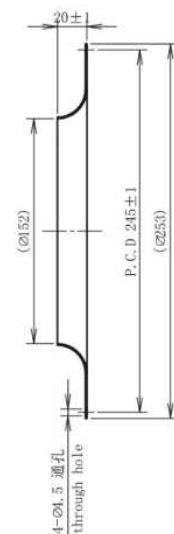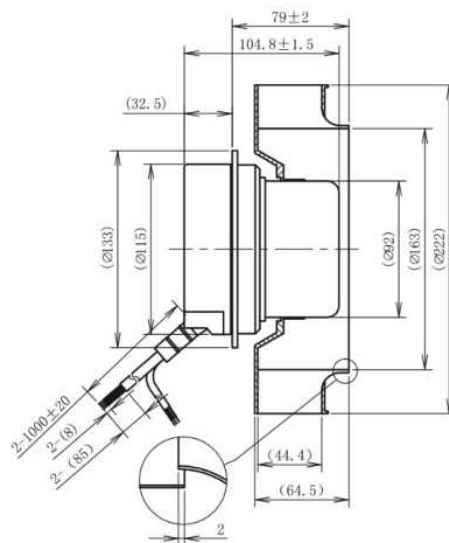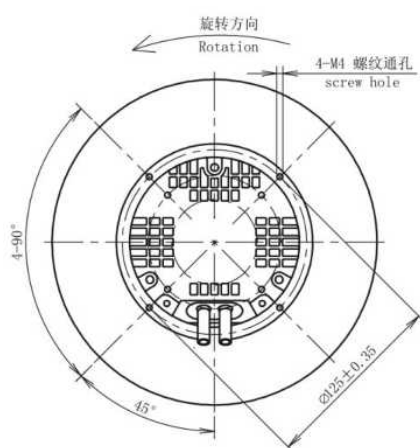


EC Backward Curved Centrifugal Fans 225mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com


Website: www.airtekipower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

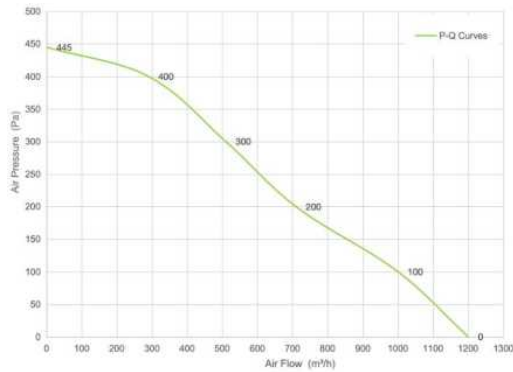

Pa	m³/h	rpm	W
200	700	2311	81
300	500	2265	79
350	400	2252	78

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E225H81-72-A0	230	50/60	2200	80	1200	65

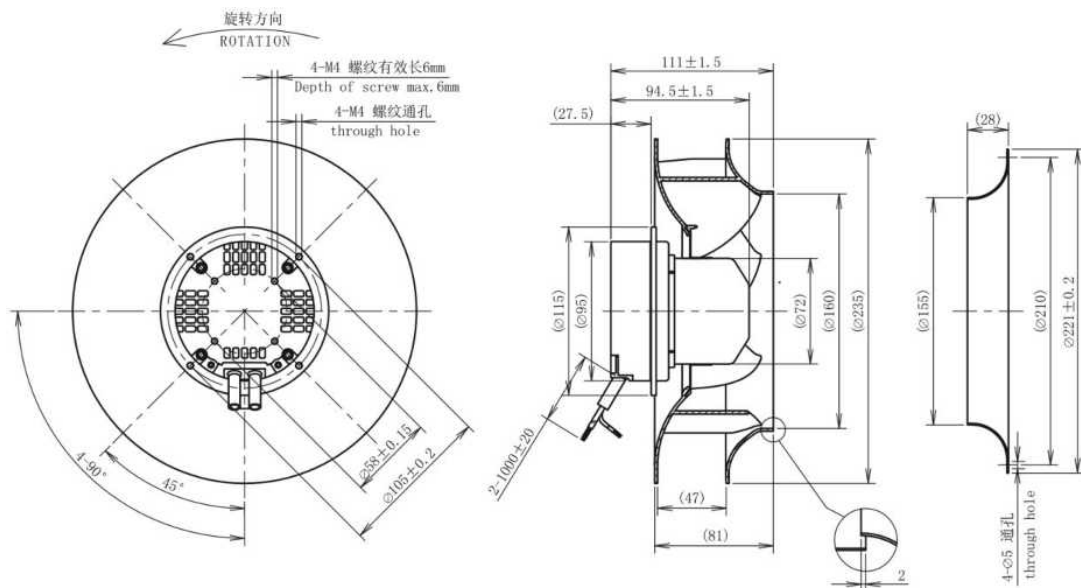


EC Backward Curved Centrifugal Fans 225mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

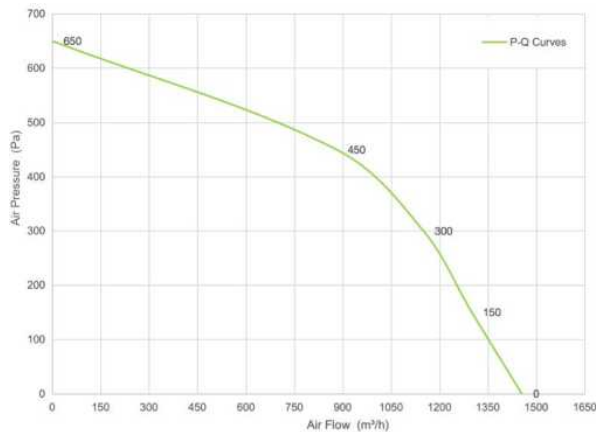

Pa	m³/h	rpm	W
300	1145	3060	213
350	1055	3060	197
405	975	3060	205
500	764	3060	210

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E225H89-92-00	230	50/60	3060	215	1455	71

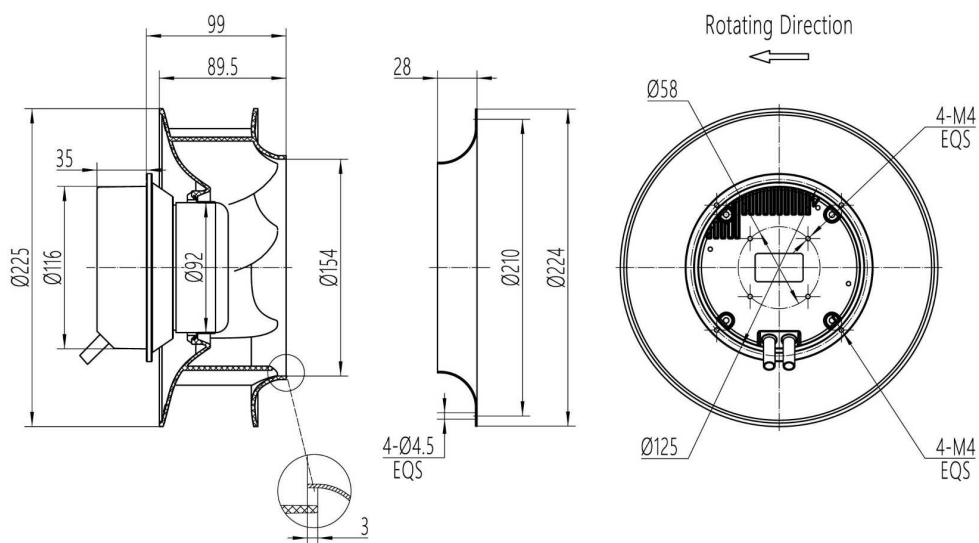


EC Backward Curved Centrifugal Fans 250mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60°C
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

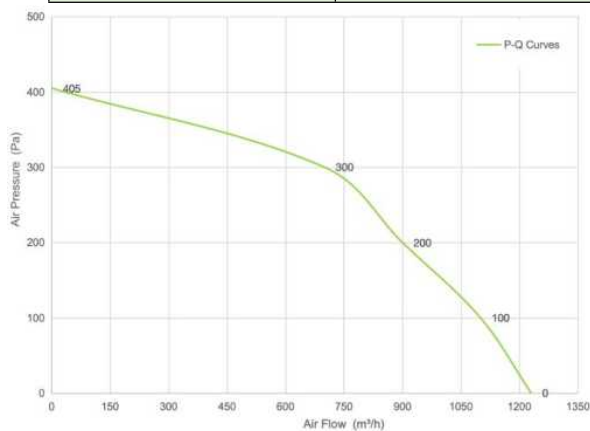

Pa	m ³ /h	rpm	W
300	700	1980	82
200	900	2032	85
100	1100	2098	87

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E250H73-72-A0	230	50/60	2150	90	1230	68

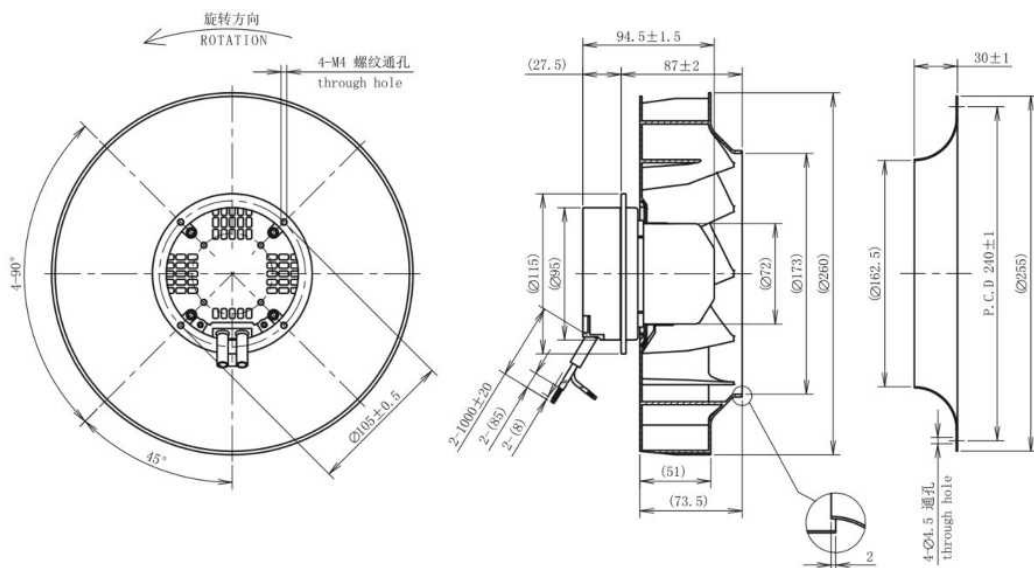


EC Backward Curved Centrifugal Fans 250mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com



Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

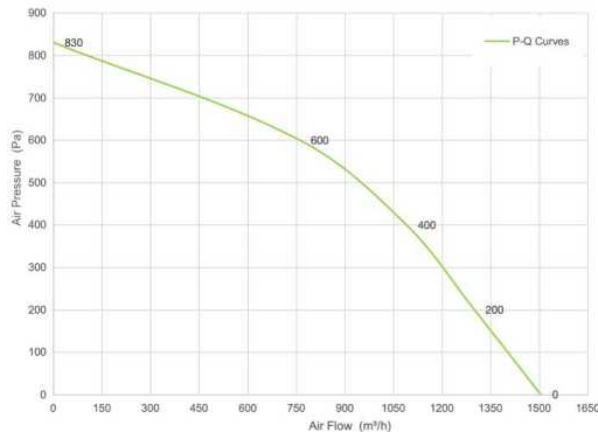

Pa	m³/h	rpm	W
300	1200	3185	241
400	1105	3185	271
500	960	3160	287
600	795	3160	294

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E250H85-92-00	230	50/60	3170	295	1505	73

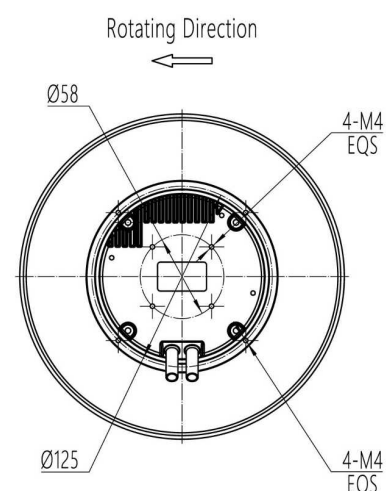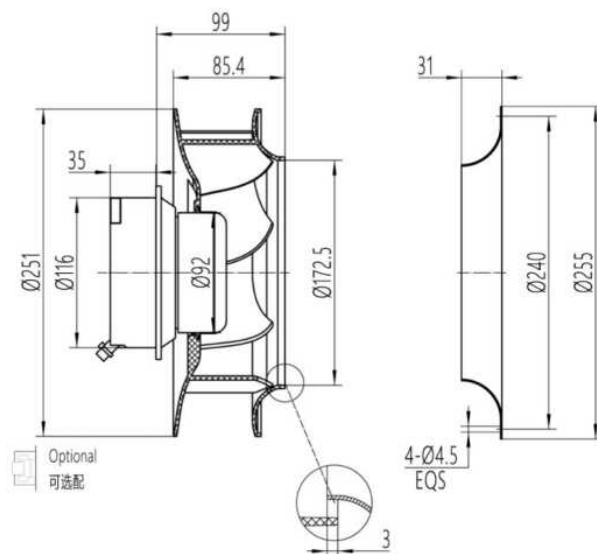


EC Backward Curved Centrifugal Fans 250mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA), RS485
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

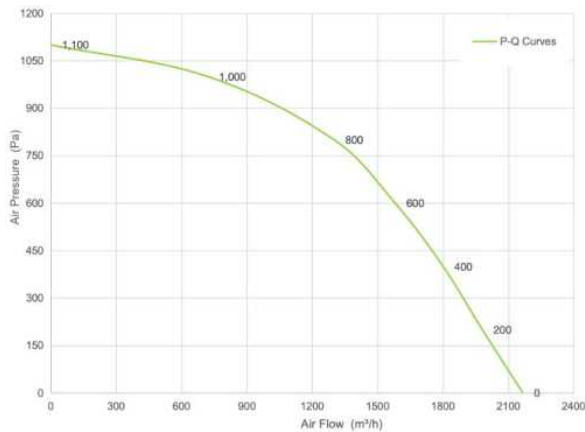

Pa	m³/h	rpm	W
500	1736	3893	563
600	1625	3902	585
700	1532	3902	614
800	1377	3849	618

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E250H87-102-00	230	50/60	3920	618	2166	75

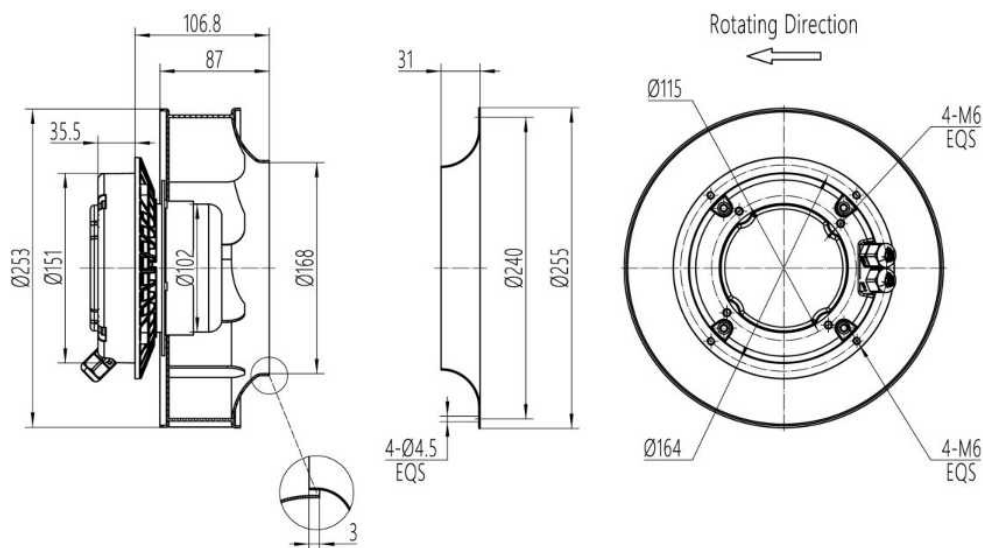


EC Backward Curved Centrifugal Fans 280mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com


Website: www.airtekipower.com

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

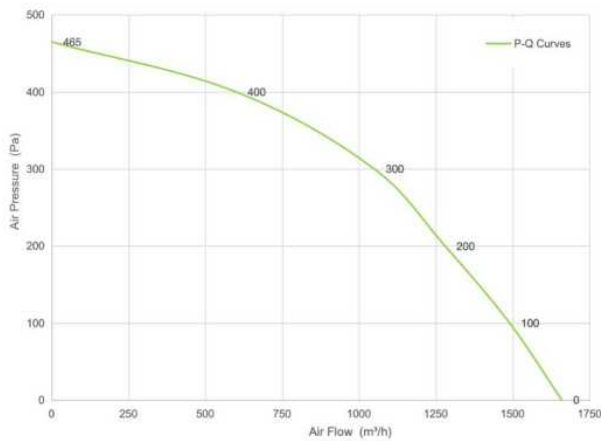

Pa	m³/h	rpm	W
200	1280	2220	167
250	1165	2220	178
300	1025	2220	186
350	865	2220	191

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E280H81-92-00	230	50/60	2220	195	1660	69

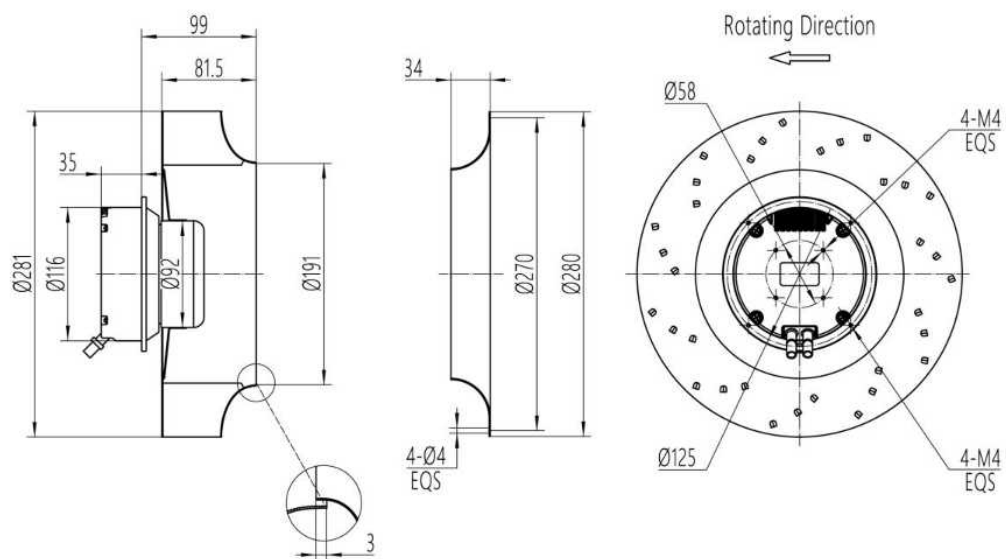


EC Backward Curved Centrifugal Fans 280mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

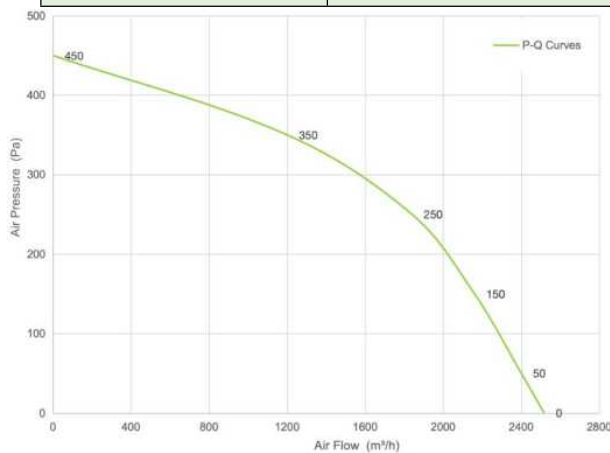

Pa	m³/h	rpm	W
100	2260	2010	198
200	2010	1985	197
300	1596	1968	194
400	675	1948	195

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E280H128-92-B0	230	50/60	1950	195	2517	71.5

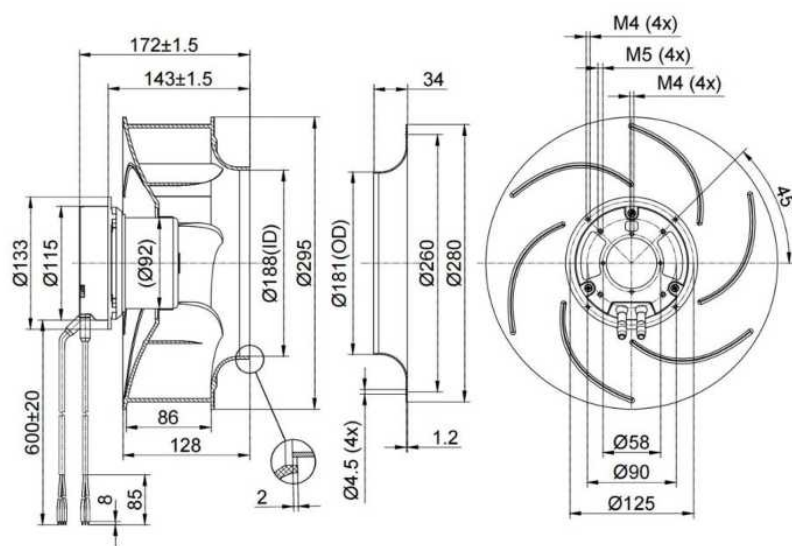


EC Backward Curved Centrifugal Fans 280mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com


Website: www.airtekipower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

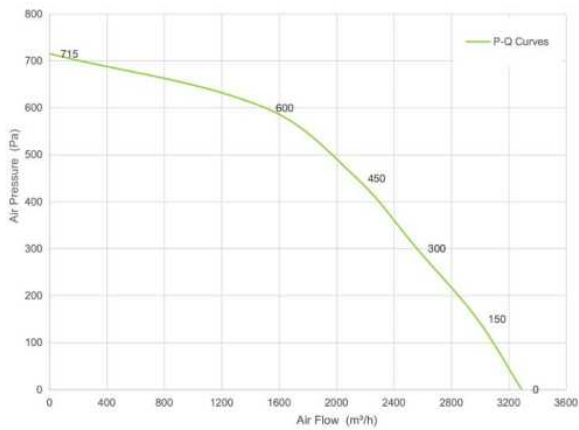

Pa	m³/h	rpm	W
200	2830	2598	375
300	2510	2572	374
400	2315	2550	374
500	1980	2452	374

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E280H128-102-B0	230	50/60	2500	370	3290	78

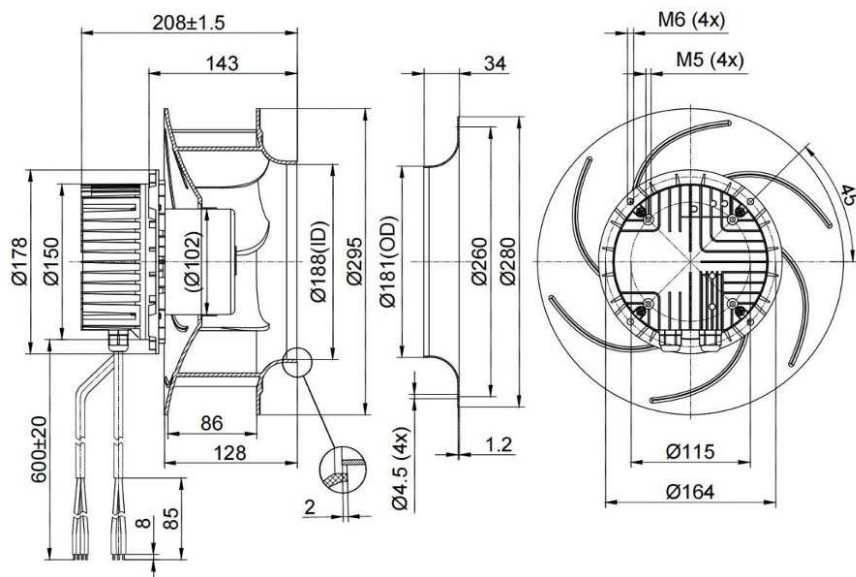


EC Backward Curved Centrifugal Fans 280mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

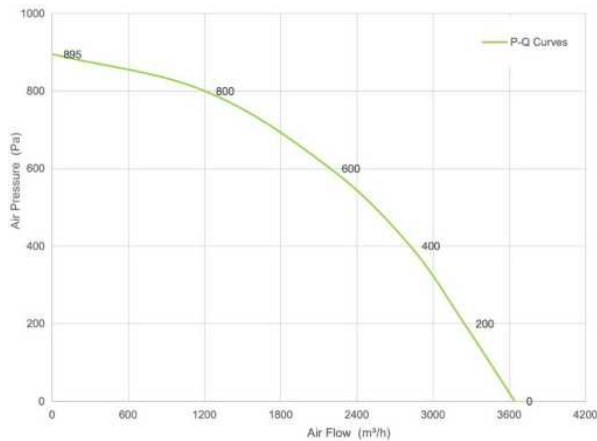

Pa	m³/h	rpm	W
300	3040	2862	511
400	2810	2829	508
500	2525	2801	506
600	2885	2780	506

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E280H128-102-B1	230	50/60	2750	500	3642	80

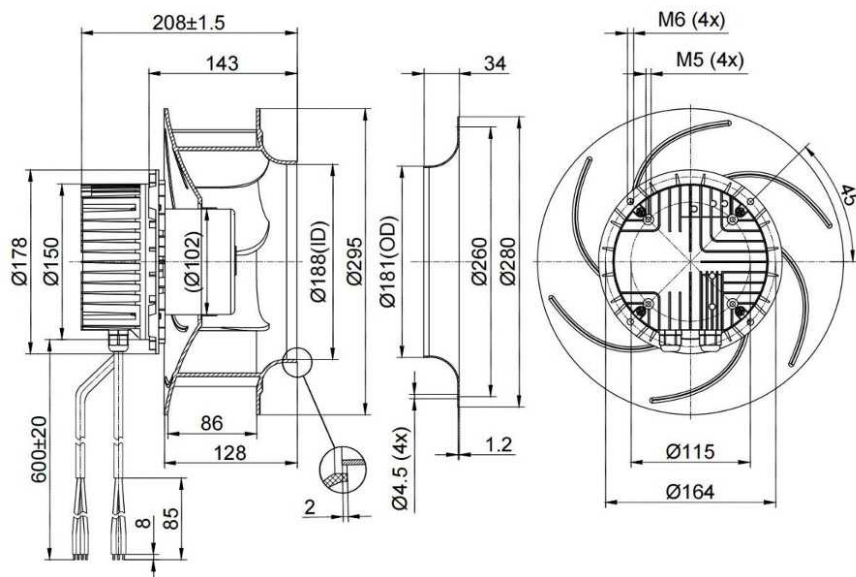


EC Backward Curved Centrifugal Fans 280mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA), RS485
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

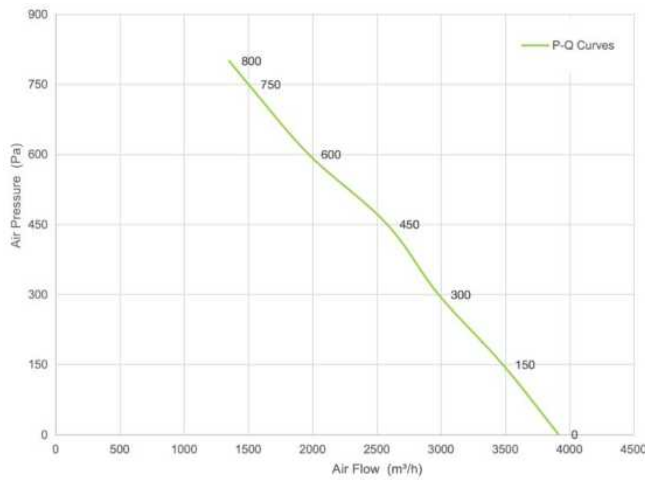

Pa	m³/h	rpm	W
400	2611	2645	616
500	2295	2600	602
600	1975	2569	598
700	1668	2653	613

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E280H133-102-00	230	50/60	3100	732	3916	76

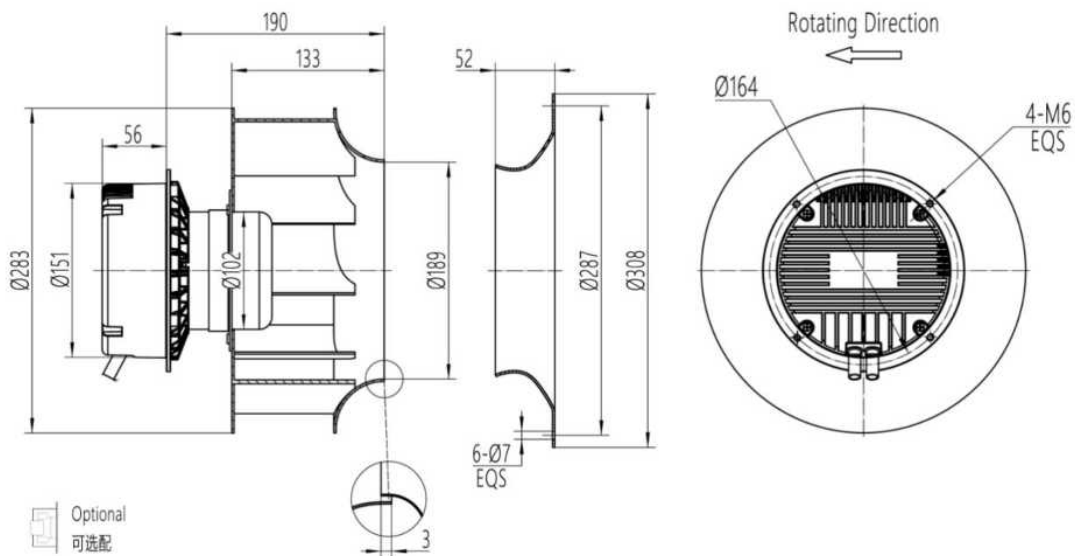


EC Backward Curved Centrifugal Fans 280mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com


Website: www.airtekipower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA), RS485
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

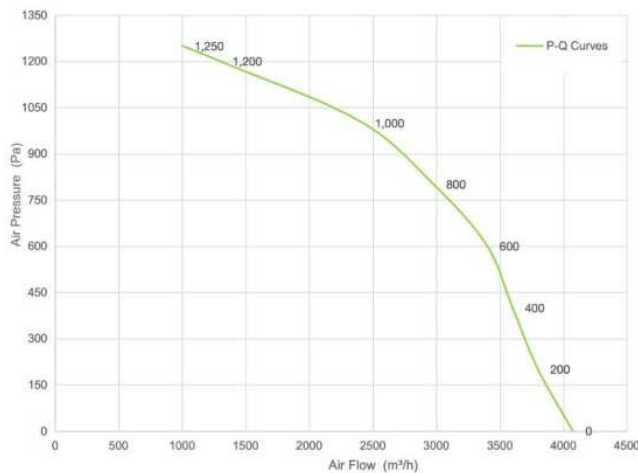

Pa	m³/h	rpm	W
500	3482	3427	1233
600	3354	3424	1285
700	3210	3429	1325
800	3029	3434	1434

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E280H133-138-00	380	50/60	3450	1450	4075	79

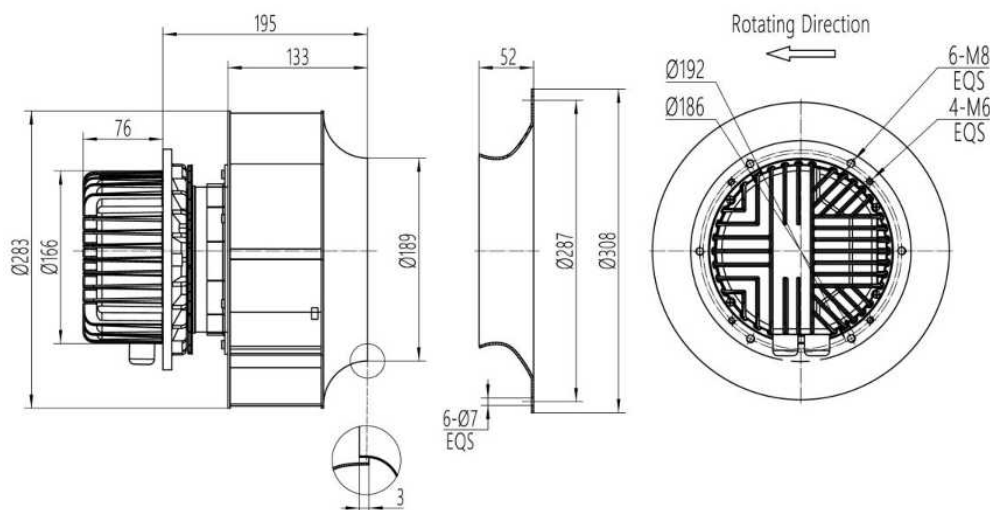


EC Backward Curved Centrifugal Fans 320mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

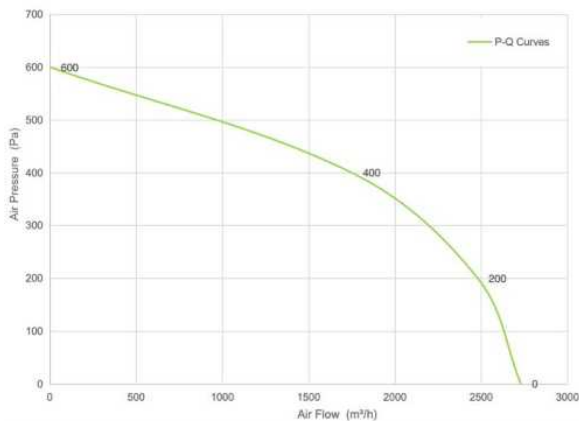

Pa	m³/h	rpm	W
290	2150	2150	353
355	1920	2150	348
400	1735	2160	352
460	1420	2160	346

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H134-102-00	230	50/60	2150	355	2730	72

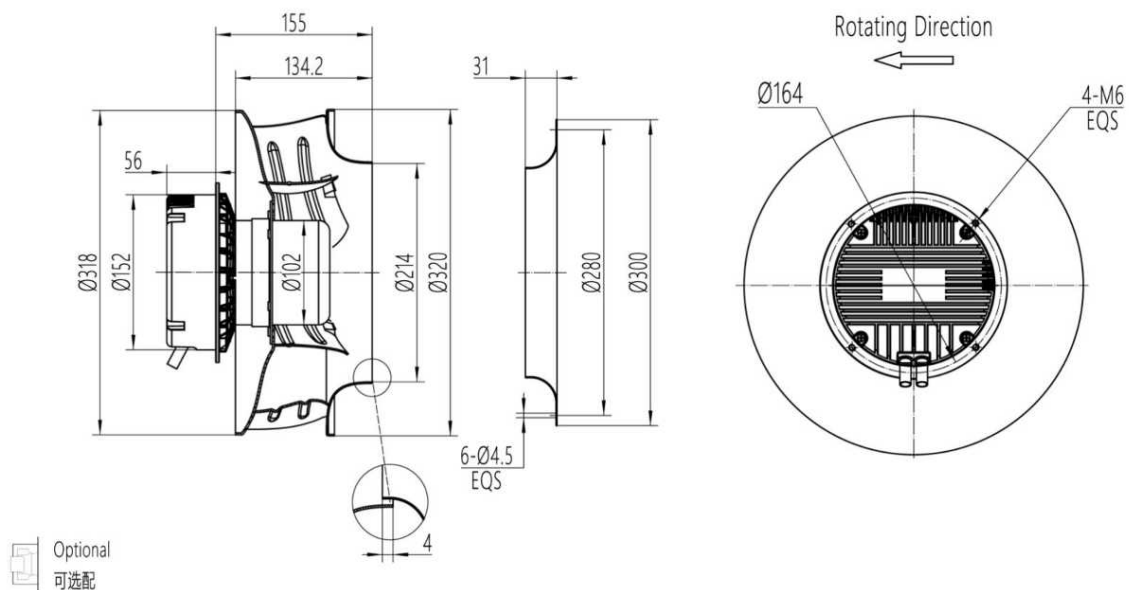


EC Backward Curved Centrifugal Fans 320mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com



Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

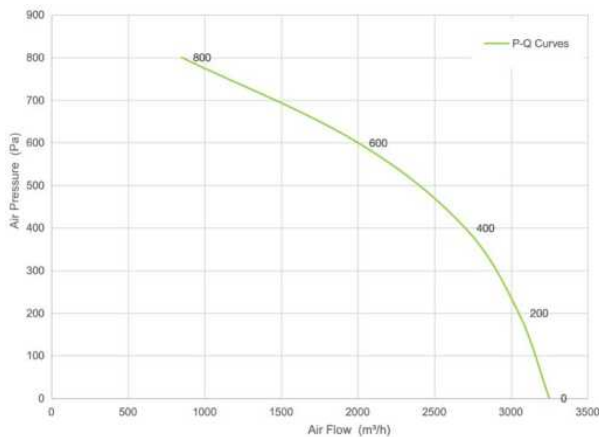

Pa	m³/h	rpm	W
400	2670	2590	637
500	2435	2595	653
600	2025	2595	618
700	1540	2595	584

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H134-102-01	230	50/60	2600	655	3250	77

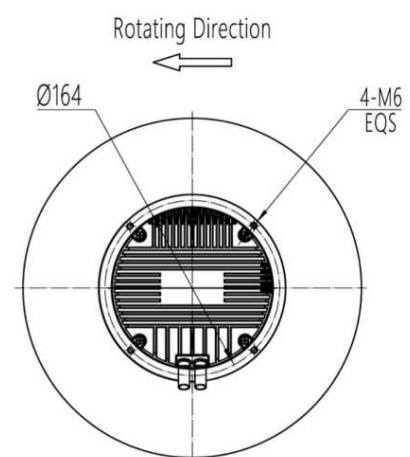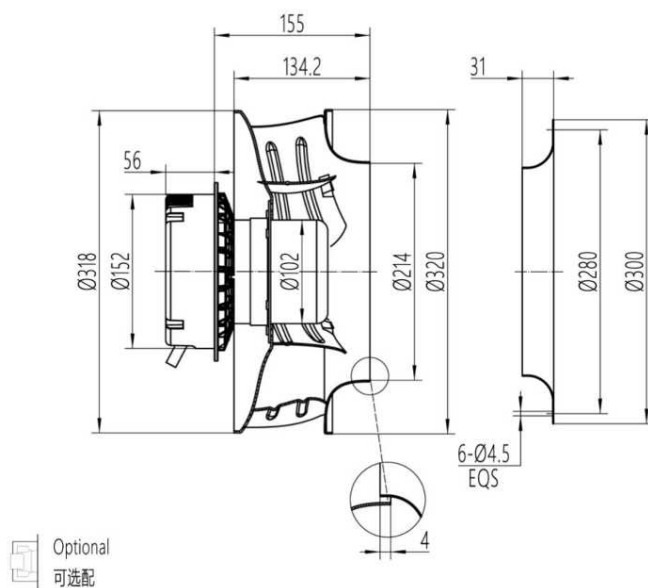


EC Backward Curved Centrifugal Fans 320mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

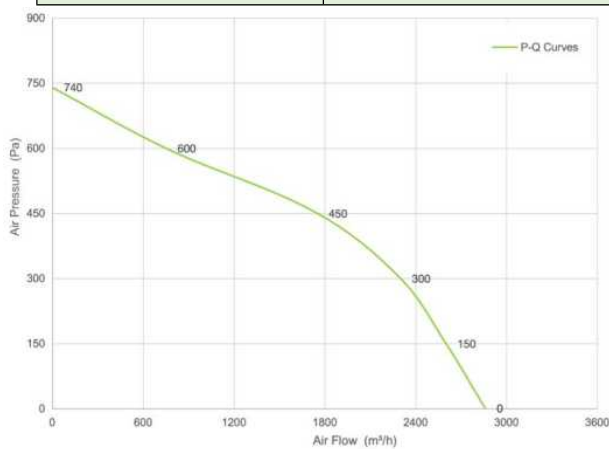

Pa	m³/h	rpm	W
200	2527	2305	396
300	2419	2308	444
400	1993	2291	417
500	1540	2293	408

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H134-102-02	230	50/60	2300	445	2860	70

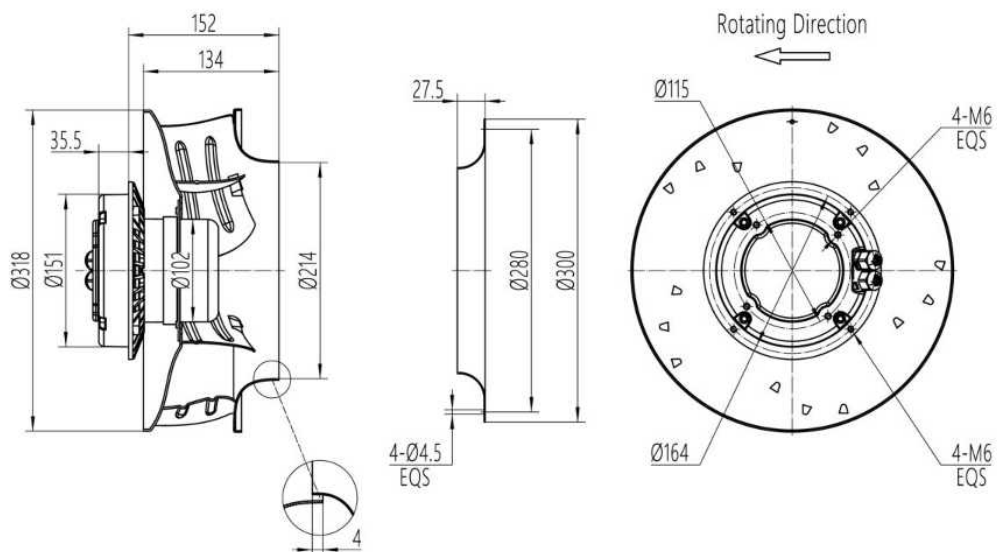


EC Backward Curved Centrifugal Fans 320mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

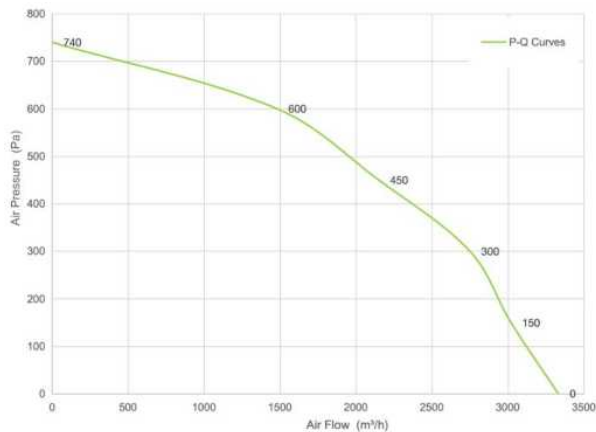


Pa	m³/h	rpm	W
450	2223	2496	571
502	2055	2499	570
550	1869	2496	563
600	1594	2500	542

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H105-102-00	230	50/60	2500	594	3332	75

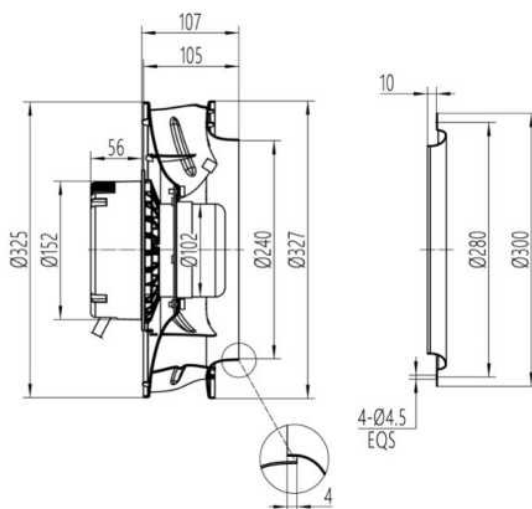

Optional
可选配

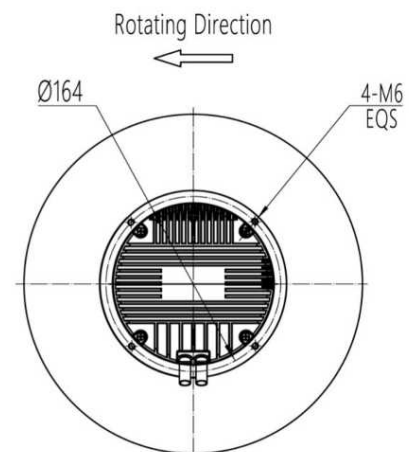


EC Backward Curved Centrifugal Fans 320mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com


Website: www.airtekipower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

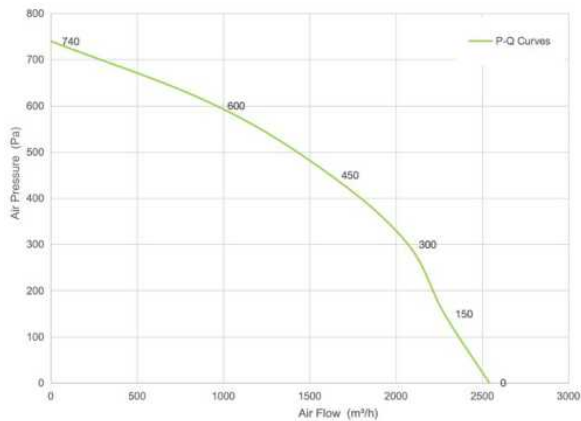

Pa	m³/h	rpm	W
275	2109	2486	484
400	1840	2486	482
450	1689	2479	468
495	1479	2482	451

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H76-102-00	230	50/60	2480	484	2541	70

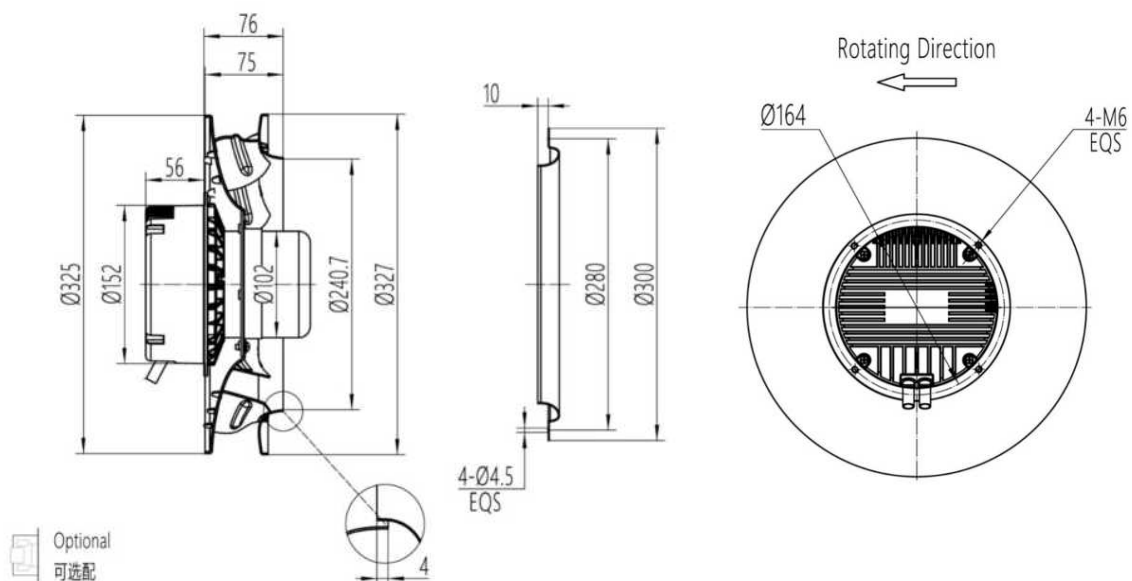


EC Backward Curved Centrifugal Fans 320mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

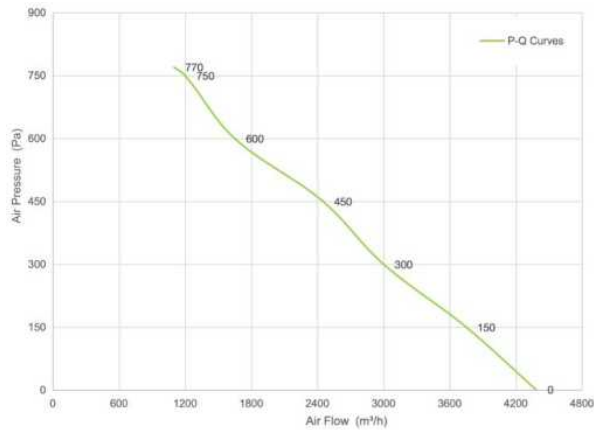


Pa	m³/h	rpm	W
300	3067	2374	575
400	2610	2299	555
500	2135	2251	542
600	1715	2275	547

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H128-102-00	230	50/60	2860	575	4386	79

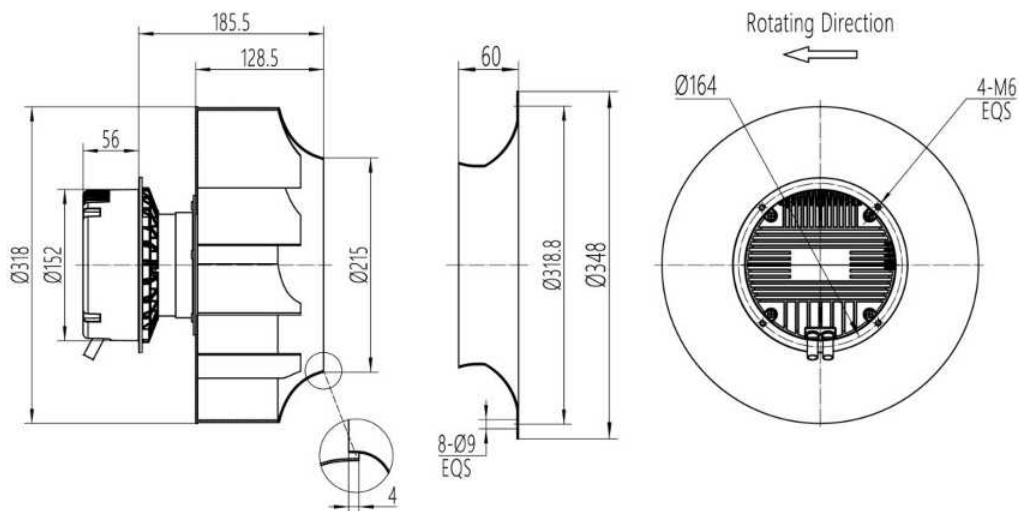


EC Backward Curved Centrifugal Fans 320mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

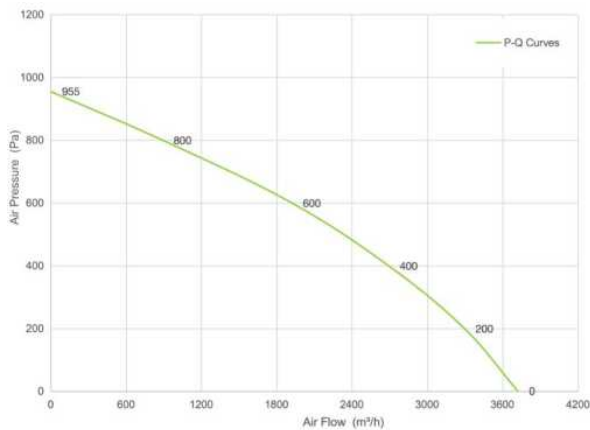

Pa	m³/h	rpm	W
300	3040	2862	511
400	2810	2829	508
500	2525	2801	506
600	2885	2780	506

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H141-102-B0	230	50/60	2360	500	3721	81

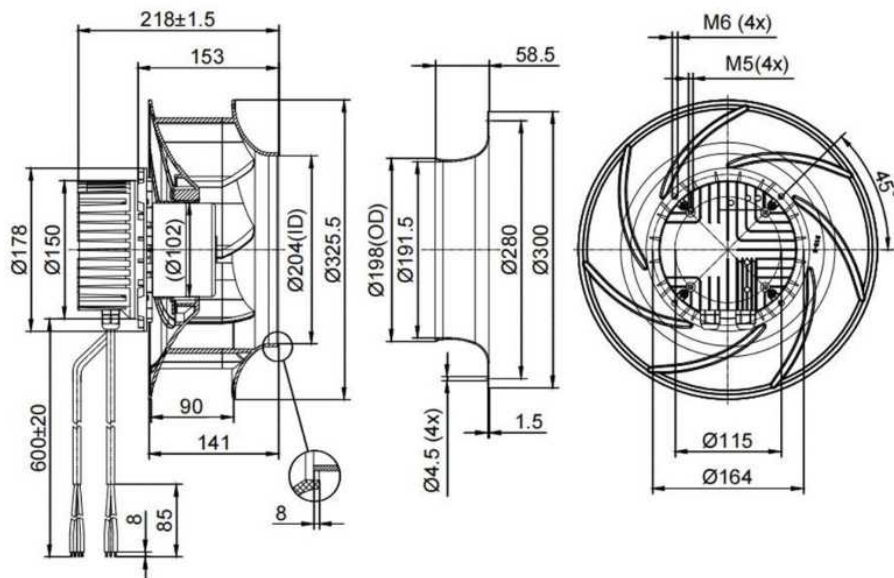


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 320mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

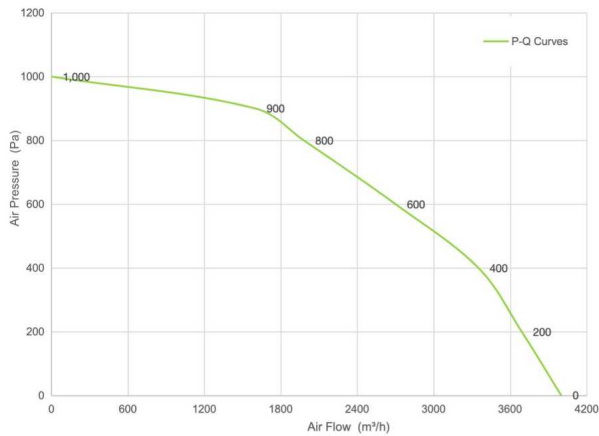

Pa	m³/h	rpm	W
300	3500	2725	750
400	3345	2709	746
500	3000	2685	745
600	2690	2652	742

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E320H141-102-B1	230	50/60	2640	740	4000	84

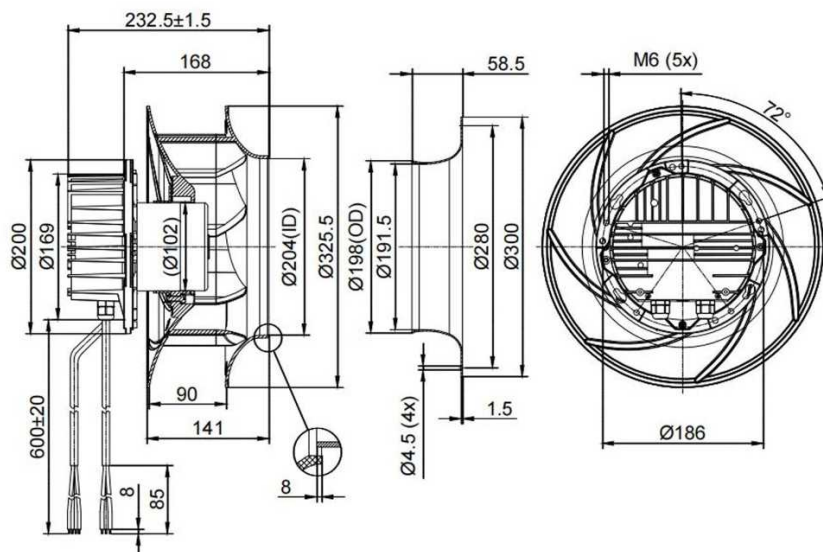


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 320mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

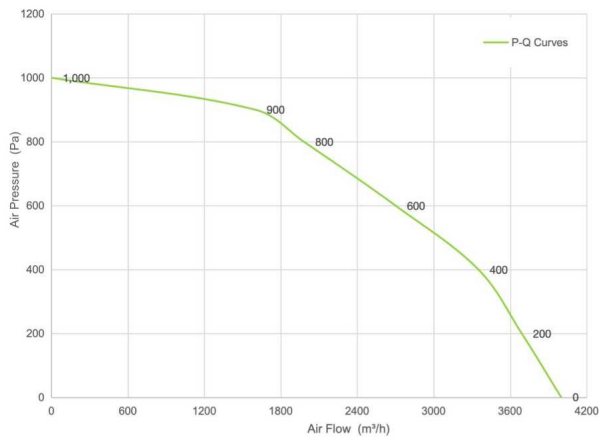

Pa	m³/h	rpm	W
300	3500	2725	750
400	3345	2709	746
500	3000	2685	745
600	2690	2652	742

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E320H141-102-B0	380	50/60	2700	790	4000	84

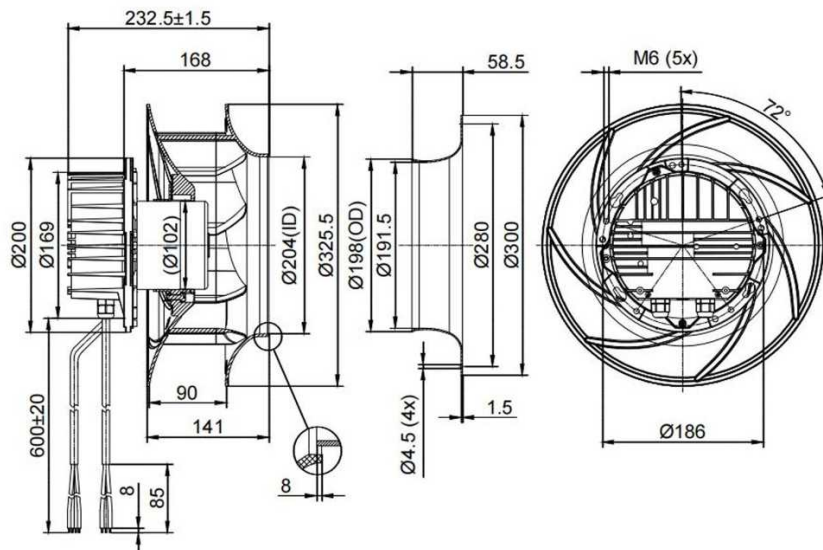


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com

EC Backward Curved Centrifugal Fans 320mm


Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

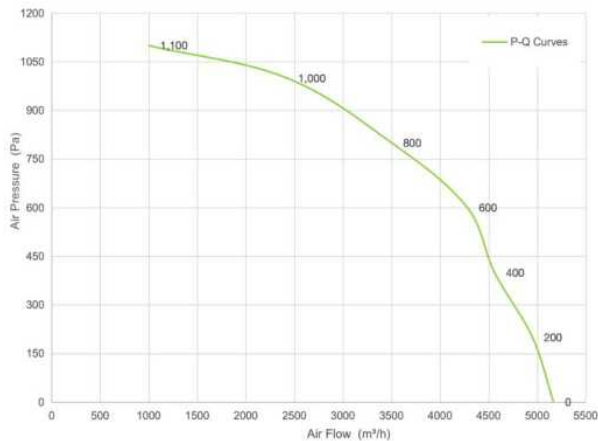

Pa	m³/h	rpm	W
500	4440	3039	1449
600	4161	3019	1474
700	3945	3014	1494
800	3655	2970	1486

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E320H145-138-00	380	50/60	3028	1494	5168	78

EC Backward Curved Centrifugal Fans 355mm

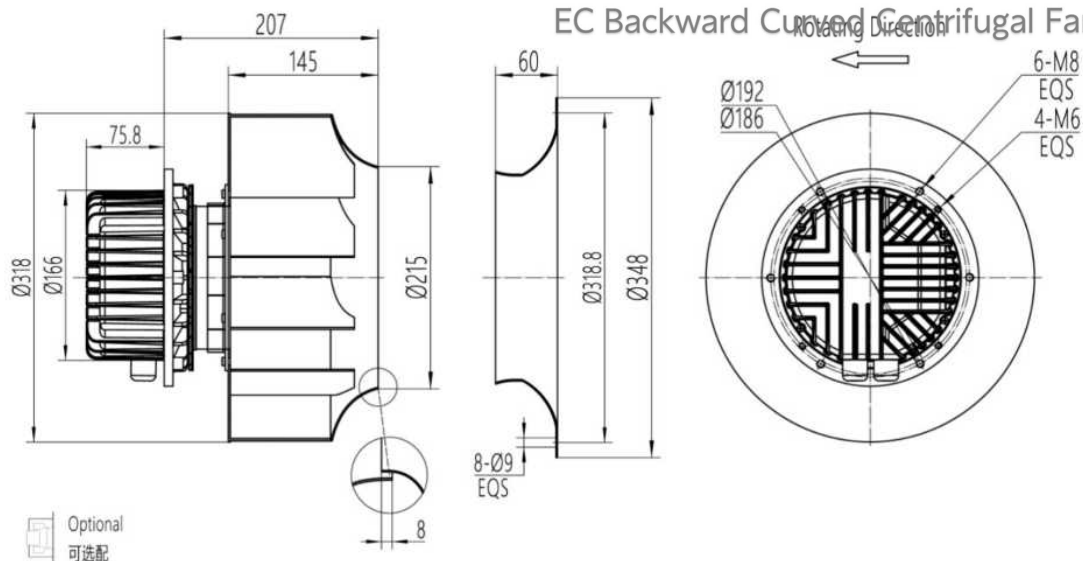


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

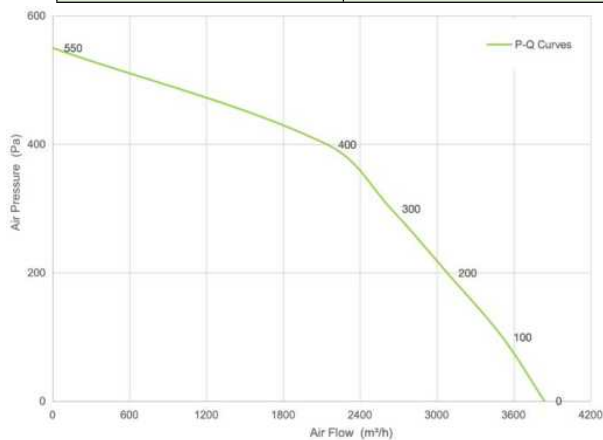

Pa	m³/h	rpm	W
200	3050	1792	485
300	2745	1768	481
400	2060	1742	479
500	1160	1718	477

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E355H179-102-C0	230	50/60	1720	477	3840	78

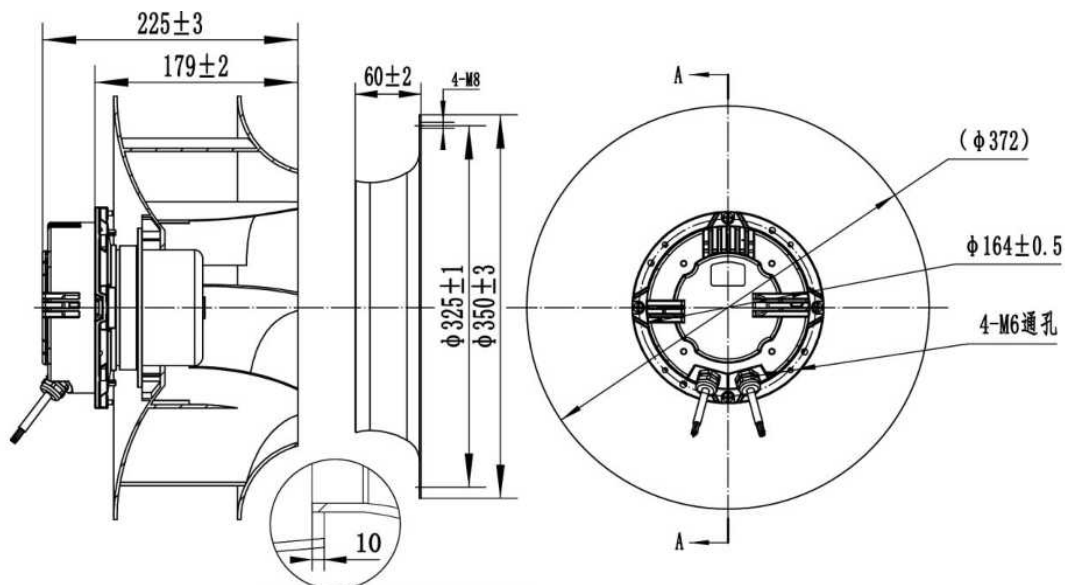


EC Backward Curved Centrifugal Fans 355mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com


Website: www.airtekipower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

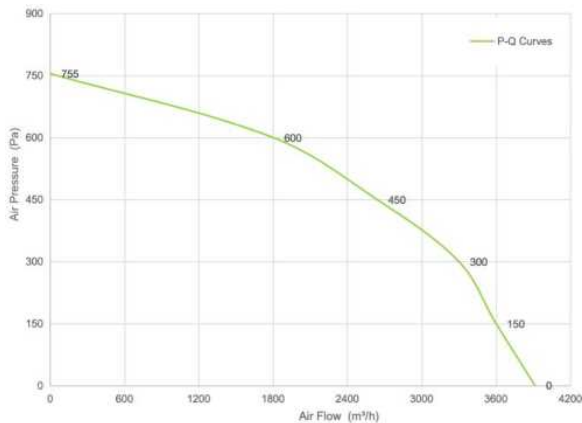


Pa	m³/h	rpm	W
350	3173	2053	614
400	3031	2055	637
500	2556	2040	642
600	1981	2056	632

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E355H147-102-00	230	50/60	2055	645	3915	74

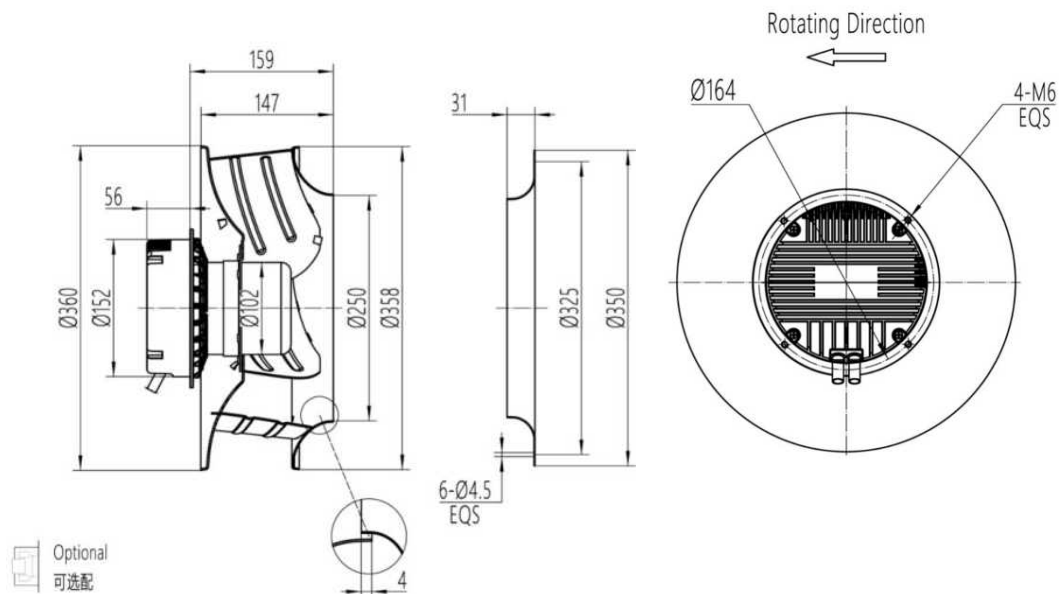


EC Backward Curved Centrifugal Fans 355mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

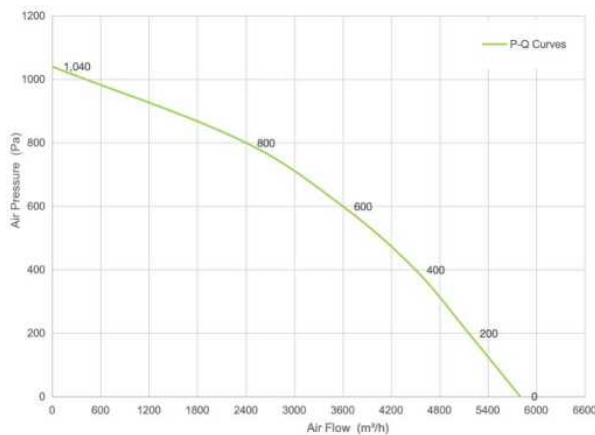

Pa	m³/h	rpm	W
300	4880	2465	1068
400	4560	2450	1065
500	3920	2423	1062
600	3600	2401	1060

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E355H179-102-C0	380	50/60	2400	1065	5800	82

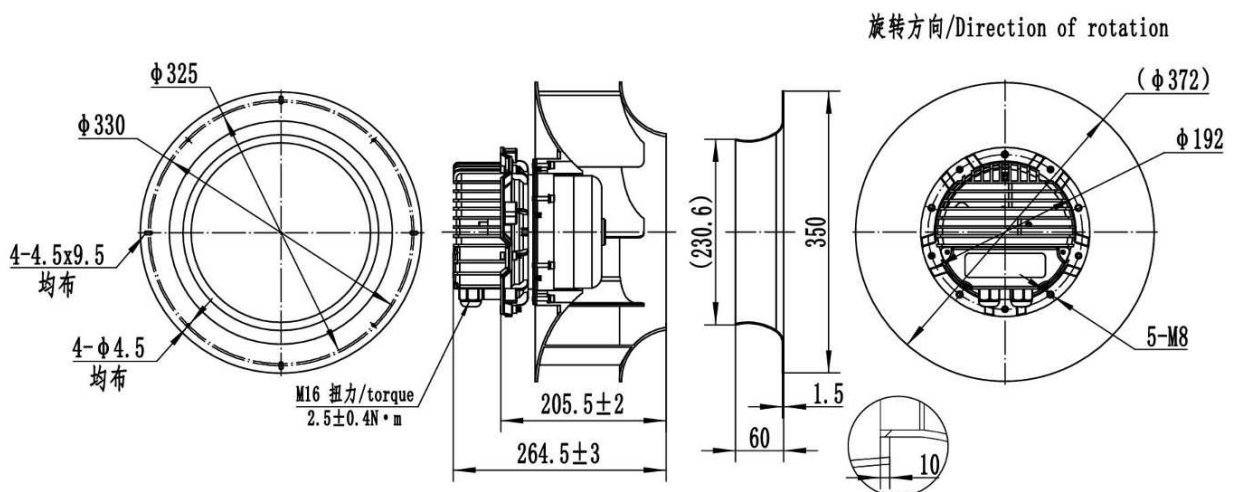


EC Backward Curved Centrifugal Fans 355mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

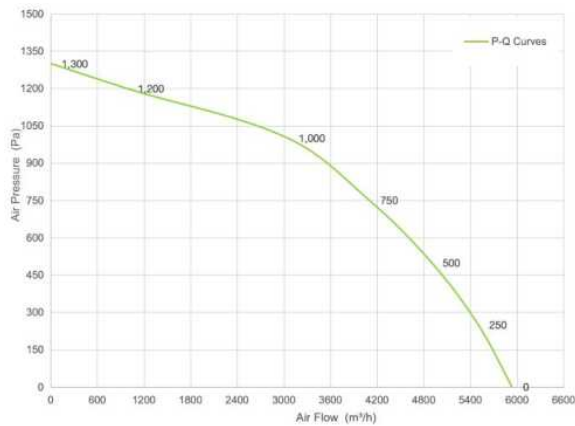

Pa	m³/h	rpm	W
560	4790	2710	1430
745	4235	2710	1510
935	3465	2710	1485
995	3175	2710	1455

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E355H152-138-00	380	50/60	2710	1510	5935	77

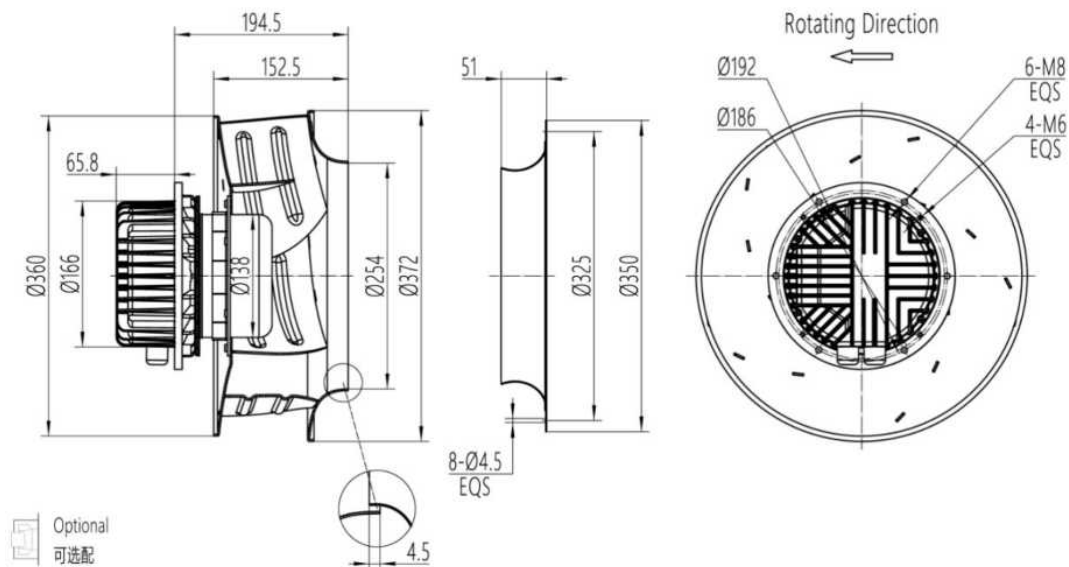


EC Backward Curved Centrifugal Fans 400mm

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

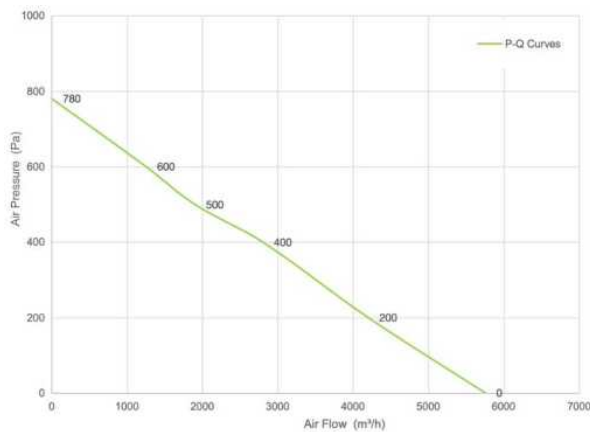

Pa	m³/h	rpm	W
300	3525	1598	509
400	2901	1565	507
500	1890	1538	505
600	1225	1502	502

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E400H182-102-C1	230	50/60	1500	500	5755	80

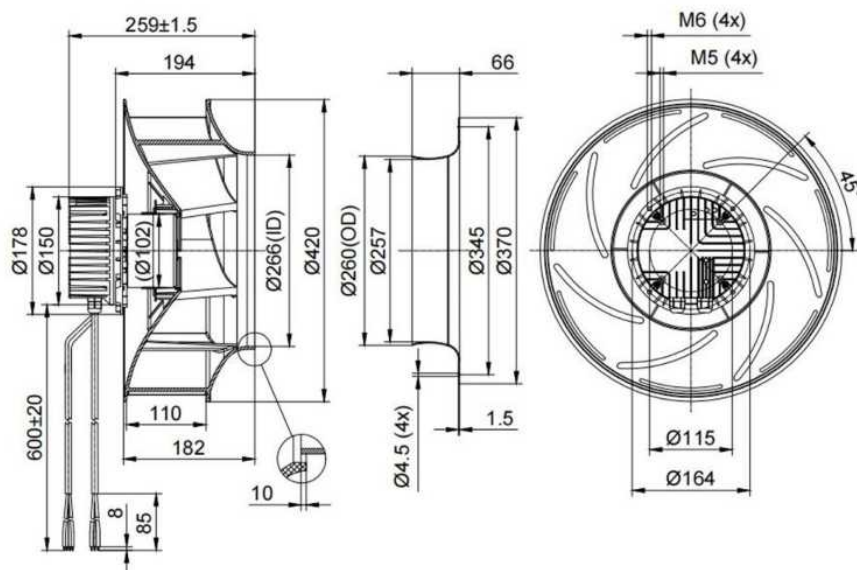


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

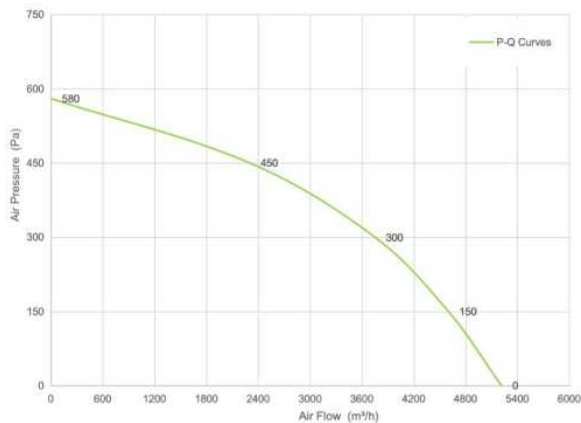

Pa	m³/h	rpm	W
300	3770	1515	648
350	3485	1515	638
400	3115	1520	645
440	2590	1520	586

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E400H181-102-00	230	50/60	1520	650	5215	75

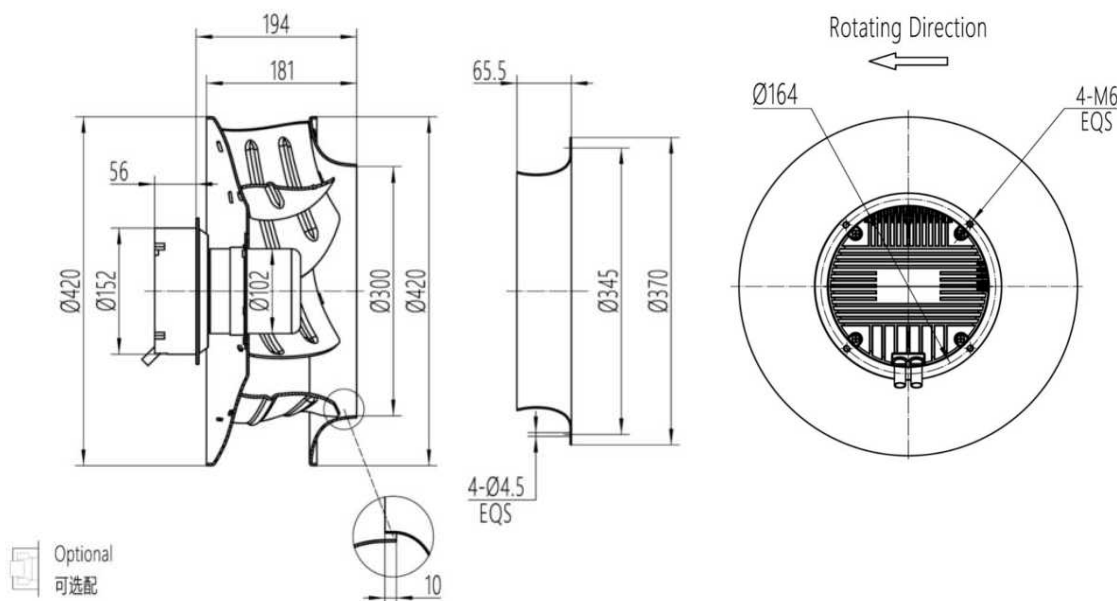


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 400mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

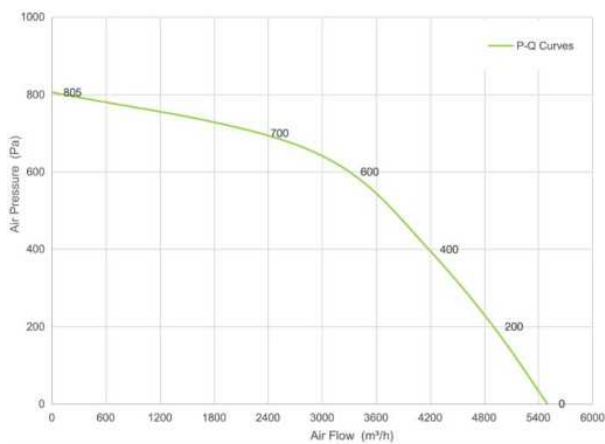

Pa	m³/h	rpm	W
300	4510	1985	775
400	4200	1968	772
500	3821	1958	769
600	3320	1938	768

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23E400H182-102-C0	230	50/60	1920	770	5500	81

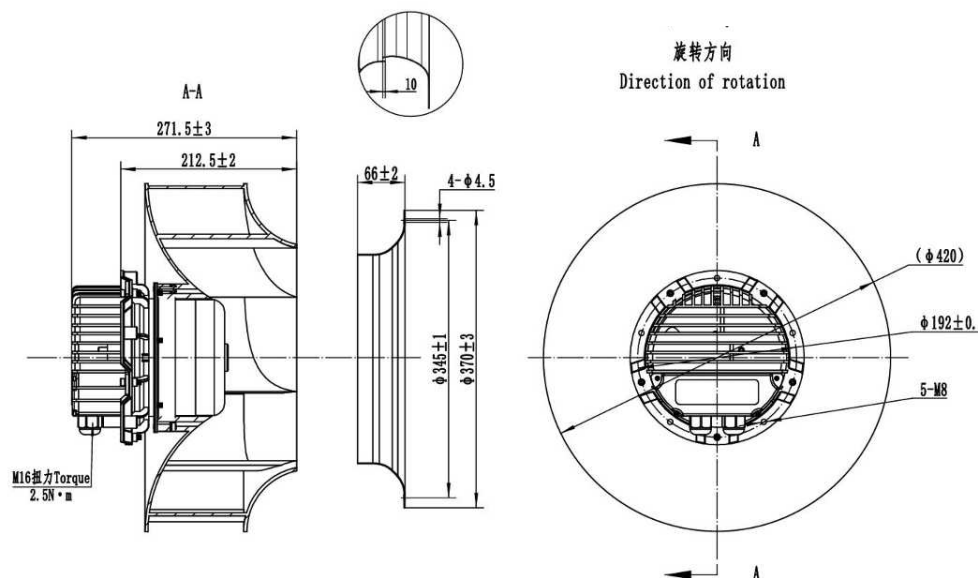


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 400mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

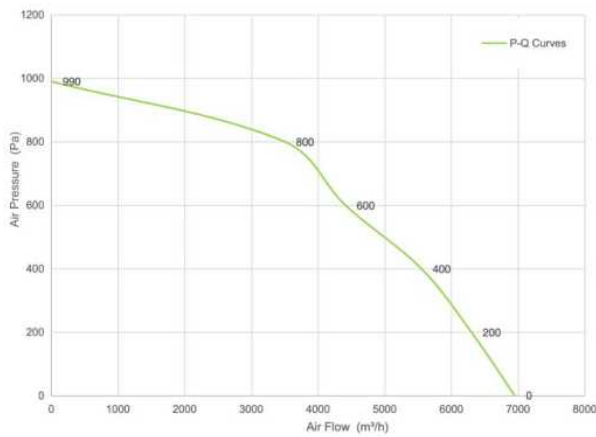

Pa	m³/h	rpm	W
300	5910	2121	1329
400	5580	2099	1325
500	4750	2076	1322
600	4320	2052	1321

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E400H182-102-B0	380	50/60	2060	1320	6950	89

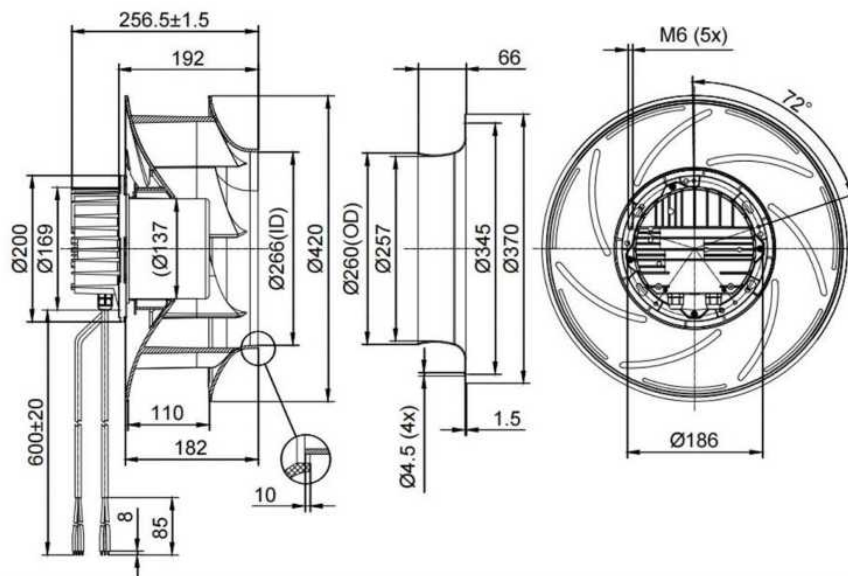


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com

Website: www.airtekipower.com


EC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

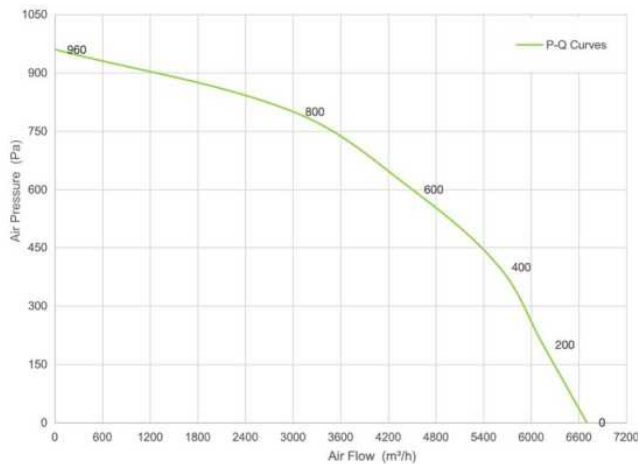


Pa	m³/h	rpm	W
600	4667	2060	1470
650	4415	2065	1480
700	4100	2065	1480
800	3275	2065	1340

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E400H181-138-00	380	50/60	2060	1480	6700	77

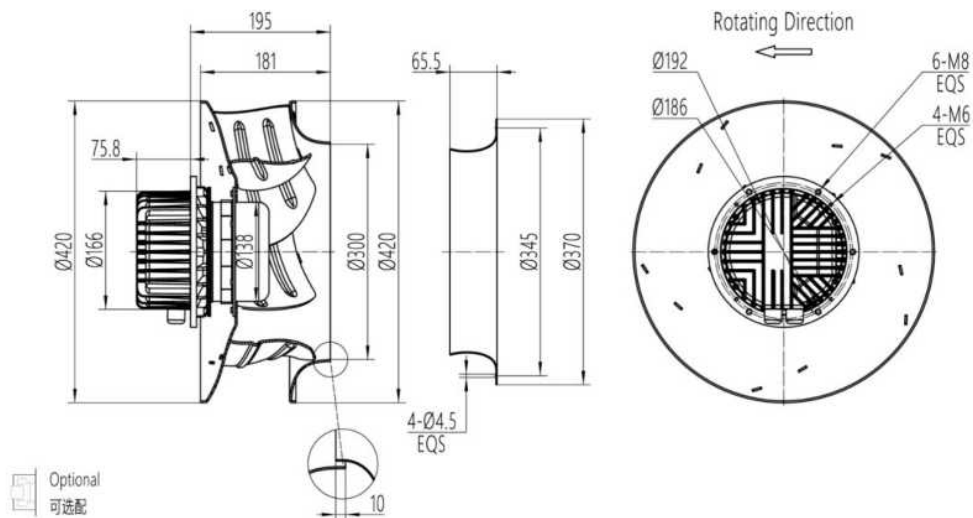


EC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

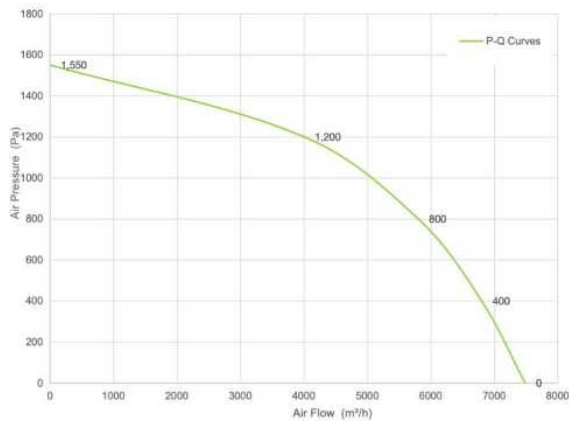

Pa	m³/h	rpm	W
800	5750	2405	2560
1000	5215	2405	2655
1200	4495	2405	2695
1400	3220	2405	2495

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E400H245-188-00	380	50/60	2405	2700	7485	81

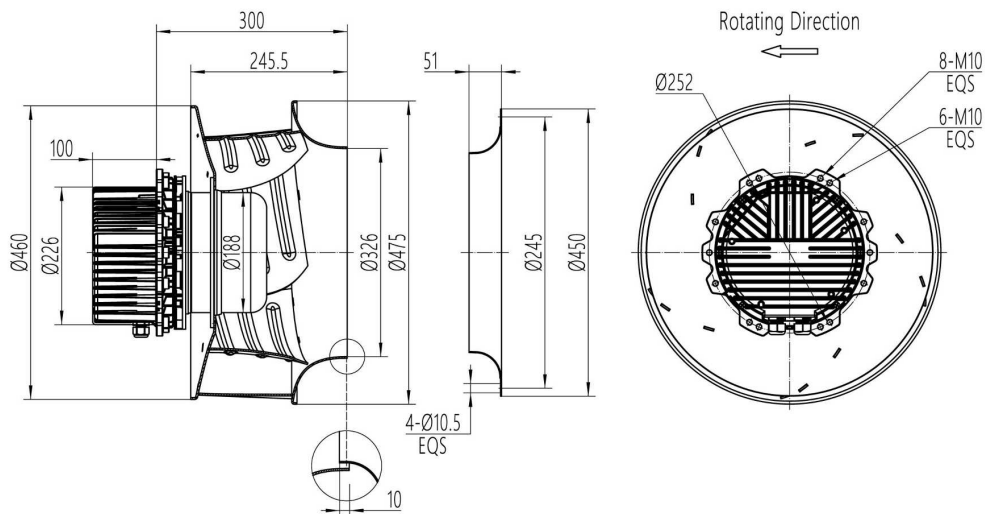


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com

Website: www.airtekipower.com


EC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

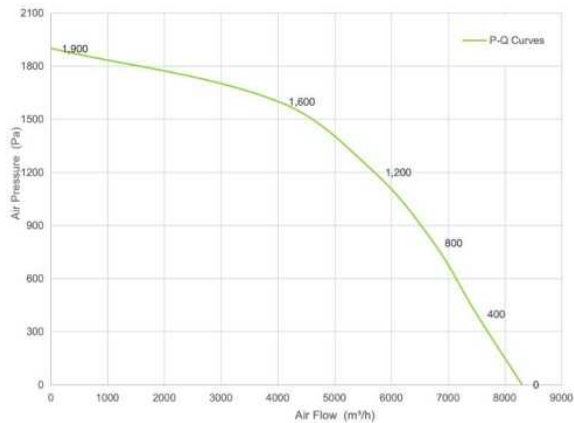

Pa	m³/h	rpm	W
1000	6310	2675	3430
1200	5775	2665	3565
1400	5060	2655	3585
1600	4380	2665	3535

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E400H245-188-01	380	50/60	2745	3585	8305	85

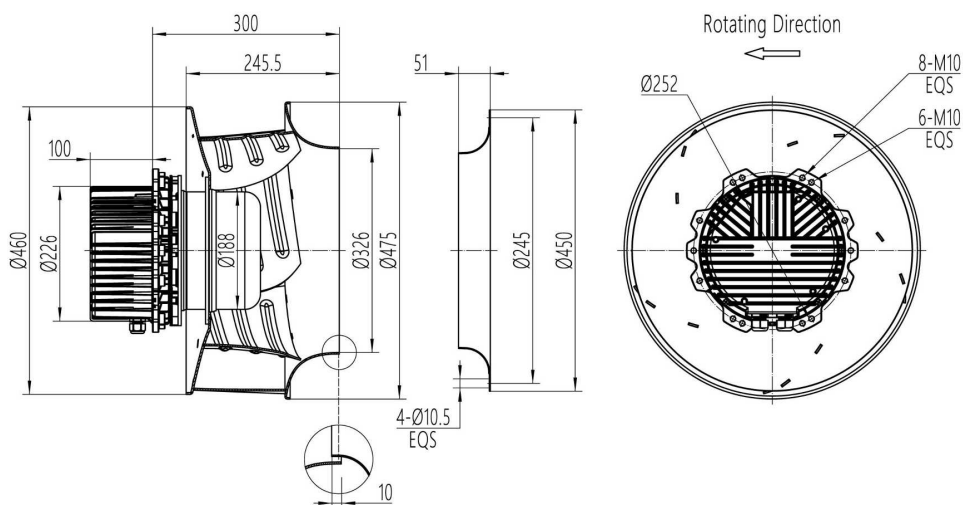


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com

Website: www.airtekipower.com


EC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

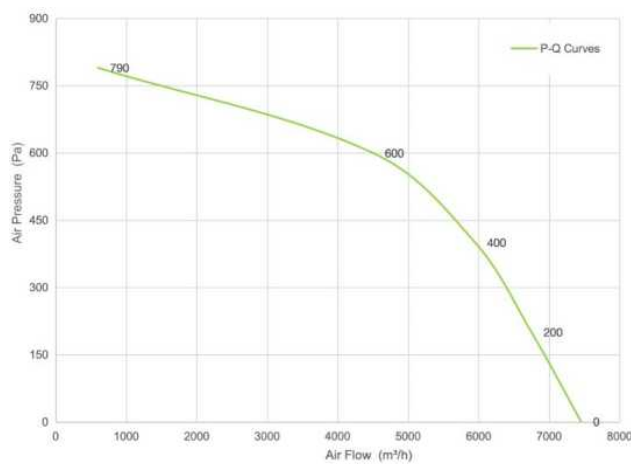

Pa	m³/h	rpm	W
500	5380	1725	1340
550	5050	1725	1340
600	4615	1725	1325
650	4165	1725	1300

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E450H206-138-00	380	50/60	1725	1340	7455	79

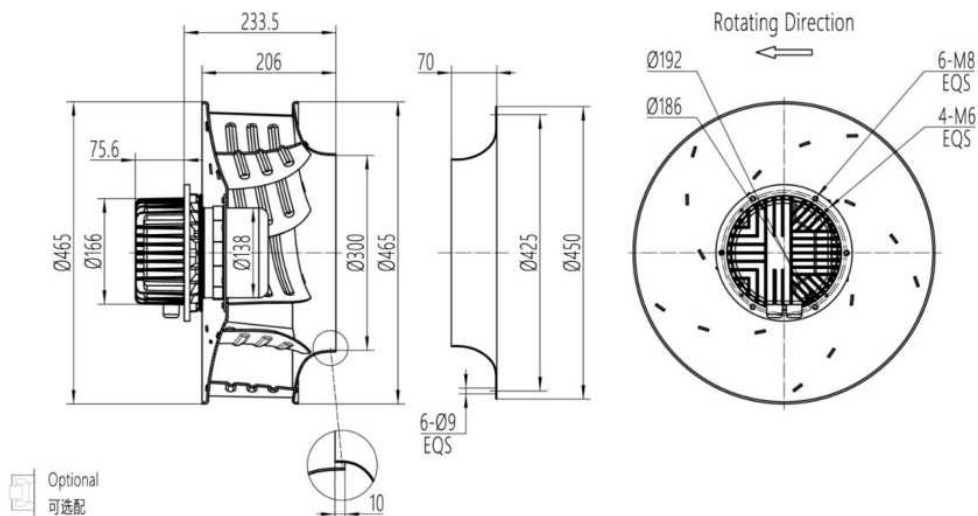


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

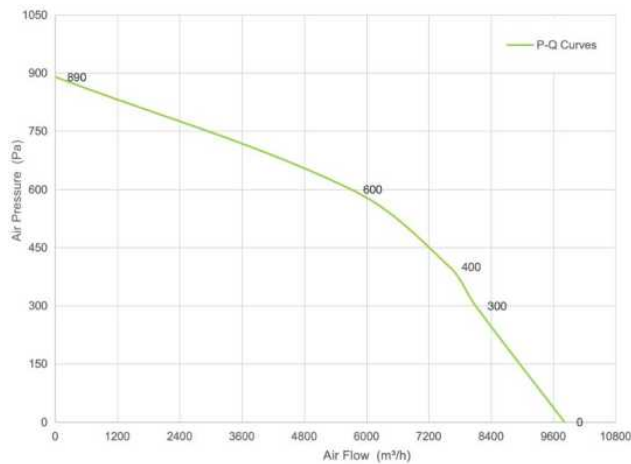

Pa	m³/h	rpm	W
300	8290	1700	2245
400	7745	1700	2310
500	7140	1700	2400
595	6400	1700	2319

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E520H225-188-00	380	50/60	1700	2400	9815	84

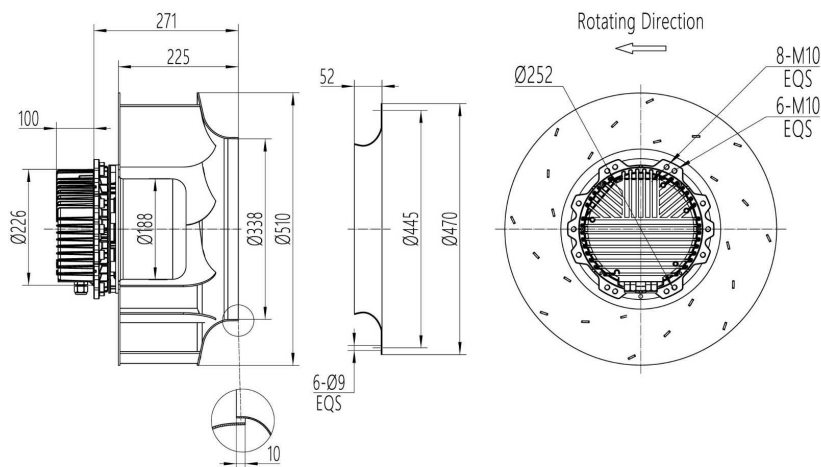


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekipower.com

Website: www.airtekipower.com


EC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

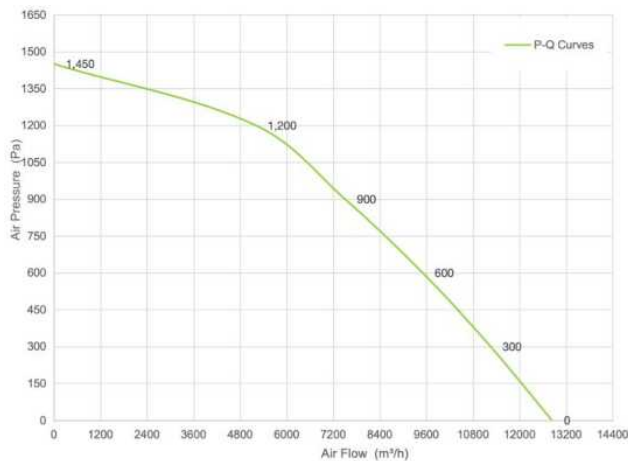

Pa	m³/h	rpm	W
700	8905	2060	4220
800	8335	2050	4220
1000	6840	2050	4260
1100	6260	2060	4265

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E520H225-188-01	380	50/60	2200	4260	12830	88

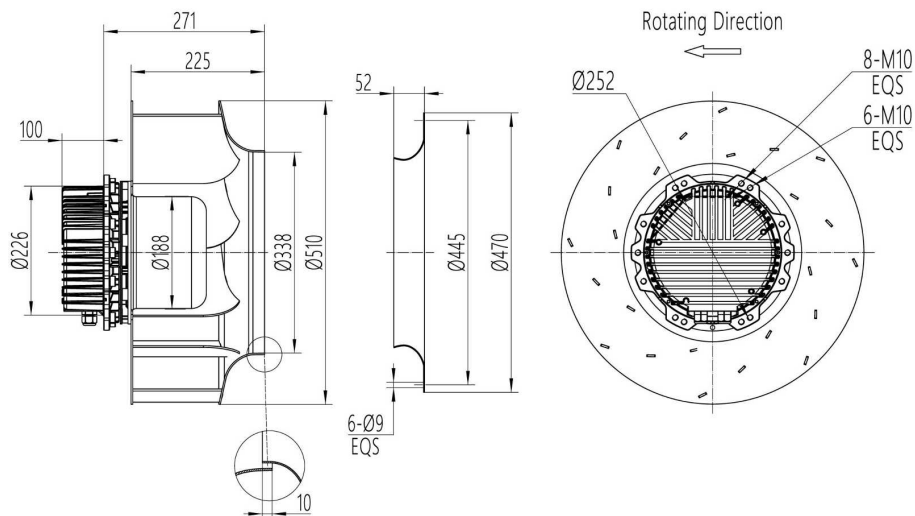


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpowers.com

Website: www.airtekpowers.com


EC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

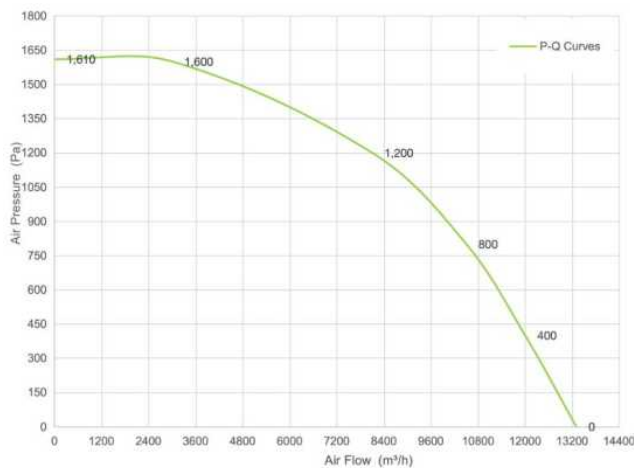

Pa	m³/h	rpm	W
950	9768	2200	5519
1076	9110	2200	5623
1197	8338	2200	5574
1293	7427	2200	5454

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E520H225-188-02	380	50/60	2200	5623	13304	93

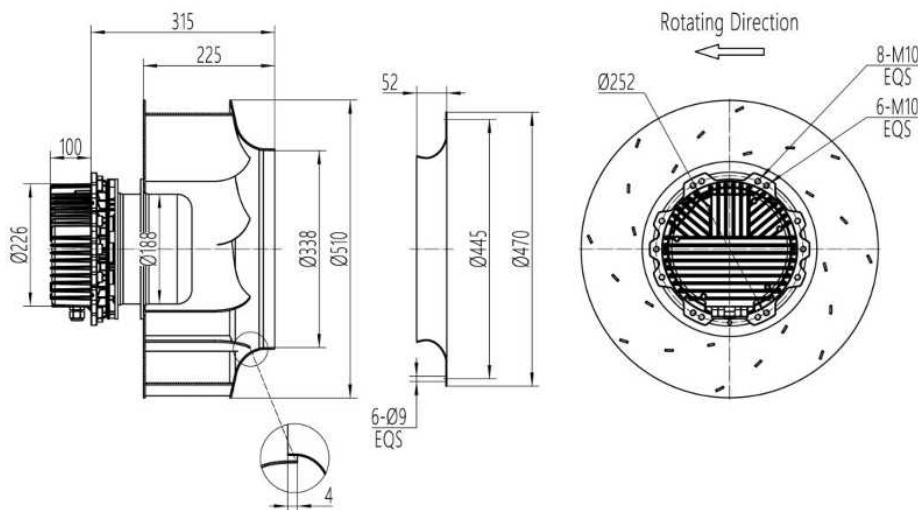


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com



EC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

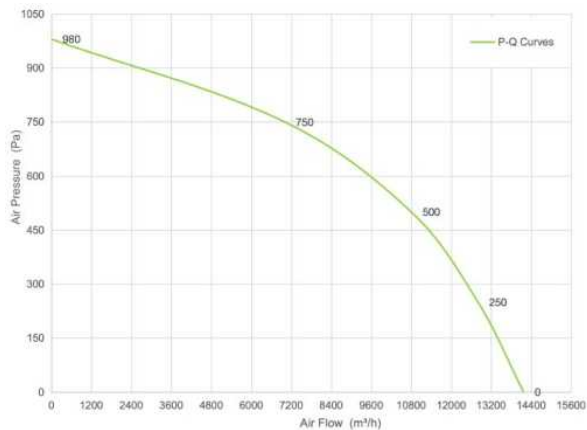


Pa	m³/h	rpm	W
500	10640	1500	2955
600	9510	1500	2900
705	8170	1500	2895
805	5655	1500	2500

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E560H258-188-00	380	50/60	1500	2990	14170	83

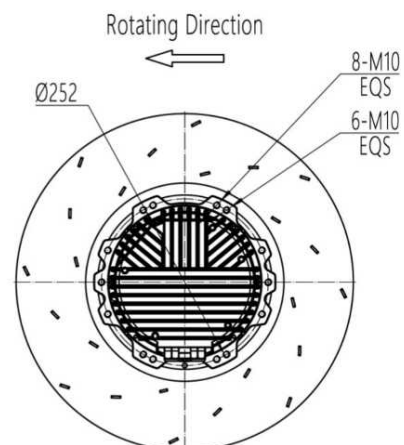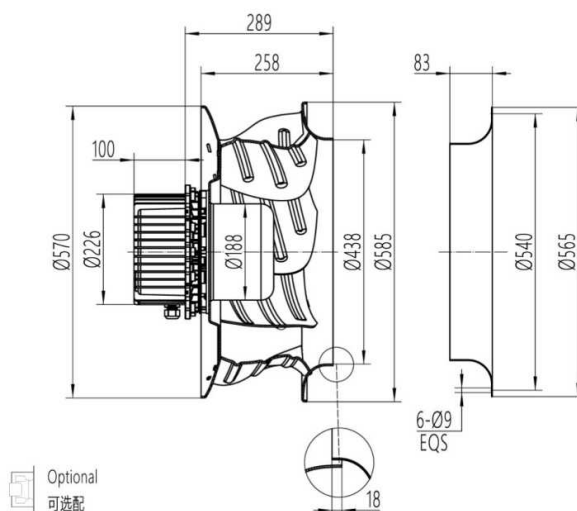



EC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

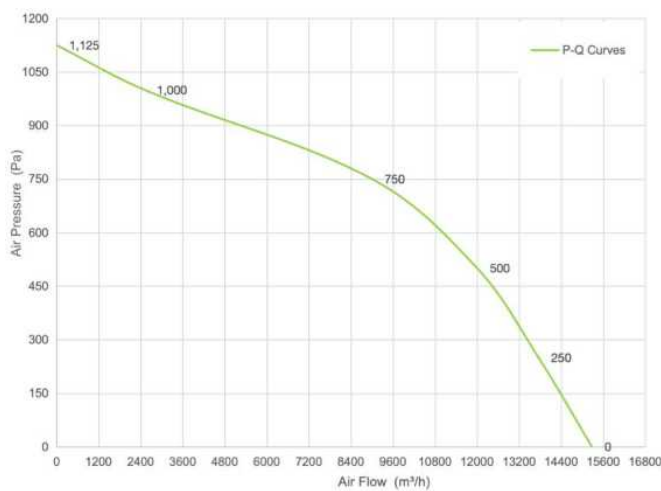

Pa	m³/h	rpm	W
575	12340	1620	3635
695	10350	1620	3660
800	8900	1620	3535
920	6450	1620	3220

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E560H258-188-01	380	50/60	1620	3660	15275	87

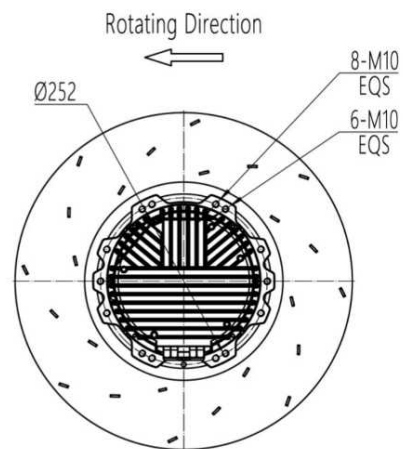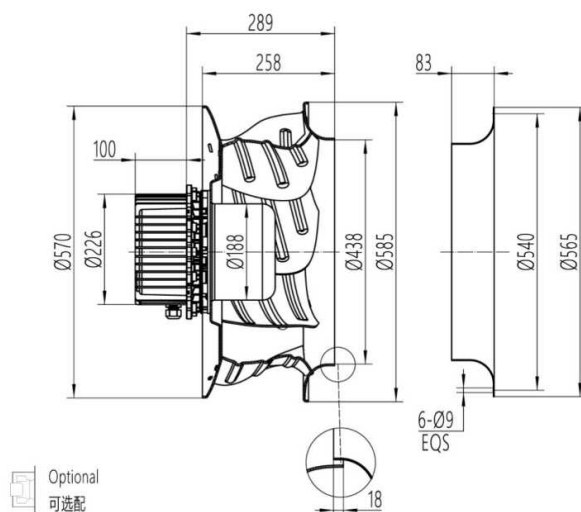


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

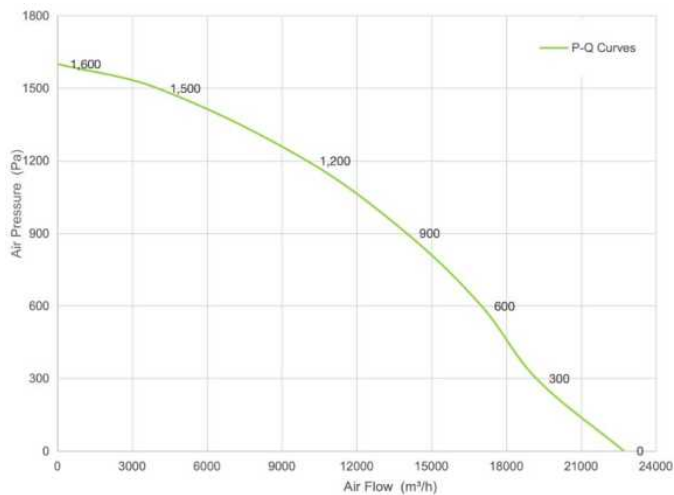

Pa	m³/h	rpm	W
710	15970	1744	5653
890	13950	1728	5545
1060	11975	1723	5570
1140	11000	1730	5550

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E560H311-188-00	380	50/60	1770	5570	20710	87

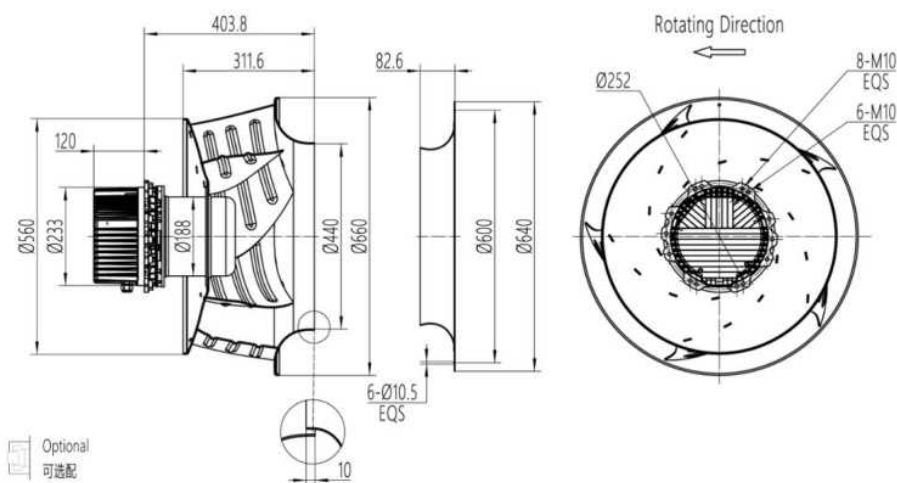


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com

Website: www.airtekpower.com


EC Backward Curved Centrifugal Fans 630mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

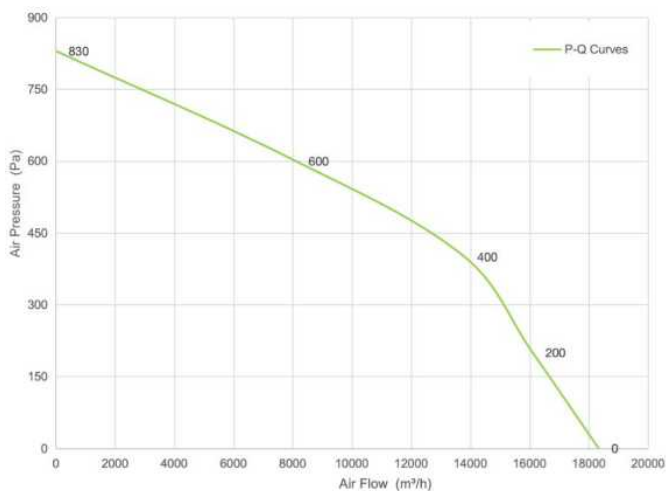

Pa	m³/h	rpm	W
400	13395	1260	2905
500	12230	1260	2970
600	10020	1260	2840

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E630H293-188-00	380	50/60	1260	2970	18330	84

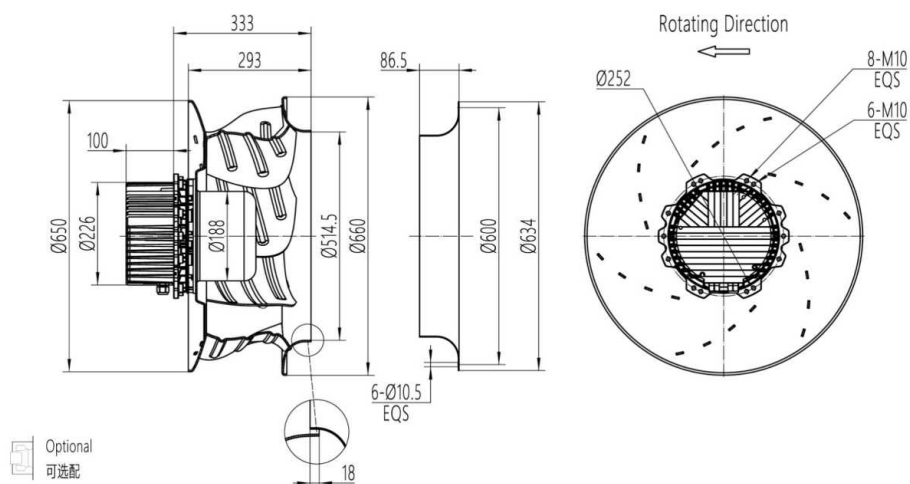


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com


Website: www.airtekpower.com

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

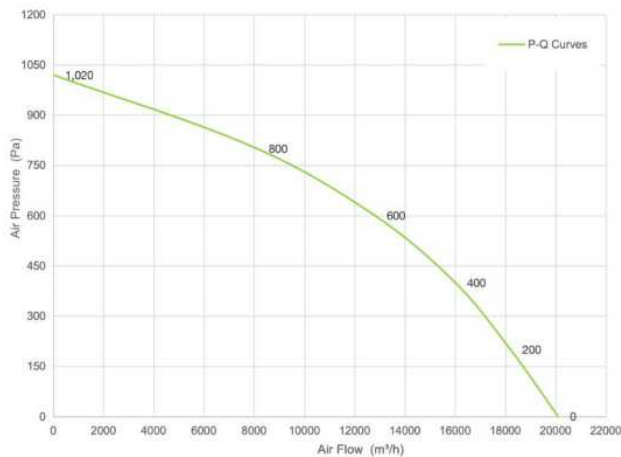

Pa	m³/h	rpm	W
500	14645	1380	3820
600	12965	1380	3850
700	11380	1380	3805

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38E630H293-188-01	380	50/60	1380	3850	20100	88

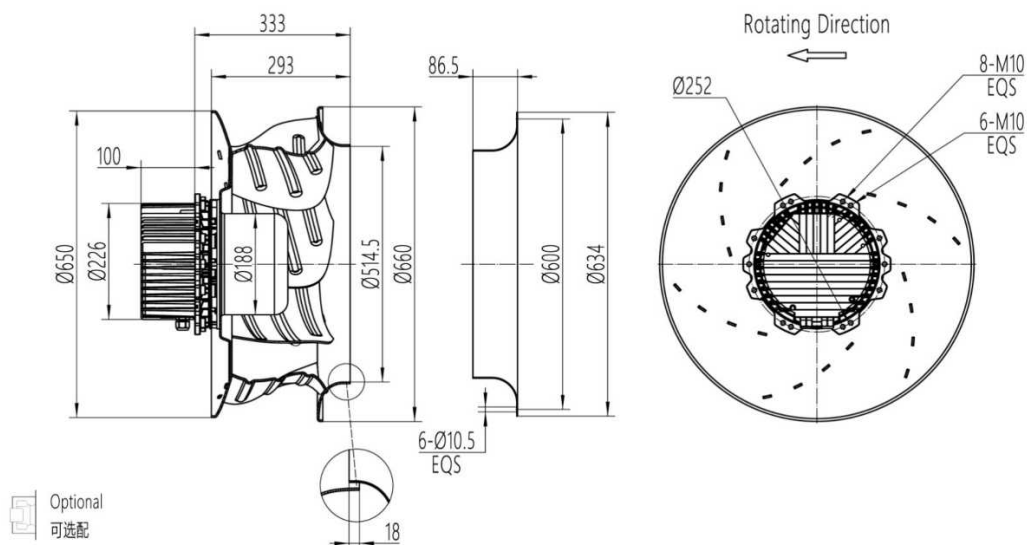




AC Backward Curved Centrifugal Fans







AC Backward Curved Centrifugal Fans 133mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

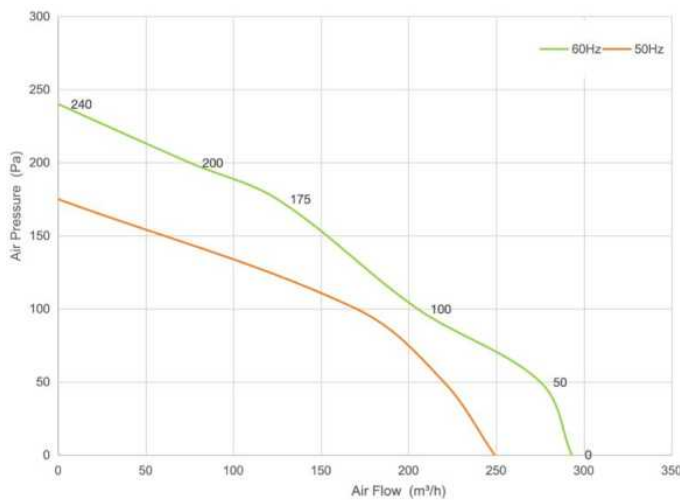

	Pa	m³/h	rpm	W
60Hz	40	280	3434	34.7
	60	267	3430	35.0
	101	233	3419	35.8
	126	214	3427	35.7
50Hz	40	231	2891	33.5
	60	213	2887	33.8
	101	172	2884	33.6
	125	138	2887	33.8

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A133H54-72-00	230	60	3453	34	293	58
	230	50	2904	33	249	57

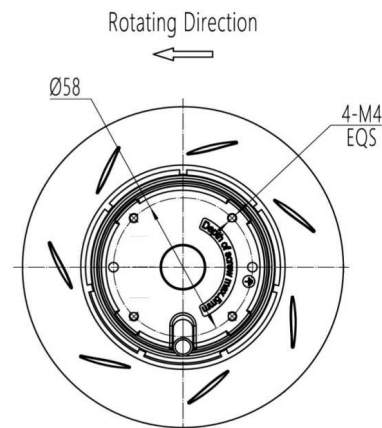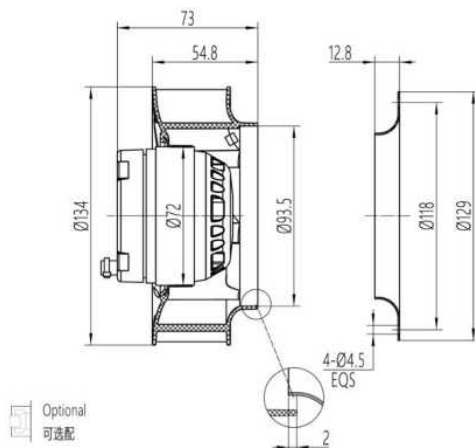

AC Backward Curved Centrifugal Fans 155mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com

Website: www.airtekipower.com




Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

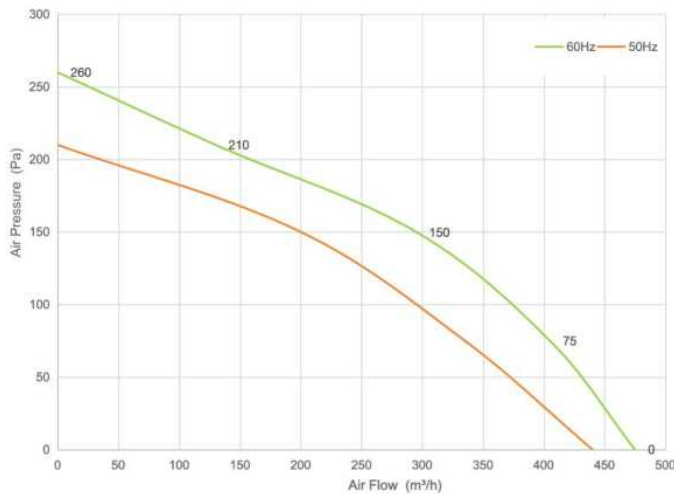

	Pa	m³/h	rpm	W
60Hz	50	435	2962	36
	100	370	2960	37
	150	300	2965	36
	200	155	2968	36
50Hz	50	368	2641	32
	100	295	2612	31
	150	200	2633	31


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A155H75-92-A0	230	60	3000	38	475	64
	230	50	2650	32	440	61

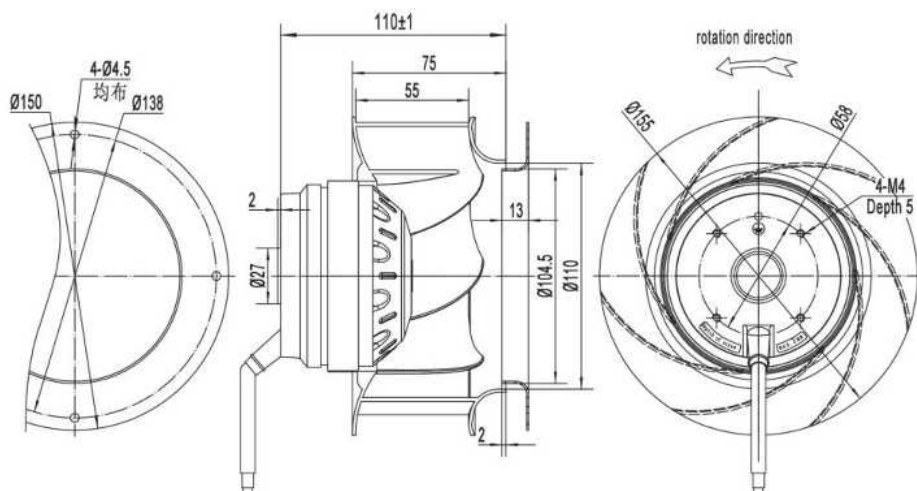





AC Backward Curved Centrifugal Fans 175mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

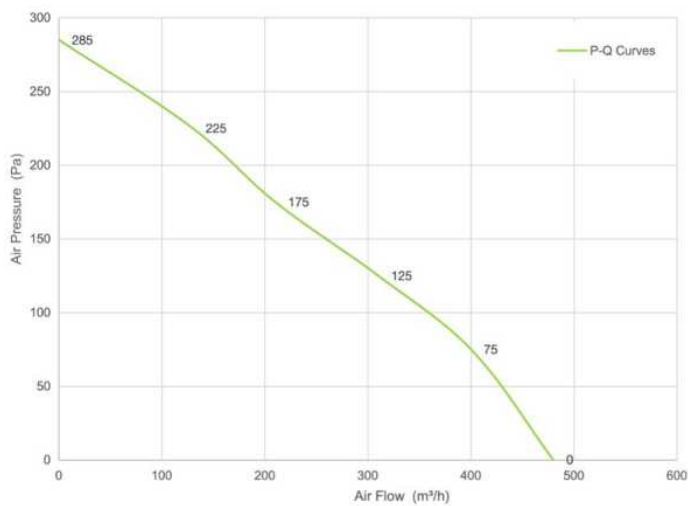

Pa	m³/h	rpm	W
120	349	2670	41
145	309	2646	42
156	288	2640	43
175	252	2633	43


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A175H62-72-00	230	50	2775	43	480	60

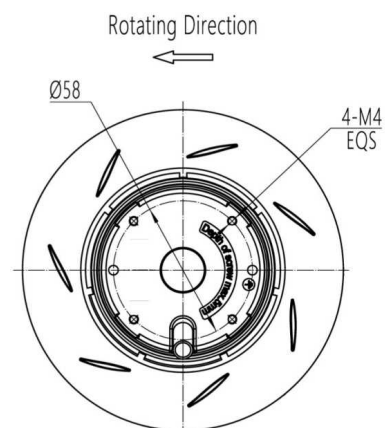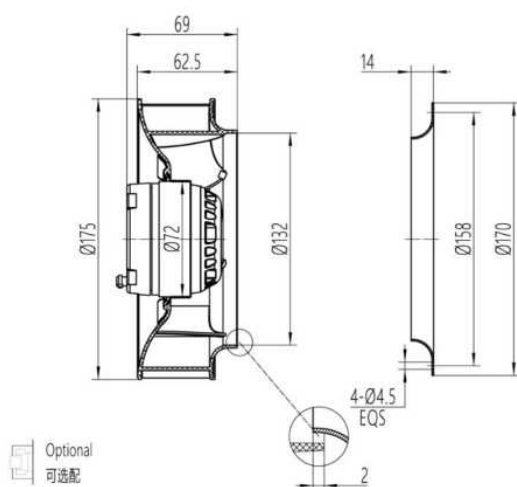




AC Backward Curved Centrifugal Fans 175mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

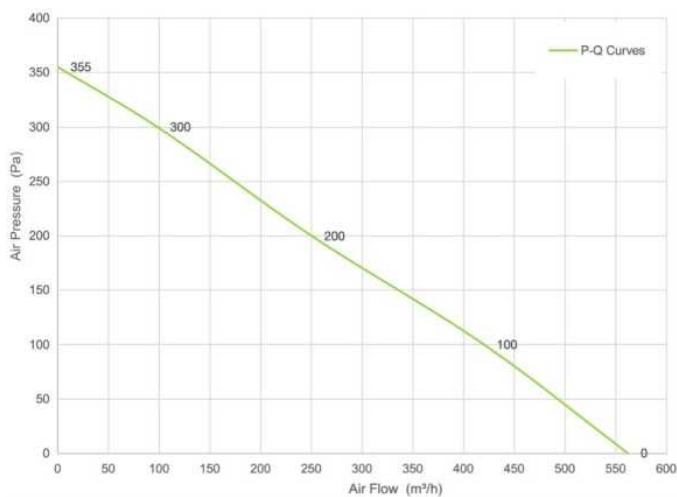

Pa	m³/h	rpm	W
50	447	2679	43
100	385	2612	45
150	306	2578	46
200	184	2592	45


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A175H62-72-01	230	50	2770	46	508	63

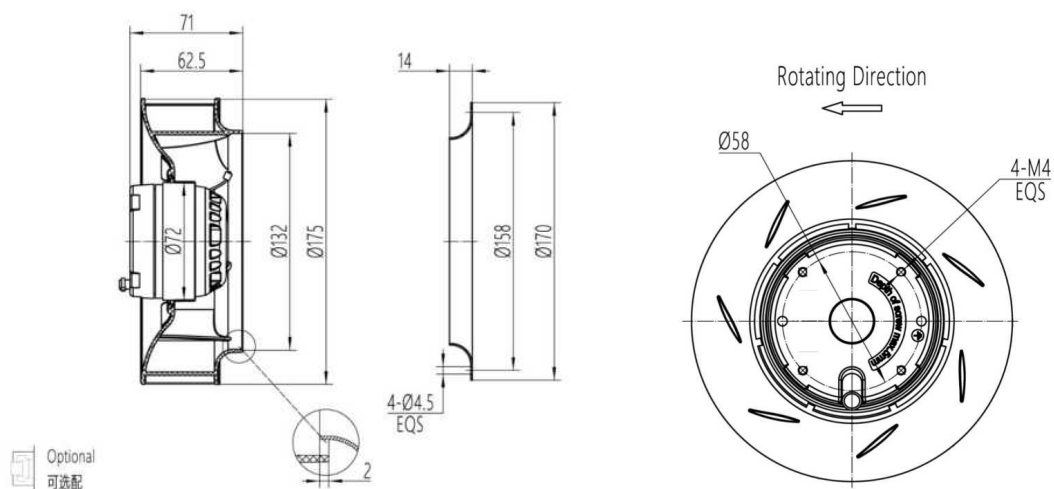




AC Backward Curved Centrifugal Fans 175mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

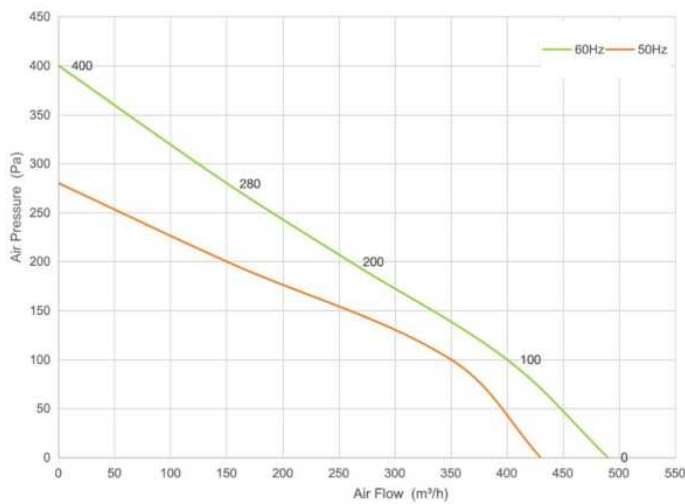

	Pa	m³/h	rpm
60Hz	100	400	2780
	200	260	2720
	300	126	2652
50Hz	100	350	2562
	150	255	2503
	200	150	2468


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A175H63-72-A0	230	60	2700	66	490	66
		50	2500	52	430	64

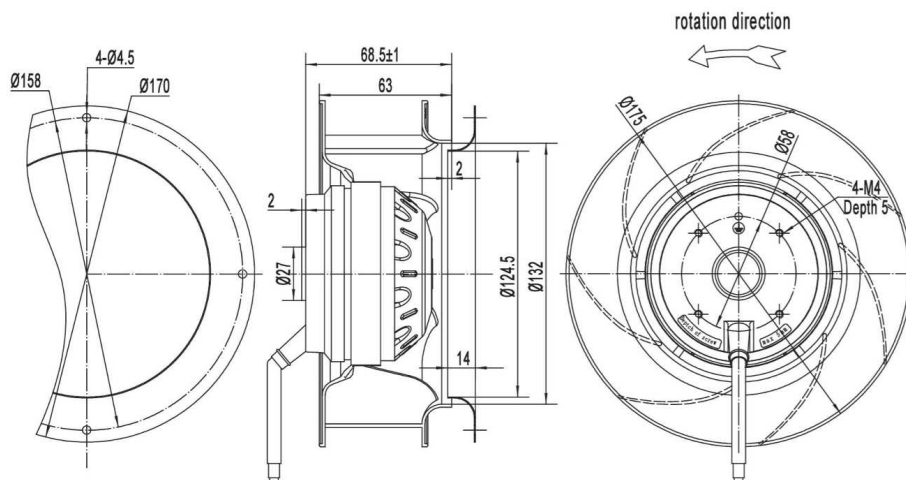




AC Backward Curved Centrifugal Fans 175mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

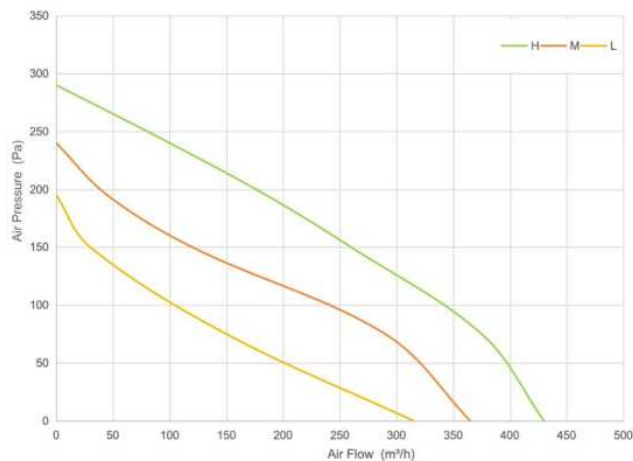


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A175H63-72-A1 3 speeds	230	50	2530	52	430	64
			2150	45	365	60
			1850	42	315	55

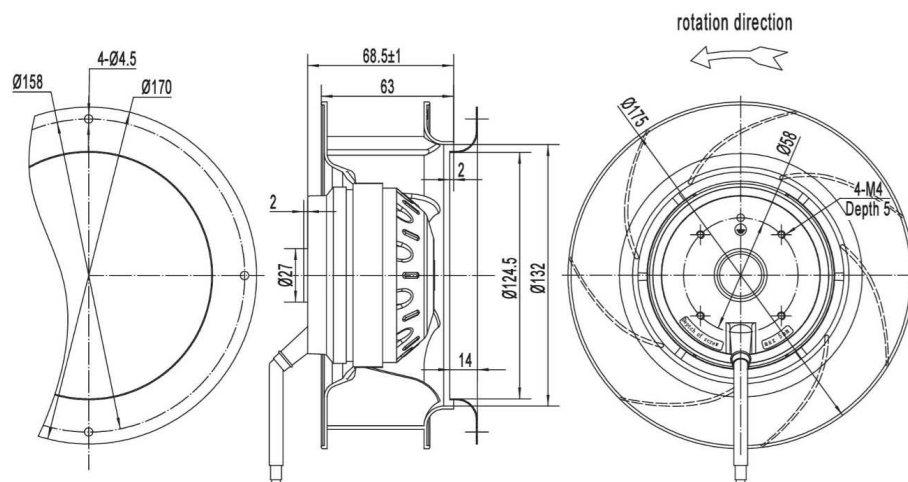




AC Backward Curved Centrifugal Fans 180mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

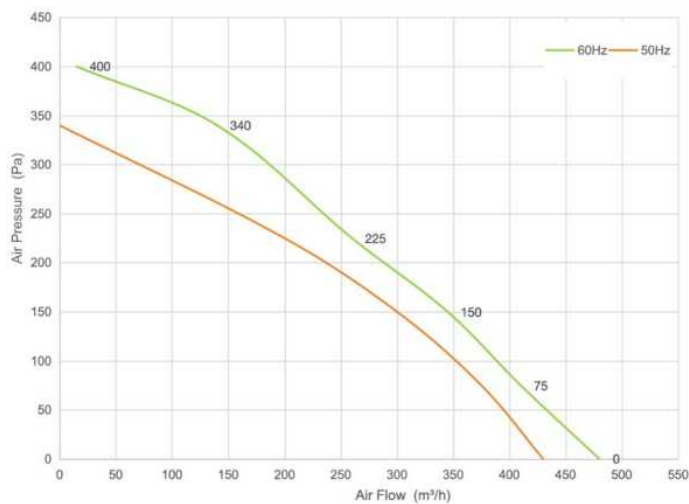

	Pa	m³/h	rpm
60Hz	100	380	2920
	200	285	2902
	300	182	2875
50Hz	100	350	2680
	150	300	2652
	200	238	2623


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A180H49-92-A0	230	60	2850	66	480	66
		52	2550	52	430	63

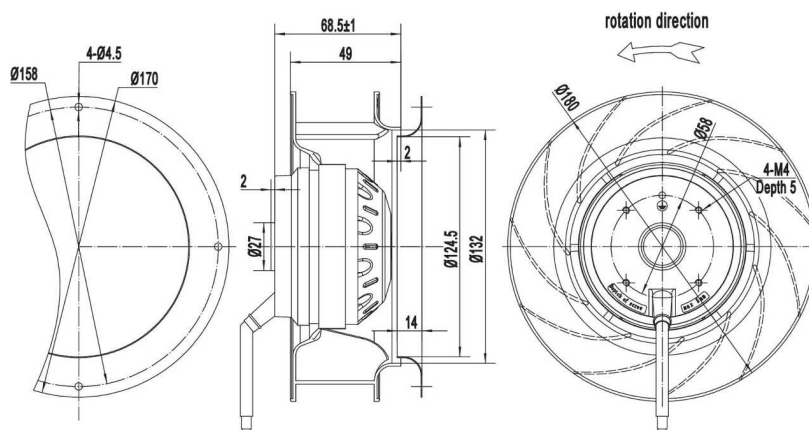




AC Backward Curved Centrifugal Fans 180mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

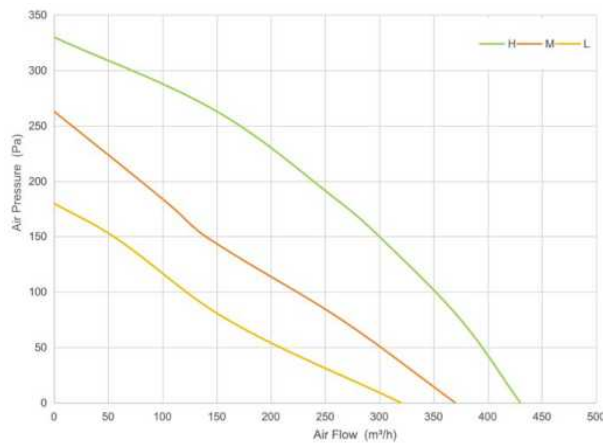


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A180H49-92-A1 3 speeds	230	50	2560	52	430	63
			2200	42	370	59
			1900	40	320	55

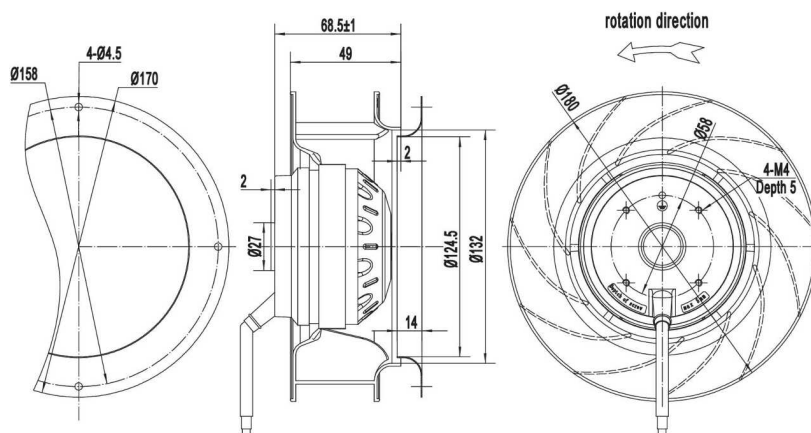




AC Backward Curved Centrifugal Fans 190mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

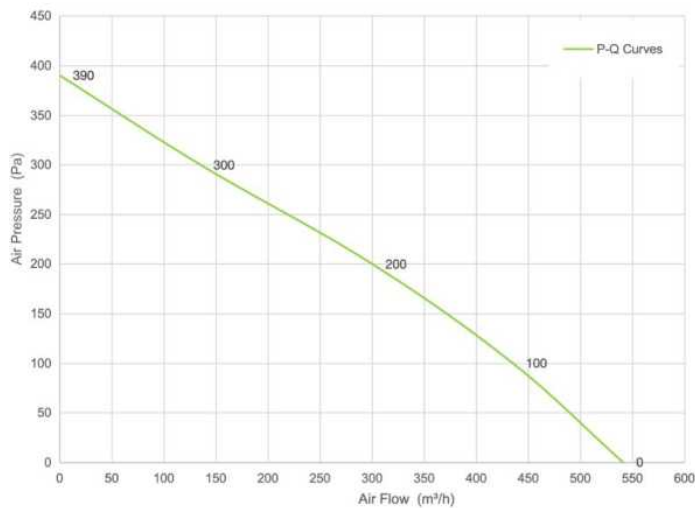

Pa	m³/h	rpm	W
125	405	2713	57
150	368	2659	59
175	326	2635	60
200	282	2613	61


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A190H63-72-00	230	50	2782	61	541	64

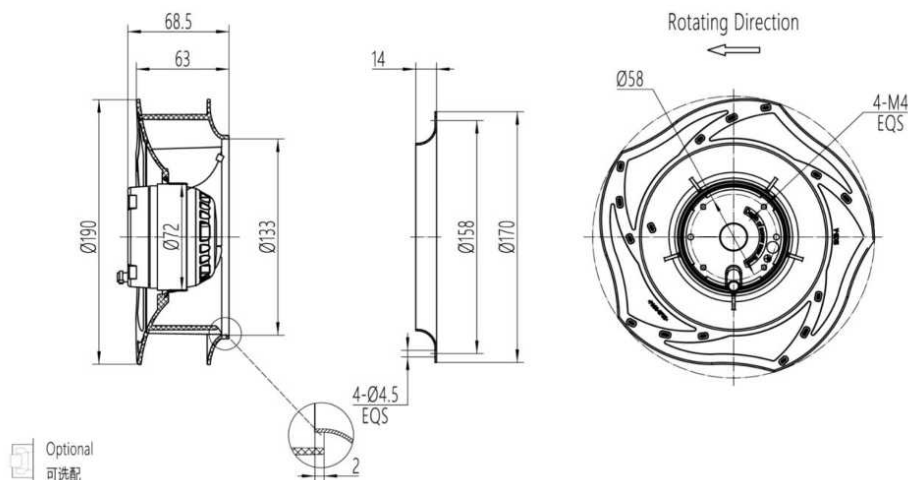




AC Backward Curved Centrifugal Fans 190mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

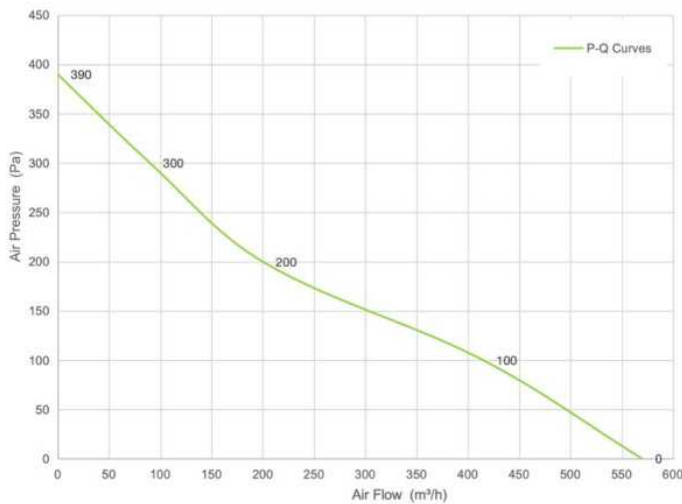

Pa	m³/h	rpm	W
50	504	2773	66
100	431	2665	67
150	319	2469	70
175	251	2413	70


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A190H63-92-00	230	60	2920	70	570	70

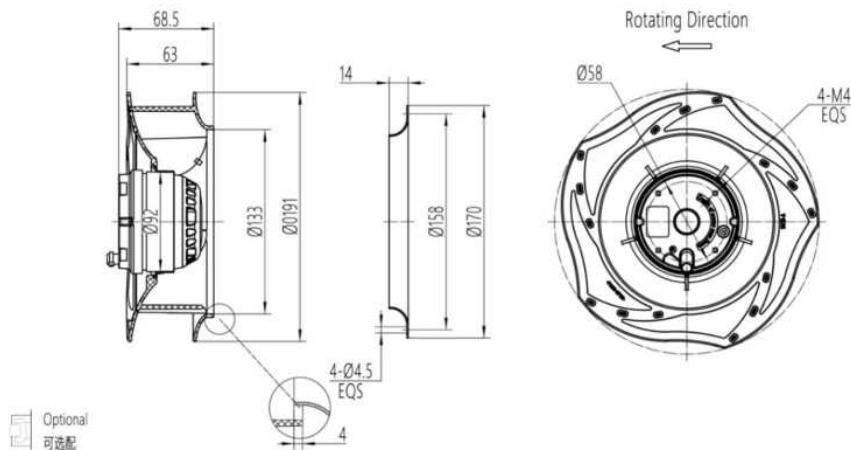




AC Backward Curved Centrifugal Fans 190mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

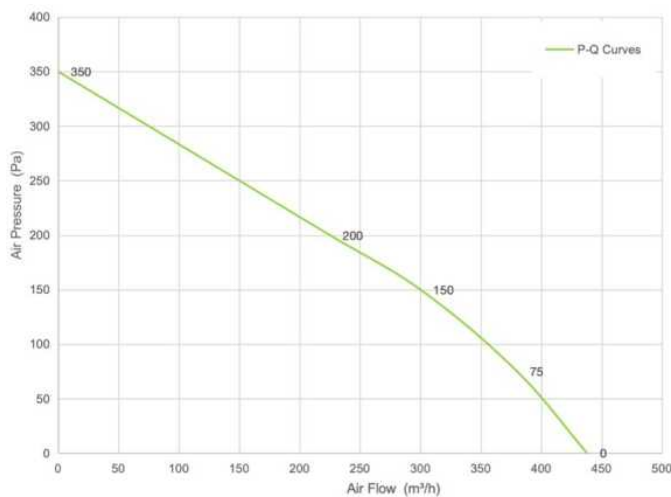

Pa	m³/h	rpm	W
140	319	2642	62
160	300	2635	62
180	270	2620	63
190	260	2620	64


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A190H62-92-00	230	50	2700	64	438	65

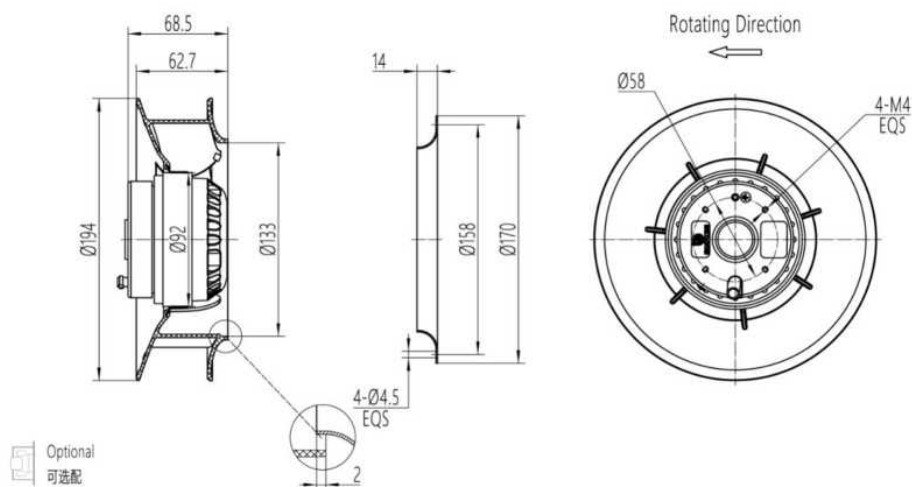




AC Backward Curved Centrifugal Fans 190mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

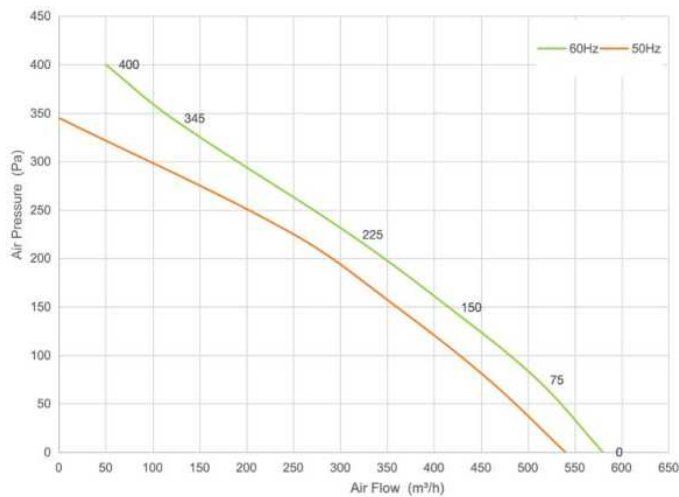

	Pa	m³/h	rpm
60Hz	100	465	2786
	200	350	2732
	300	195	2695
50Hz	100	445	2625
	150	355	2603
	200	295	2564


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A190H63-92-A0	230	60	2700	76	580	68
		52	2500	60	540	65

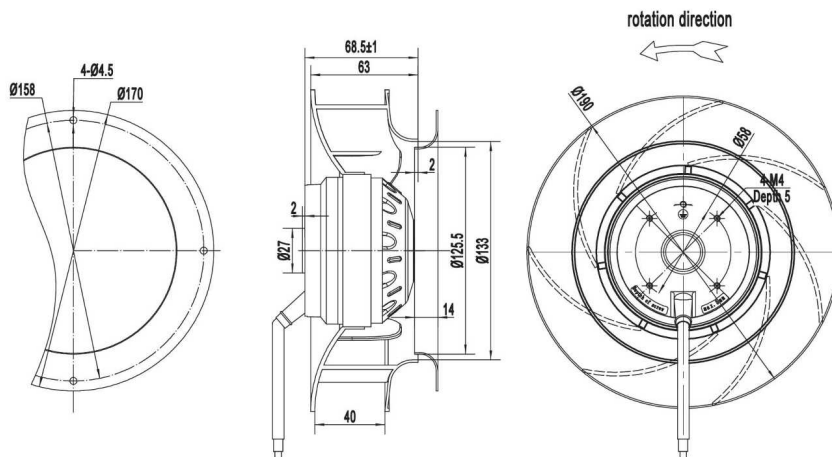




AC Backward Curved Centrifugal Fans 190mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

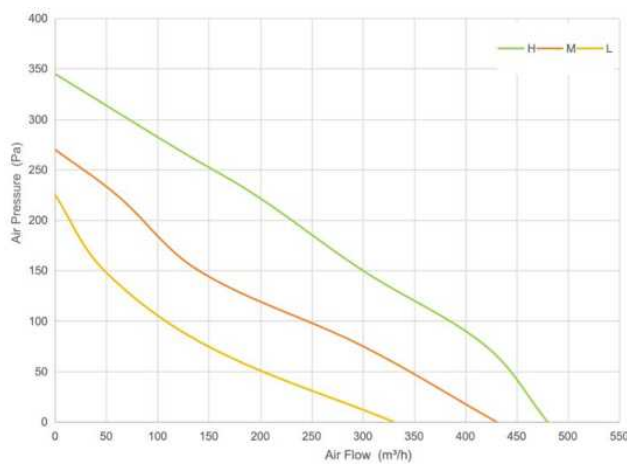


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A190H63-92-A1 3 speeds	230	50	2500	60	480	65
			2000	48	430	60
			1650	45	330	54

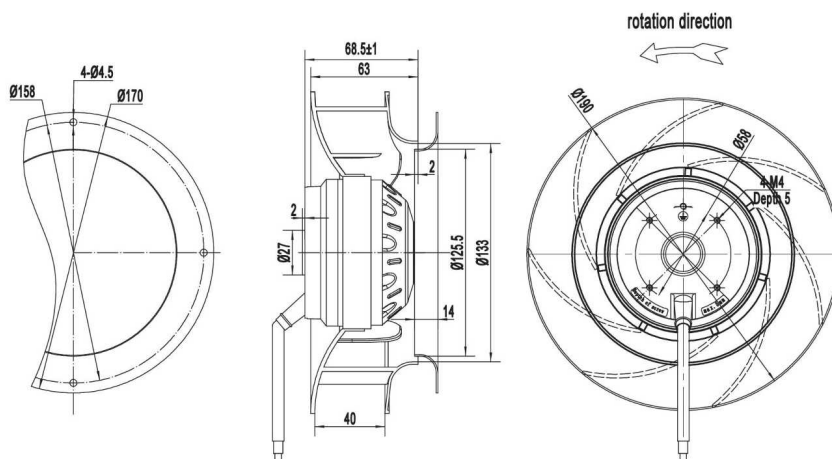




AC Backward Curved Centrifugal Fans 220mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

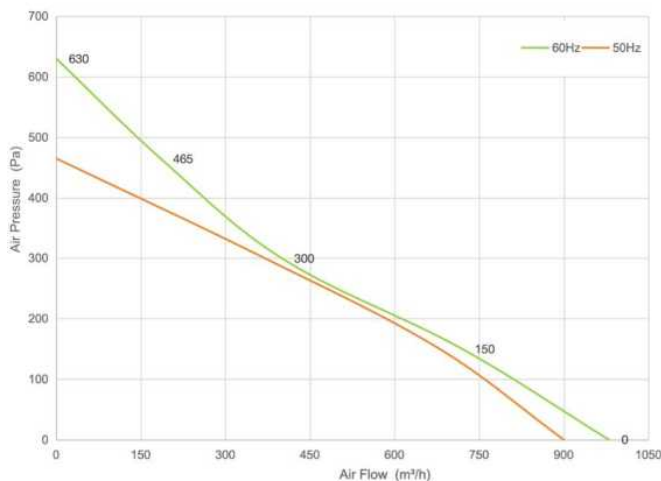

	Pa	m³/h	rpm	W
50Hz	150	750	2585	138
	200	645	2500	141
	250	515	2445	142
60Hz	190	625	2410	111
	250	485	2400	112
	150	750	2585	138


Model	Frequency [Hz]	Max Current [A]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A220H64-92-00	230	60	2780	142	980	67
	230	50	2530	112	900	66

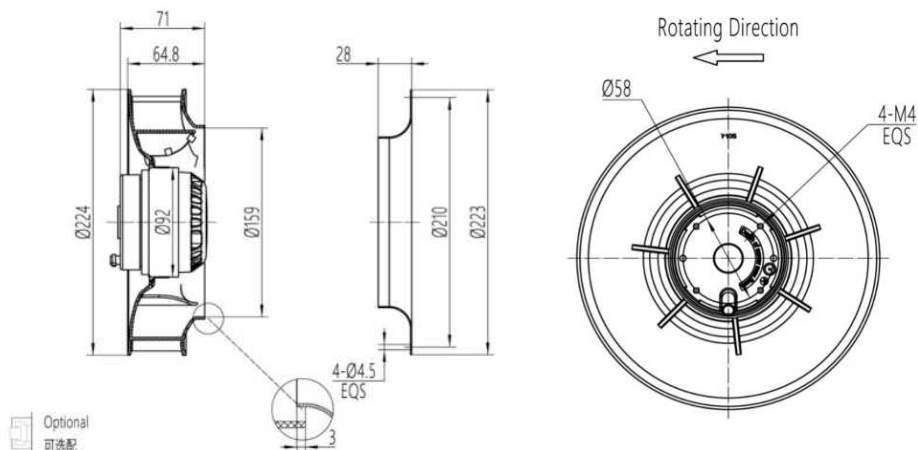




AC Backward Curved Centrifugal Fans 220mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

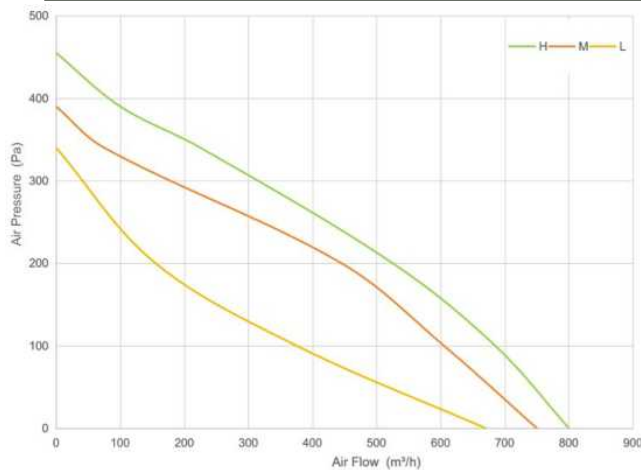


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A220H64-92-A1 3 speeds	230	50	2500	95	800	70
			2300	90	750	67
			2000	88	670	64

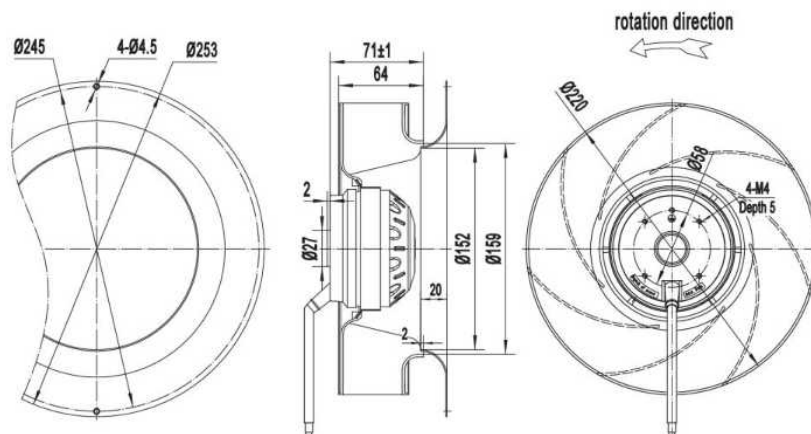




AC Backward Curved Centrifugal Fans 225mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

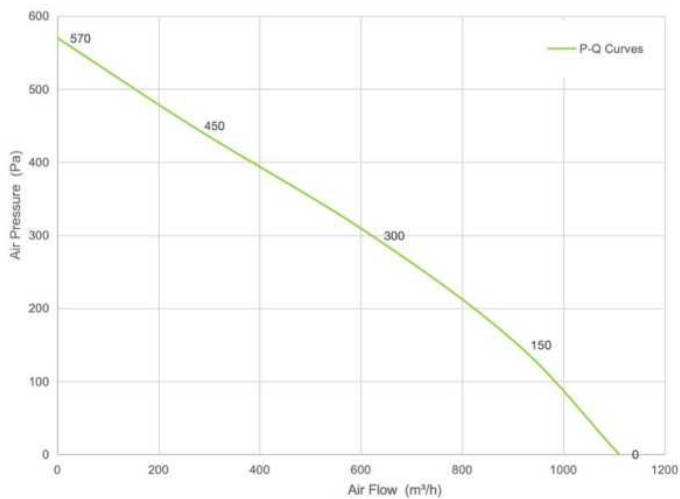

Pa	m³/h	rpm	W
200	850	2580	143
250	750	2565	144
310	630	2545	148
345	545	2540	148


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A225H89-92-00	230	50	2655	148	1110	68

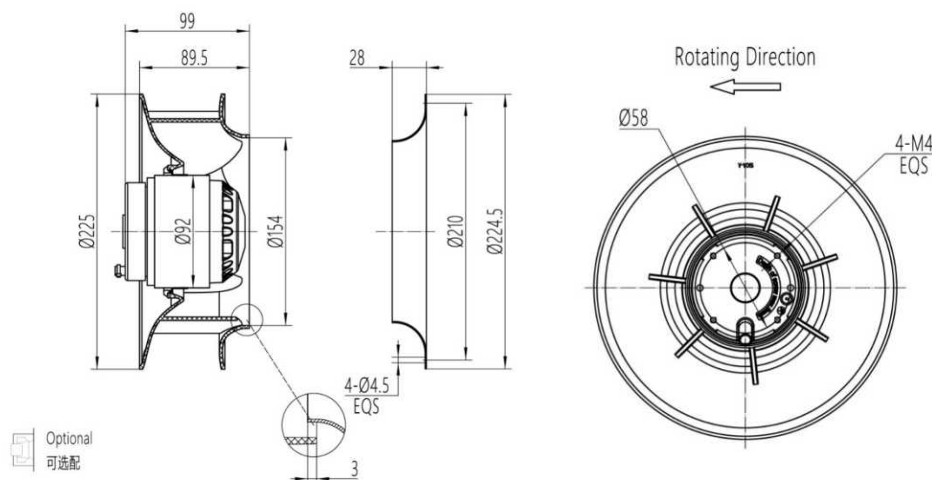




AC Backward Curved Centrifugal Fans 225mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

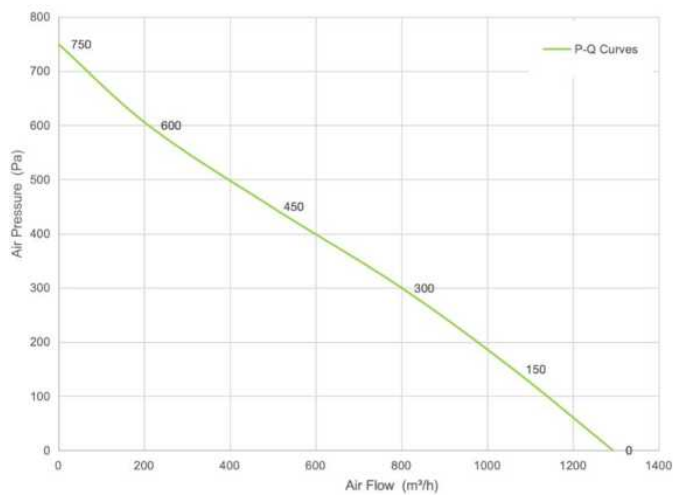

Pa	m³/h	rpm	W
100	1150	2827	214
200	975	2684	227
300	814	2739	221
350	696	2686	225


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A225H90-92-00	230	60	2925	227	1293	71

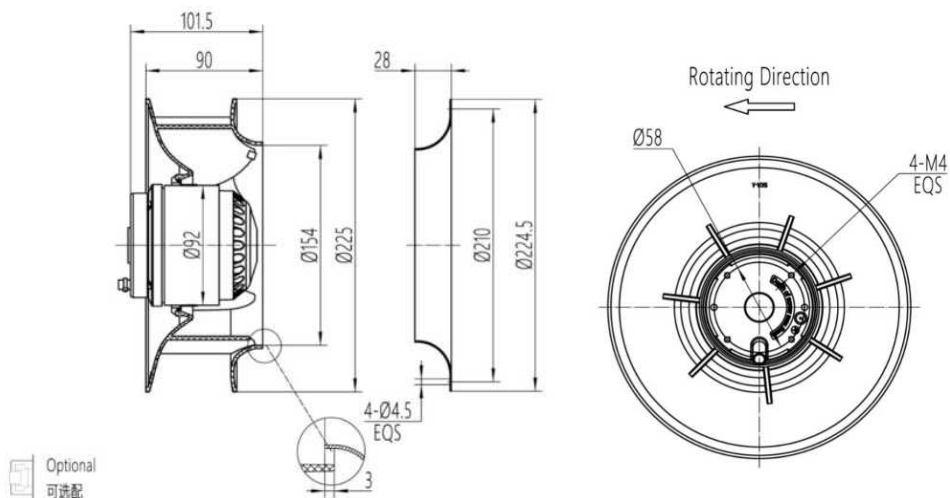




AC Backward Curved Centrifugal Fans 225mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

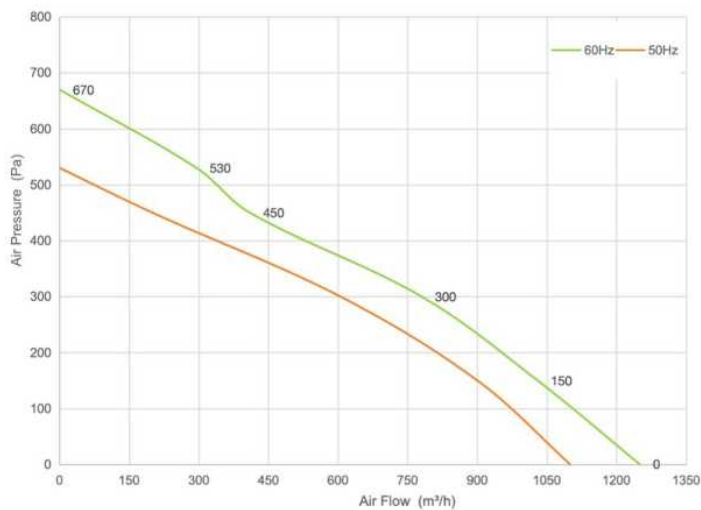

	Pa	m³/h	rpm	W
60Hz	150	1050	2965	182
	200	950	2931	180
	300	770	2903	179
	400	530	2829	179
50Hz	150	900	2695	136
	200	810	2656	136
	300	600	2615	134
	400	330	2568	135


Model	Frequency [Hz]	Max Current [A]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A225H89-92-A0	230	60	2900	180	1250	72
	230	50	2600	135	1100	70

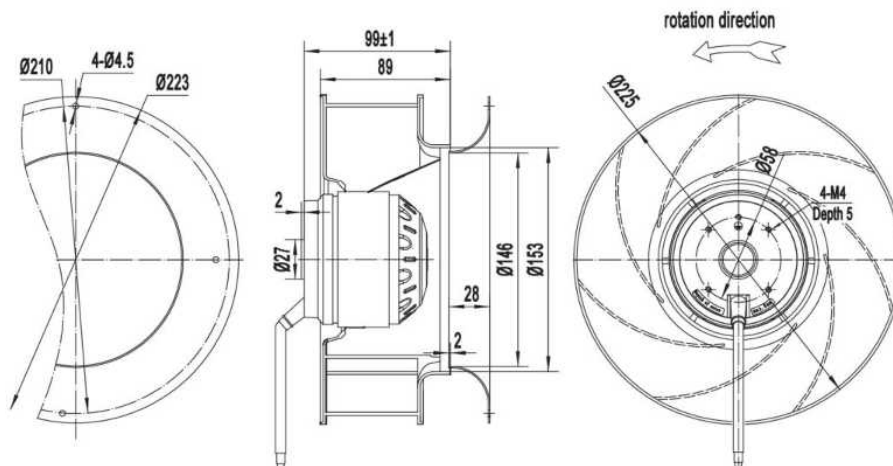




AC Backward Curved Centrifugal Fans 225mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

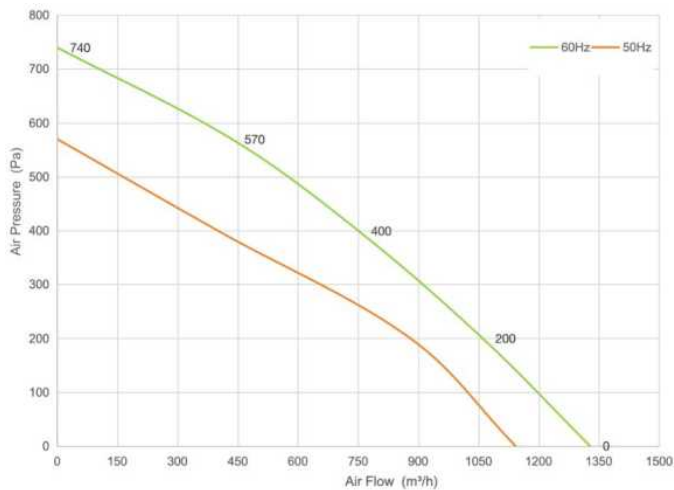

	Pa	m³/h	rpm	W
60Hz	280	966	2920	242
	318	893	2985	223
	360	821	2965	228
	400	744	2947	232
50Hz	250	766	2587	137
	279	712	2576	140
	318	625	2558	143
	360	520	2558	143


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A225H89-92-00	460	60	3095	242	1328	71
	380	50	2658	143	1142	68

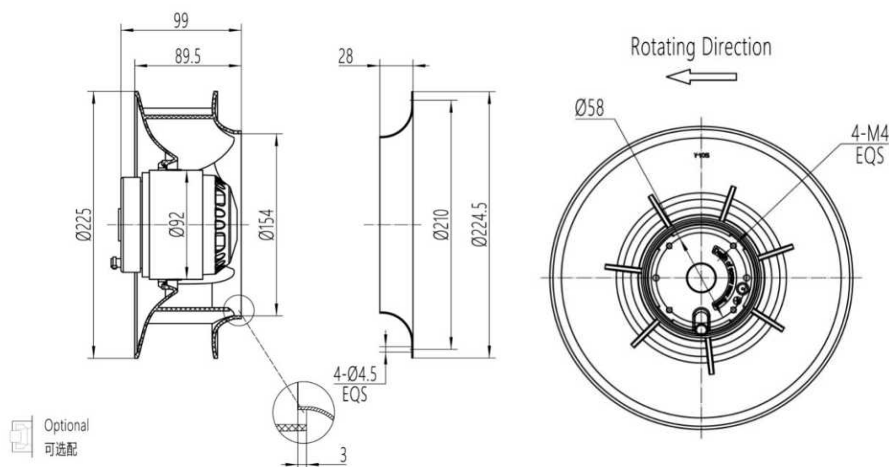




AC Backward Curved Centrifugal Fans 225mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

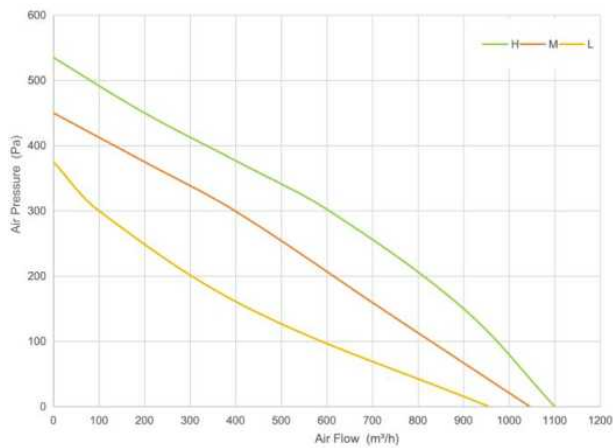


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A225H89-92-A1 3 speeds	230	50	2650	125	1100	70
			2500	120	1045	68
			2290	115	955	66

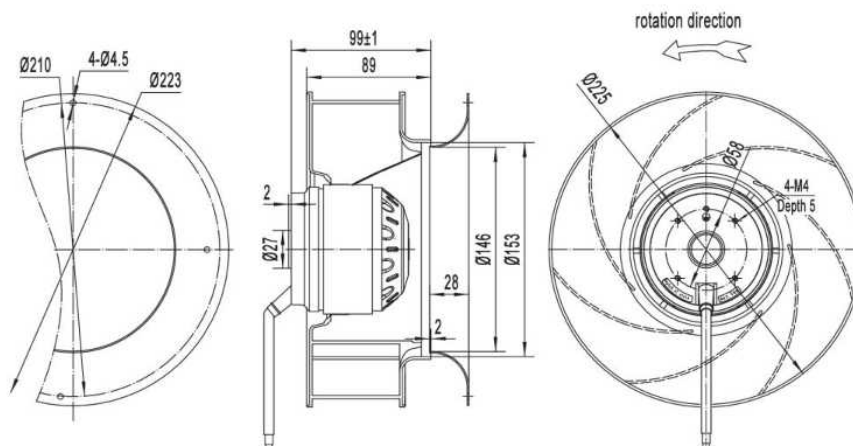




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

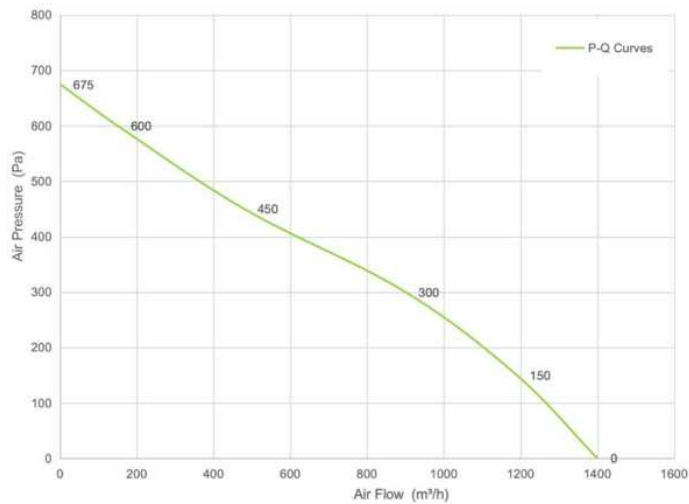

Pa	m³/h	rpm	W
200	1100	2580	177
235	1040	2550	184
300	890	2485	196
325	820	2465	199


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A250H85-92-00	230	50	2700	200	1400	72

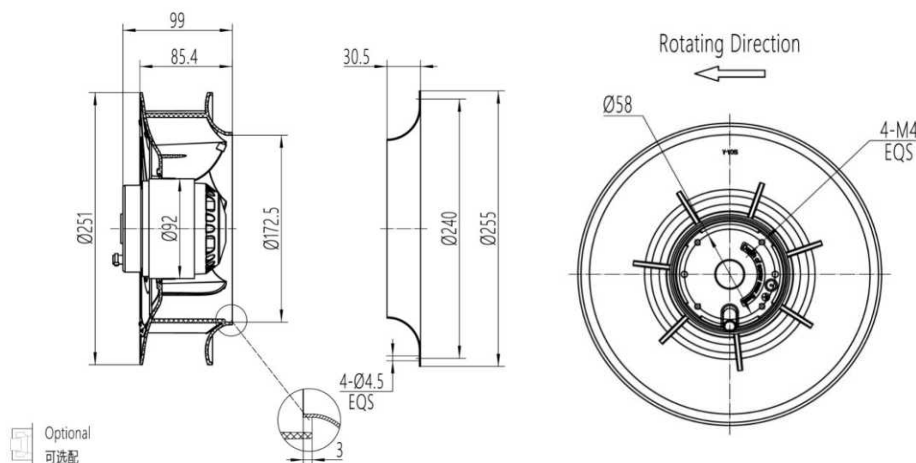




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

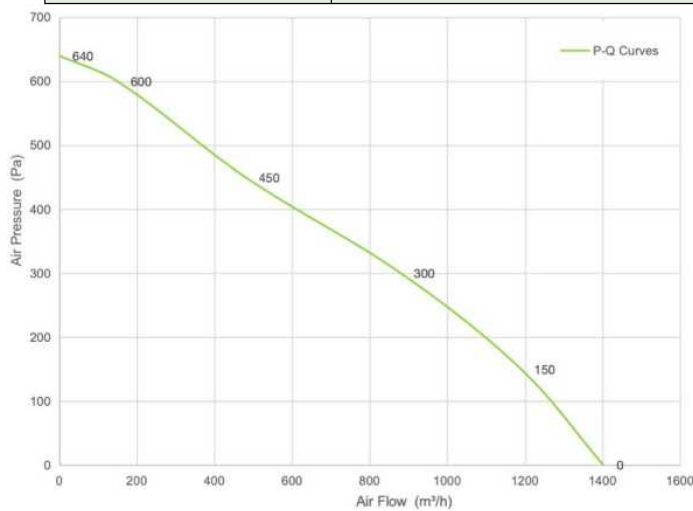

Pa	m³/h	rpm	W
200	1102	2582	177
234	1039	2550	184
300	892	2484	196
400	627	2467	198


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A250H85-92-00	380	50	2700	198	1402	72

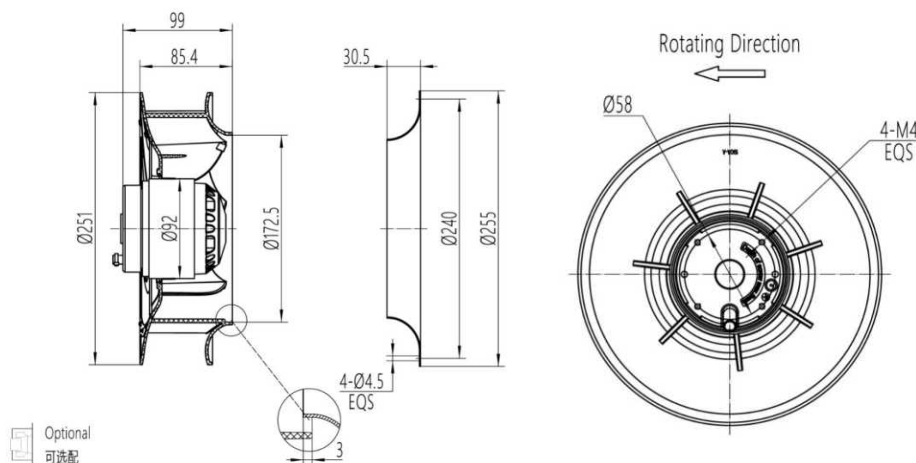




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

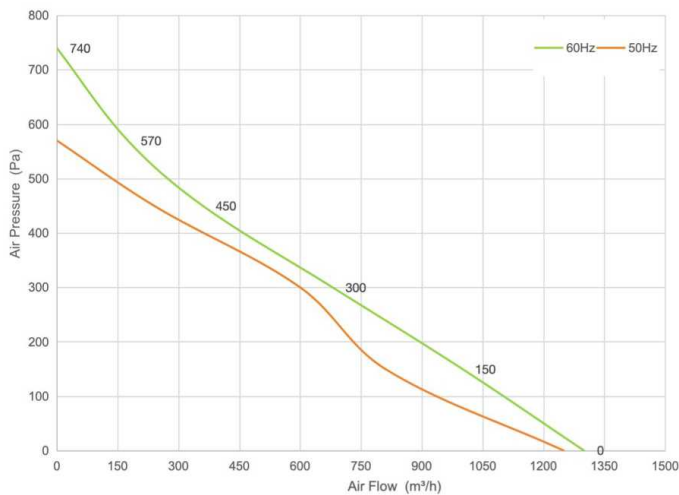

	Pa	m³/h	rpm	W
60Hz	150	1050	2665	192
	200	900	2623	190
	300	675	2595	187
	400	450	2568	187
50Hz	150	820	2521	136
	200	740	2493	135
	300	600	2421	134
	400	375	2395	134


Model	Frequency [Hz]	Max Current [A]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A250H77-92-A0	230	60	2600	190	1300	76
	230	50	2450	135	1250	74

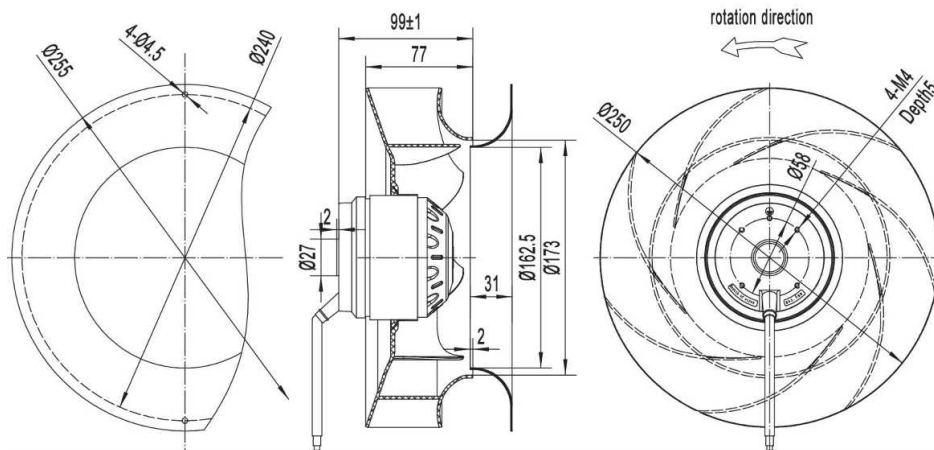




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

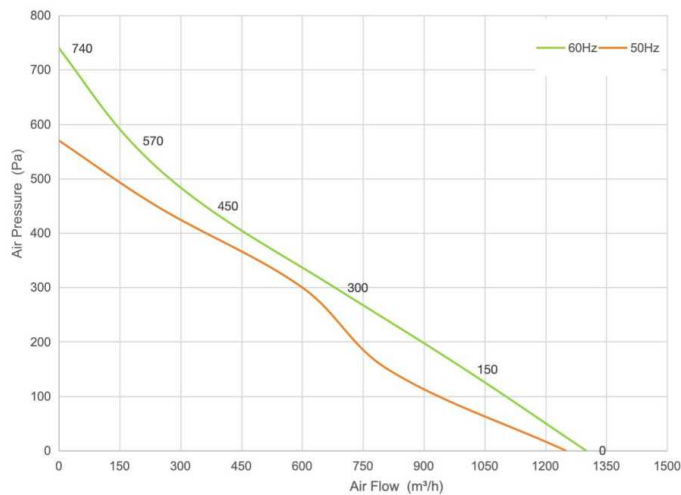

	Pa	m³/h	rpm	W
60Hz	150	1050	2665	192
	200	900	2623	190
	300	675	2595	187
	400	450	2568	187
50Hz	150	820	2521	136
	200	740	2493	135
	300	600	2421	134
	400	375	2395	134


Model	Frequency [Hz]	Max Current [A]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A250H77-92-A0	380	60	2600	190	1300	76
	380	50	2450	135	1250	74

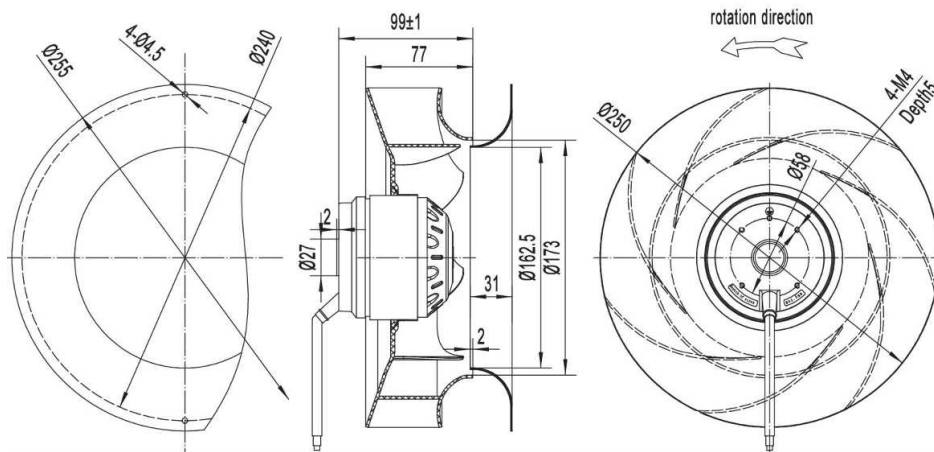




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

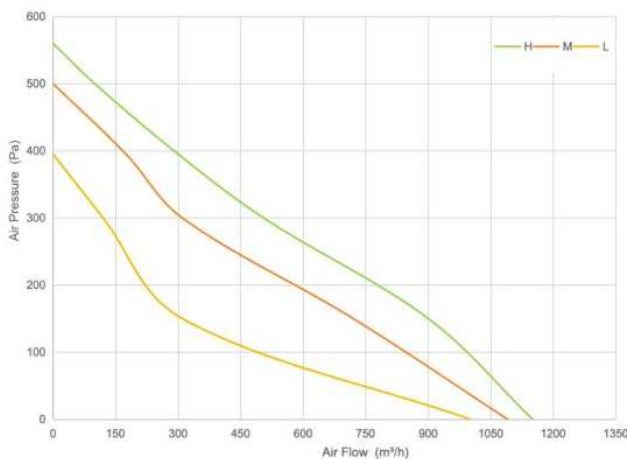


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A250H77-92-A1 3 speeds	230	50	2650	130	1150	68
			2400	125	1090	65
			2150	120	1000	61

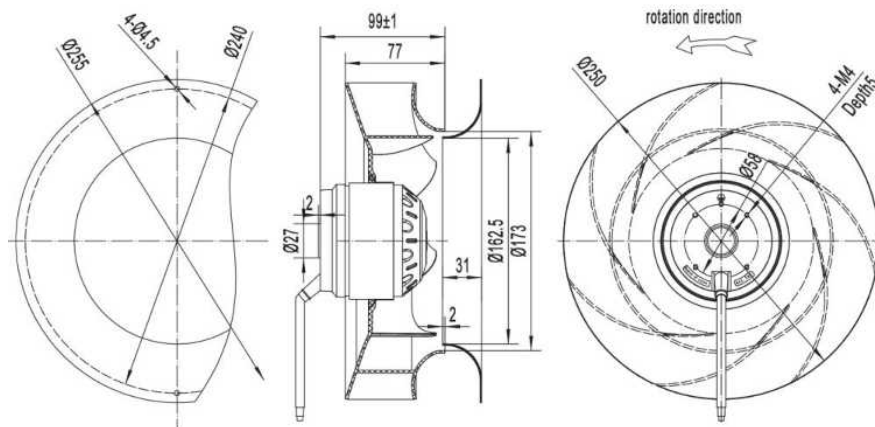




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

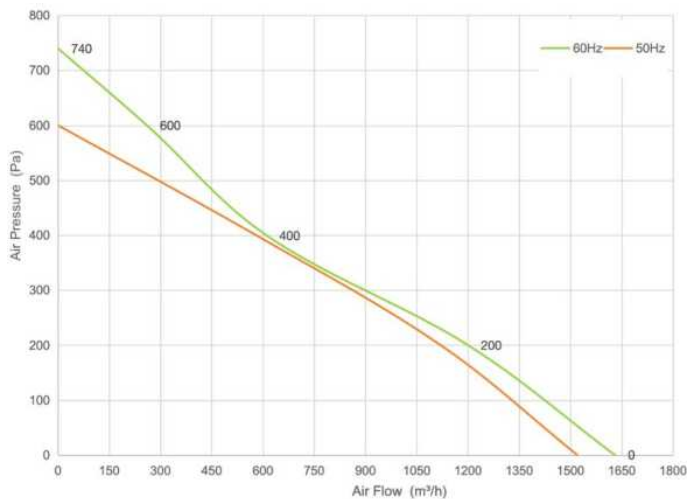

	Pa	m³/h	rpm	W
60Hz	150	1340	2995	286
	200	1200	2965	285
	300	900	2904	281
	400	600	2889	281
50Hz	150	1280	2686	195
	200	1100	2655	194
	300	890	2621	192
	400	590	2596	192


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A250H84-92-A0	230	60	2900	283	1630	76
		50	2600	192	1520	74

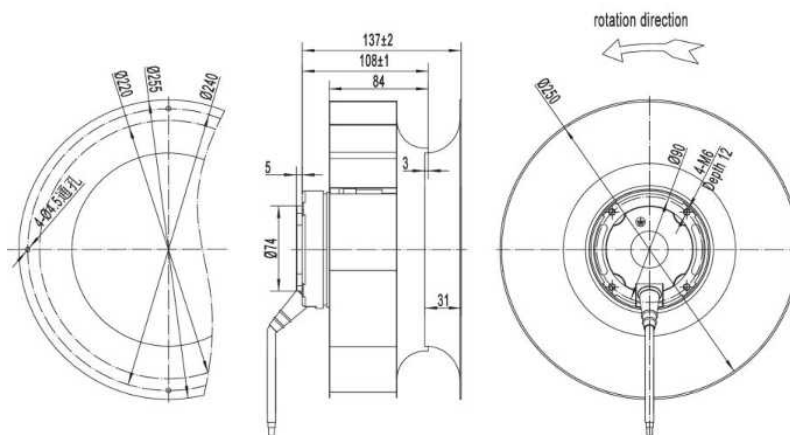




AC Backward Curved Centrifugal Fans 250mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

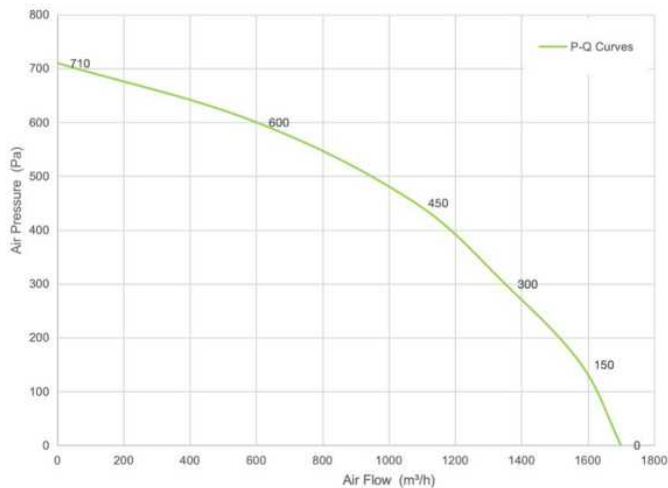

Pa	m³/h	rpm	W
200	1500	2905	292
300	1320	2865	292
400	1200	2841	287
500	930	2801	287


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A250H100-92-A0	230	50	2800	290	1700	76
B38A250H100-92-A0	380	50	2800	290	1700	77

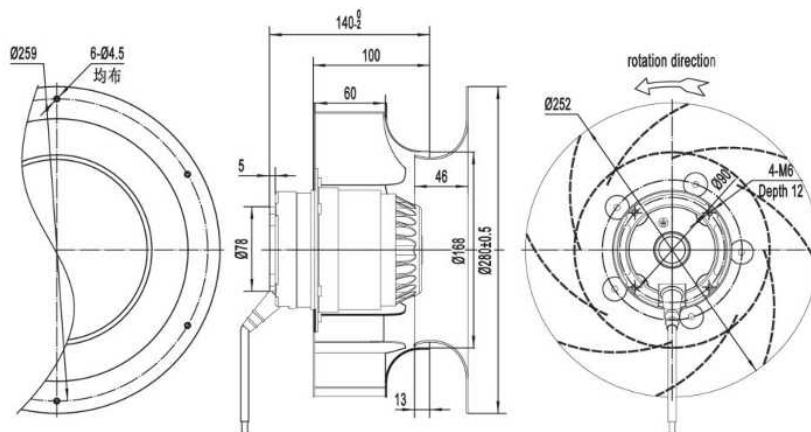




AC Backward Curved Centrifugal Fans 280mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

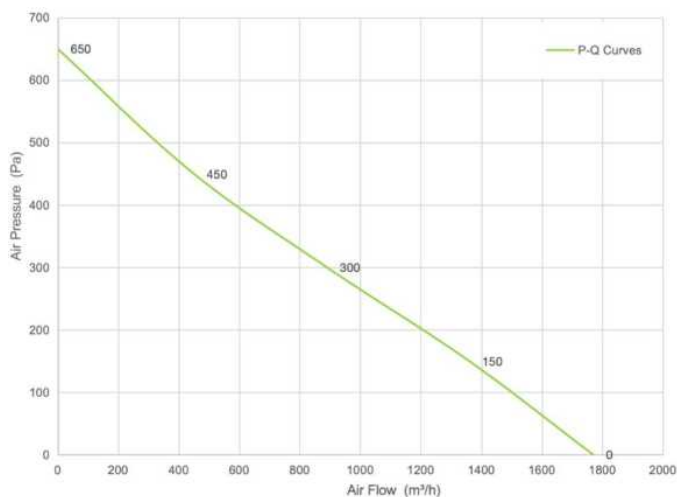

Pa	m³/h	rpm	W
200	1200	2691	275
300	900	2652	274
400	600	2602	270
500	315	2580	268


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A280H81-92-00	230	50	2575	270	1770	74.7

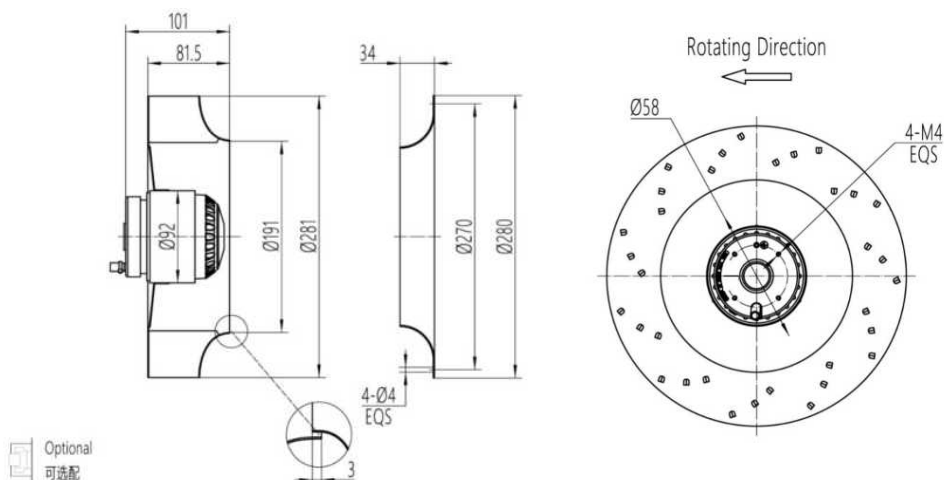




AC Backward Curved Centrifugal Fans 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

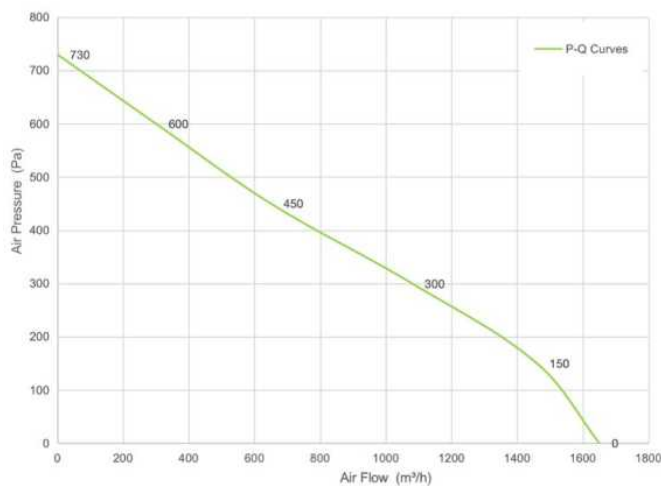

Pa	m³/h	rpm	W
200	1350	2565	232
300	1080	2525	232
400	795	2496	231
500	510	2465	230


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A280H71-92-A0	230	50	2450	230	1650	78
B38A280H71-92-A0	380	50	2500	200	1650	79

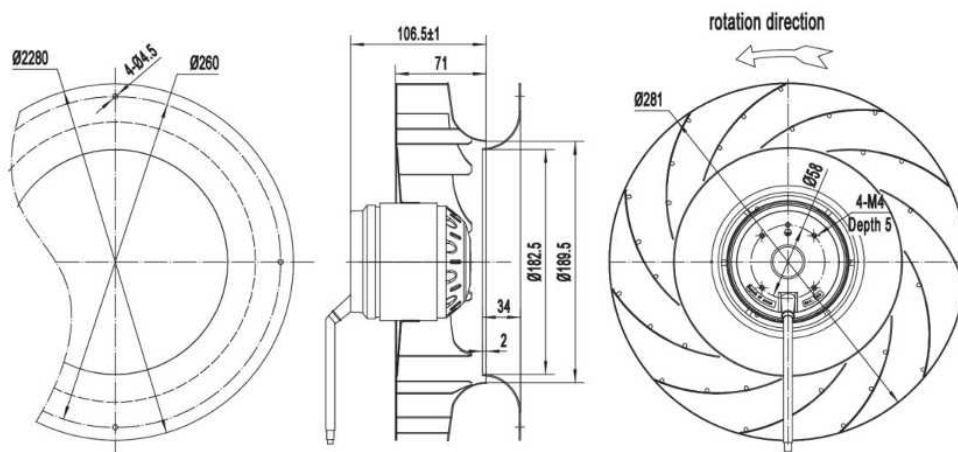




AC Backward Curved Centrifugal Fans 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

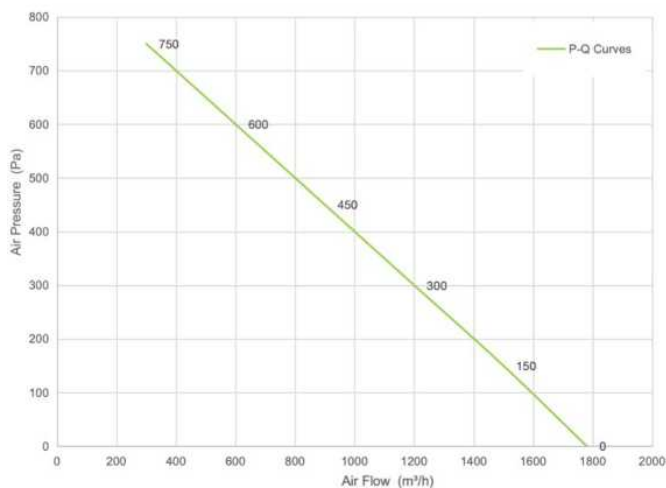

Pa	m³/h	rpm	W
300	1200	2785	302
400	1000	2739	300
500	800	2698	299
600	600	2685	299


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A280H81-92-A0	230	50	2700	300	1780	80
B38A280H81-92-A0	380	50	2650	250	1780	80

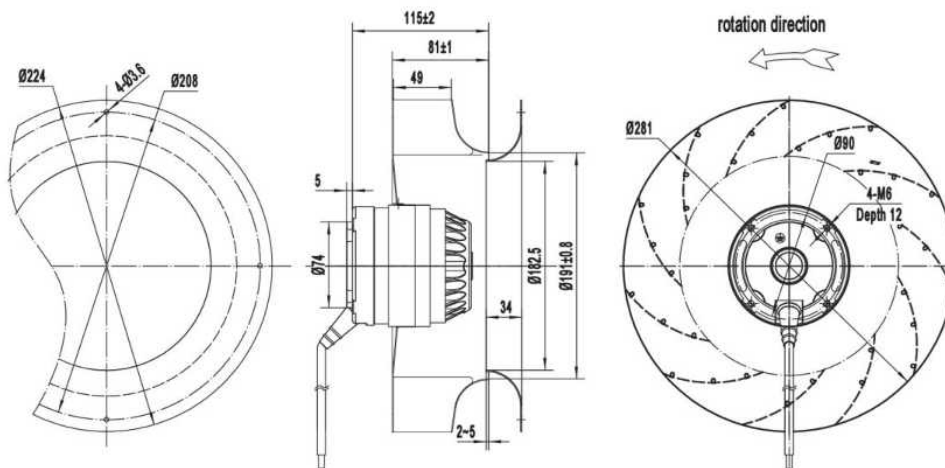




AC Backward Curved Centrifugal Fans 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

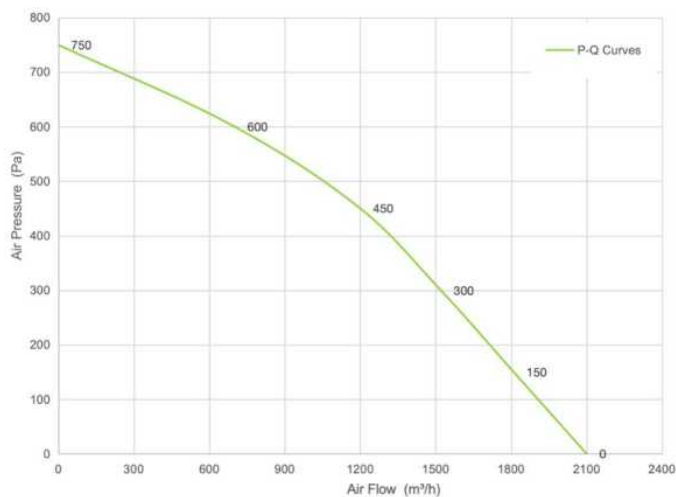

Pa	m³/h	rpm	W
300	1500	2788	330
400	1300	2756	331
500	1050	2721	328
600	690	2675	331


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A280H92-92-A0	230	50	2700	330	2100	80
B38A280H92-92-A0	380	50	2700	330	2100	80

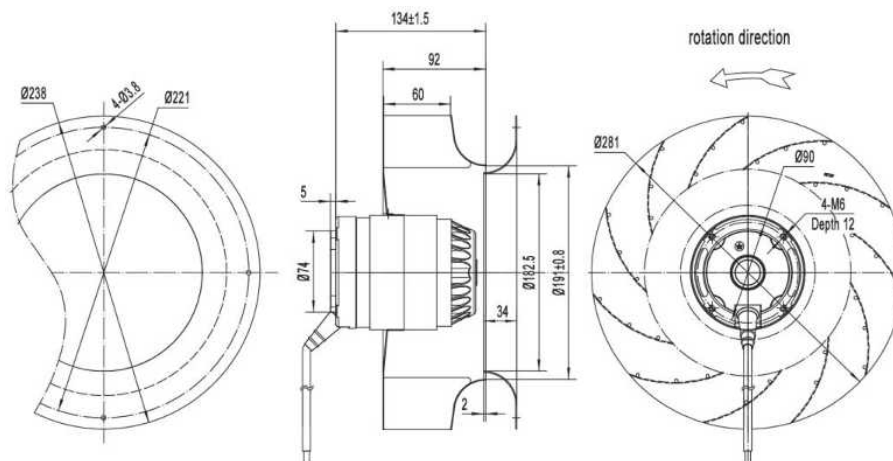




AC Backward Curved Centrifugal Fans 280mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

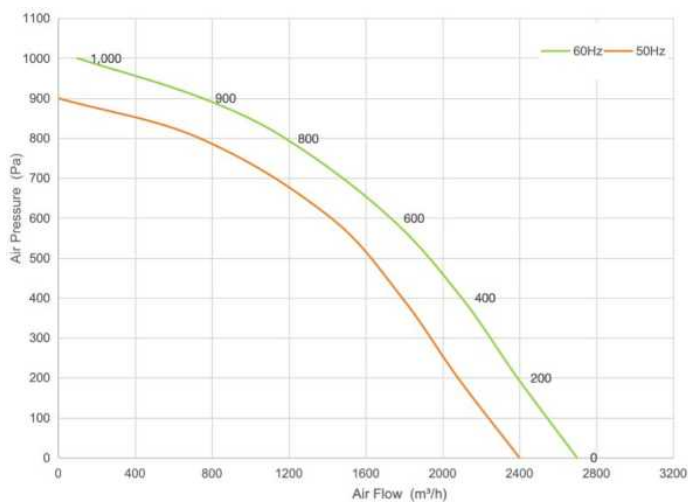

	Pa	m³/h	rpm	W
60Hz	300	2230	3191	805
	400	2100	3155	801
	500	1910	3105	796
	600	1700	3068	795
50Hz	300	1900	2862	506
	400	1750	2810	505
	500	1640	2785	502
	600	1400	2755	500


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A280H115-102-A0	380	60	3100	800	2700	85
		50	2750	500	2400	82

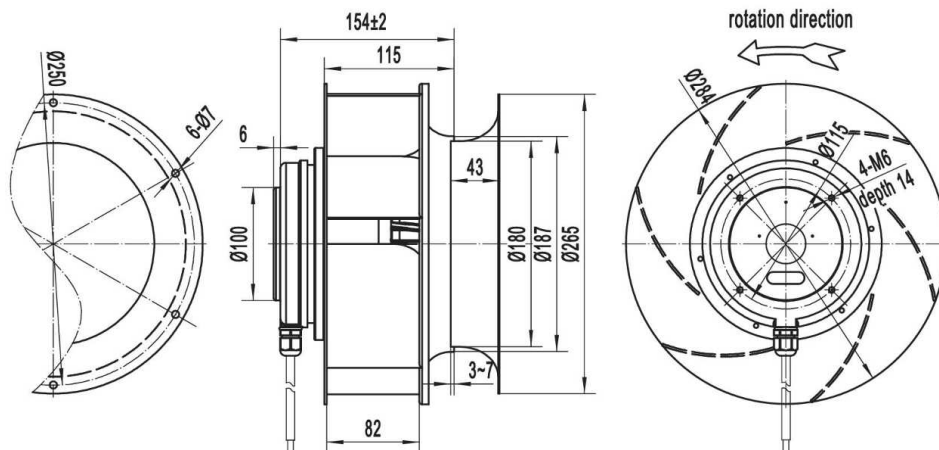




AC Backward Curved Centrifugal Fans 280mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

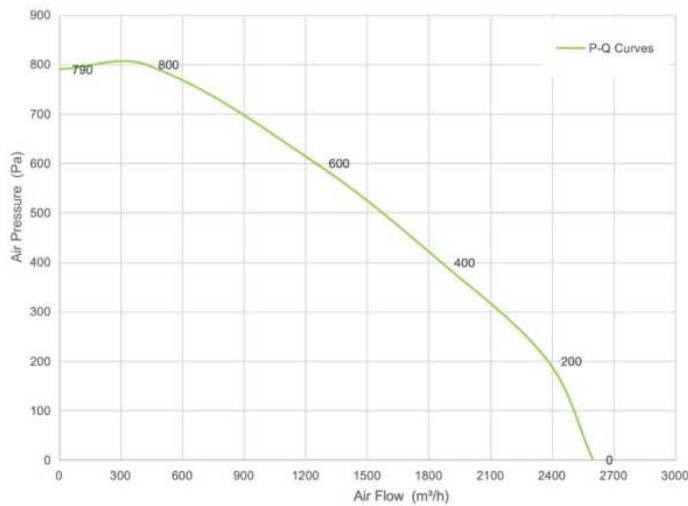

Pa	m³/h	rpm	W
300	2150	2718	505
400	1880	2686	503
500	1600	2651	501
600	1250	2605	499


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A280H135-102-A0	380	50	2750	500	2600	78

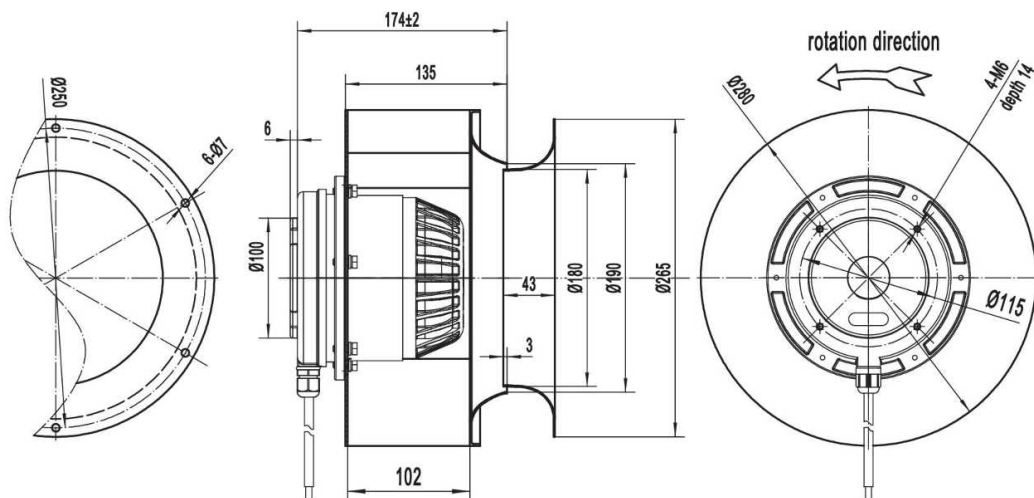




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

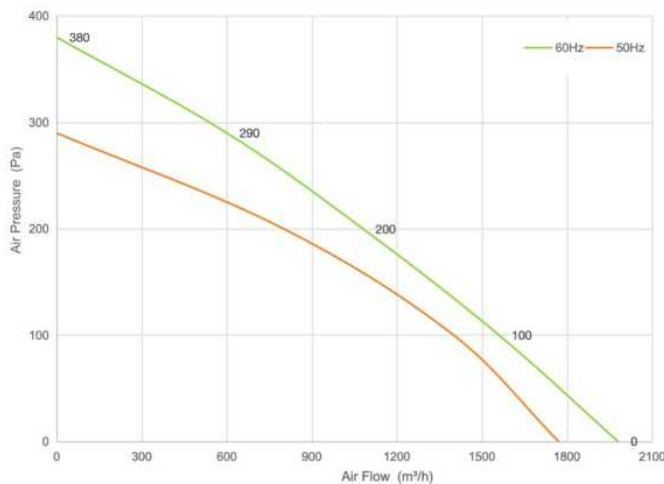

	Pa	m³/h	rpm	W
60Hz	100	1565	1470	171
	150	1315	1430	176
	200	1095	1435	175
	260	730	1475	166
50Hz	100	1445	1370	129
	150	1225	1370	130
	200	830	1385	122
	220	660	1395	117


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H134-102-00	230	60	1550	176	1980	69
	230	50	1390	130	1770	67

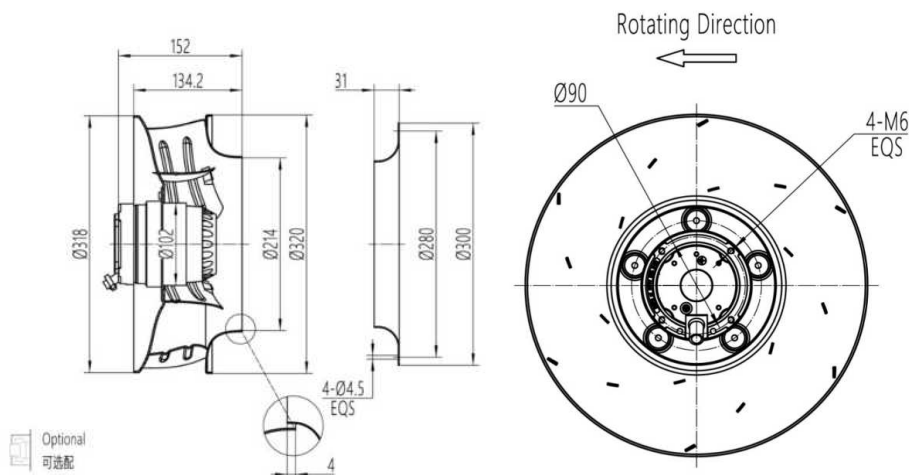




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

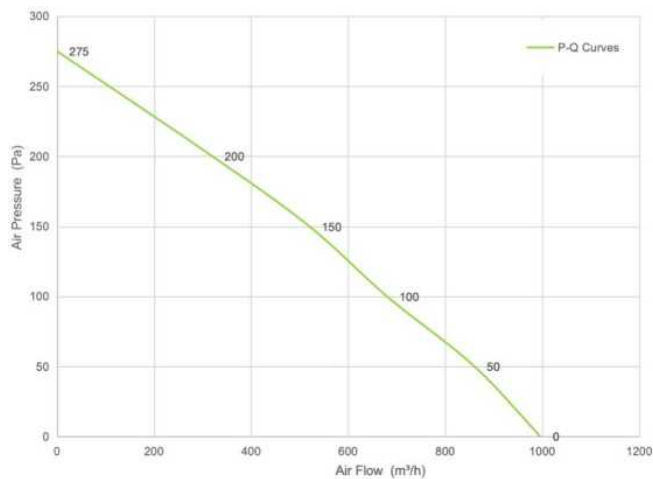

Pa	m³/h	rpm	W
50	833	1165	135
100	689	1225	128
150	544	1327	116
200	337	1368	98


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B24A320H137-102-00	240	50	1370	137	996	66

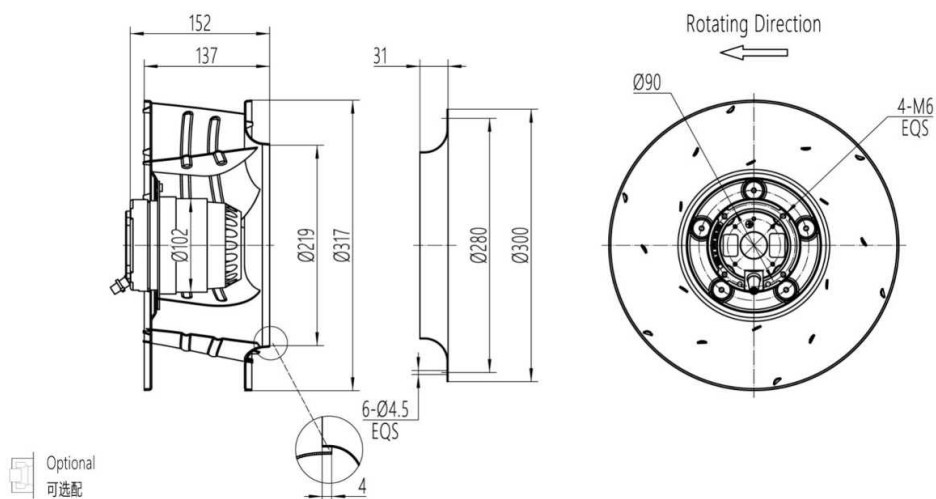




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

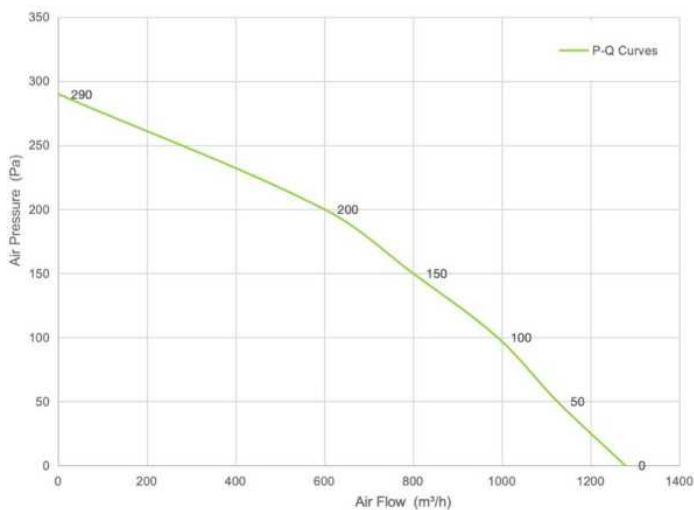

Pa	m³/h	rpm	W
100	1001	1549	167
150	825	1474	162
200	600	1487	153
250	288	1507	138


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B24A320H137-102-01	240	50	1550	169	1278	69

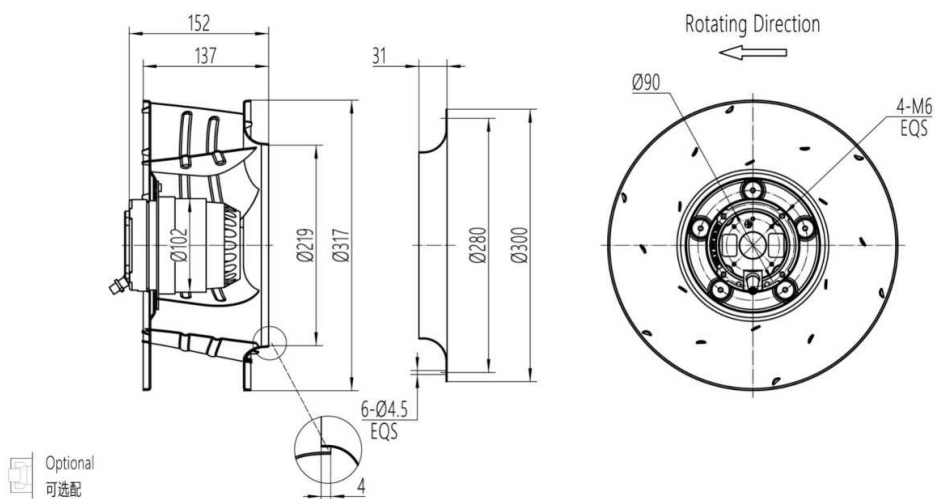




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

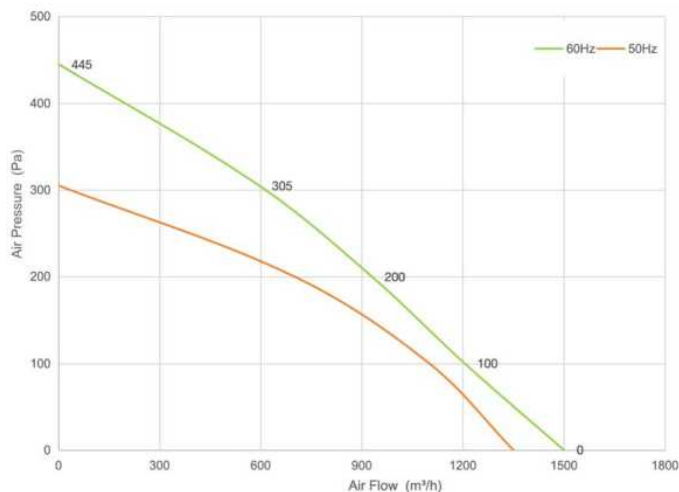

	Pa	m³/h	rpm	W
60Hz	100	1200	1695	116
	150	1050	1659	116
	200	945	1620	115
	250	730	1595	115
50Hz	100	1080	1525	98
	150	920	1496	97
	200	710	1436	97
	250	430	1402	95


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H87-102-A0	230	60	1600	115	1500	58
		50	1400	95	1350	56

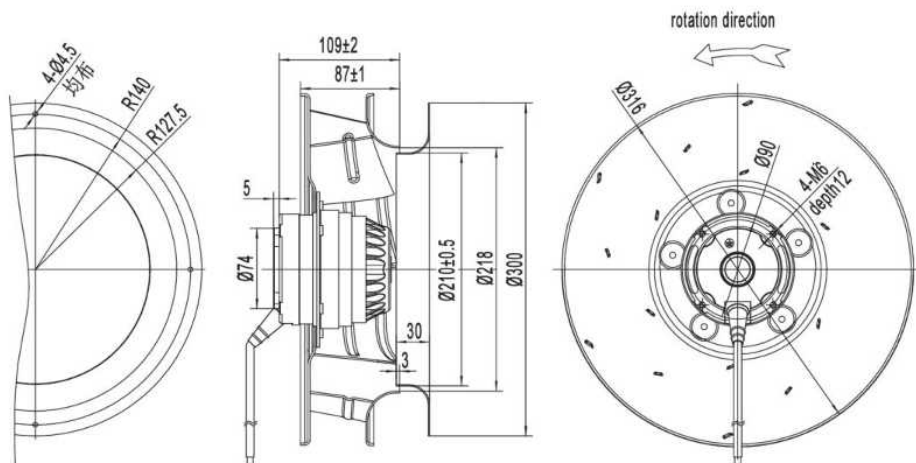




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

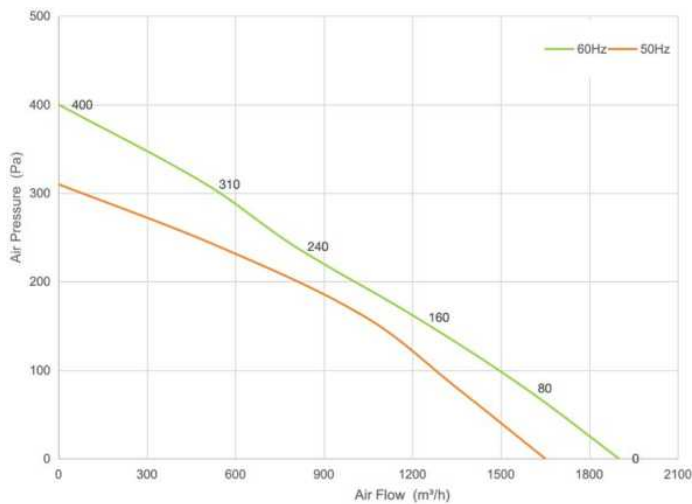

	Pa	m³/h	rpm	W
60Hz	100	1500	1652	135
	150	1250	1609	136
	200	1000	1568	131
	300	570	1522	130
50Hz	100	1280	1423	106
	150	1050	1379	106
	200	810	1335	105
	250	430	1339	105


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H107-102-A0	230	60	1600	135	1900	62
		50	1400	105	1650	60

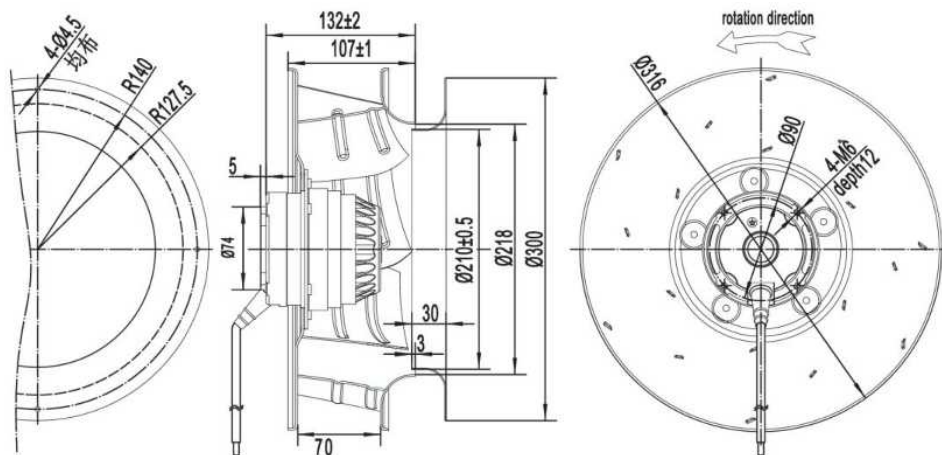




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

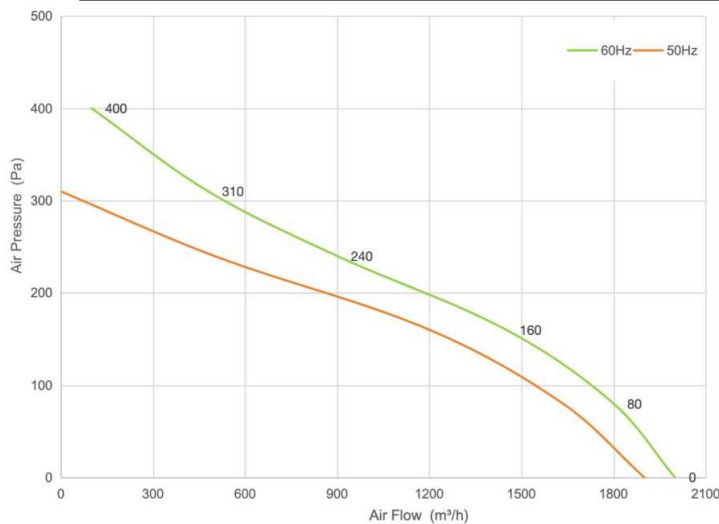

	Pa	m³/h	rpm	W
60Hz	100	1710	1612	188
	150	1520	1596	184
	200	1200	1572	184
	300	540	1542	183
50Hz	100	1530	1465	136
	150	1220	1445	136
	200	890	1409	135
	250	440	1376	135


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H135-102-A0	230	60	1580	180	2000	65
		50	1400	135	1900	63

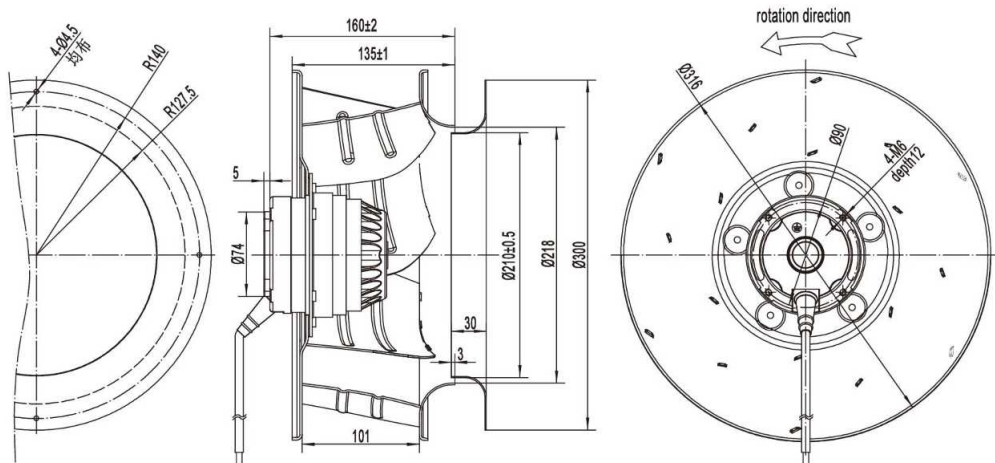




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

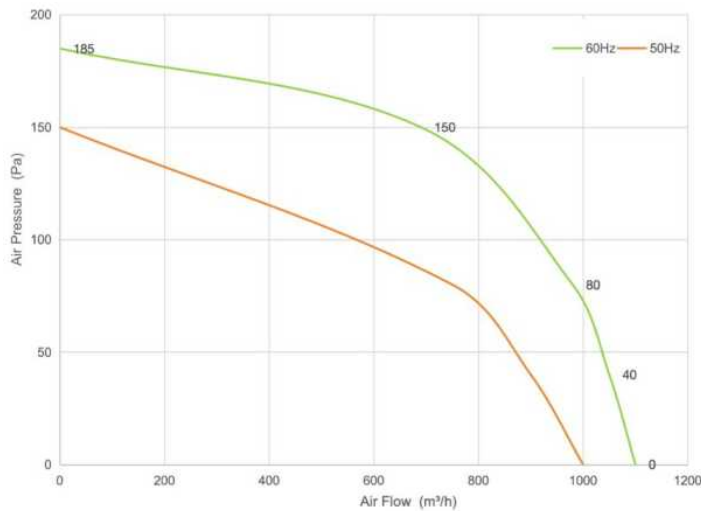

	Pa	m³/h	rpm	W
60Hz	50	1065	1165	89
	100	920	1109	89
	150	735	1078	89
50Hz	50	910	998	75
	100	580	965	74


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H135-102-A1	230	60	1050	85	1100	60
		50	940	75	1000	58

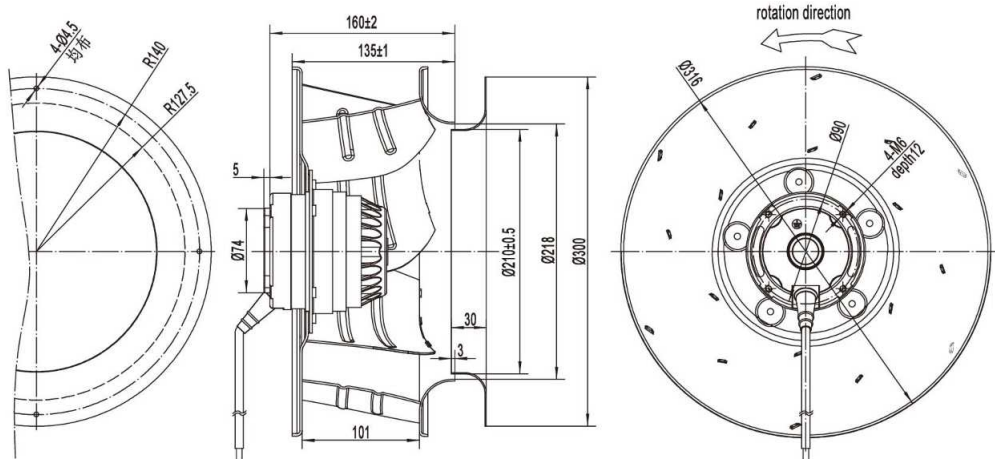




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

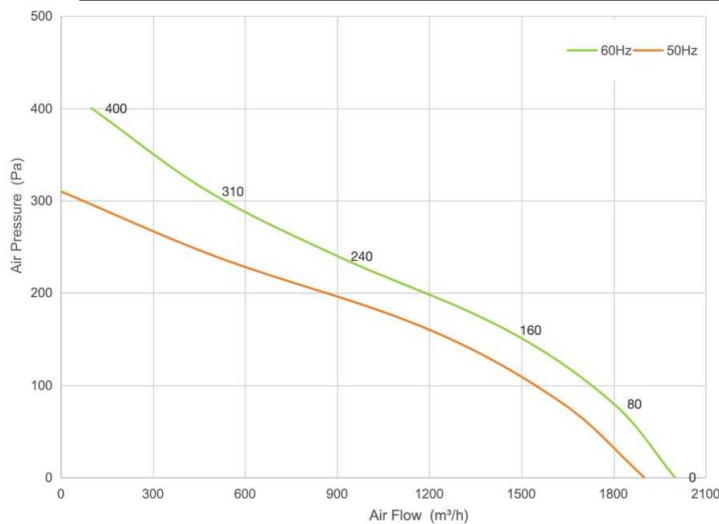

	Pa	m³/h	rpm	W
60Hz	100	1710	1612	188
	150	1520	1596	184
	200	1200	1572	184
	300	540	1542	183
50Hz	100	1530	1465	136
	150	1220	1445	136
	200	890	1409	135
	250	440	1376	135


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A320H135-102-A0	380	60	1580	180	2000	65
		50	1400	135	1900	63

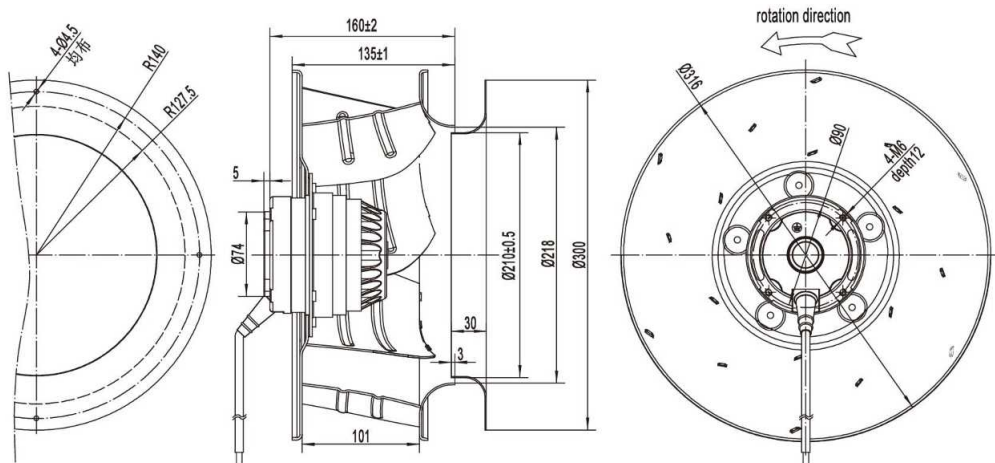




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

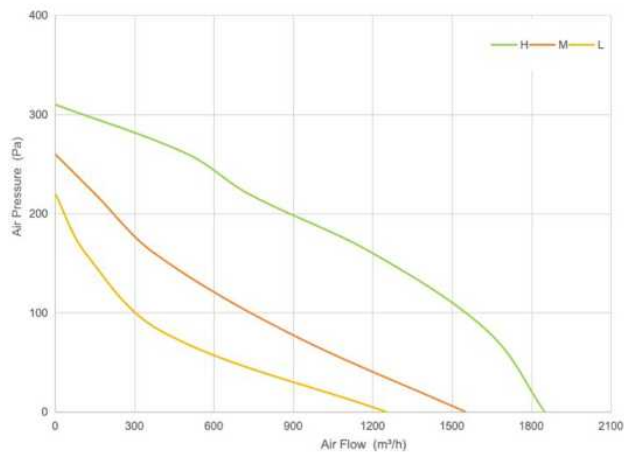

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H135-102-A2 3 speeds	230	50	1350	115	1850	63
			1100	85	1550	57
			850	65	1250	51

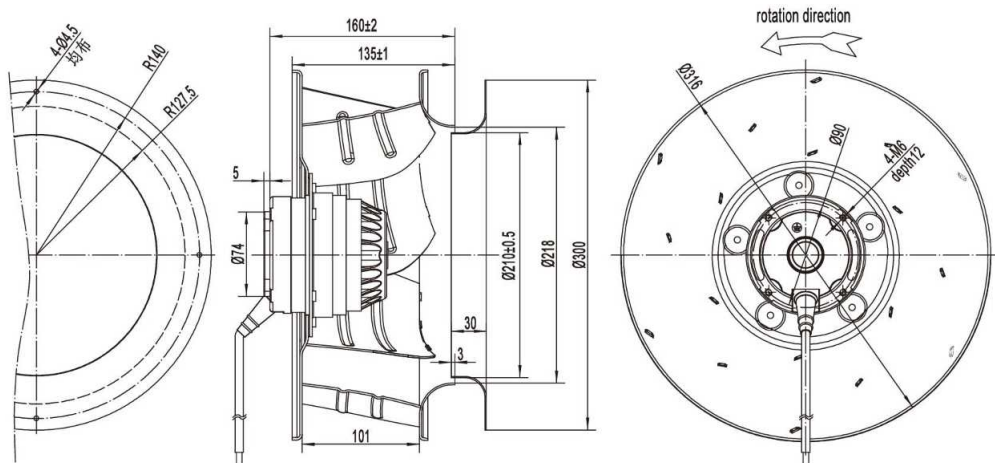

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

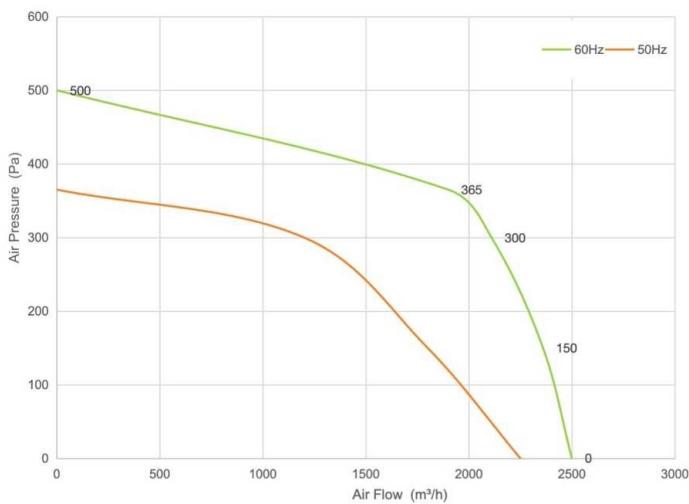

	Pa	m³/h	rpm	W
60Hz	100	2420	1721	310
	200	2260	1699	308
	300	2110	1676	306
	400	1500	1625	302
50Hz	100	1986	1535	225
	200	1605	1512	220
	250	1475	1479	221
	300	1286	1460	219


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A320H146-102-A0	230	60	1650	300	2500	66
		50	1450	220	2250	63

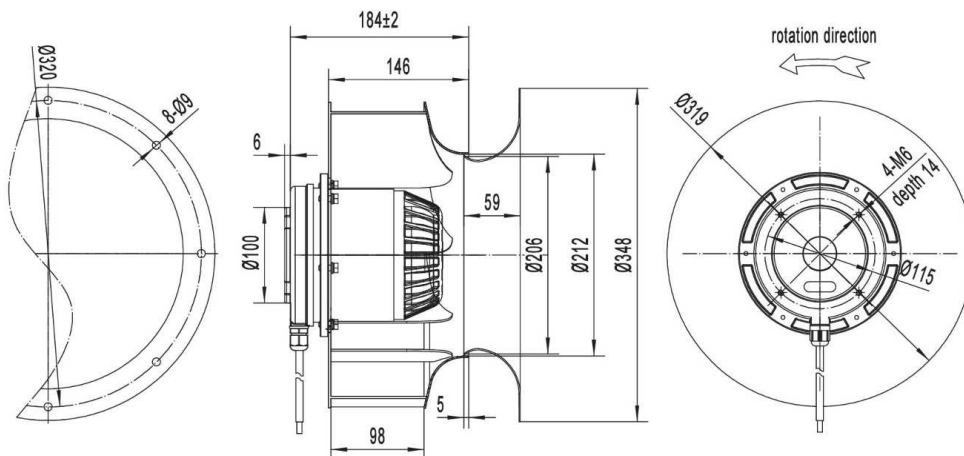




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

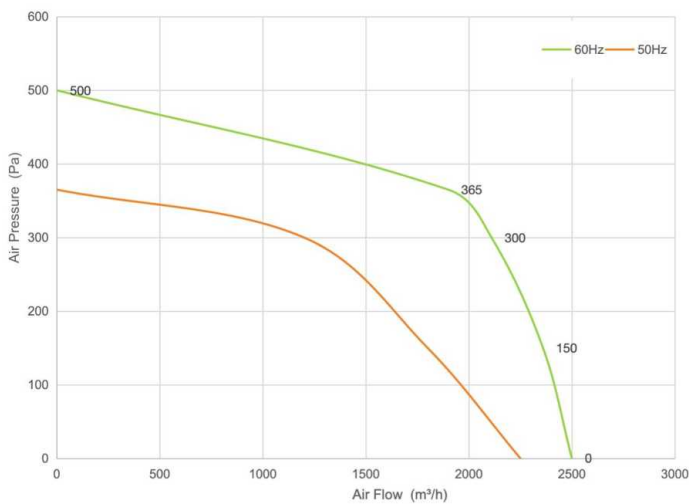

	Pa	m³/h	rpm	W
60Hz	100	2420	1721	310
	200	2260	1699	308
	300	2110	1676	306
	400	1500	1625	302
50Hz	100	1986	1535	225
	200	1605	1512	220
	250	1475	1479	221
	300	1286	1460	219


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A320H146-102-A0	380	60	1650	300	2500	66
		50	1450	220	2250	63

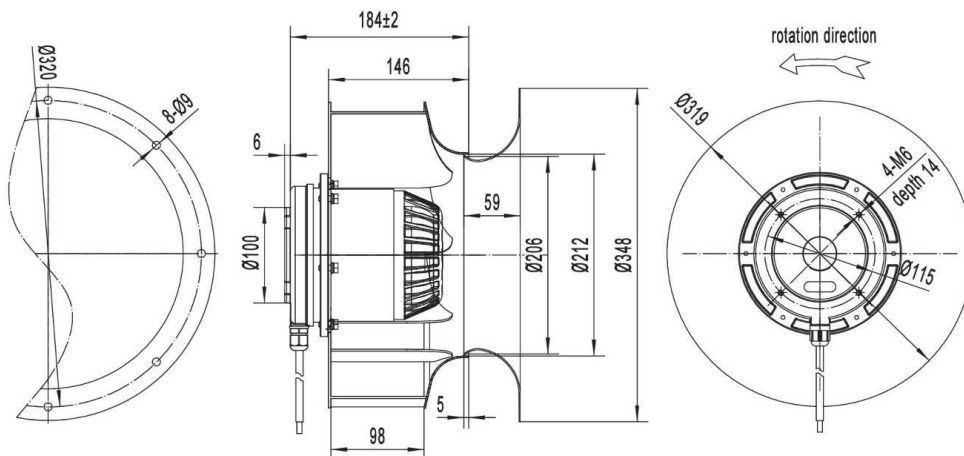




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

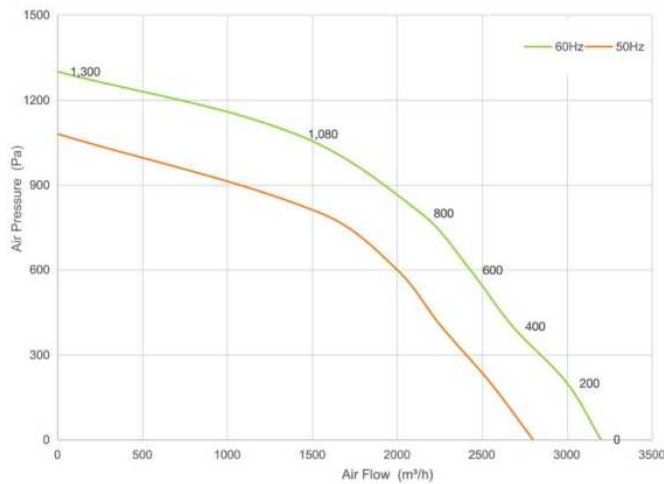

	Pa	m³/h	rpm	W
60Hz	300	2800	3150	1408
	400	2650	3125	1405
	500	2580	3096	1401
	600	2420	3086	1396
50Hz	300	2400	2859	906
	400	2200	2836	905
	500	2160	2801	905
	600	2000	2765	905


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A320H105-137-A0	380	60	3100	1400	3200	89
		50	2750	900	2800	84

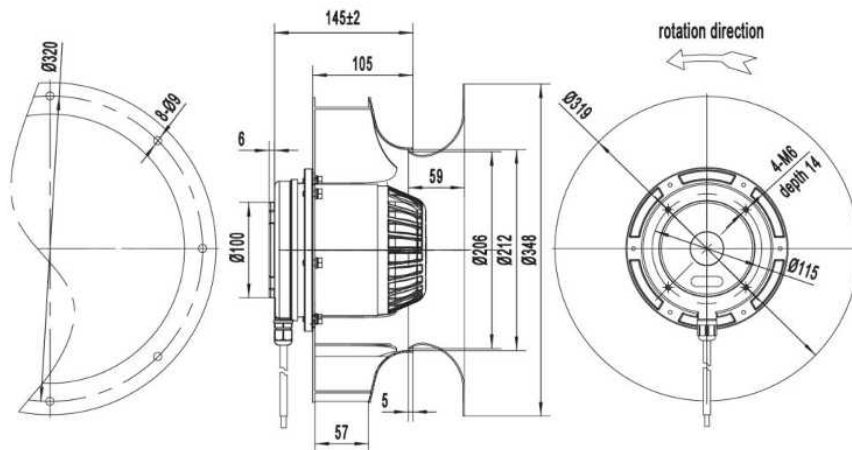




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

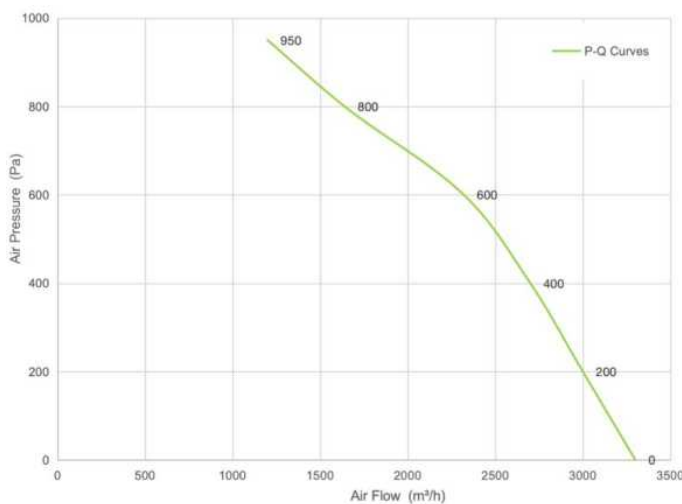

Pa	m³/h	rpm	W
300	2790	2812	810
400	2688	2785	808
500	2521	2765	808
600	2410	2742	805


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A320H118-137-A0	380	50	2750	800	3300	84

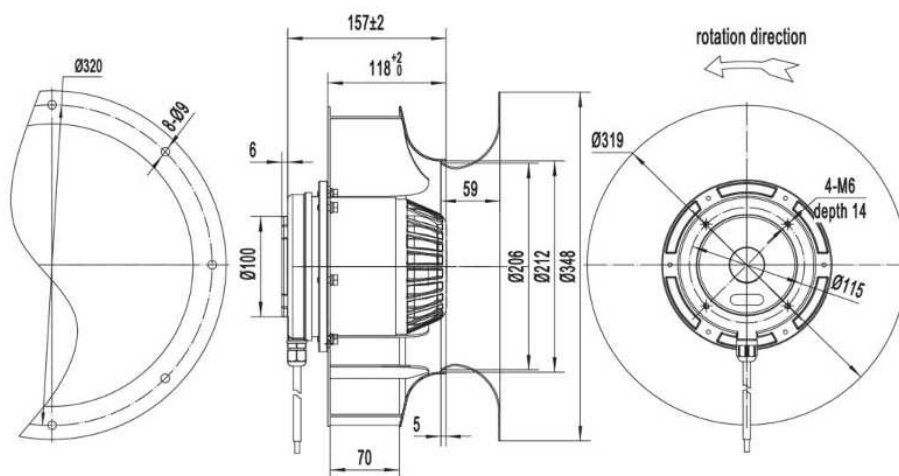




AC Backward Curved Centrifugal Fans 320mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

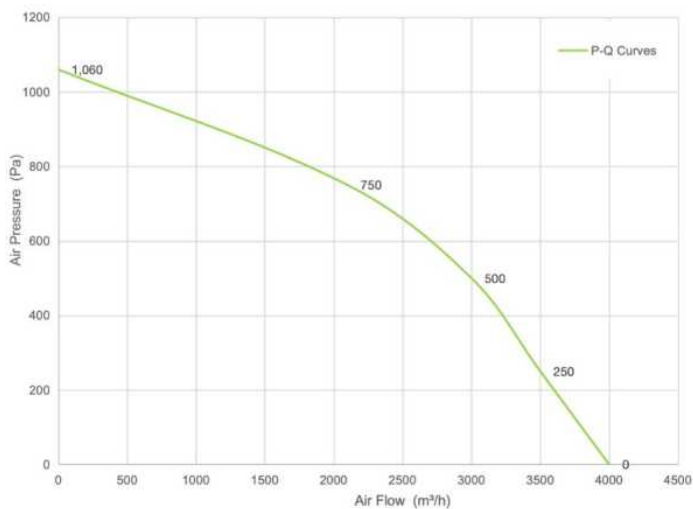

Pa	m³/h	rpm	W
300	3450	2712	1312
400	3200	2685	1305
500	3000	2669	1301
600	2650	2642	1296


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A320H146-137-A0	380	50	2650	1300	4000	85

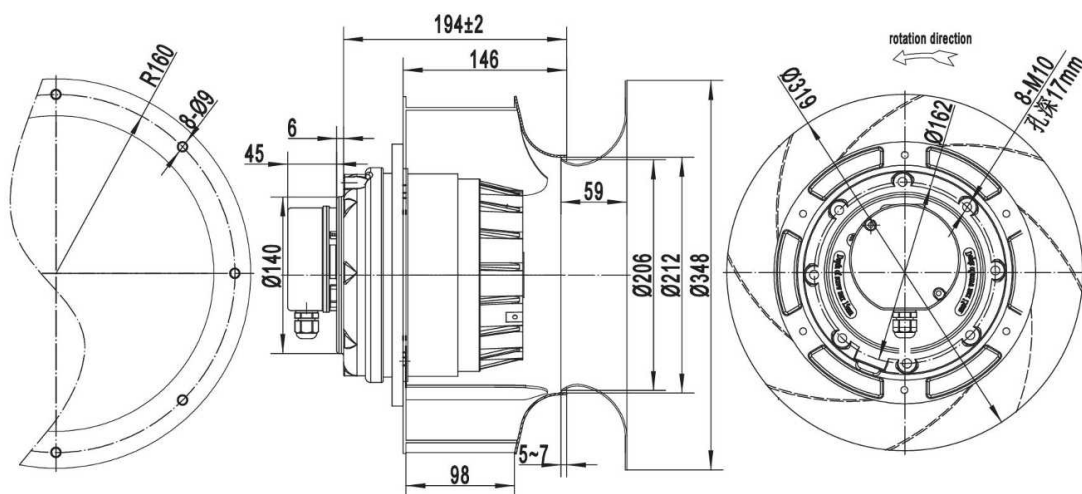




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

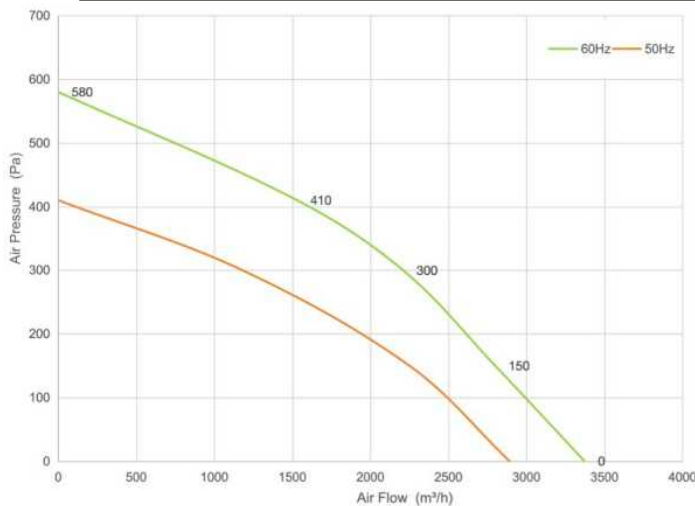

	Pa	m³/h	rpm	W
60Hz	250	2437	1595	424
	300	2166	1586	434
	350	1830	1588	426
	400	1410	1606	396
50Hz	100	2514	1401	271
	200	2055	1389	290
	250	1722	1387	294
	300	1255	1397	276


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A355H119-102-00	400	60	1650	434	3373	74
	380	50	1420	294	2892	70

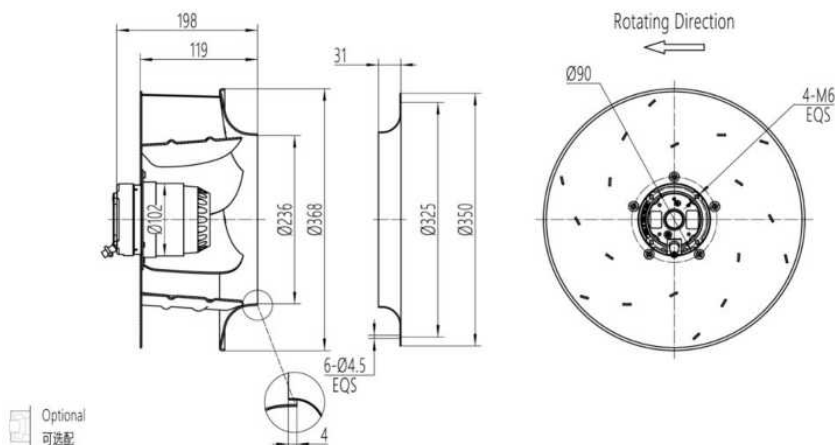




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

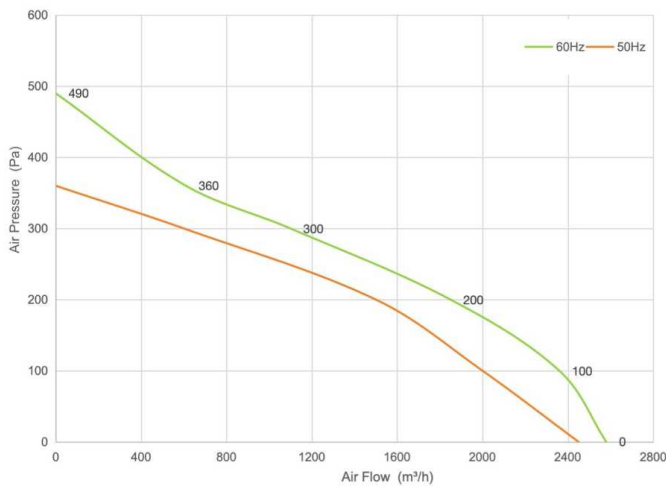

	Pa	m³/h	rpm	W
60Hz	150	2200	1495	252
	200	1860	1476	250
	250	1540	1459	250
	300	1180	1448	248
50Hz	100	2380	1485	168
	150	1810	1462	167
	200	1580	1428	167
	250	1000	1419	166


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A355H145-102-A0	230	60	1460	245	2580	65
	230	50	1420	165	2450	63

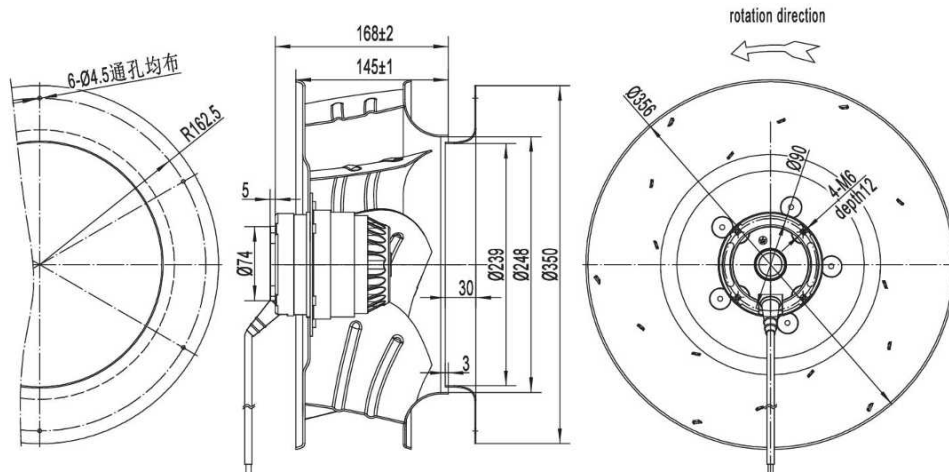




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

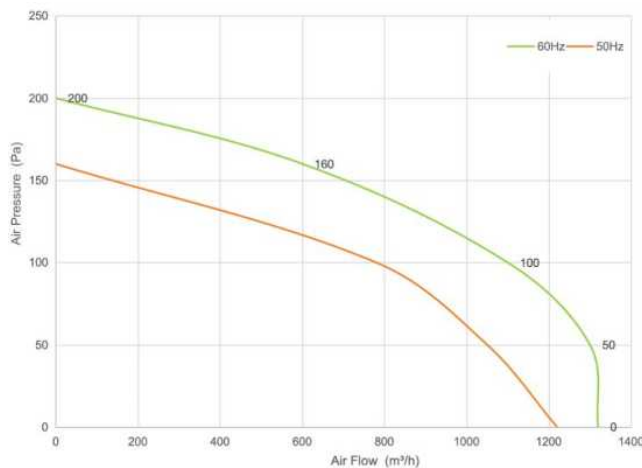

	Pa	m³/h	rpm	W
60Hz	50	1320	1129	135
	100	1080	1095	134
	150	680	1079	130
50Hz	50	1040	985	102
	100	790	976	102
	150	180	965	100


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A355H145-102-A1	230	60	1080	130	1320	61
	230	50	930	100	1220	60

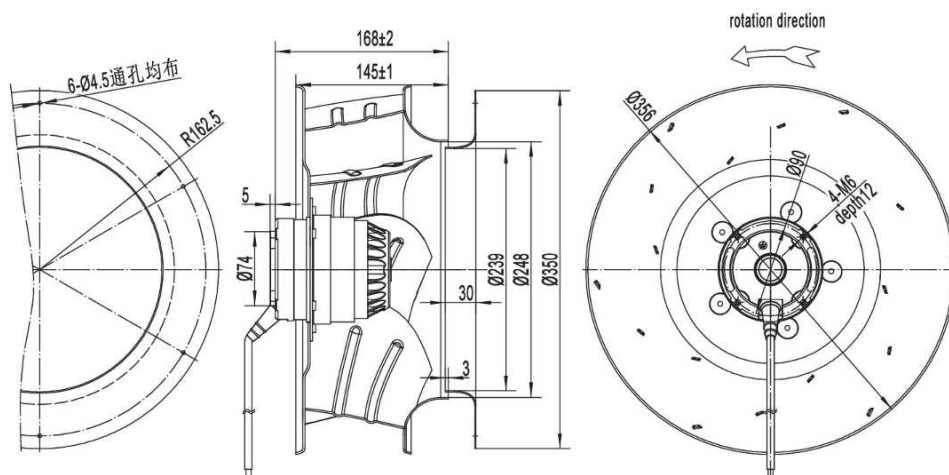




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

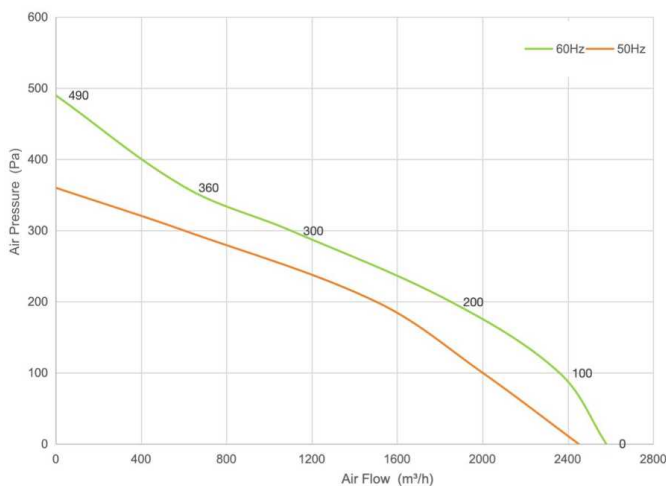

	Pa	m³/h	rpm	W
60Hz	150	2200	1495	252
	200	1860	1476	250
	250	1540	1459	250
	300	1180	1448	248
50Hz	100	2380	1485	168
	150	1810	1462	167
	200	1580	1428	167
	250	1000	1419	166


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A355H145-102-A0	380	60	1460	245	2580	65
	380	50	1420	165	2450	63

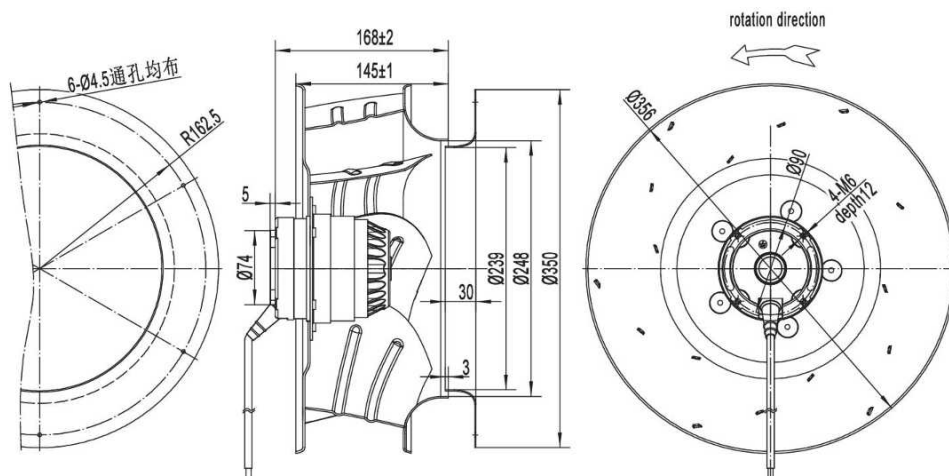




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

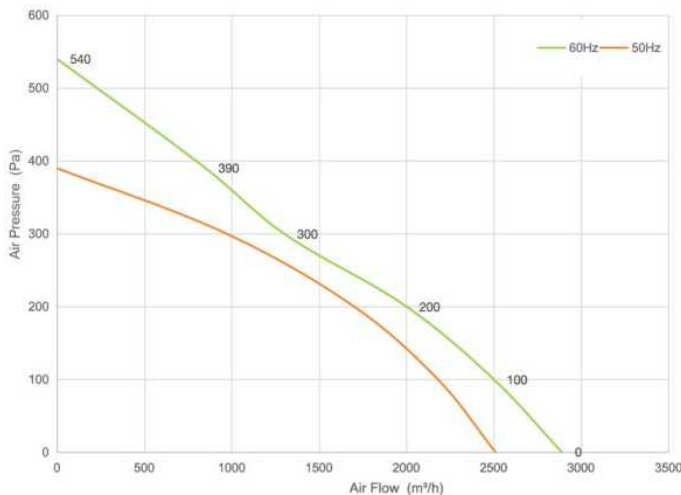

	Pa	m³/h	rpm	W
60Hz	200	2020	1475	352
	235	1730	1440	358
	280	1445	1450	353
	320	1200	1480	342
50Hz	140	2025	1365	243
	190	1780	1360	254
	235	1445	1360	253
	270	1160	1365	247


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A355H147-102-00	230	60	1635	360	2890	73
	230	50	1425	255	2510	69

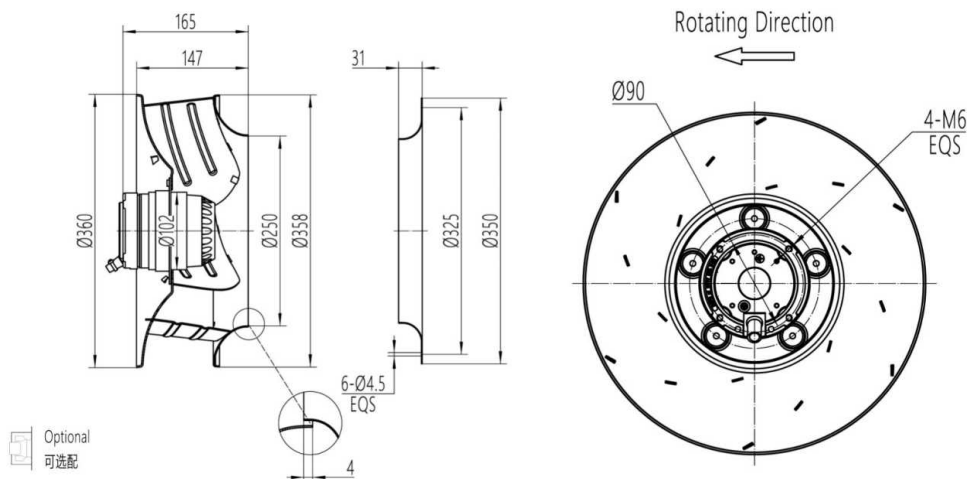





AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

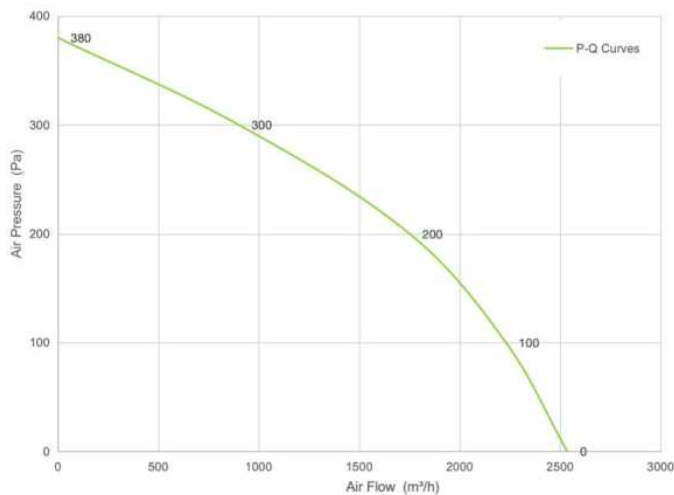

Pa	m³/h	rpm	W
150	2027	1370	225
200	1807	1360	230
250	1438	1360	230
285	1123	1370	220


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A355H147-102-00	380	50	1405	235	2535	70

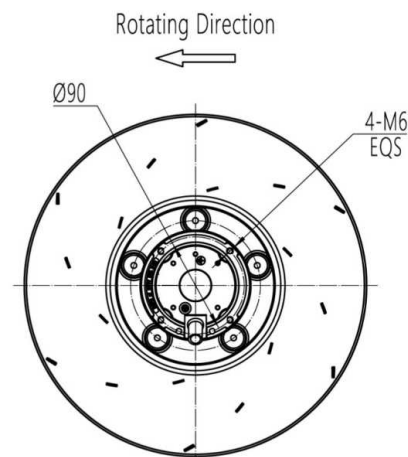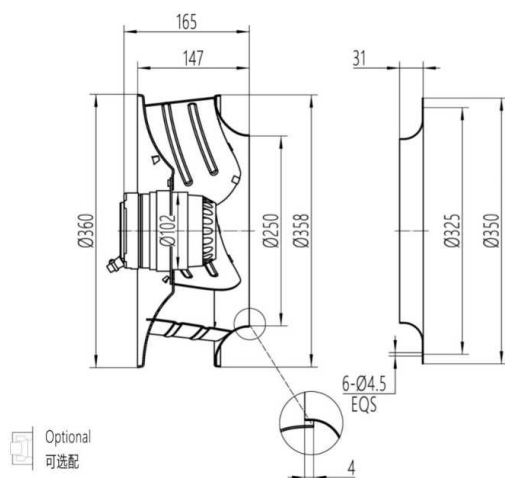




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

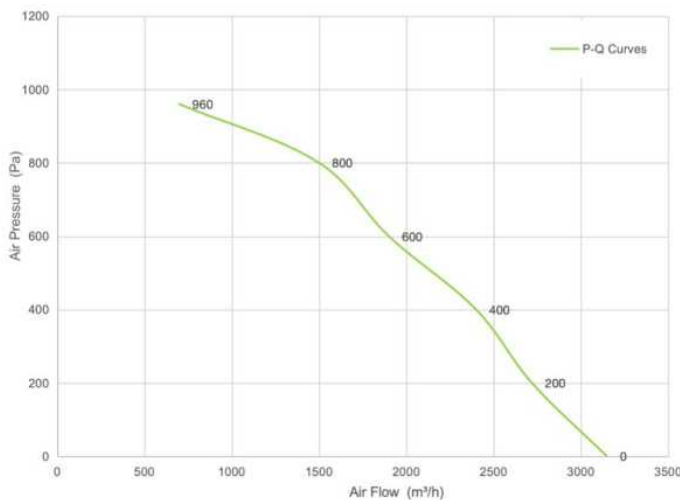

Pa	m³/h	rpm	W
200	2720	2812	810
400	2426	2795	806
600	1903	2762	802
800	1500	2760	799


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A355H102-138-A0	220	50	2750	800	3150	82
3 Phase 2 Voltage	380	50	2750	800	3150	82

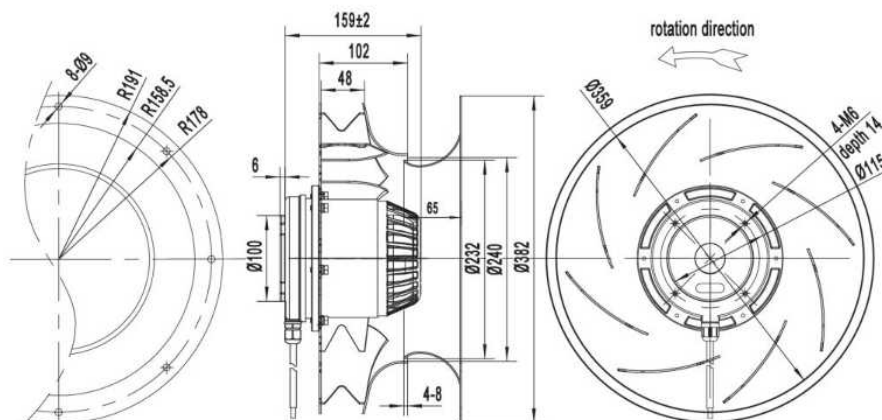




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

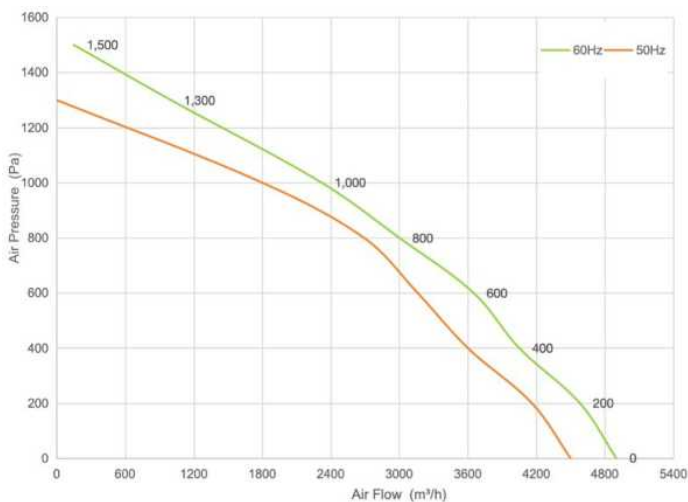

	Pa	m³/h	rpm	W
60Hz	200	4680	3023	1710
	400	4050	2986	1706
	600	3640	2954	1704
	800	3000	2935	1685
50Hz	200	4180	2752	1225
	400	3600	2706	1196
	600	3150	2685	1185
	800	2720	2645	1161


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A355H132-137-A0	380	60	2950	1700	4900	90
	380	50	2650	1200	4500	88

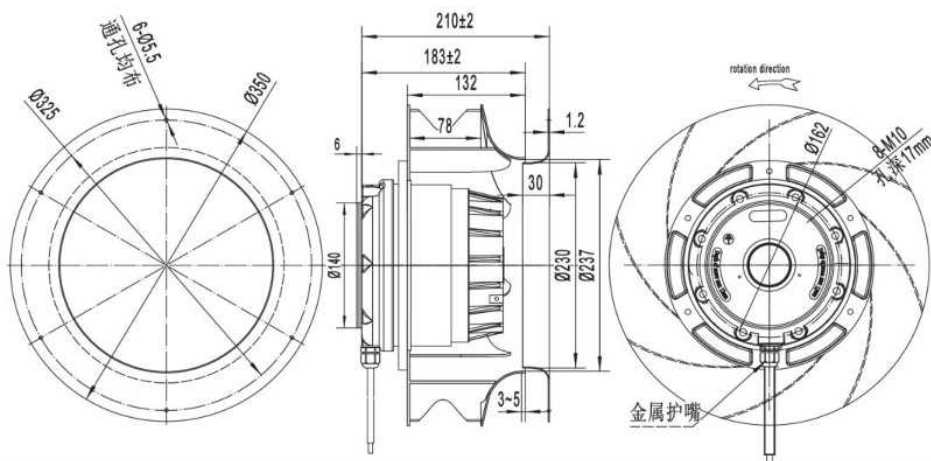




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

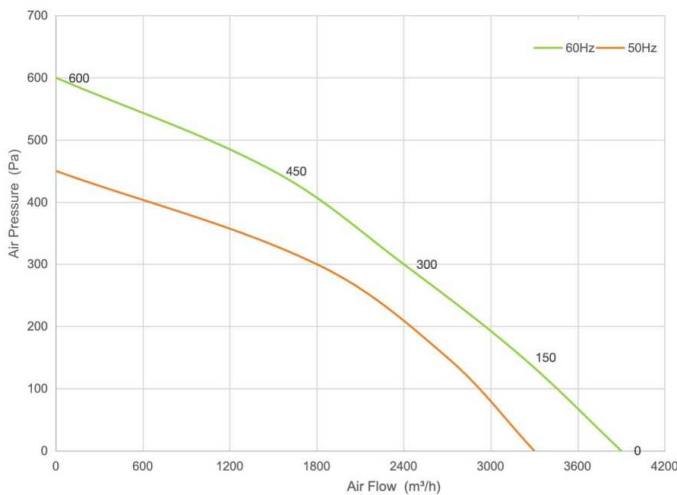

	Pa	m³/h	rpm	W
60Hz	200	3000	1780	612
	300	2400	1765	611
	400	1840	1732	608
	500	3000	1701	608
50Hz	100	2920	1465	405
	200	2430	1451	403
	300	1800	1426	400
	400	600	1405	399


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A355H164-137-A0	230	60	1700	600	3900	77
	230	50	1400	400	3300	72

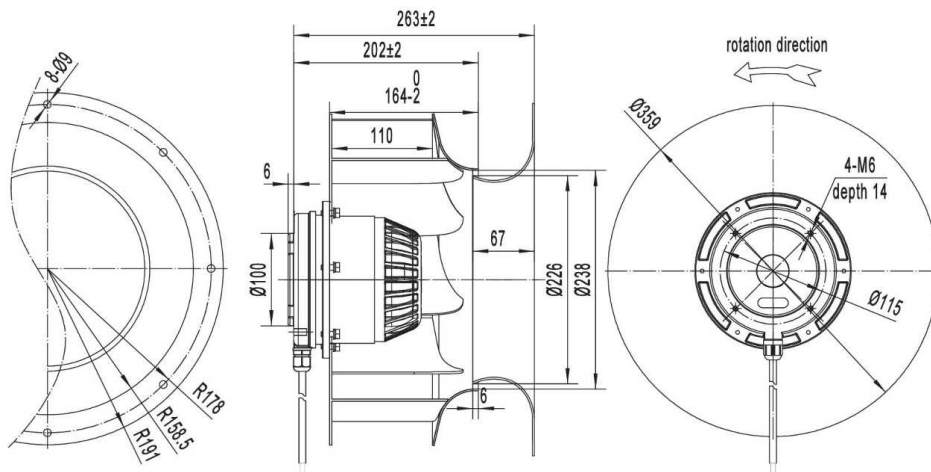




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

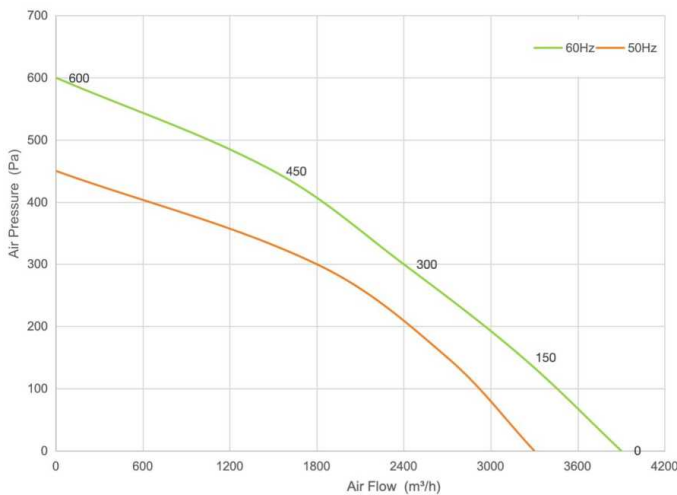

	Pa	m³/h	rpm	W
60Hz	200	3000	1780	612
	300	2400	1765	611
	400	1840	1732	608
	500	3000	1701	608
50Hz	100	2920	1465	405
	200	2430	1451	403
	300	1800	1426	400
	400	600	1405	399


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A355H164-137-A0	380	60	1700	600	3900	77
	380	50	1400	400	3300	72

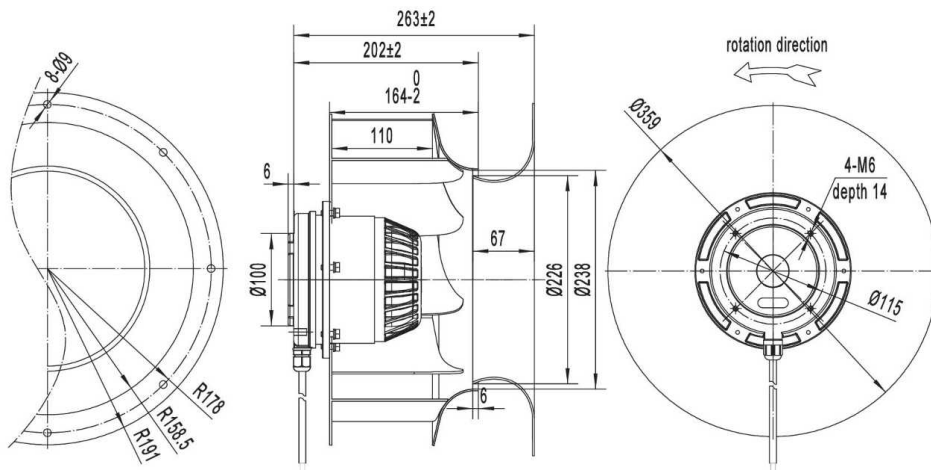




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

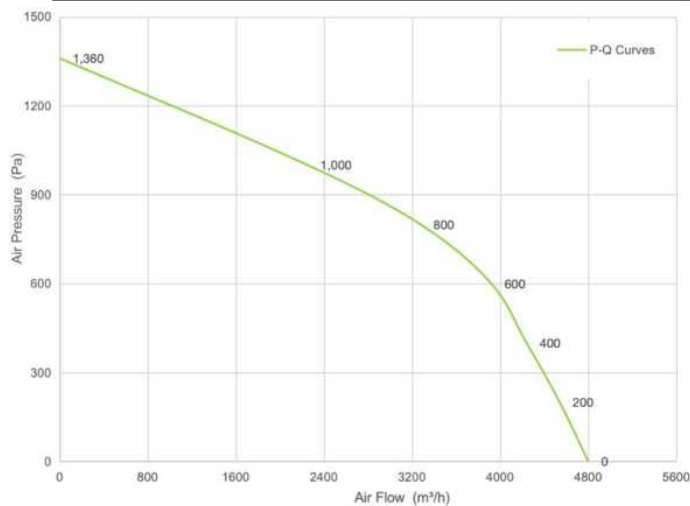

Pa	m³/h	rpm	W
300	4340	2792	2502
500	4200	2775	2499
700	3840	2745	2498
1000	2400	2712	2498


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A355H164-137-A1	380	60	2700	2500	4800	90

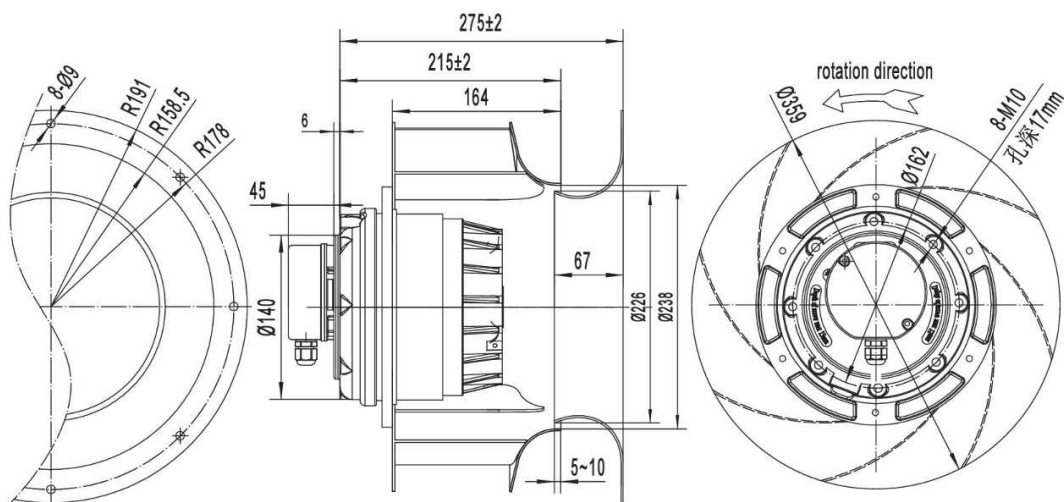




AC Backward Curved Centrifugal Fans 355mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

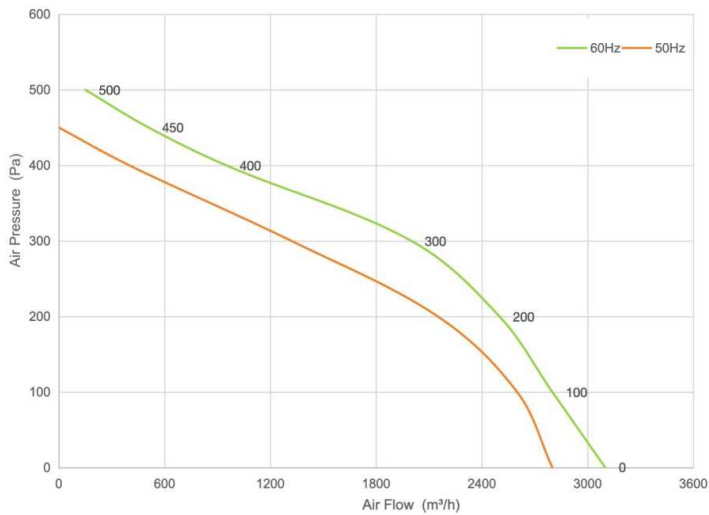

	Pa	m³/h	rpm	W
60Hz	100	2800	1612	285
	200	2500	1601	285
	300	2021	1575	283
	400	1024	1565	281
50Hz	100	2610	1412	212
	200	2130	1386	212
	300	1280	1365	210
	400	465	1329	209

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A355H169-137-A0	230	60	1550	280	3100	67
	230	50	1350	210	2800	65

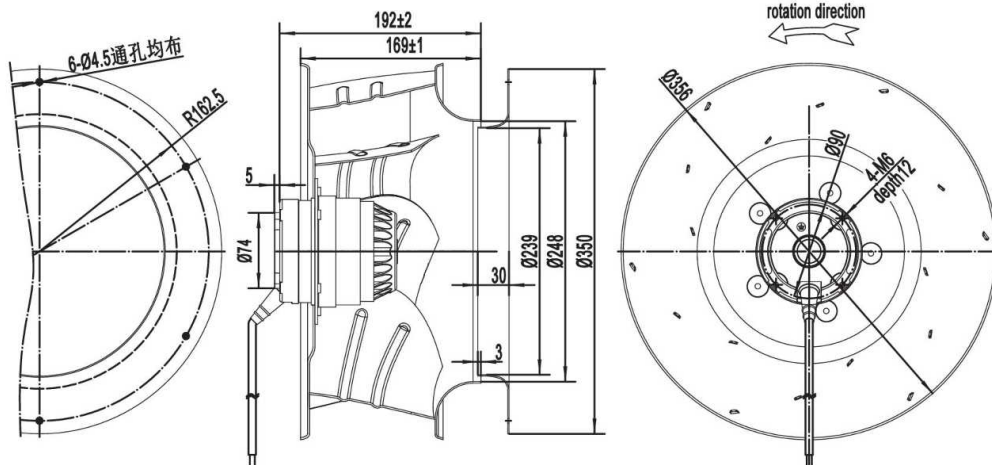

AC Backward Curved Centrifugal Fans 355mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtektpower.com

Website: www.airtektpower.com




Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

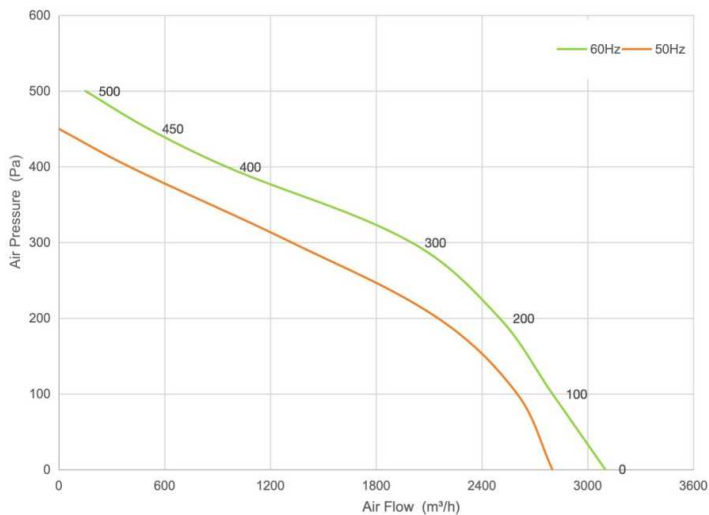

	Pa	m ³ /h	rpm	W
60Hz	100	2800	1612	285
	200	2500	1601	285
	300	2021	1575	283
	400	1024	1565	281
50Hz	100	2610	1412	212
	200	2130	1386	212
	300	1280	1365	210
	400	465	1329	209


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m ³ /h]	Noise [dB(A)]
B38A355H169-137-A0	380	60	1550	280	3100	67
	380	50	1350	210	2800	65

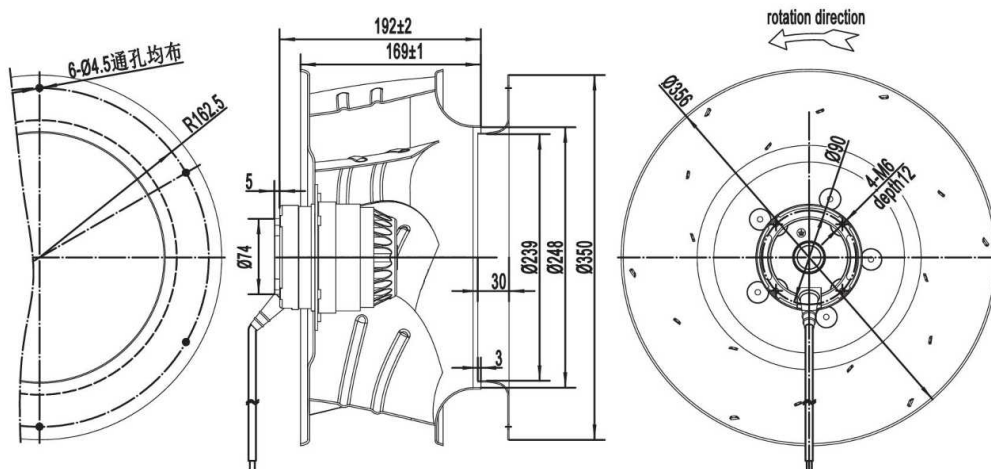




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

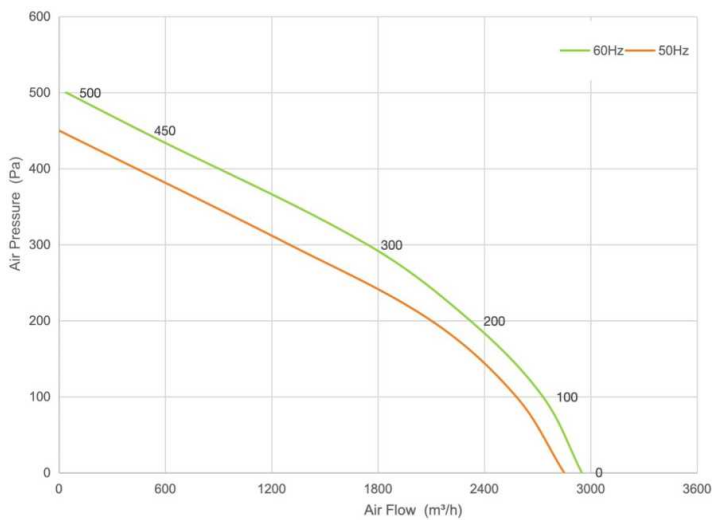

	Pa	m³/h	rpm	W
60Hz	100	2780	1526	335
	200	2360	1503	331
	300	1780	1495	296
	400	900	1462	296
50Hz	100	2560	1418	265
	200	2120	1396	265
	300	1282	1385	264
	400	505	1346	263


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A400H147-137-A0	230	60	1450	330	2950	68
	230	50	1350	260	2850	64

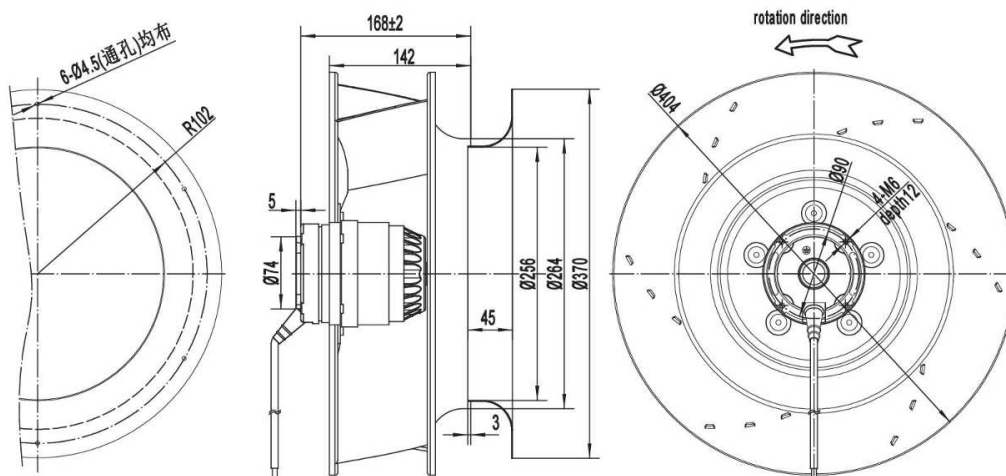




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

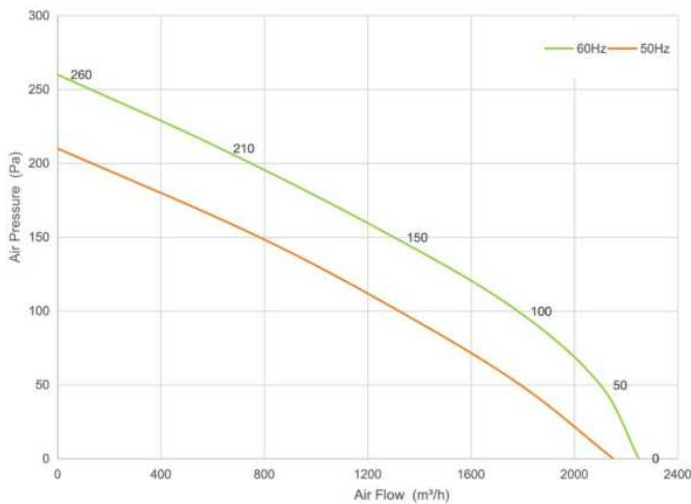

	Pa	m³/h	rpm	W
60Hz	50	2160	1098	158
	100	1745	1085	157
	150	1286	1062	157
	200	780	1050	155
50Hz	50	1740	962	136
	100	1290	958	136
	150	800	950	136


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A400H147-137-A1	230	60	1050	155	2250	57
	230	50	940	135	2150	56

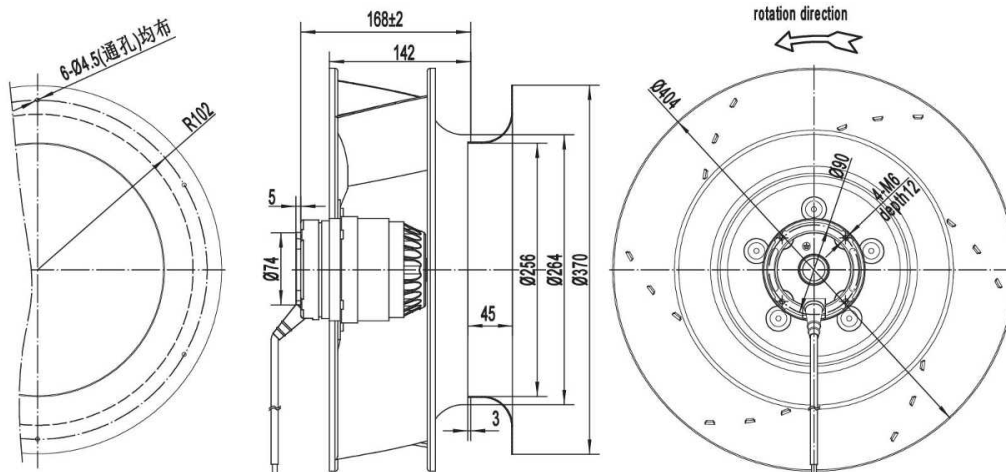




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

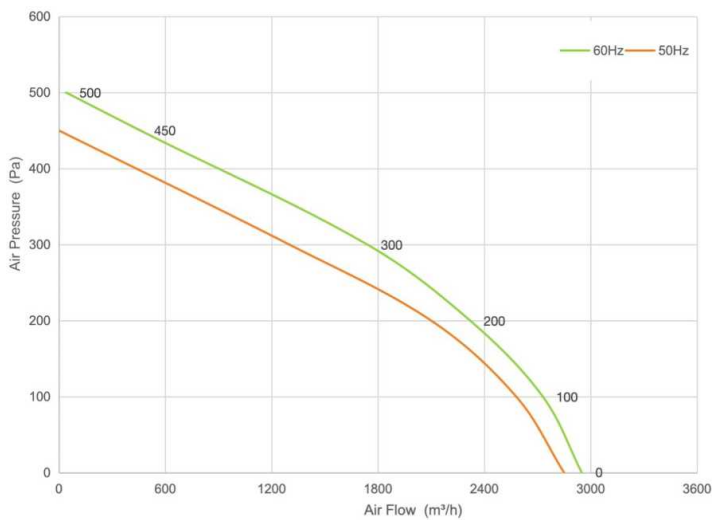

	Pa	m³/h	rpm	W
60Hz	100	2780	1526	335
	200	2360	1503	331
	300	1780	1495	296
	400	900	1462	296
50Hz	100	2560	1418	265
	200	2120	1396	265
	300	1282	1385	264
	400	505	1346	263


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A400H147-137-A0	380	60	1450	330	2950	68
	380	50	1350	260	2850	64

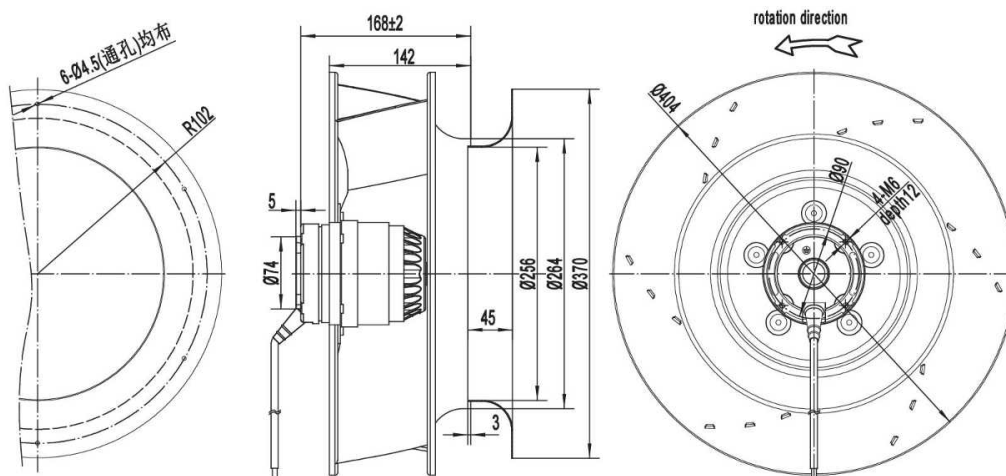




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

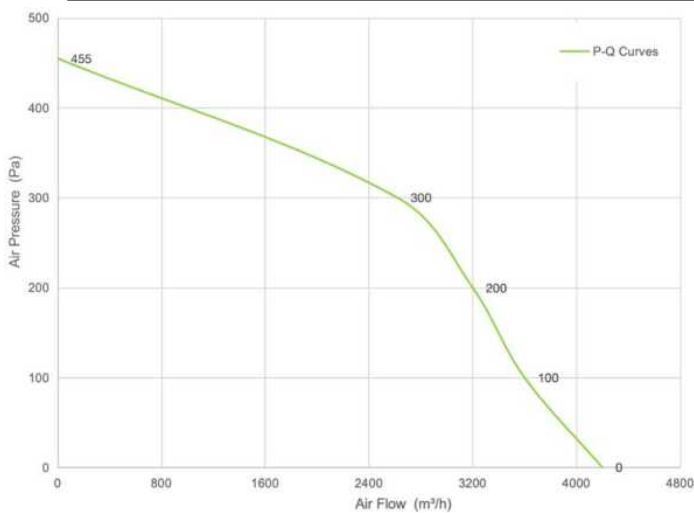

Pa	m³/h	rpm	W
100	3580	1405	482
200	3200	1386	480
300	2580	1365	479
400	810	1326	478


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A400H170-138-A0	380	50	1350	480	4200	65

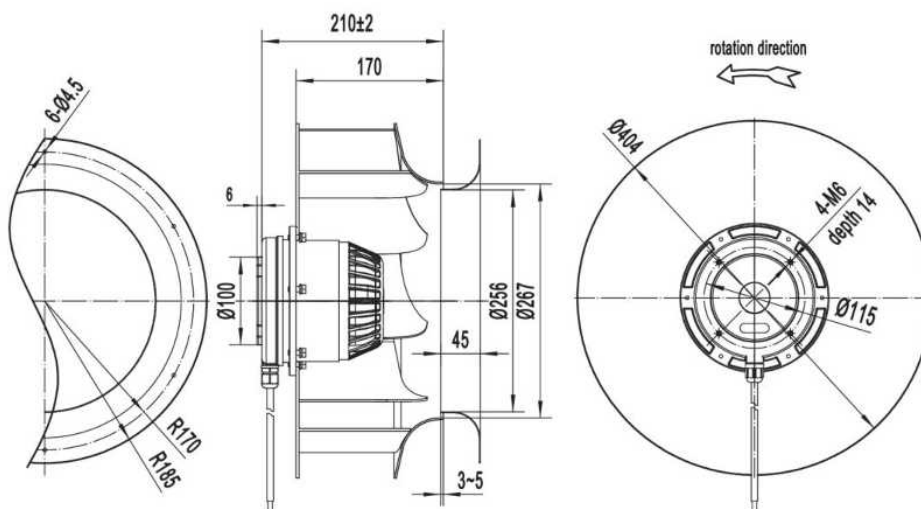




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

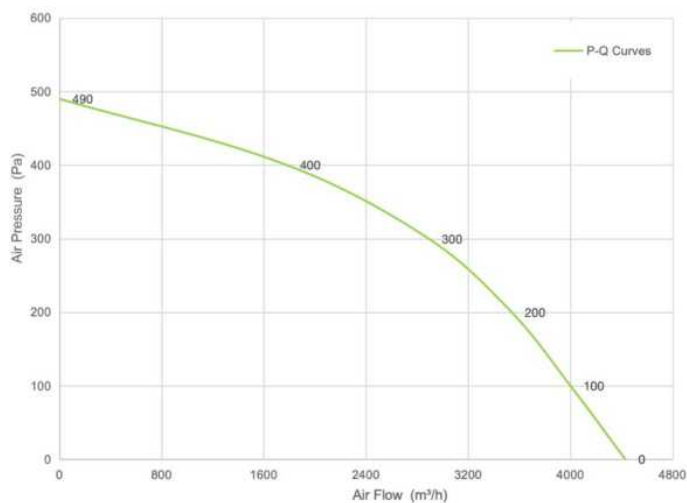

Pa	m³/h	rpm	W
250	3167	1421	470
300	2884	1421	478
350	2455	1422	472
405	1825	1429	436


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A400H181-138-00	230	50	1445	480	4430	71

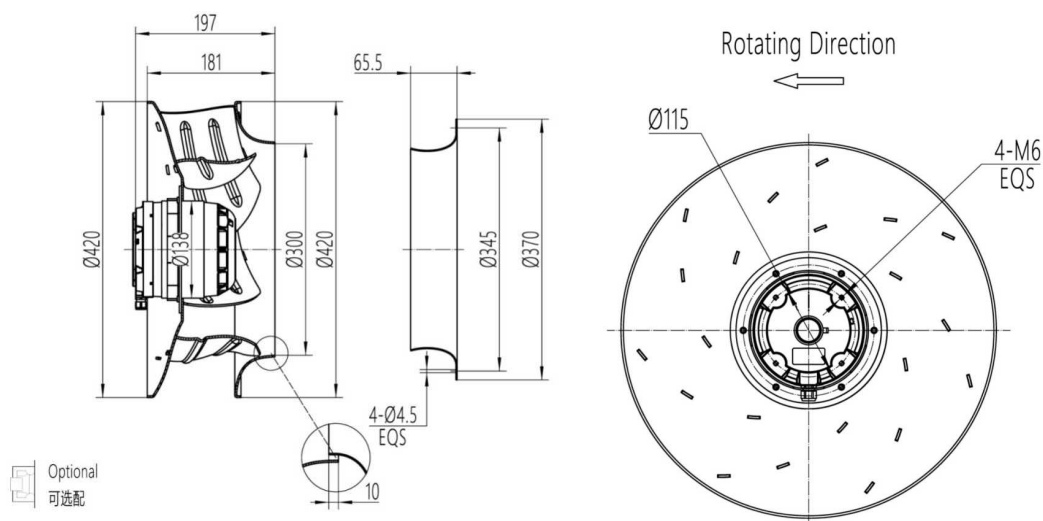




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

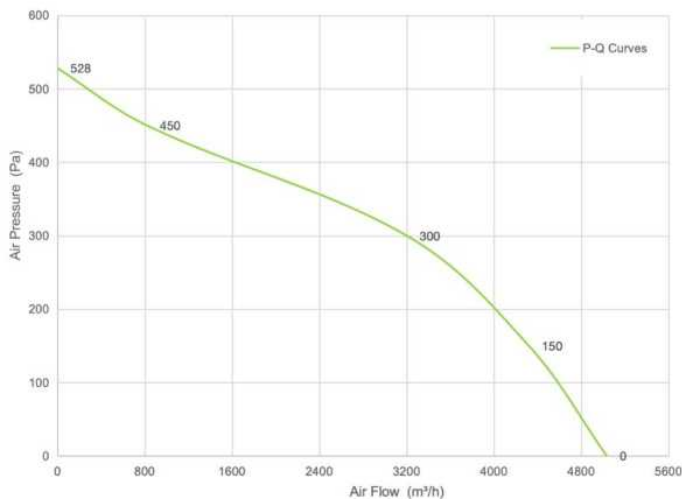

Pa	m³/h	rpm	W
200	4030	1420	546
300	3278	1414	562
405	2080	1426	496
430	1390	1437	434


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A400H181-138-00	380	50	1440	562	5034	72

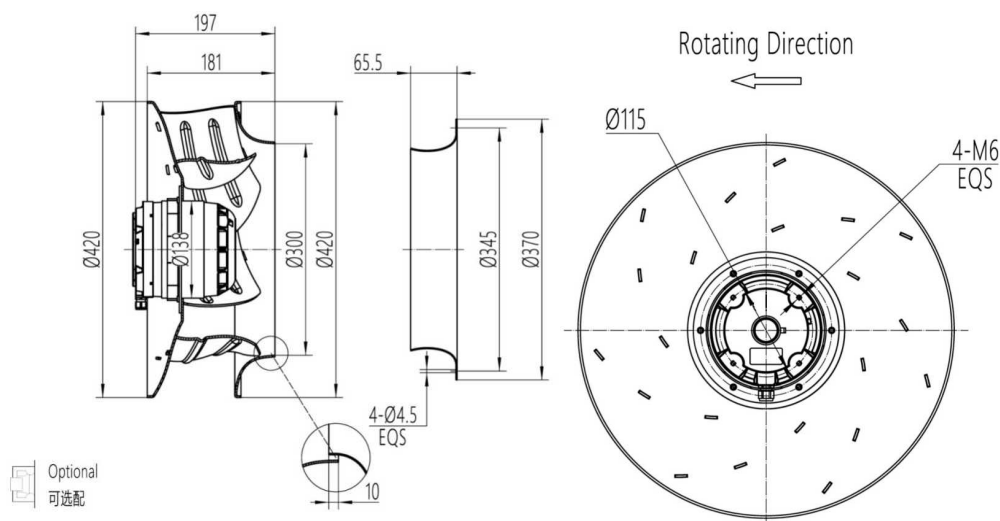




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

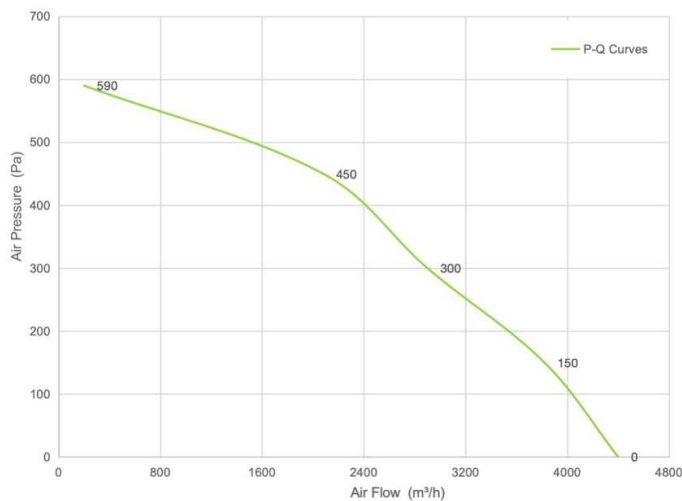

	Pa	m³/h	rpm	W
230V	200	3502	1420	516
	300	2965	1402	514
	400	2400	1390	511
	500	1596	1381	509
380V	200	3502	1432	512
	300	2965	1405	512
	400	2400	1385	509
	500	1596	1365	511


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A400H185-137-A0	230	50	1380	510	4400	69
B38A400H185-137-A0	380	50	1370	510	4400	69

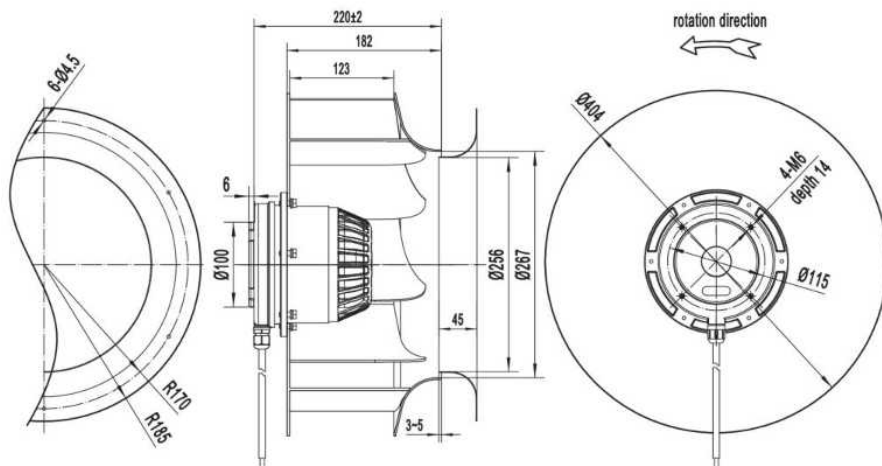




AC Backward Curved Centrifugal Fans 400mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

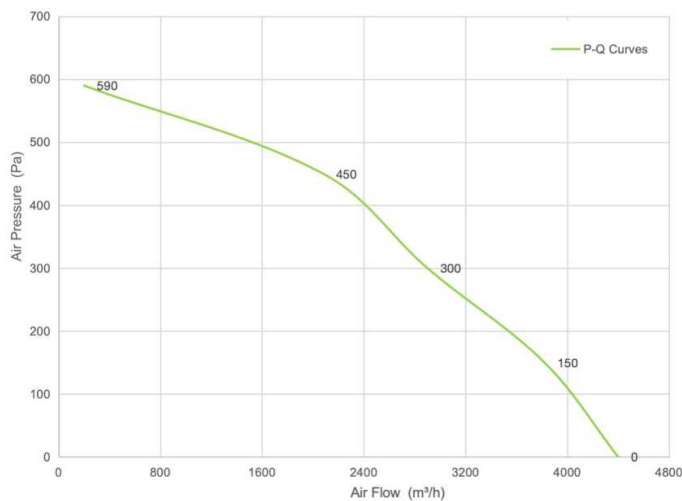

	Pa	m³/h	rpm	W
230V	200	3500	1421	515
	300	2950	1404	512
	400	2420	1395	512
	500	1580	1382	511
380V	200	3500	1435	512
	300	2959	1408	513
	400	2410	1384	510
	500	1585	1369	510


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A400H188-137-A0	230	50	1380	510	4400	69
B38A400H188-137-A0	380	50	1370	510	4400	69

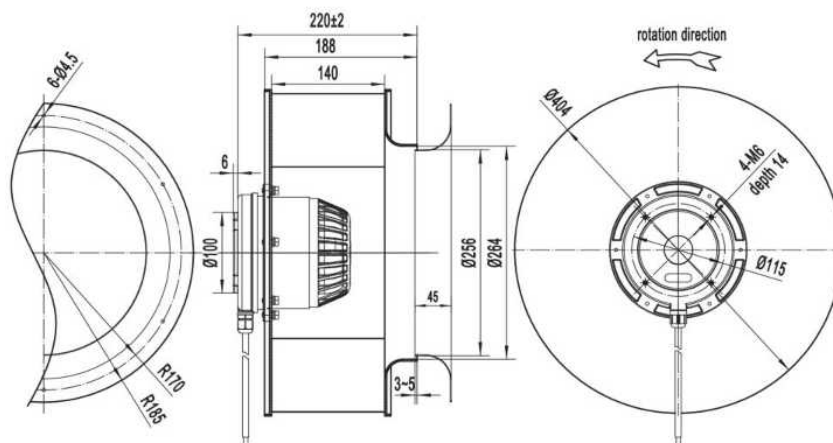




AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

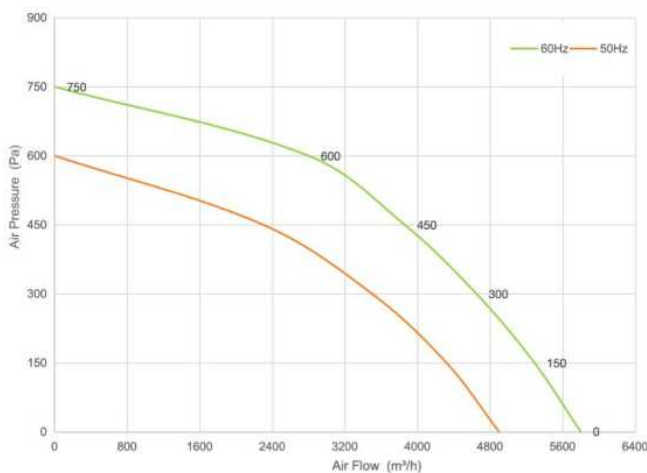

	Pa	m³/h	rpm	W
60Hz	200	5260	1712	968
	300	4710	1685	965
	400	4150	1652	966
	500	3860	1625	962
50Hz	200	4100	1496	655
	300	3299	1468	654
	400	2530	1442	655
	500	2120	1402	653


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A450H151-138-A0	380	60	1650	960	5800	79
	380	50	1400	650	4900	75

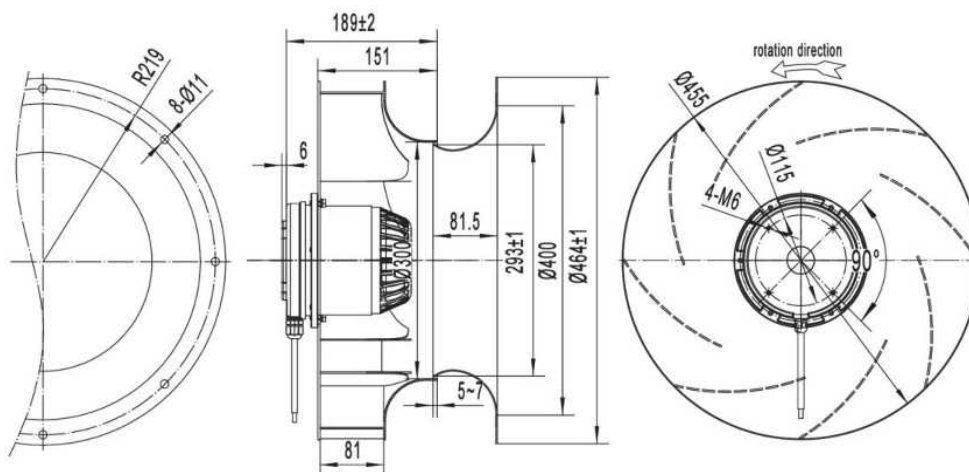




AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

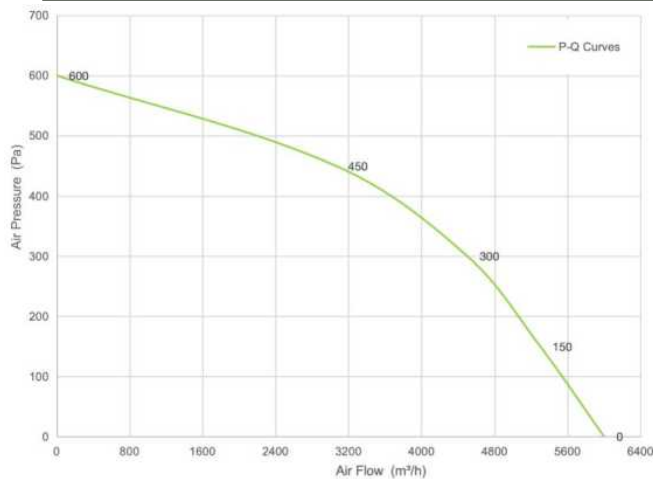

	Pa	m³/h	rpm	W
230V	200	5000	1396	805
	300	4600	1385	804
	400	3650	1369	804
	500	2300	1356	802
380V	200	5000	1389	806
	300	4600	1380	805
	400	3650	1370	805
	500	2300	1365	802


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A450H181-138-A0	230	50	1350	800	6000	78
B38A450H181-138-A0	380	50	1350	800	6000	78

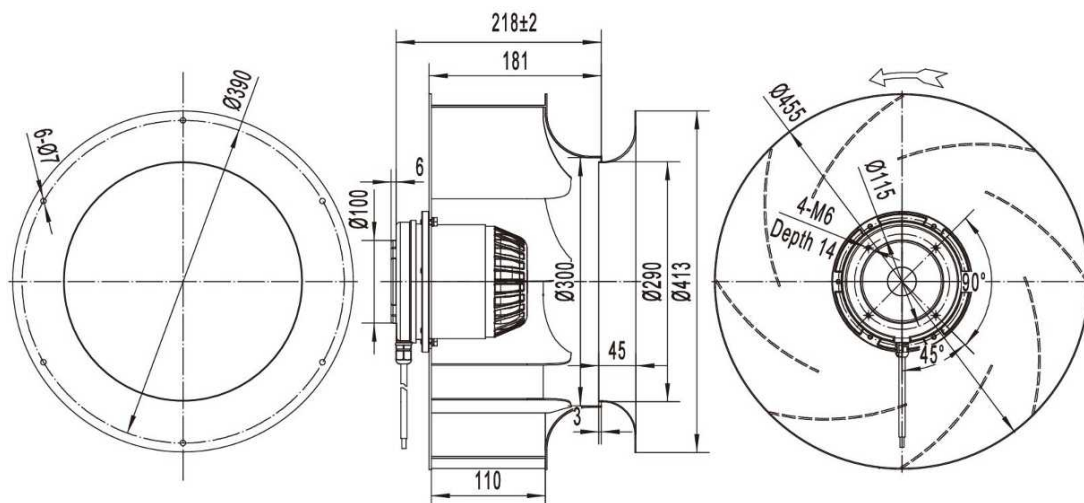





AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

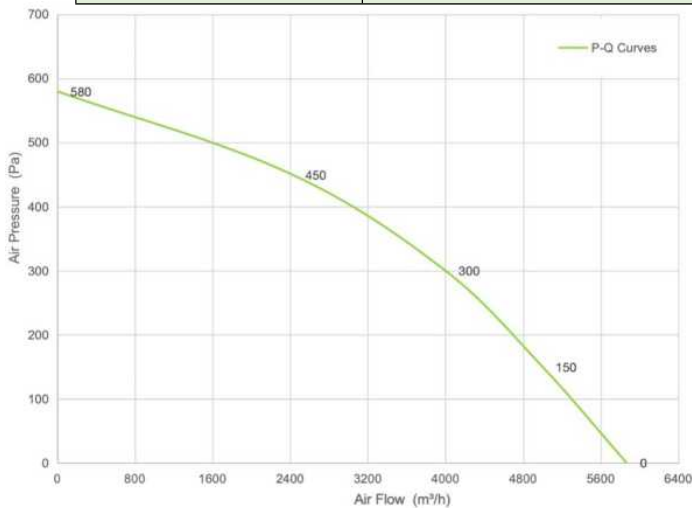

Pa	m³/h	rpm	W
293	4194	1359	748
360	3563	1359	755
400	3105	1367	733
444	2594	1372	705


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A450H206-138-00	380	50	1405	755	5867	78

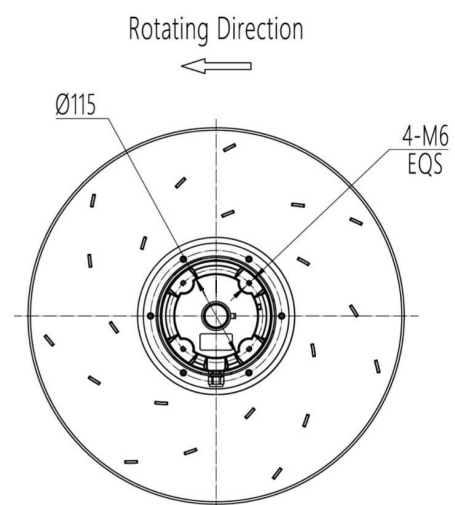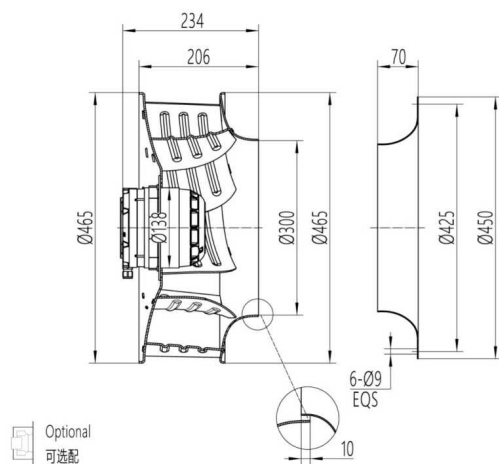




AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

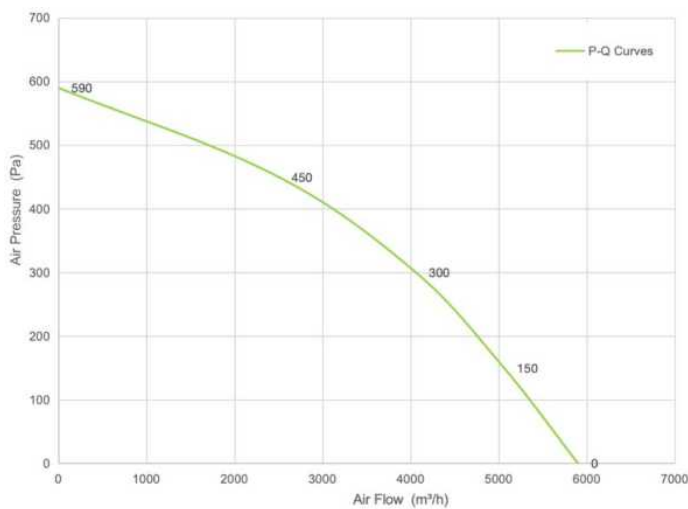

Pa	m³/h	rpm	W
200	4860	1370	721
290	4265	1350	770
350	3730	1345	782
400	3210	1345	770


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A450H206-138-00	230	50	1405	790	5900	78

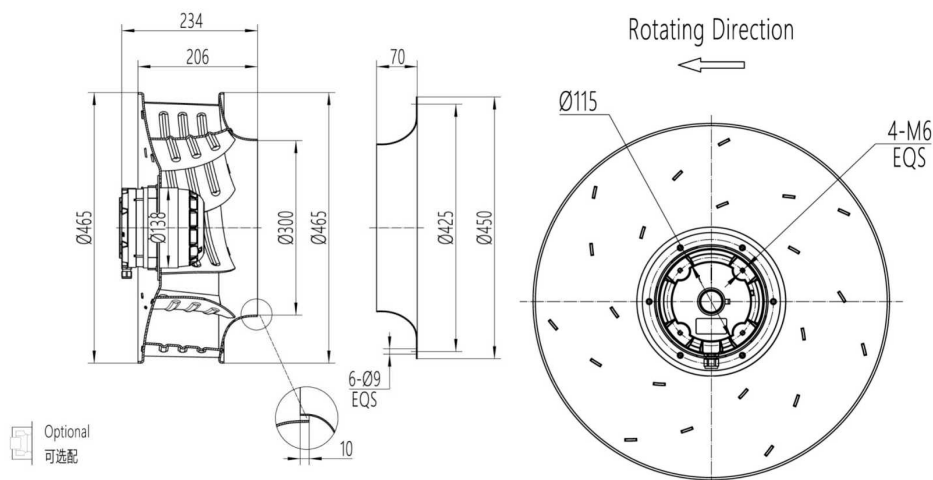




AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

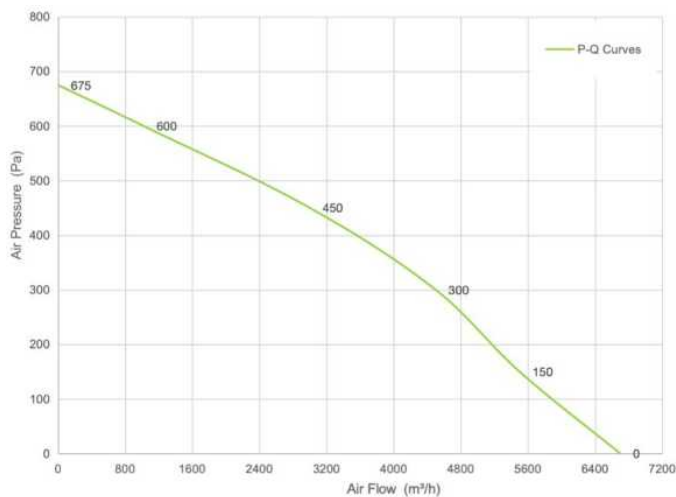


Pa	m³/h	rpm	W
200	5100	1378	802
300	4520	1360	799
400	3450	1348	798
500	2400	1326	799

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A450H209-138-A0	380	50	1350	800	6700	79

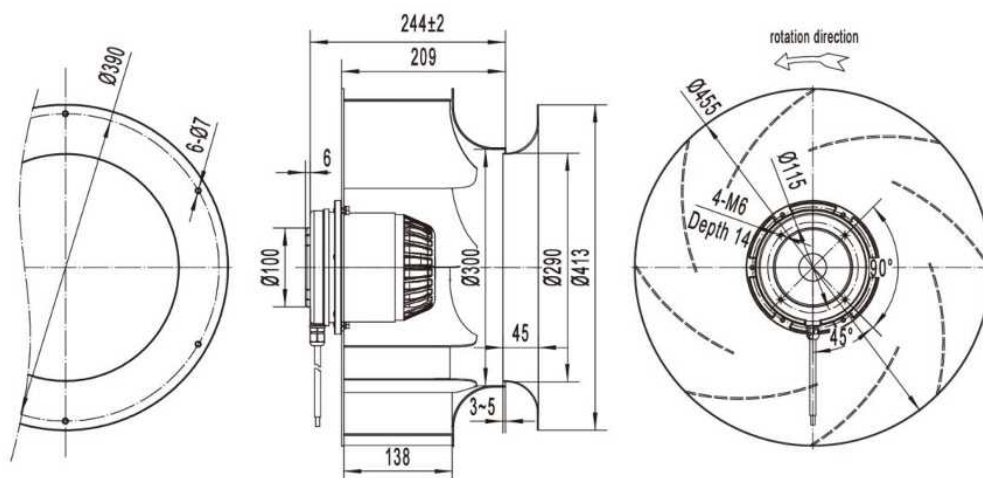


AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

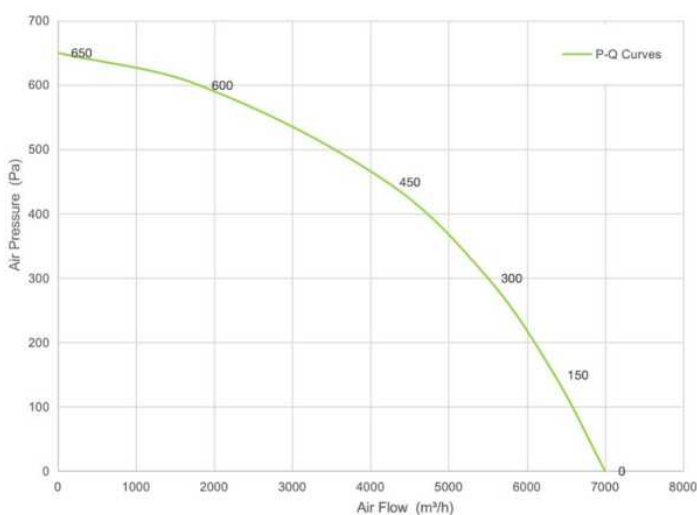

Pa	m ³ /h	rpm	W
200	6060	1495	1120
300	5450	1468	1115
400	4820	1425	1116
500	3480	1396	1112

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A450H209-138-A1	380	50	1400	1100	7000	82

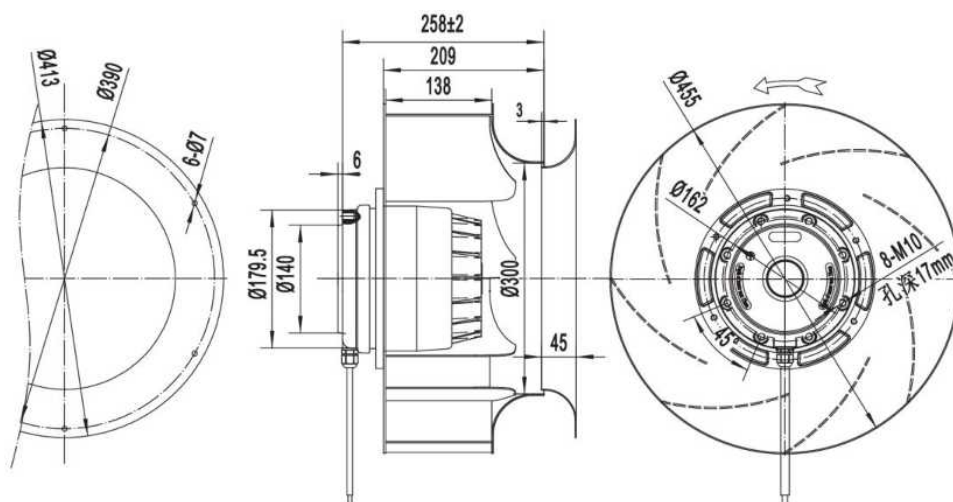

AC Backward Curved Centrifugal Fans 450mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com

Website: www.airteckpower.com




Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

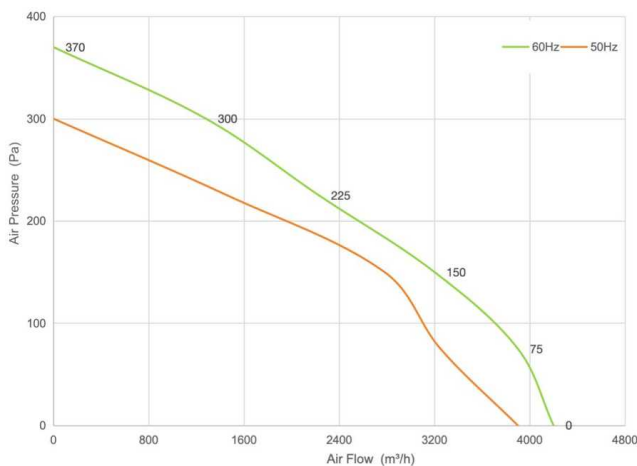

	Pa	m³/h	rpm	W
60Hz	50	4100	1096	372
	100	3710	1075	368
	150	3200	1052	367
	200	2510	1015	362
50Hz	50	3600	985	305
	100	3119	975	301
	150	2830	952	301
	200	1910	938	300


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B23A450H218-138-A0	380	60	1050	360	4200	61
		50	920	300	3900	60

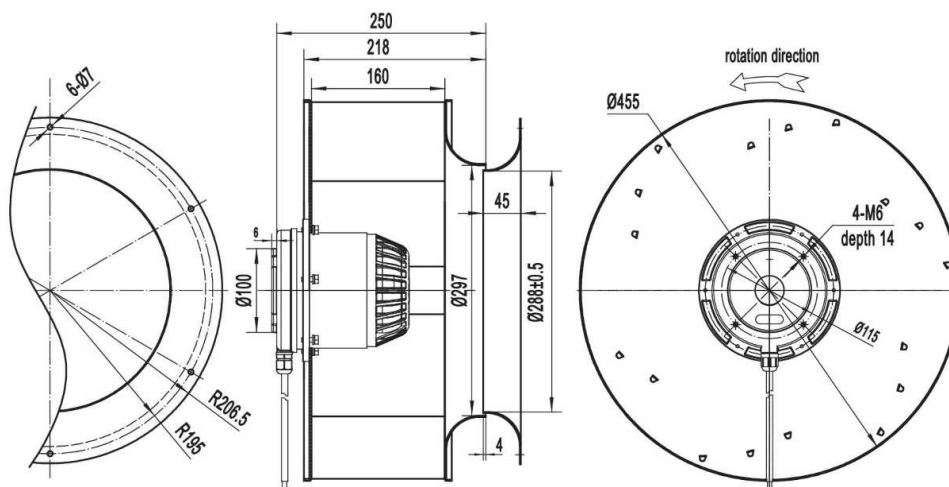




AC Backward Curved Centrifugal Fans 450mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

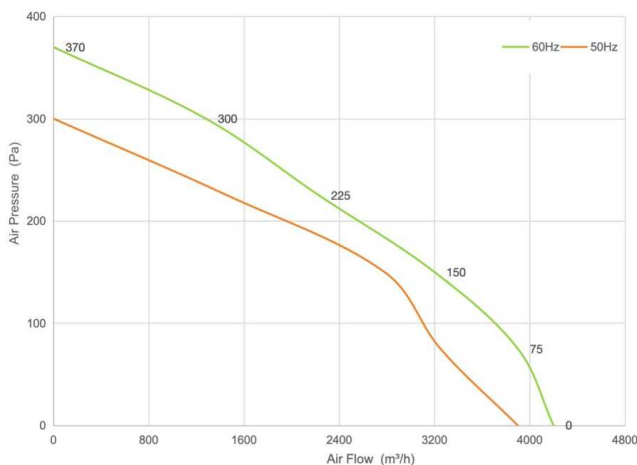


	Pa	m³/h	rpm	W
60Hz	50	4100	1096	372
	100	3710	1075	368
	150	3200	1052	367
	200	2510	1015	362
50Hz	50	3600	985	305
	100	3119	975	301
	150	2830	952	301
	200	1910	938	300

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A450H218-138-A0	380	60	1050	360	4200	61
		50	920	300	3900	60

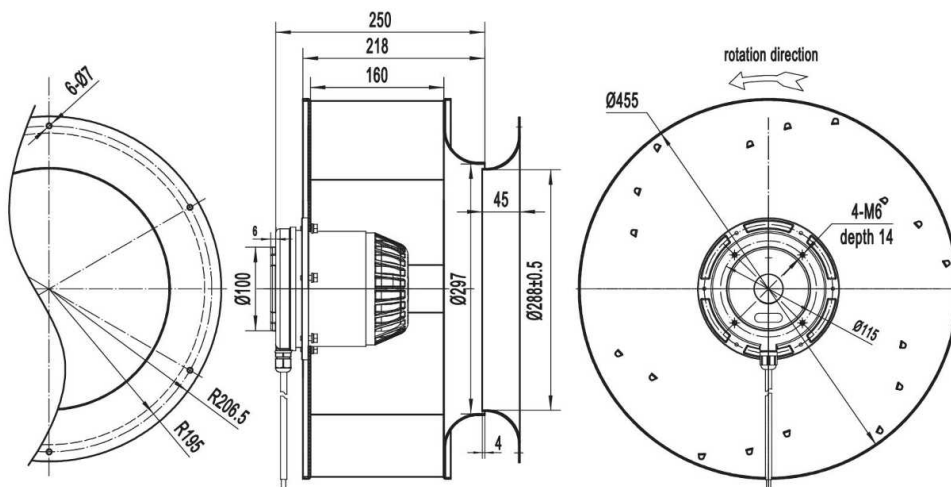


AC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

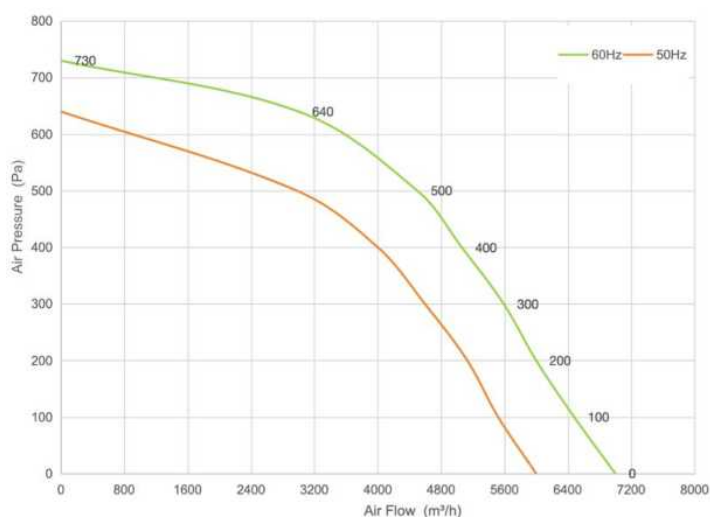

	Pa	m ³ /h	rpm	W
60Hz	200	6000	1716	1512
	300	5600	1695	1509
	400	5060	1652	1505
	500	4650	1625	1501
50Hz	200	5120	1495	1005
	300	4650	1467	1001
	400	4000	1448	998
	500	3080	1421	998

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A520H159-137-A0	380	60	1600	1500	7000	82
		50	1400	1000	6000	80

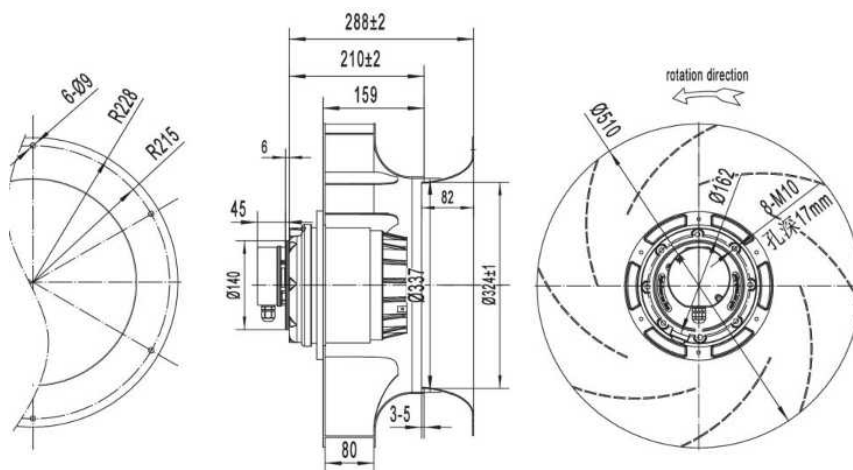

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




AC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

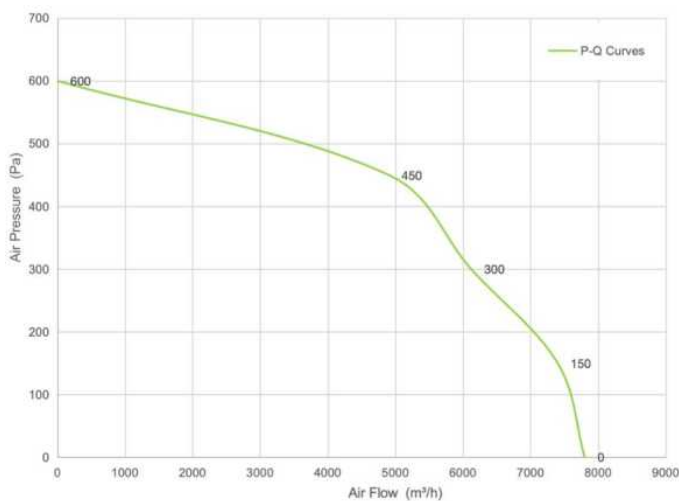

Pa	m³/h	rpm	W
200	7020	1352	1002
300	6050	1325	1000
400	5560	1304	999
500	3600	1292	999


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A520H202-180-00	380	50	1350	1000	7800	79

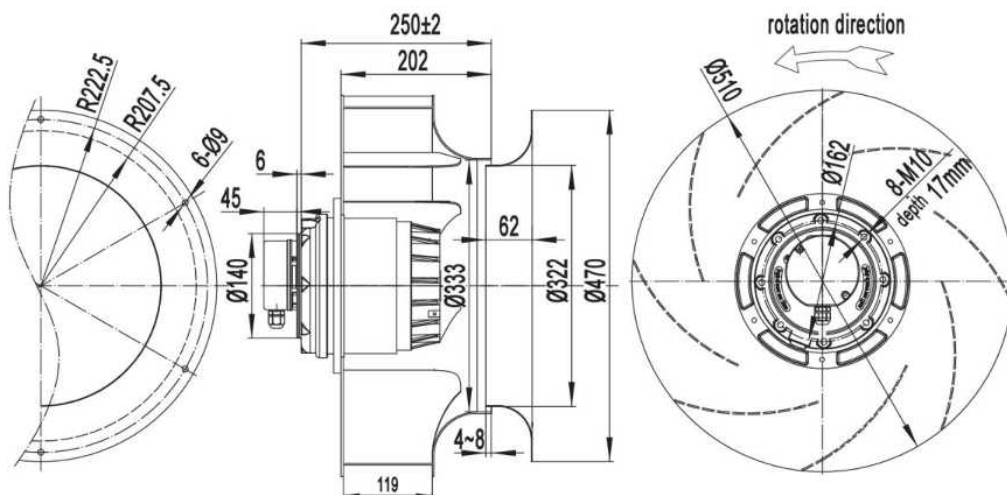




AC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

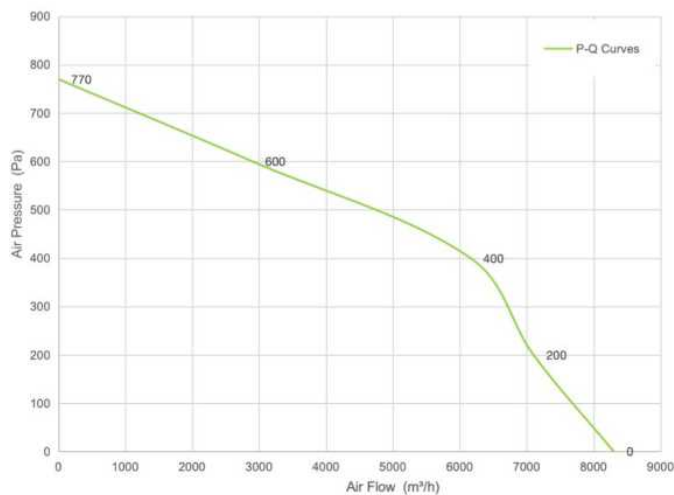

Pa	m³/h	rpm	W
300	6461	1315	1435
400	5616	1300	1484
505	4552	1300	1452
600	2816	1340	1199


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A520H225-180-00	380	50	1365	1485	8300	80

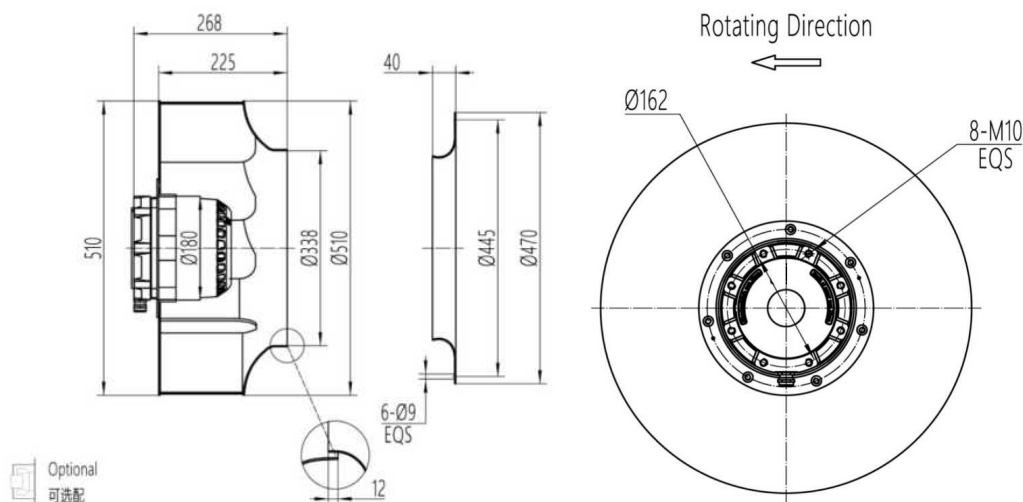




AC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

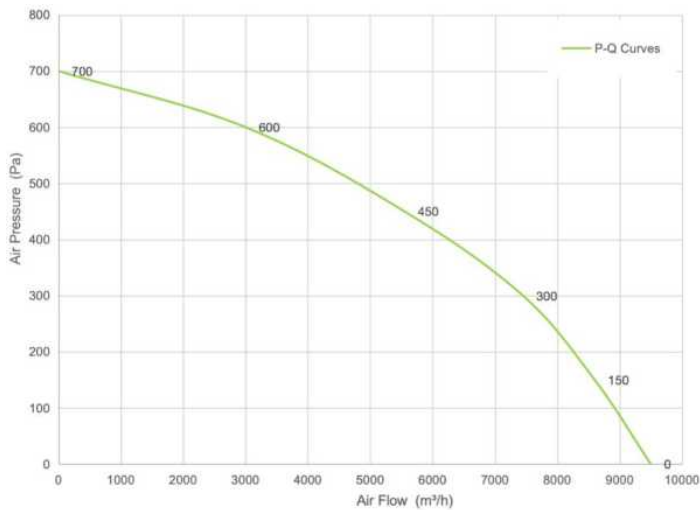


Pa	m ³ /h	rpm	W
300	7460	1495	1510
400	6100	1468	1508
500	4900	1440	1506
600	3000	1398	1504

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m ³ /h]	Noise [dB(A)]
B38A520H234-180-A0	380	50	1400	1500	9500	80

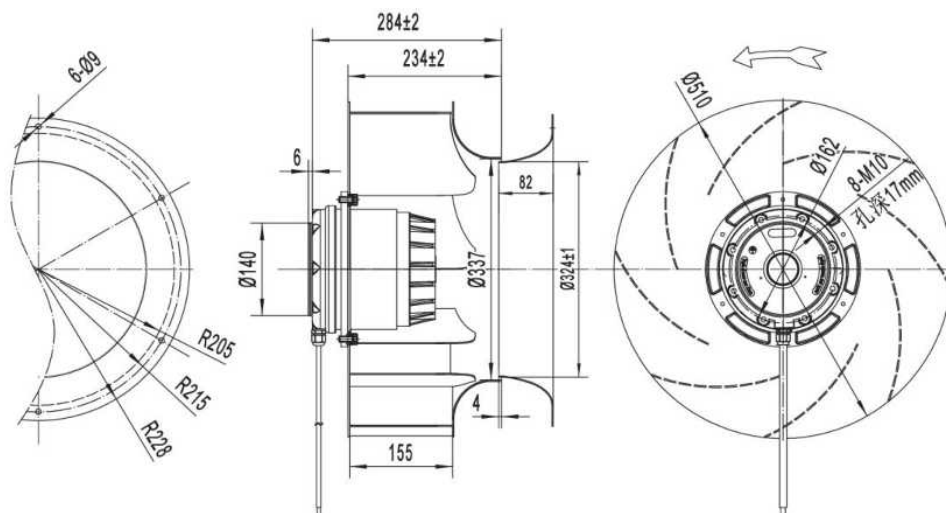


AC Backward Curved Centrifugal Fans 520mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

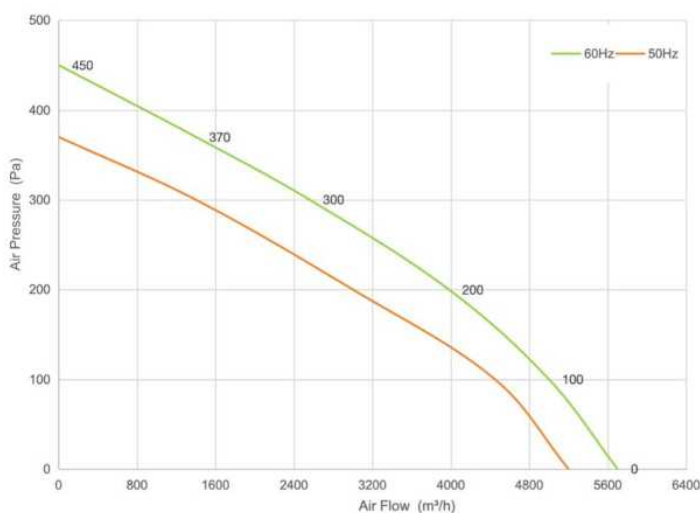

	Pa	m ³ /h	rpm	W
60Hz	100	5100	1096	552
	200	4000	1075	551
	300	2480	1042	551
	400	850	1035	550
50Hz	50	4880	980	455
	100	4410	987	452
	200	3180	968	451
	300	1525	955	450


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A520H254-180-A0	380	60	1050	550	5700	65
		50	950	450	5200	63

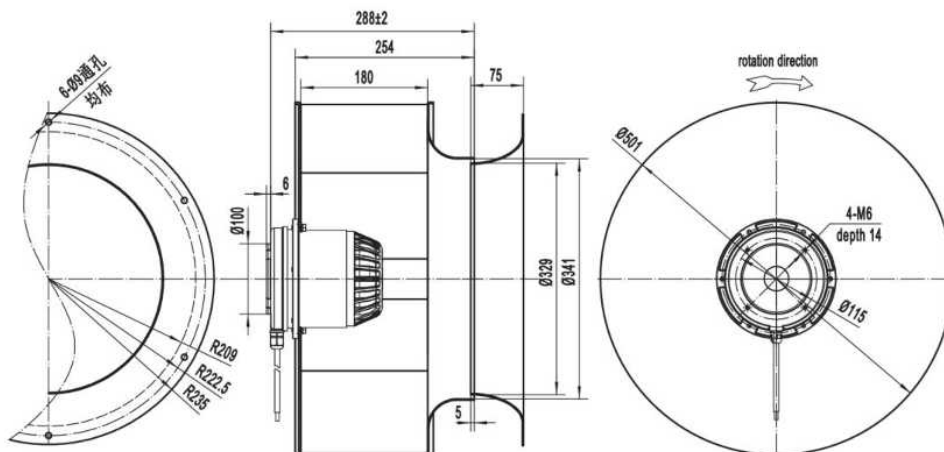




AC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

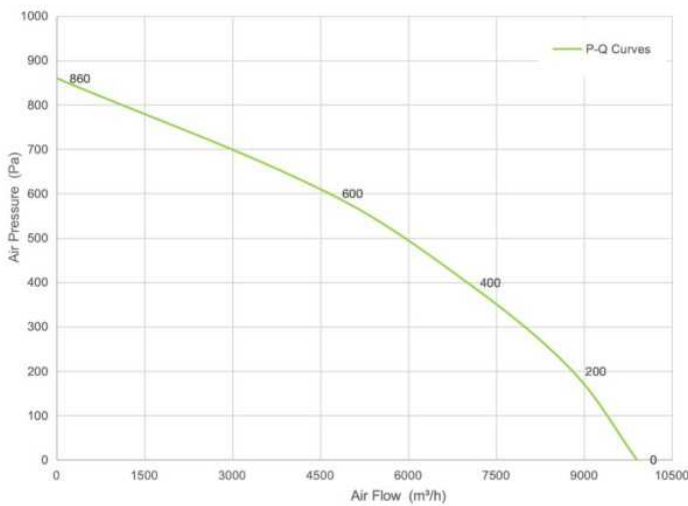

Pa	m ³ /h	rpm	W
300	8900	1402	2018
400	7050	1385	2015
500	6000	1362	2012
600	4520	1352	2009


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m ³ /h]	Noise [dB(A)]
B38A560H198-180-A0	380	50	1350	2000	9900	85

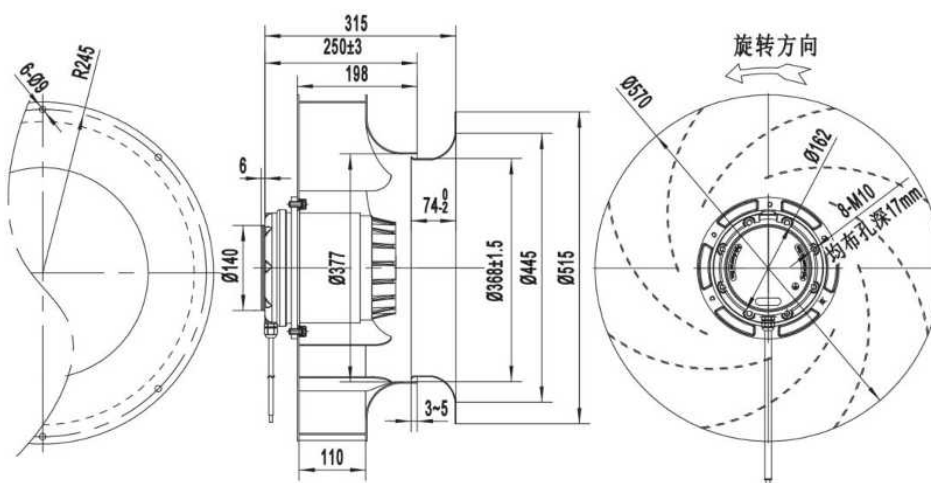




AC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

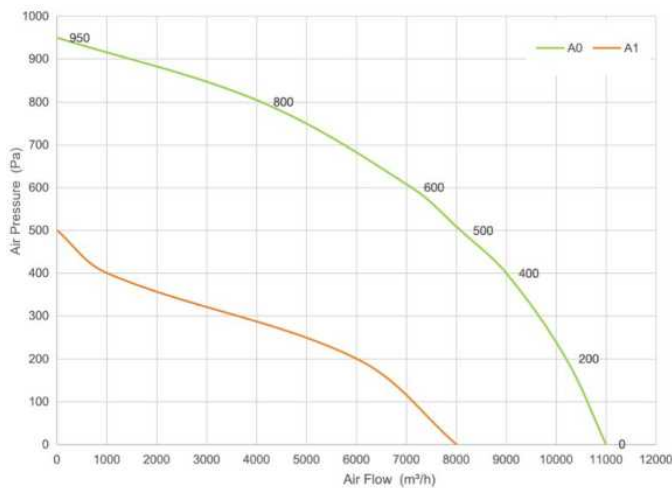

	Pa	m³/h	rpm	W
A0	200	10200	1392	2530
	300	9600	1368	2526
	400	9000	1338	2518
	500	8000	1325	2508
A1	100	7050	940	912
	200	6000	925	909
	300	3500	920	905
	400	1000	910	904


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A560H220-180-A0	380	50	1350	2500	11000	85
B38A560H220-180-A1	380	50	910	900	8000	73

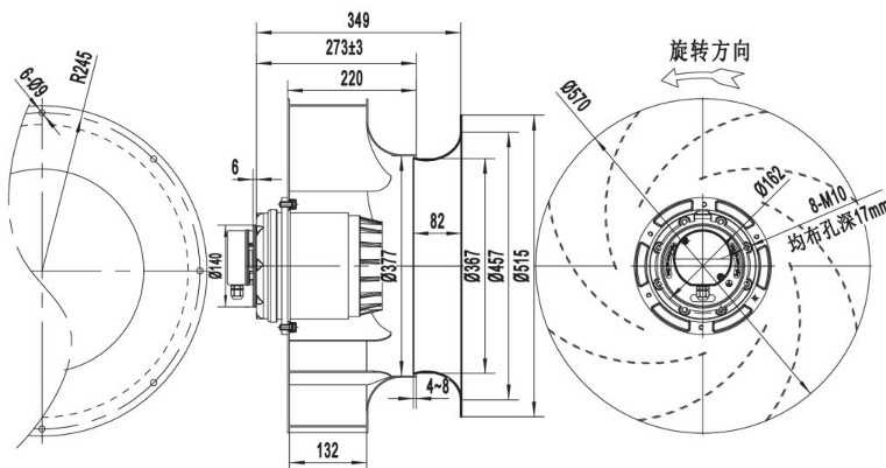




AC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

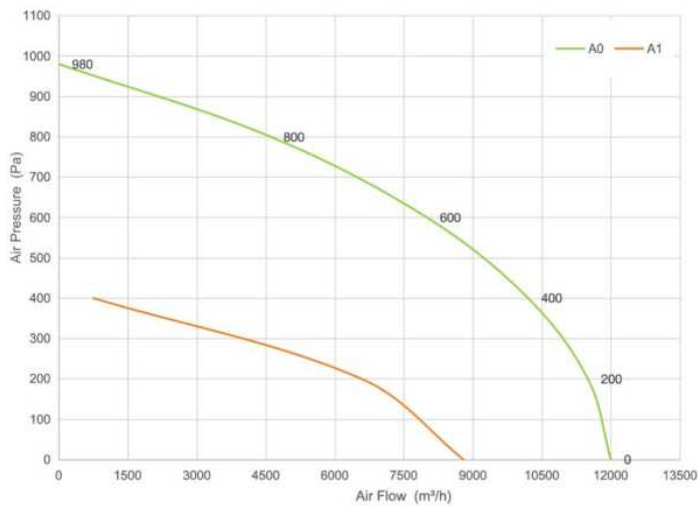

	Pa	m³/h	rpm	W
A0	300	11100	1389	2521
	400	10100	1372	2516
	500	9200	1365	2510
	600	7900	1355	2505
A1	50	8400	968	906
	100	7600	942	901
	200	6450	921	899
	300	3800	909	895


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A560H243-180-A0	380	50	1350	2500	12000	85
B38A560H243-180-A1	380	50	910	900	8800	73

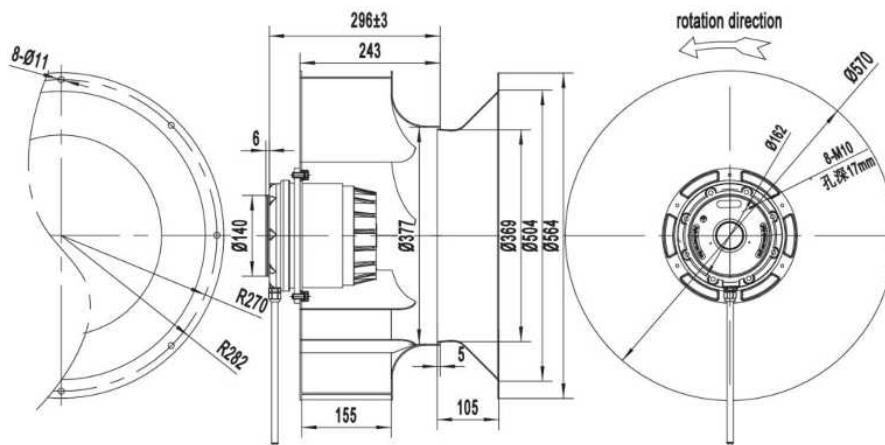





AC Backward Curved Centrifugal Fans 560mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

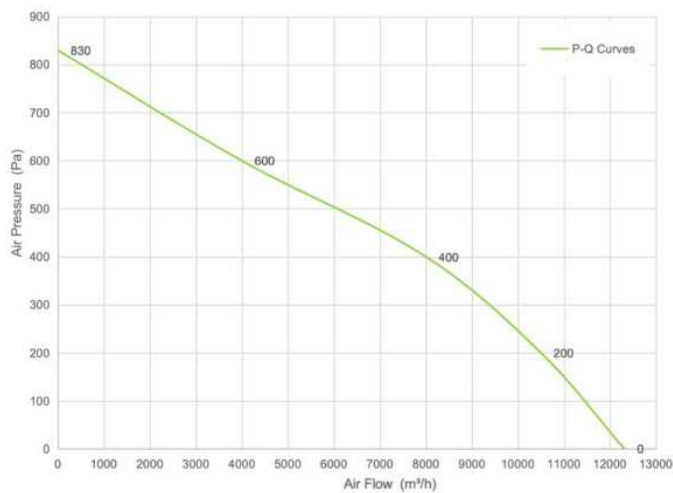

Pa	m³/h	rpm	W
300	9461	1266	2348
400	8187	1259	2368
499	6631	1266	2299
601	4154	1323	1868


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A560H256-180-00	380	50	1310	2368	12315	83

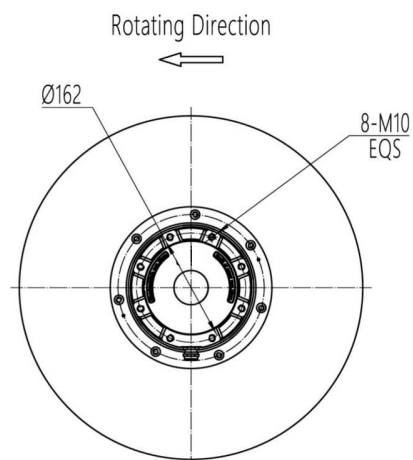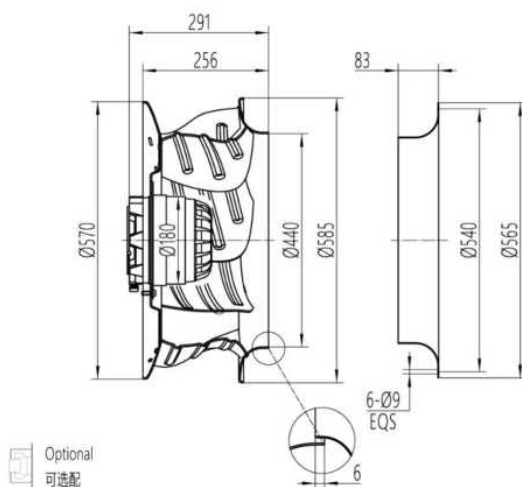




AC Backward Curved Centrifugal Fans 630mm

Impeller Material	Aluminum alloy 5052
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

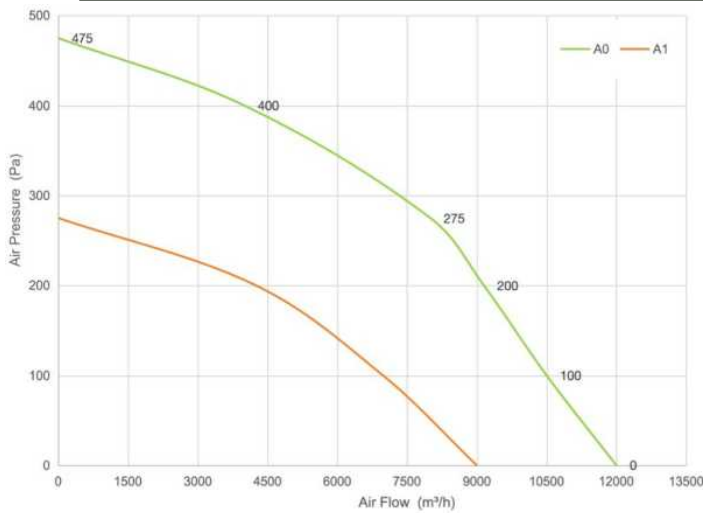

	Pa	m³/h	rpm	W
A0	100	10500	998	1510
	200	10100	972	1505
	300	9100	959	1508
	400	4100	925	1502
A1	50	8500	765	706
	100	7000	751	702
	150	5900	725	703
	200	4400	701	701

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
B38A630H293-180-A0	380	50	900	1500	12000	80
B38A630H293-180-A1	380	50	700	700	9000	72

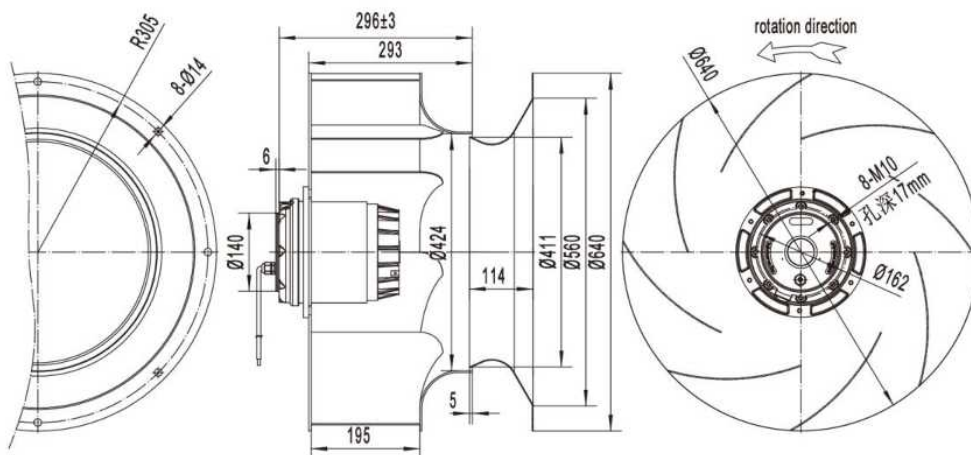




EC Forward Centrifugal Fan






EC Forward Centrifugal Fan 108mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

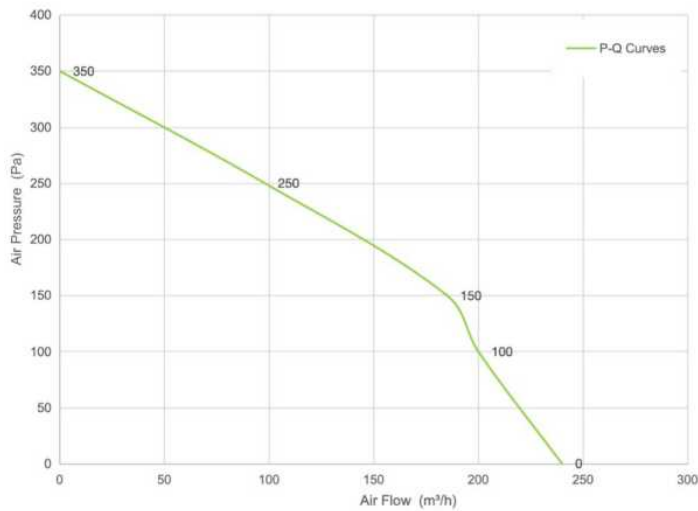

Pa	m³/h	rpm	W
50	220	2852	55
100	199	2812	51
150	185	2786	50
200	147	2756	50


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E108H51-72-B0	230	50/60	2800	50	240	64

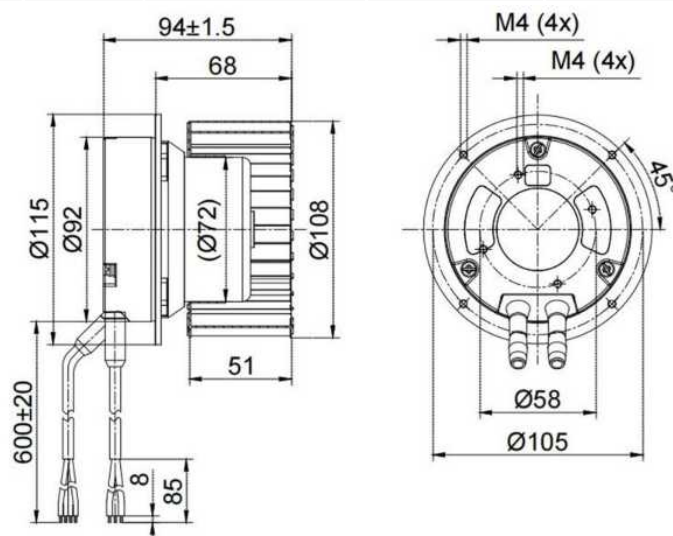




EC Forward Centrifugal Fan 120mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

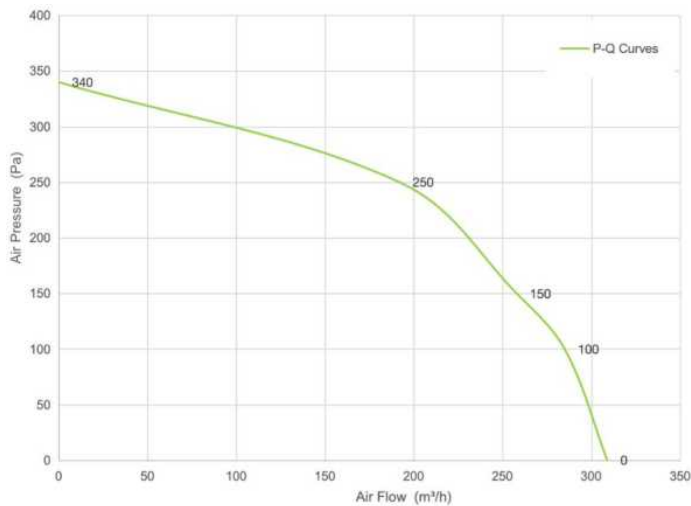

Pa	m³/h	rpm	W
100	285	2612	65
150	258	2586	65
200	238	2565	65
300	100	2512	65


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E120H61-72-B0	230	50/60	2580	65	309	65

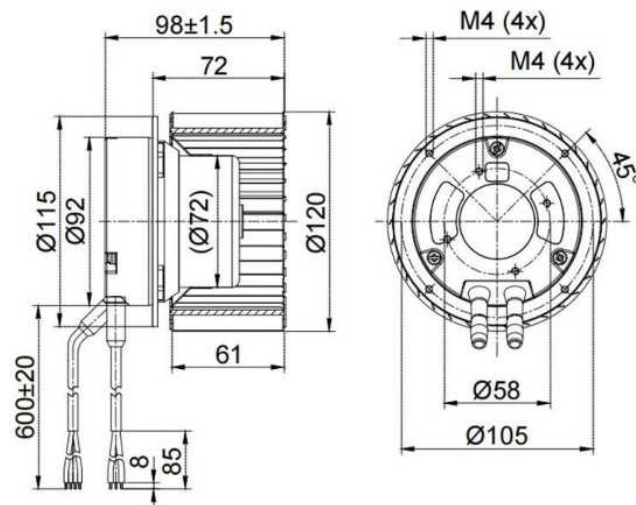




EC Forward Centrifugal Fan 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

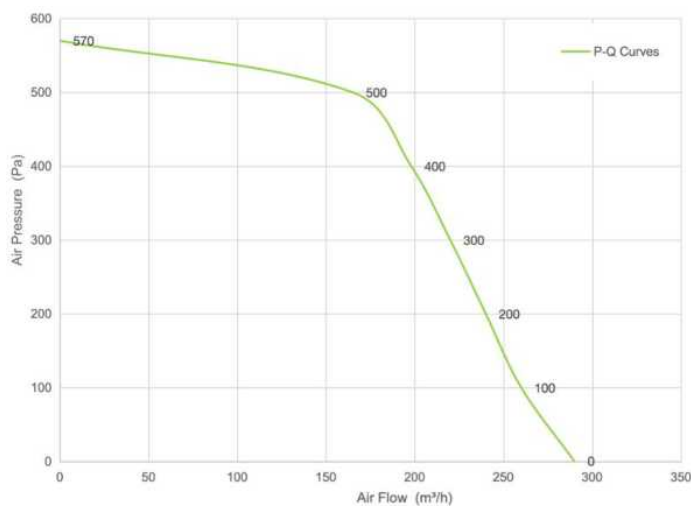

Pa	m³/h	rpm	W
100	265	2695	84
200	240	2653	84
300	228	2632	83
400	198	2612	82


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E133H46-72-B0	230	50/60	2600	82	290	66

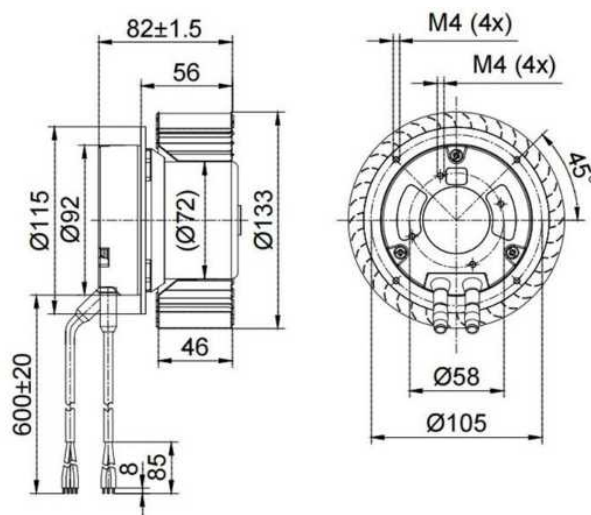




EC Forward Centrifugal Fan 140mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

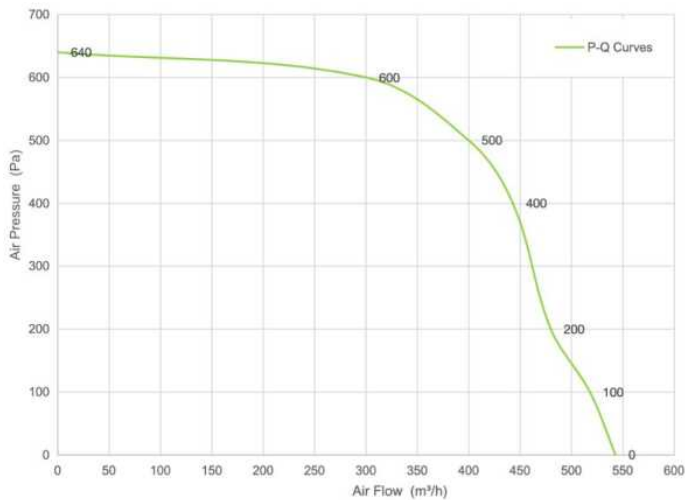

Pa	m³/h	rpm	W
200	480	2686	152
300	460	2662	151
400	443	2612	152
500	399	2554	152


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E140H59-92-B0	230	50/60	2580	150	543	70

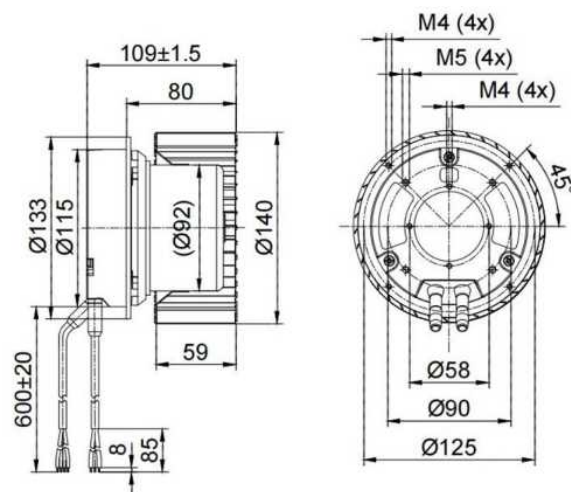




EC Forward Centrifugal Fan 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

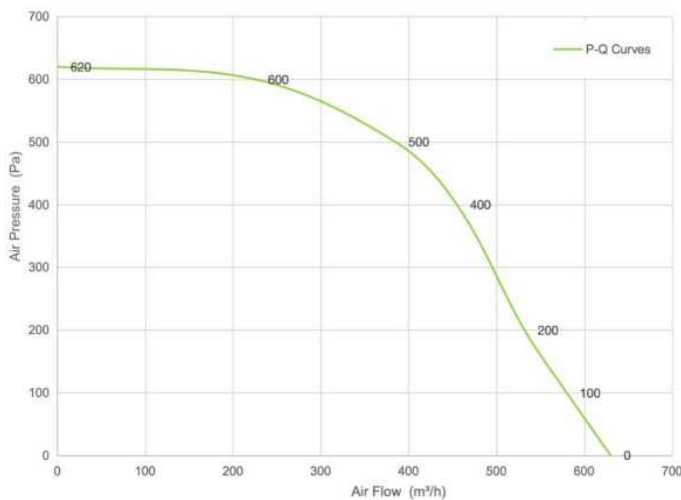

Pa	m³/h	rpm	W
200	524	2102	151
300	500	2086	151
400	450	2052	151
500	394	2034	150


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E160H62-92-B0	230	50/60	2050	150	630	71

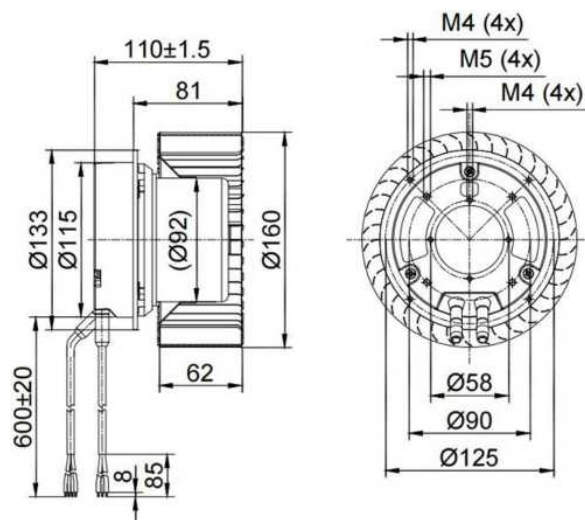




EC Forward Centrifugal Fan 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

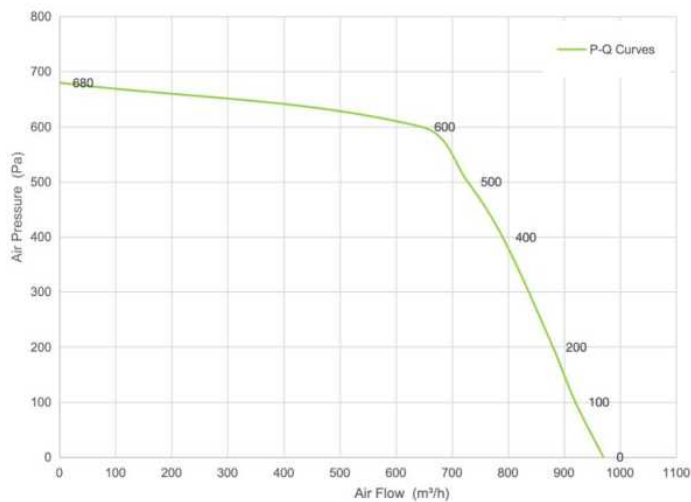

Pa	m³/h	rpm	W
200	870	2105	205
300	825	2068	204
400	797	2025	205
500	720	1998	202


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E180H92-92-B0	230	50/60	2000	200	970	70

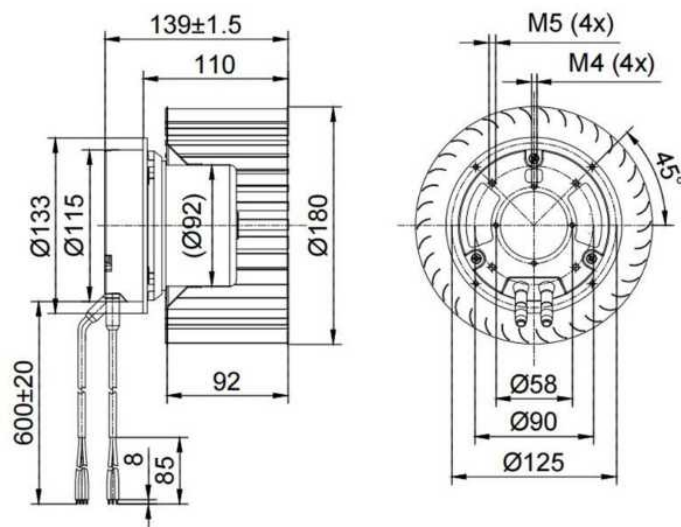




EC Forward Centrifugal Fan 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

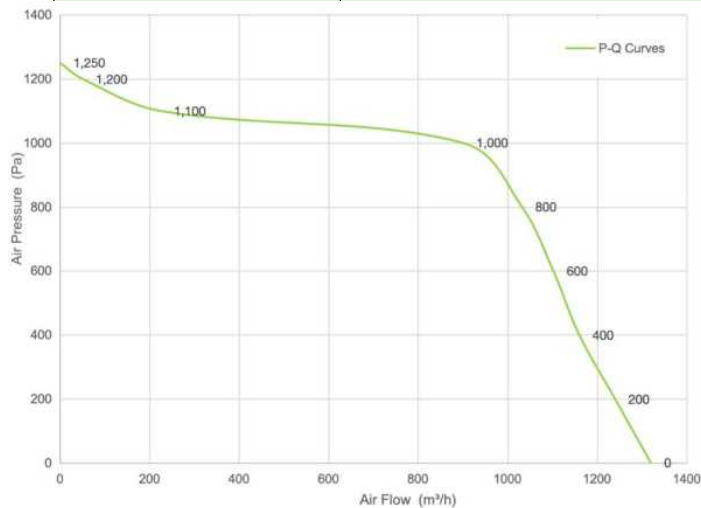

Pa	m³/h	rpm	W
300	1200	2525	498
400	1125	2489	496
600	1100	2452	495
800	1038	2376	494


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A180H92-102-B0	230	50/60	2460	495	1320	76

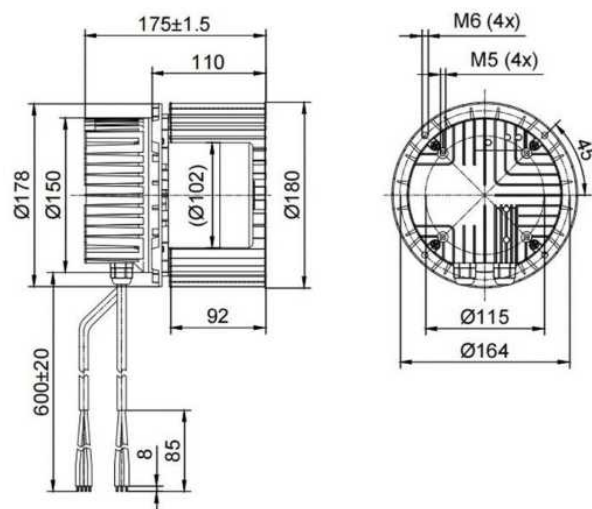




EC Forward Centrifugal Fan 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

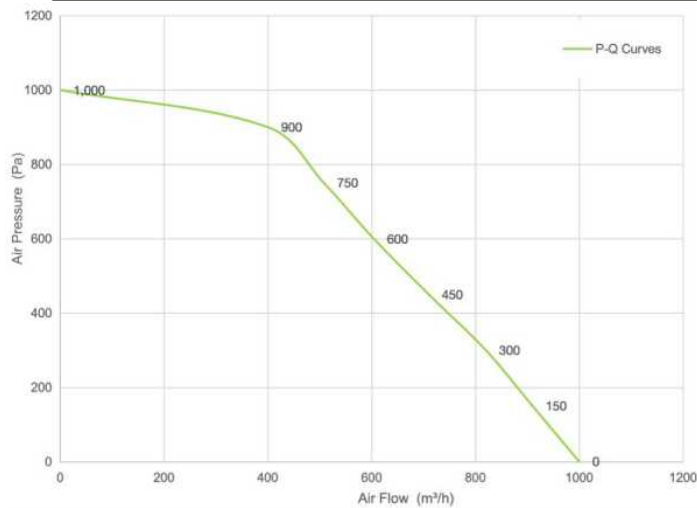

Pa	m³/h	rpm	W
300	820	1685	223
400	725	1652	222
600	600	1628	222
800	482	1602	222


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E200H83-92-B0	230	50/60	1600	220	1000	74

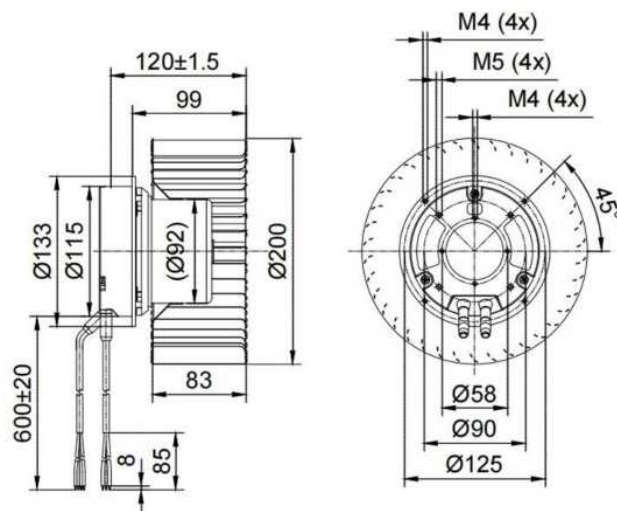




EC Forward Centrifugal Fan 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

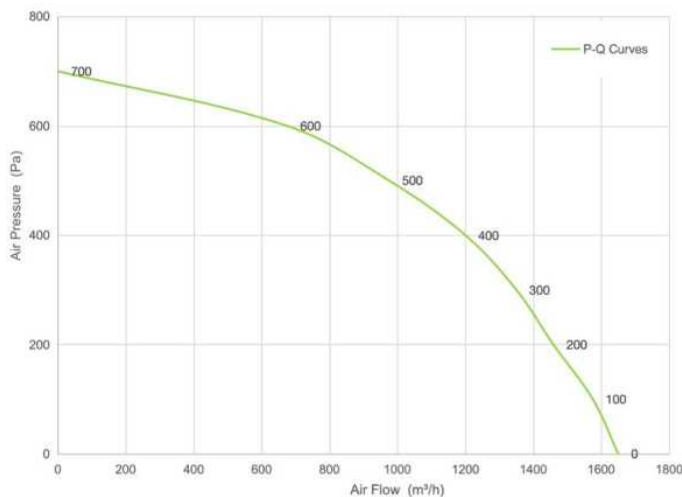

Pa	m³/h	rpm	W
300	1380	1985	505
400	1200	1972	506
500	990	1942	502
600	642	1908	500


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E200H102-102-B0	230	50/60	1900	500	1650	76

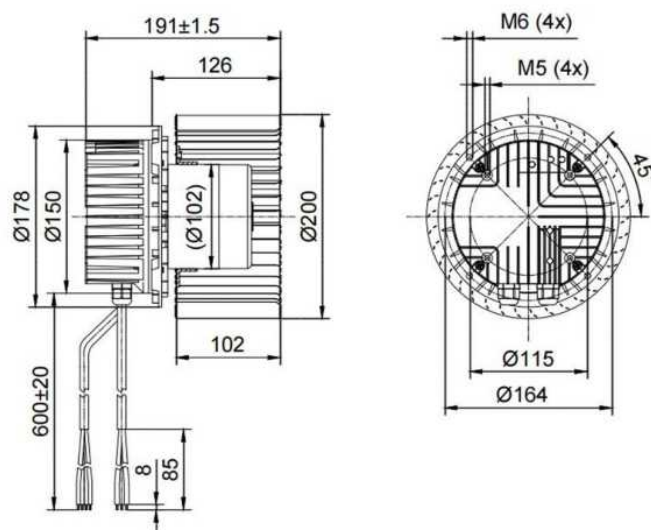




EC Forward Centrifugal Fan 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

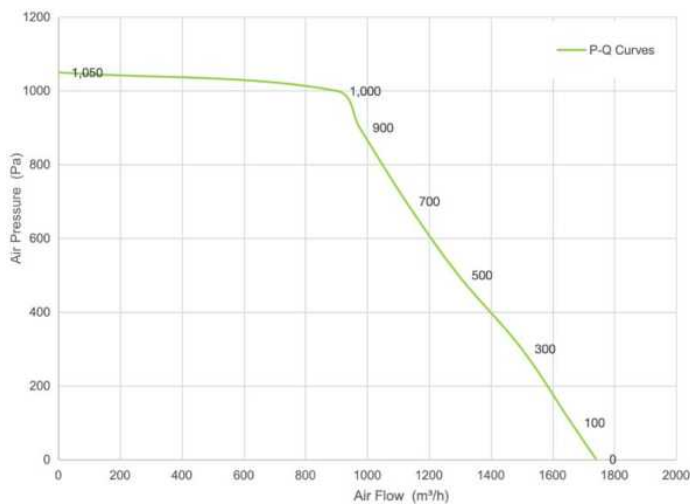

Pa	m³/h	rpm	W
300	1500	1295	365
400	1400	1265	360
600	1200	1202	358
800	1080	1196	356

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23E225H100-102-B0	230	50/60	1250	355	1741	75

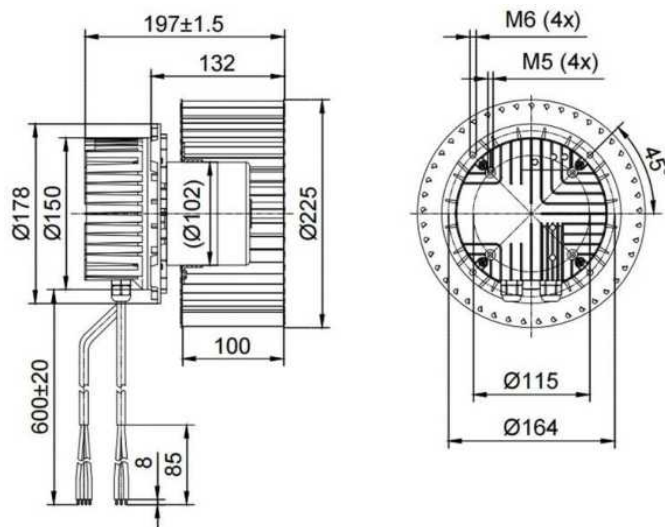




AC Forward Centrifugal Fan






AC Forward Centrifugal Fan 120mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

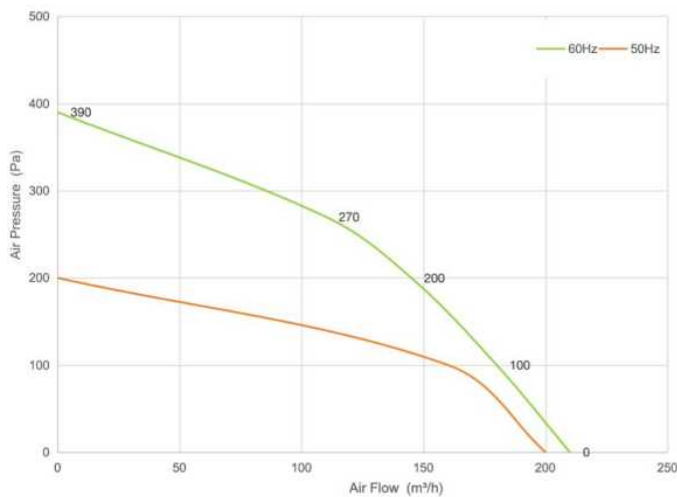

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A120H61-92-A0	230	50	2550	50	200	51
		60	2800	63	210	53

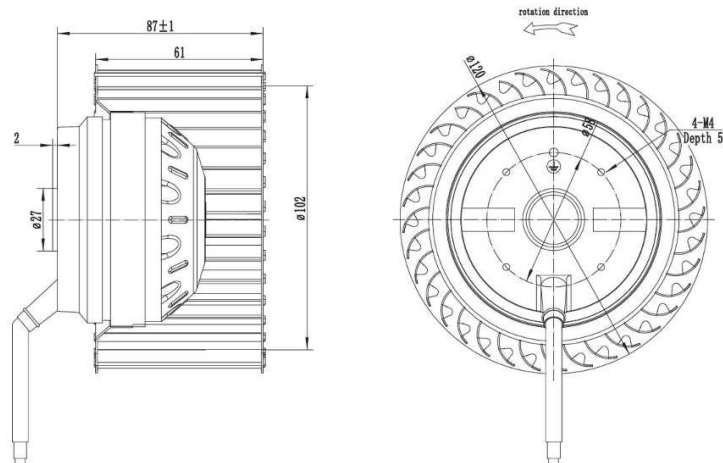

AC Forward Centrifugal Fan 133mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com


Website: www.airtekipower.com



Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

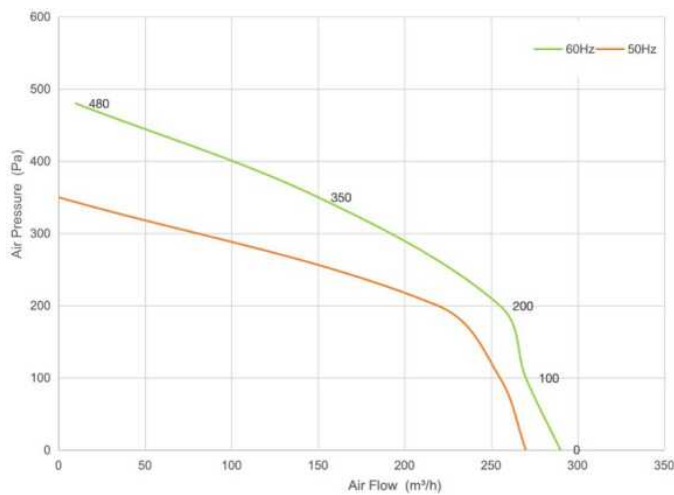


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A133H73-92-A0	230	50	2300	70	290	61
		60	2350	85	270	63

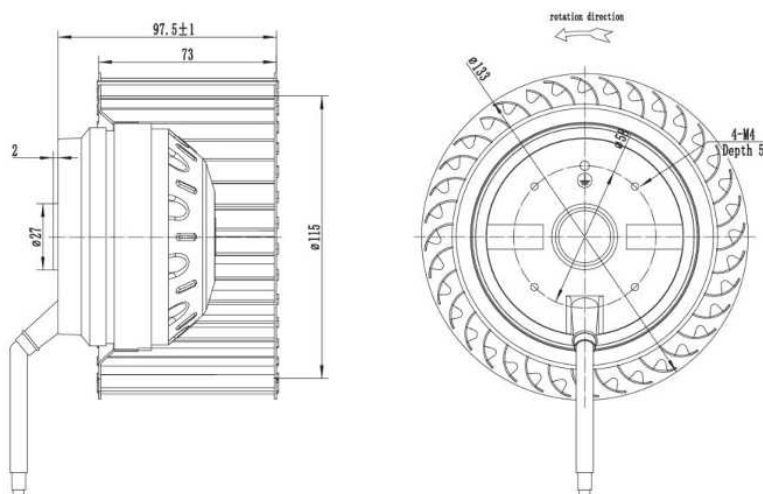




AC Forward Centrifugal Fan 140mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

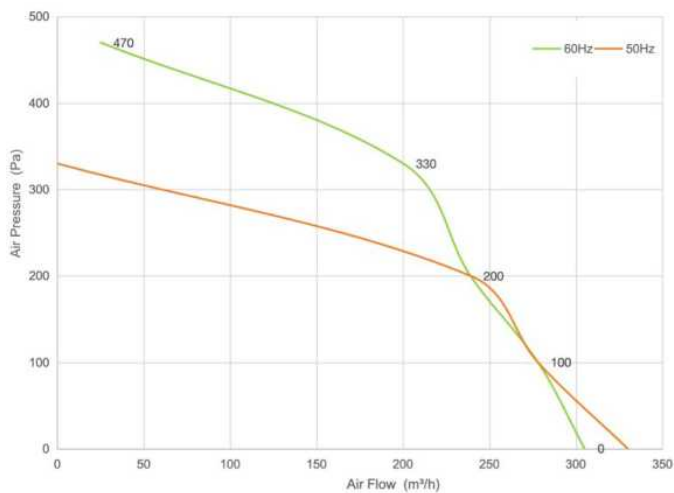


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A140H60-92-A0	230	50	1600	100	330	52
		60	1500	110	305	58

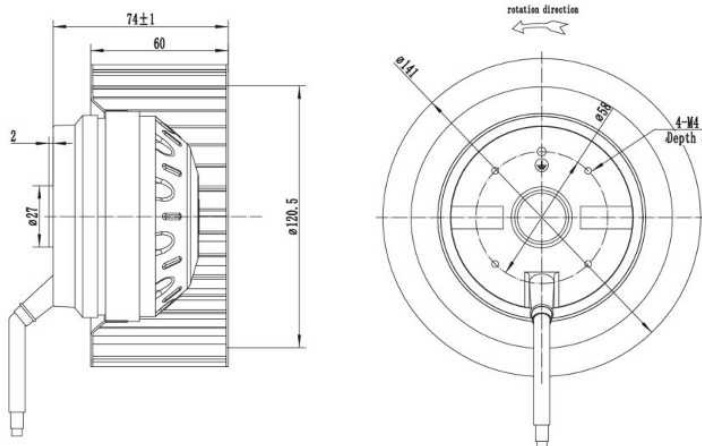





AC Forward Centrifugal Fan 140mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

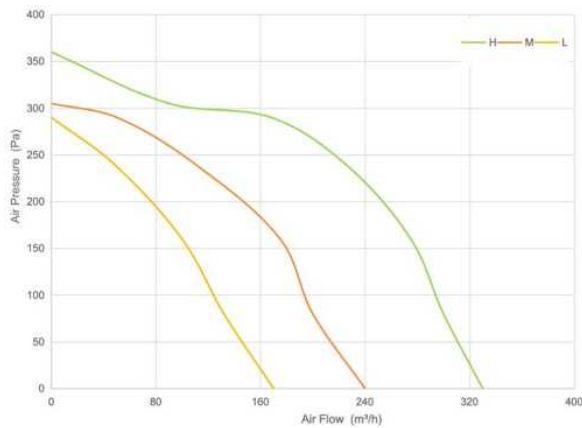


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A140H60-92-A1 3 Speeds	230	50	1600	100	330	52
			1200	65	240	40
			900	40	170	32

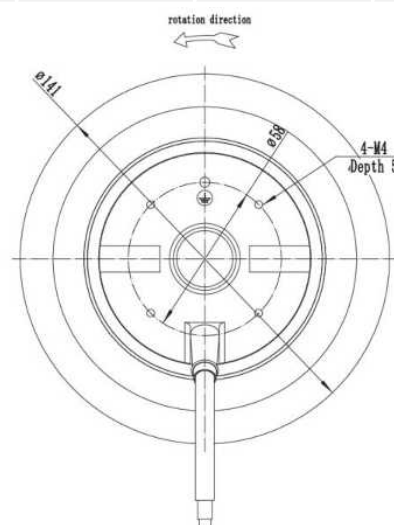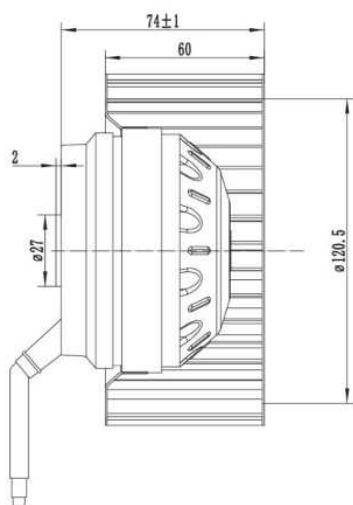




AC Forward Centrifugal Fan 150mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

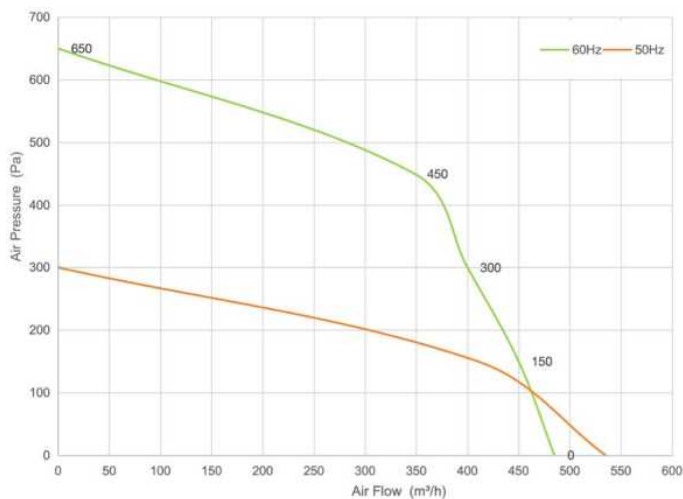


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A150H70-92-A0	230	50	2600	135	535	67
		60	2850	180	485	71

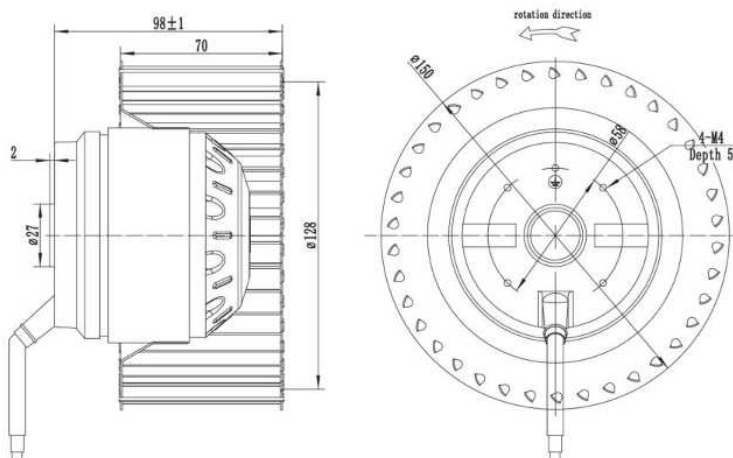




AC Forward Centrifugal Fan 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

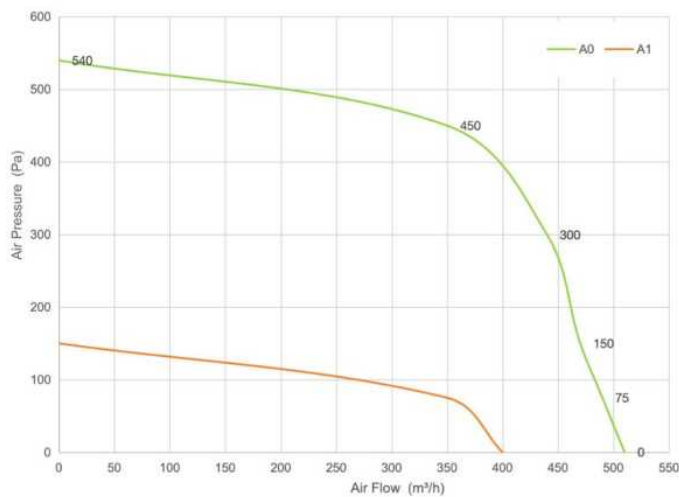


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A160H62-92-A0	230	50	1700	230	510	63
F23A160H62-92-A1		50	1500	68	400	68

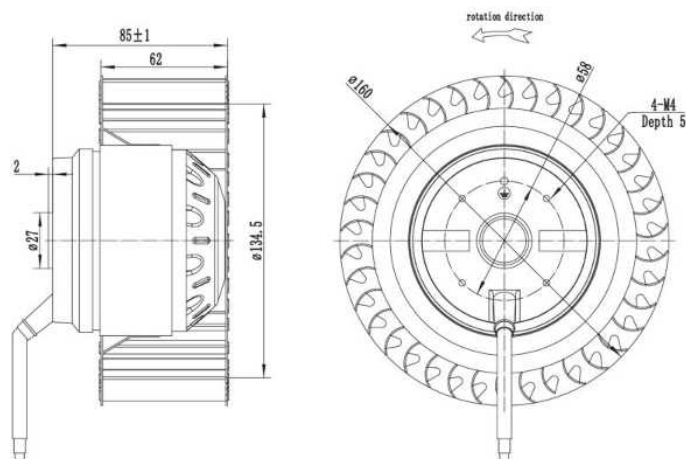




AC Forward Centrifugal Fan 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

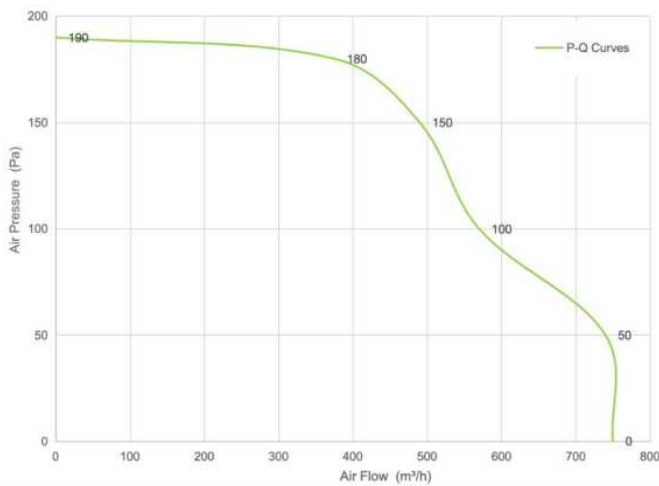


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A180H92-102-A0	230	50	1450	85	750	69

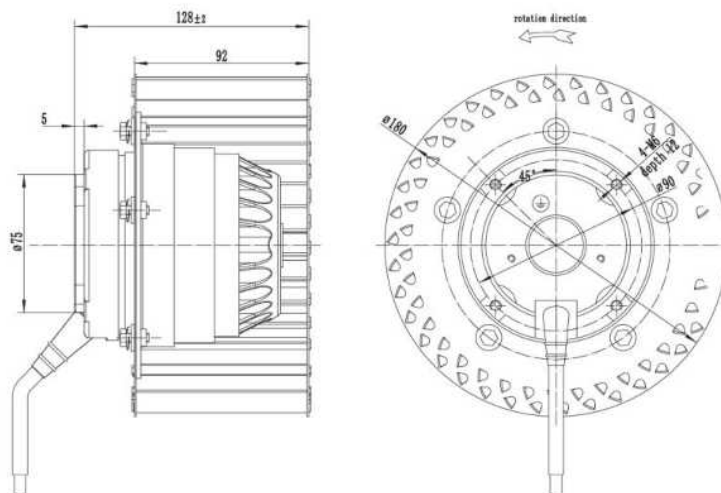





AC Forward Centrifugal Fan 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

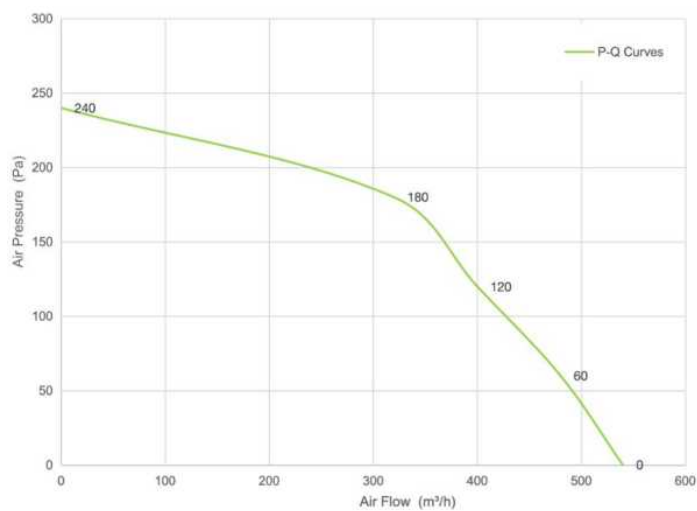


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A200H52-92-A0	230	50	1300	120	540	58

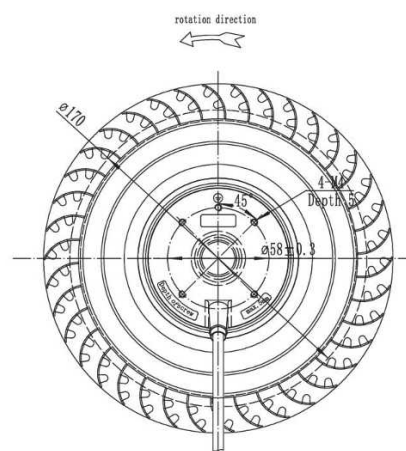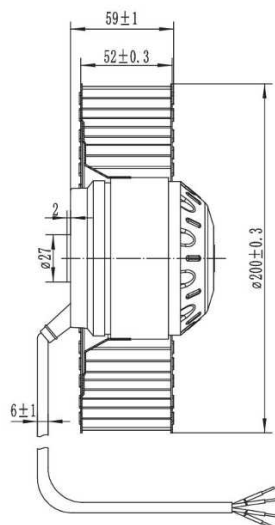





AC Forward Centrifugal Fan 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

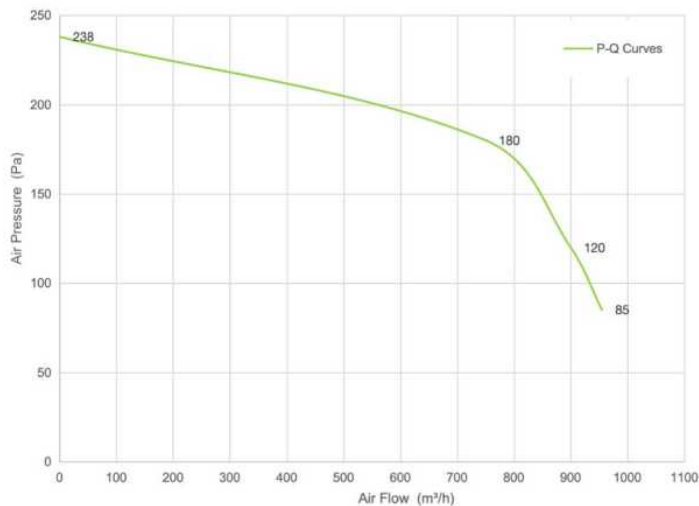

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A200H102-102-A0	230	50	1300	200	1000	66
F38A200H102-102-A0	380	50	1300	200	1000	66

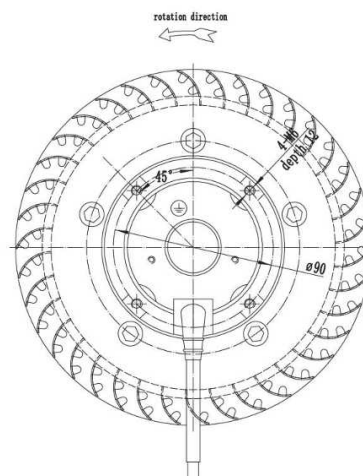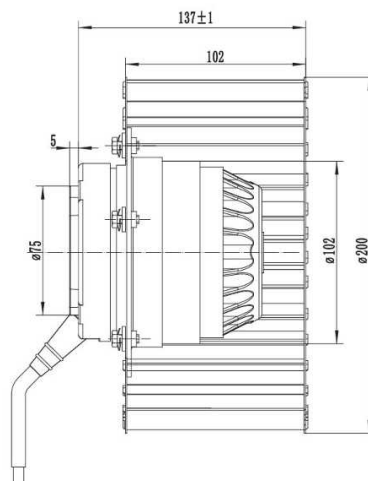

AC Forward Centrifugal Fan 225mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com



Website: www.airtekipower.com



Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

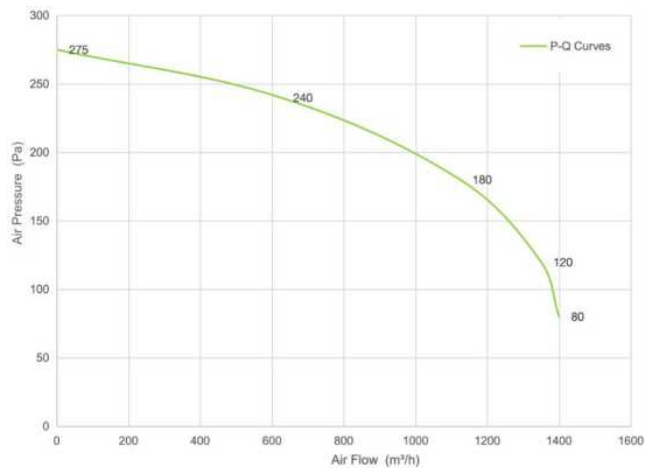


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A225H92-137-A0	230	50	1320	400	1400	73
F38A225H92-137-A0	380	50	1320	400	1400	73

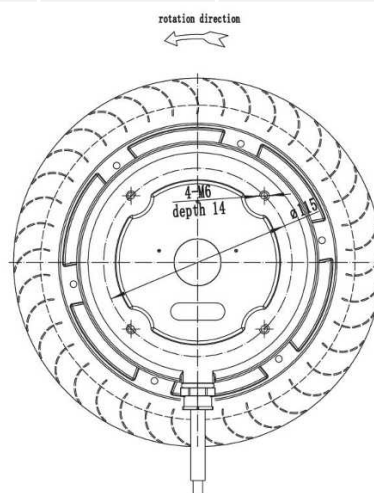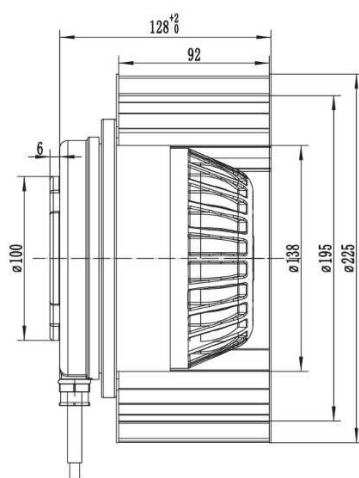





AC Forward Centrifugal Fan 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

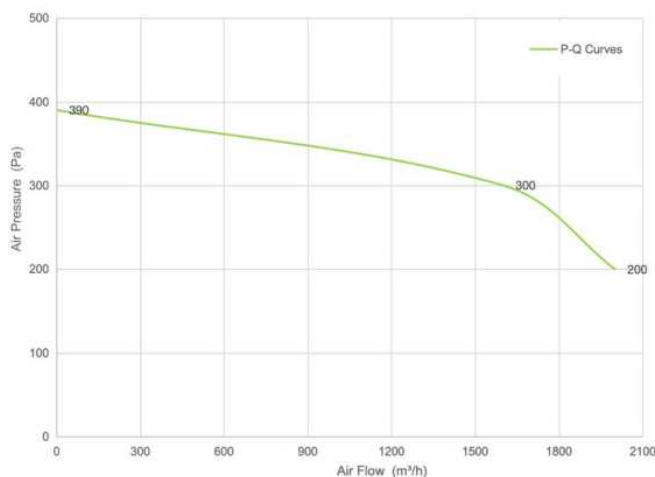

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A250H102-137-A0	230	50	1300	630	2400	74
F38A250H102-137-A0	380	50	1300	630	2400	74

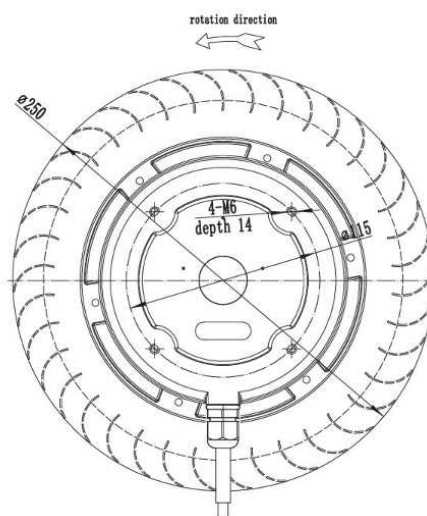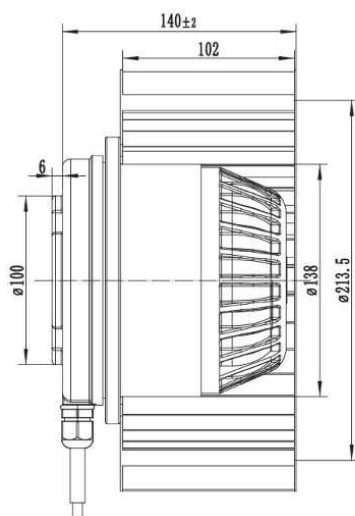

AC Forward Centrifugal Fan 250mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpowers.com



Website: www.airtekpowers.com



Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

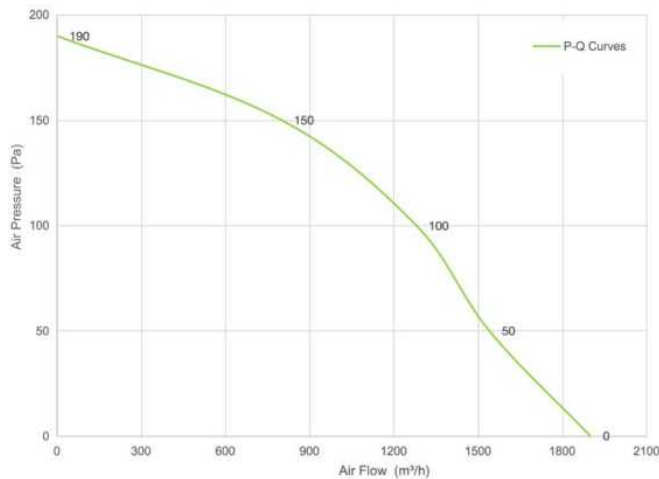

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A250H102-137-A1	230	50	950	200	1900	67
F38A250H102-137-A1	380	50	950	200	1900	67

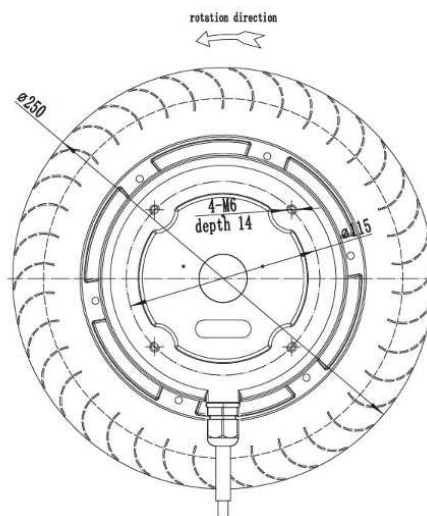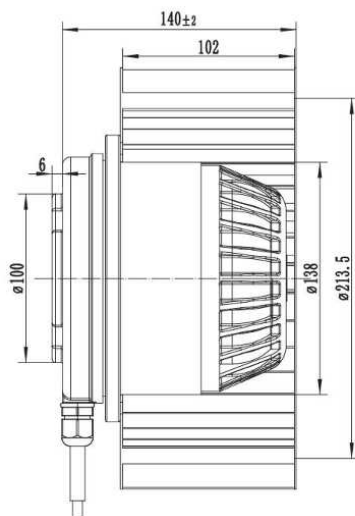

AC Forward Centrifugal Fan 250mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com



Website: www.airtekipower.com



Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

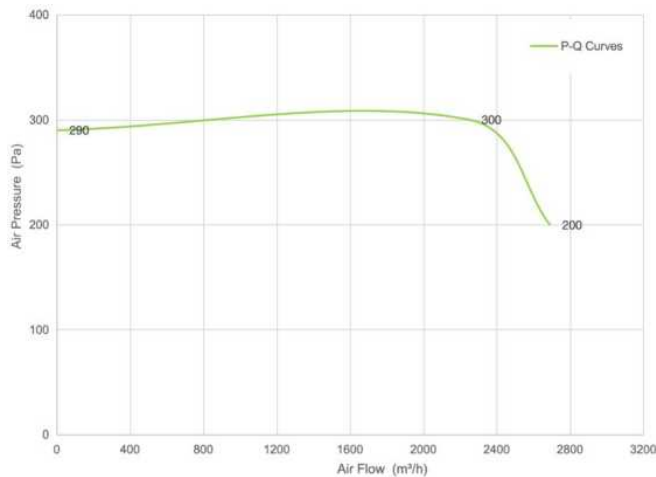


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F38A250H102-137-A2	380	50	1350	850	3300	80

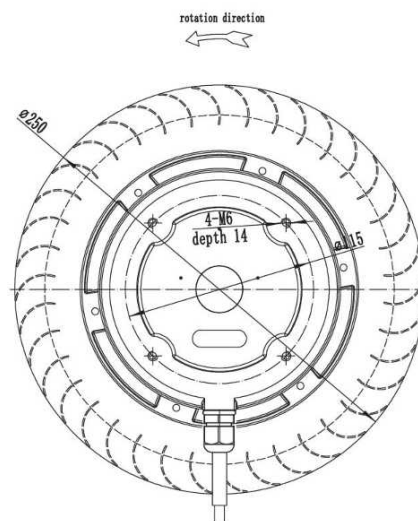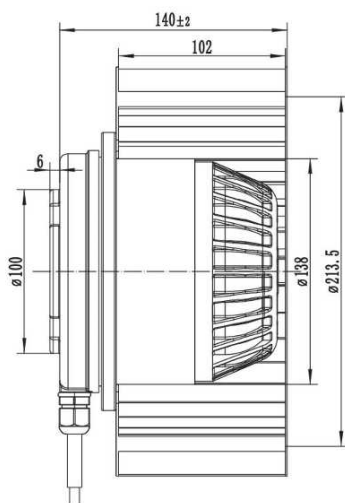





AC Forward Centrifugal Fan 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

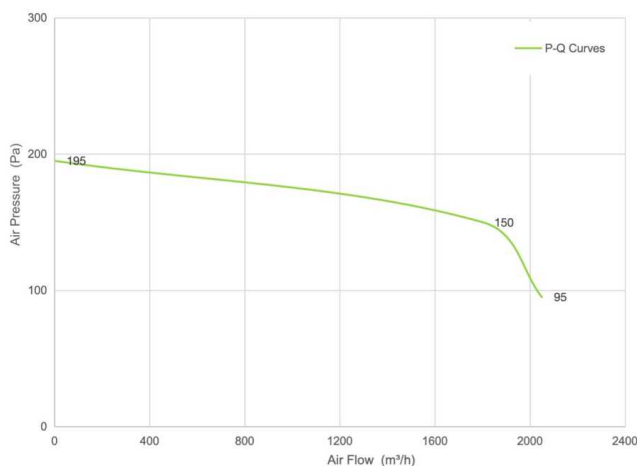


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F23A280H114-137-A0	230	50	750	550	2400	66
F38A280H114-137-A0	380	50	750	550	2400	66

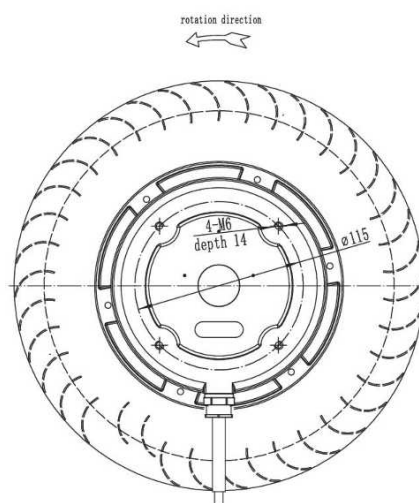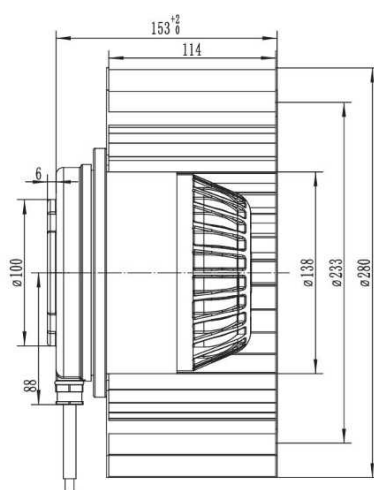





AC Forward Centrifugal Fan 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

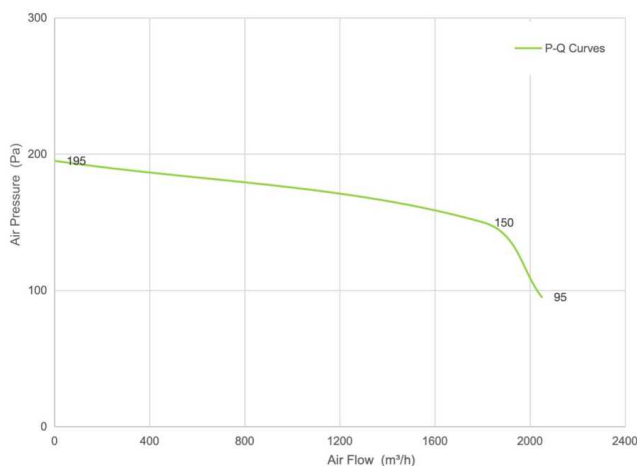

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
F38A280H114-137-A1	380	50	1400	1400	4100	82

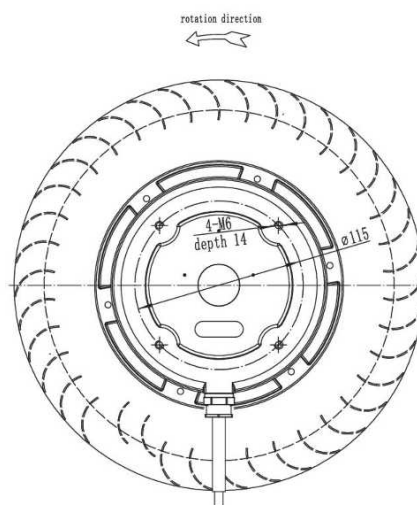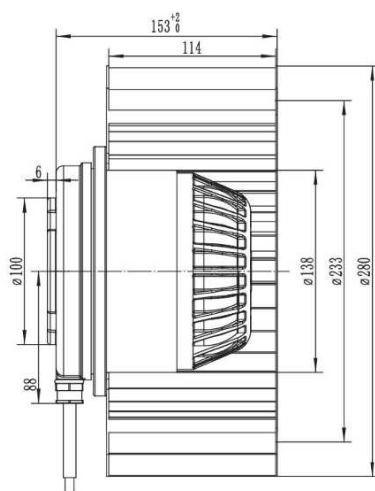




EC Single Inlet Blower







EC Single Inlet Blowers 120mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

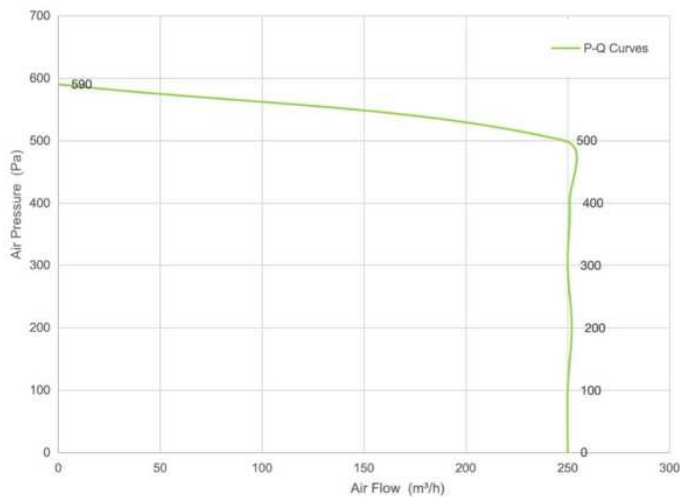

Pa	m³/h	rpm	W
500	210	2100	43
400	220	2010	42
300	230	1950	40
200	240	1920	35

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E120H115-72-A0	230	50/60	1850	35	250	44

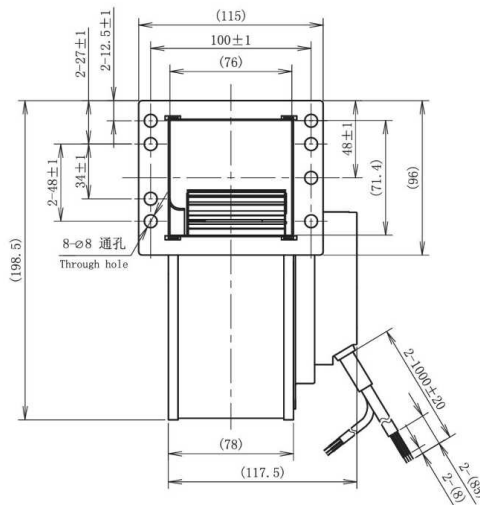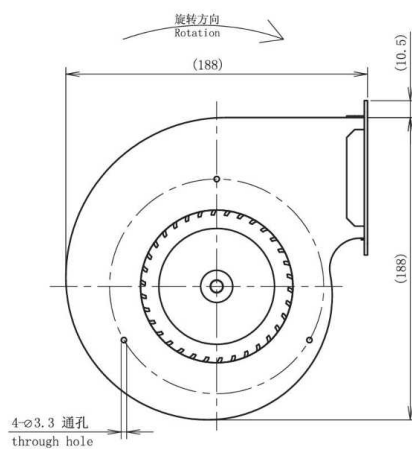

EC Single Inlet Blowers 120mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpower.com

Website: www.airtekpower.com





Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

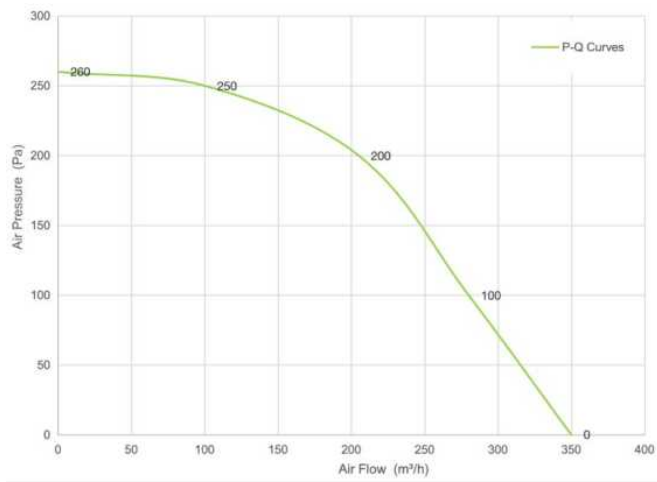

Pa	m³/h	rpm	W
200	200	2480	70
150	230	2520	72
100	280	2400	74
50	310	2410	72

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E120H115-72-A1	230	50/60	2400	70	350	66

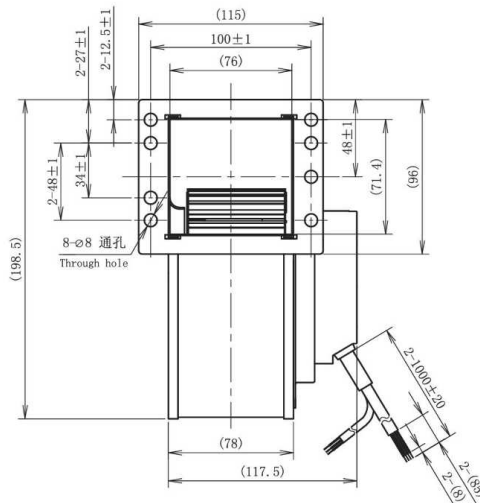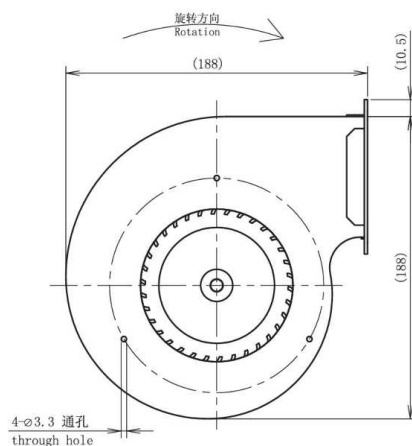

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




EC Single Inlet Blowers 133mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

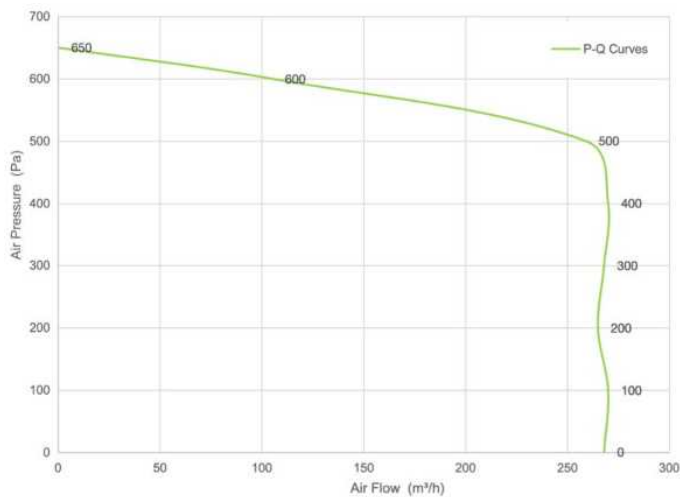

Pa	m³/h	rpm	W
500	220	2120	45
400	230	1950	45
300	240	1932	45
200	250	1820	45

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E133H116-72-A0	230	50/60	1700	45	265	65

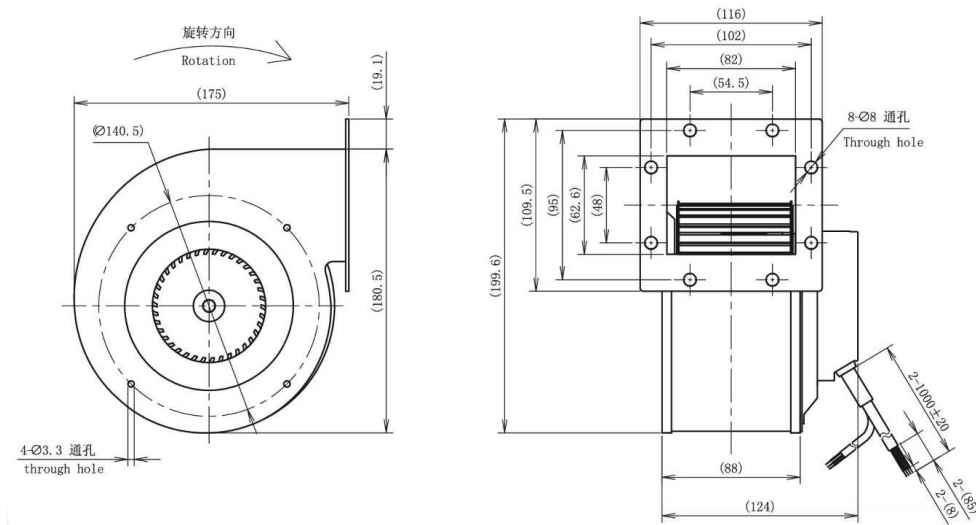

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




EC Single Inlet Blowers 133mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

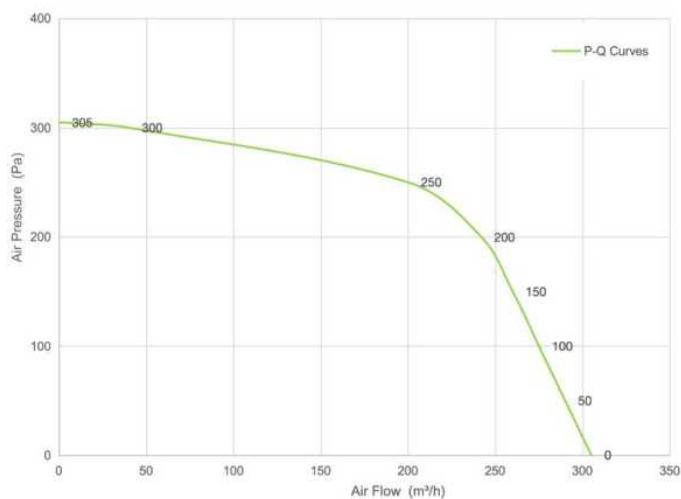

Pa	m³/h	rpm	W
250	170	2130	65
200	240	1958	66
150	260	1982	65
100	275	2020	64

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E133H116-72-A1	230	50/60	2100	65	305	71

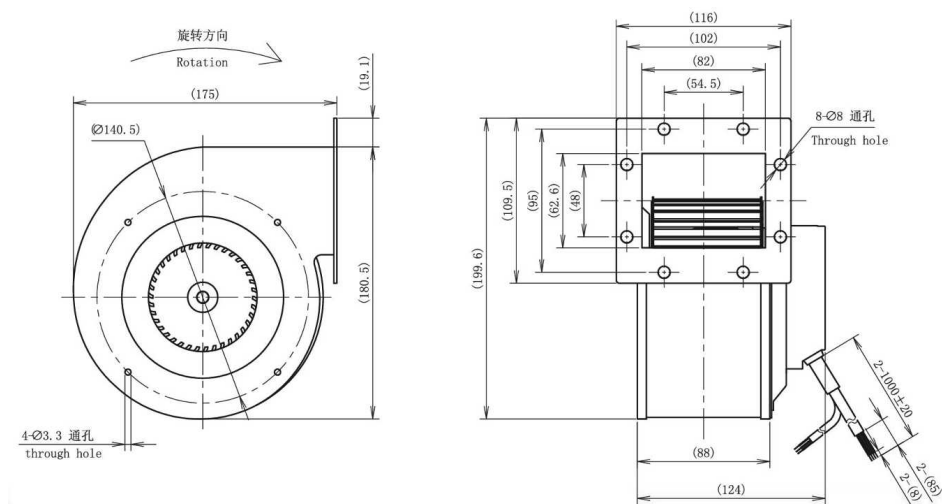

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





EC Single Inlet Blowers 140mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

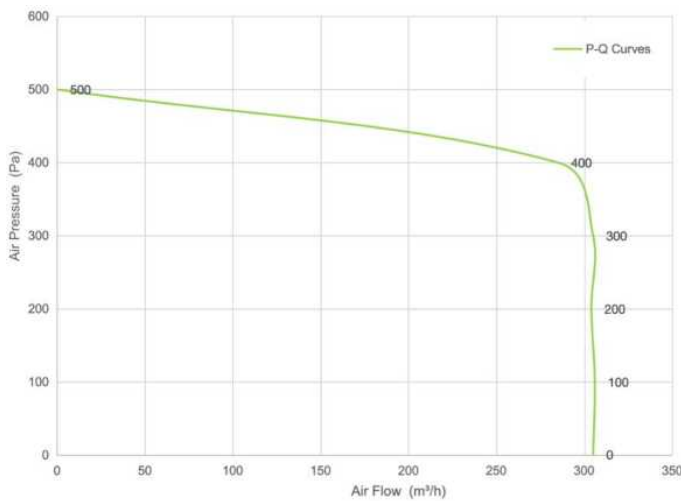

Pa	m³/h	rpm	W
400	240	1130	34
300	260	1258	32
200	280	1212	30
100	295	1320	33

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E140H135-72-A0	230	50/60	1250	30	305	63

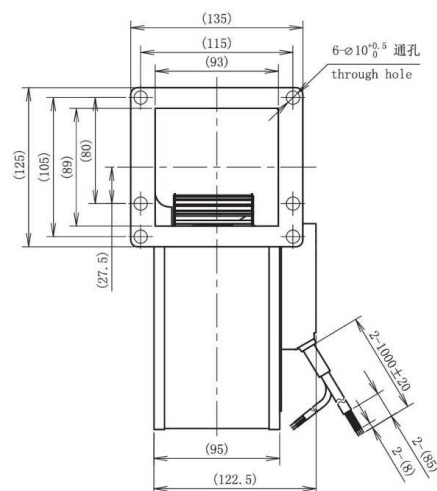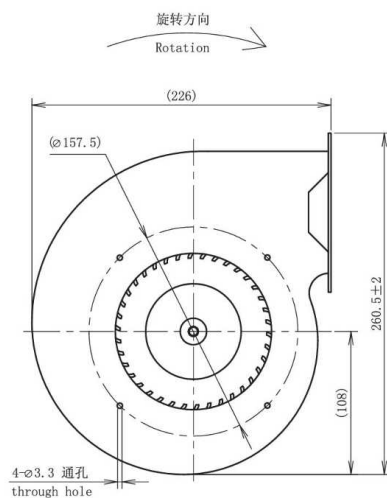

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





EC Single Inlet Blowers 140mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

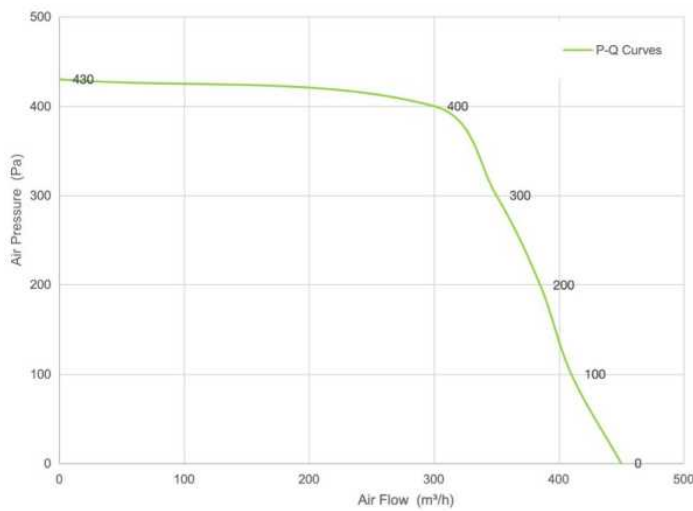

Pa	m³/h	rpm	W
400	305	1730	80
300	350	1828	78
200	370	1892	80
100	420	1780	81

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E140H135-72-A1	230	50/60	1800	80	450	59

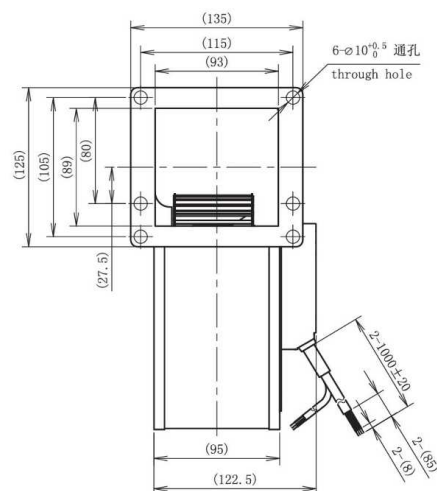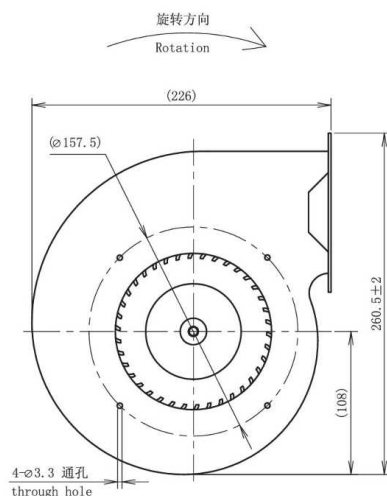

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




EC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

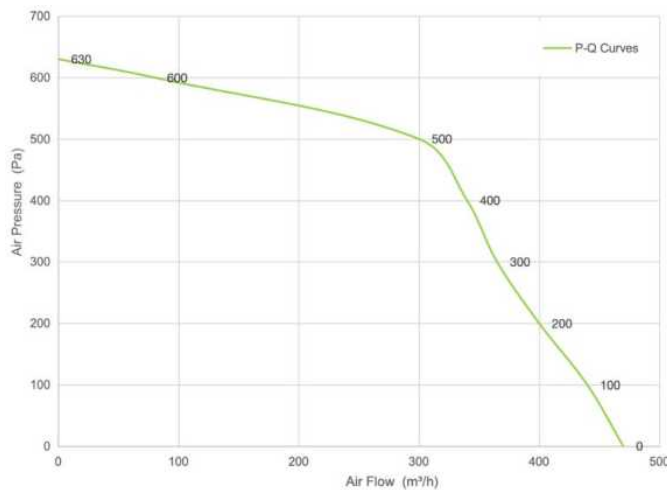

Pa	m³/h	rpm	W
100	442	1680	82
200	400	1658	82
300	371	1602	80
400	445	1585	80

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E160H135-72-A0	230	50	1500	80	470	52

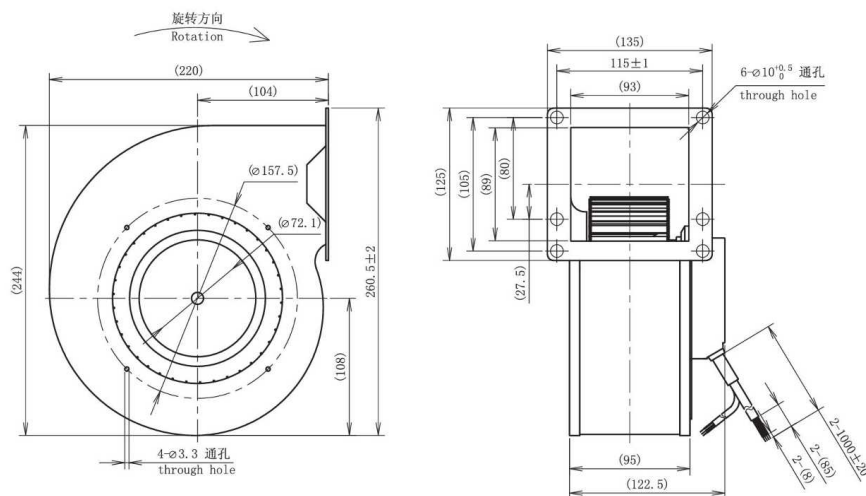

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




EC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

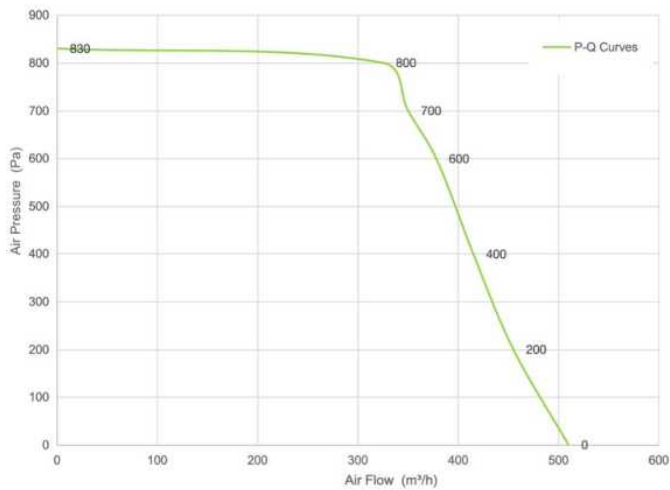

Pa	m³/h	rpm	W
200	448	1986	122
300	428	1968	122
400	411	1926	121
500	400	1900	121

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E160H135-72-A1	230	50	1900	120	510	65

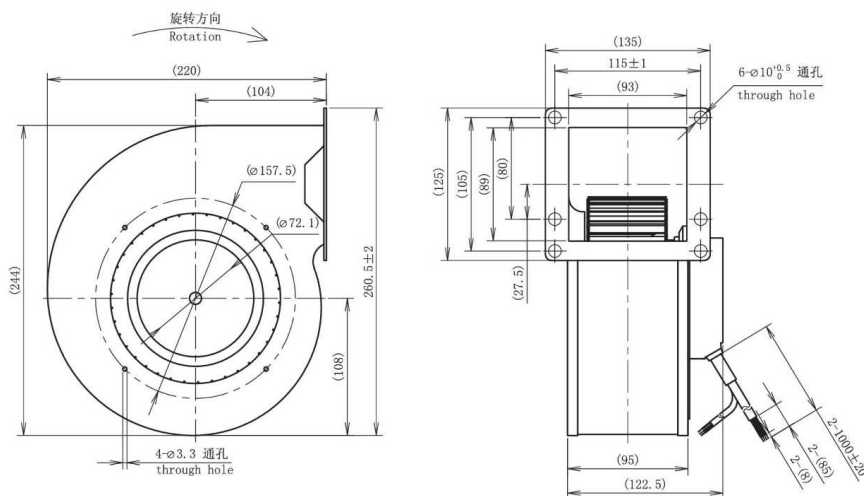

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




EC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

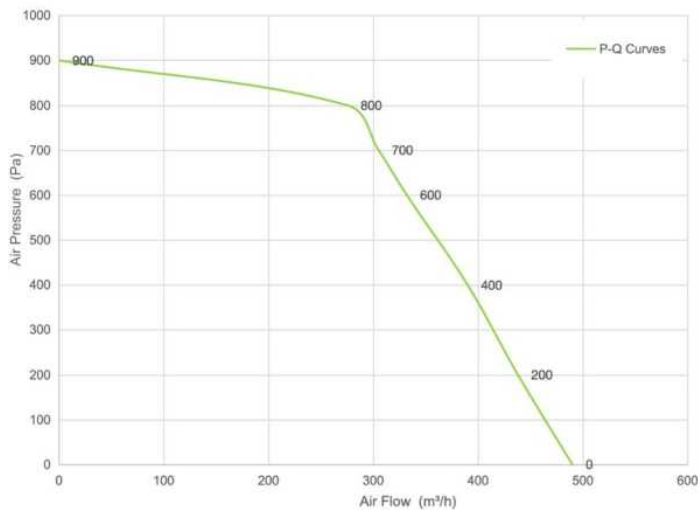

Pa	m³/h	rpm	W
300	408	1792	102
400	390	1769	102
500	361	1749	101
600	332	1739	100

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E160H135-72-A2	230	50	1750	100	490	64

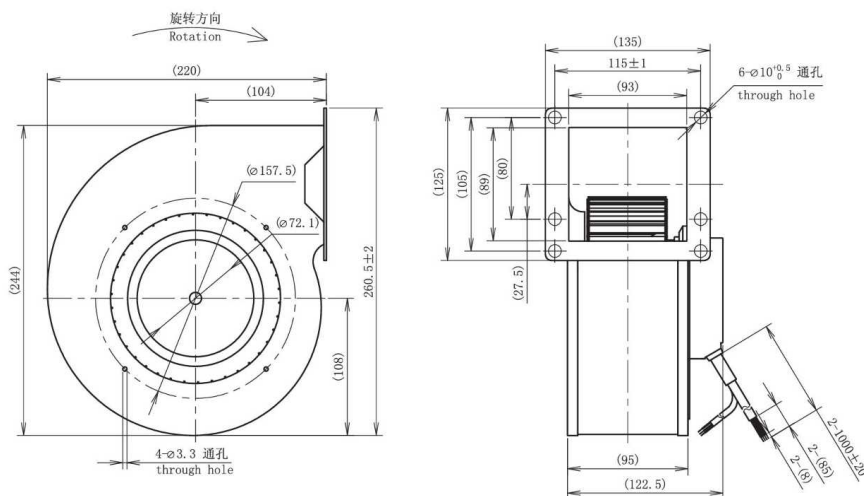

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




EC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

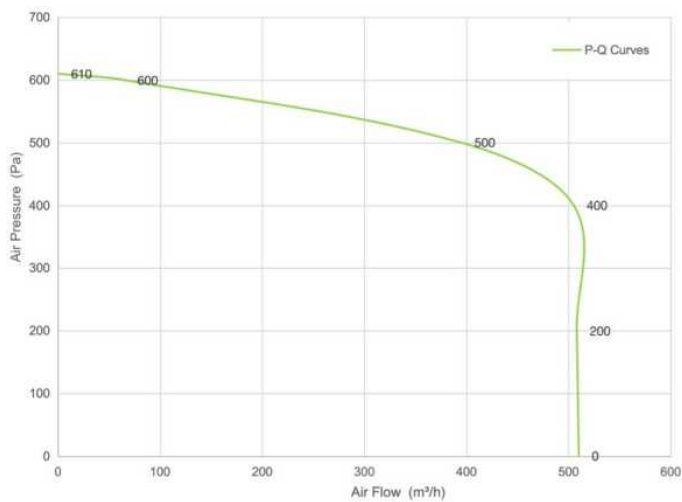

Pa	m³/h	rpm	W
200	509	1925	111
300	515	1906	108
400	502	1895	106
500	400	1885	108

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E160H135-72-A3	230	50	1900	110	510	66

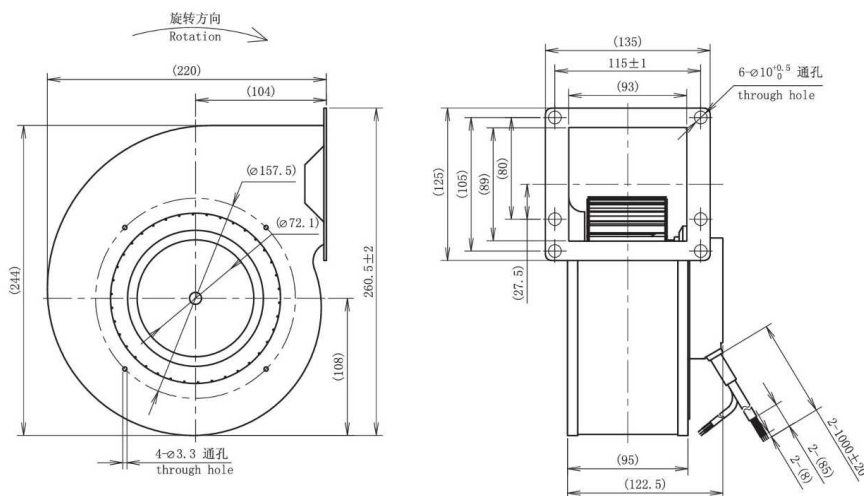

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




EC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

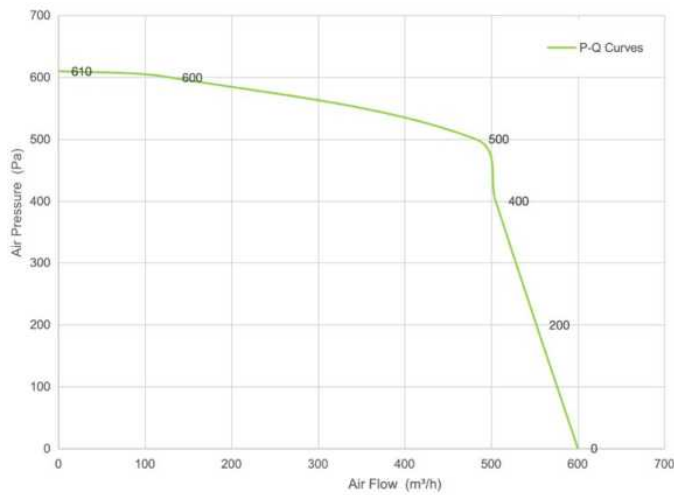

Pa	m³/h	rpm	W
200	545	2198	157
300	518	2168	158
400	505	2156	155
500	495	2125	155

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E160H135-72-A4	230	50	2150	150	600	67

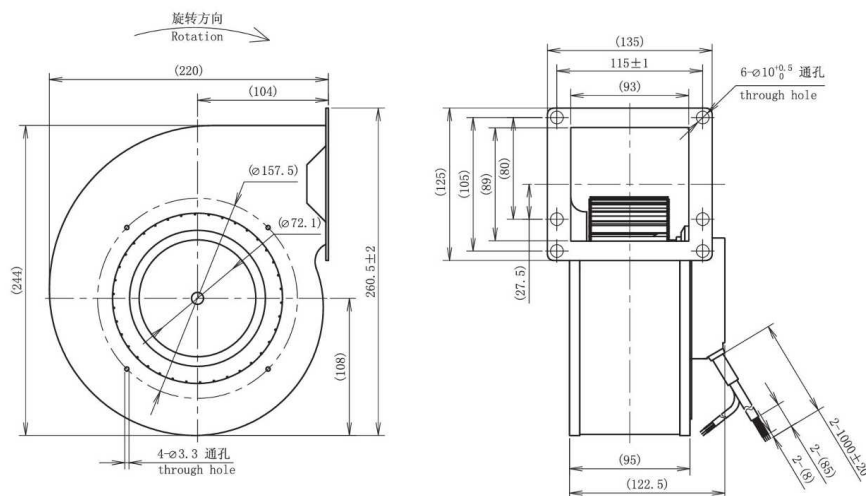

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





EC Single Inlet Blowers 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

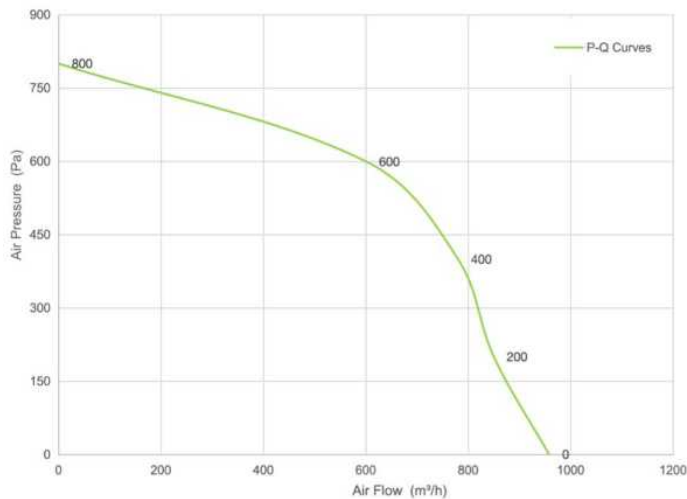

Pa	m³/h	rpm	W
350	797	2004	233
400	776	2075	240
500	773	2223	254
600	676	2380	270

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E180H170-72-00	230	50	1440	177	958	64

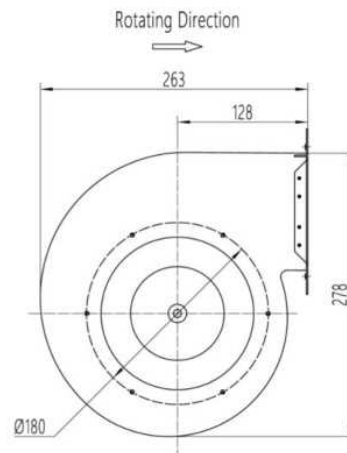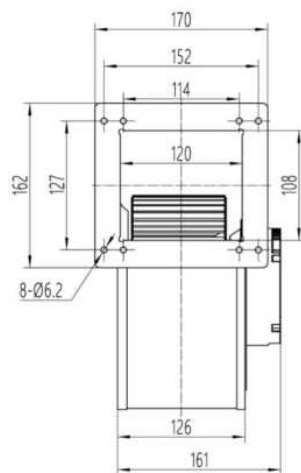

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China


Email: sales@airtekpower.com

Website: www.airtekpower.com




EC Single Inlet Blowers 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

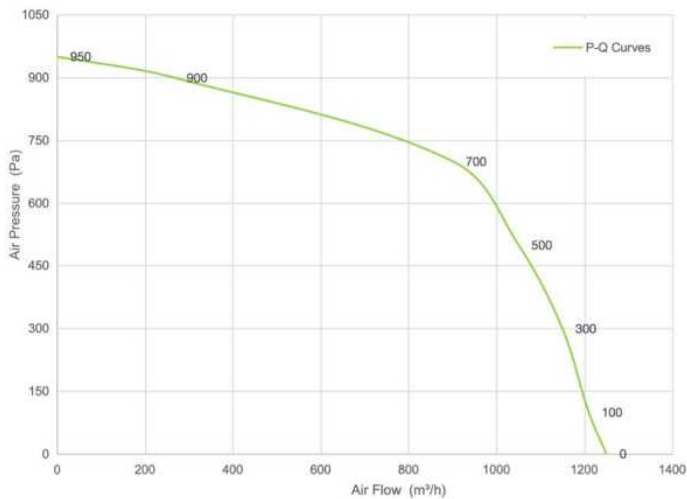

Pa	m³/h	rpm	W
700	880	1687	333
600	1000	1712	280
500	1050	1811	284
400	1100	1623	279

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E180H183-92-A0	230	50	1600	300	1250	75

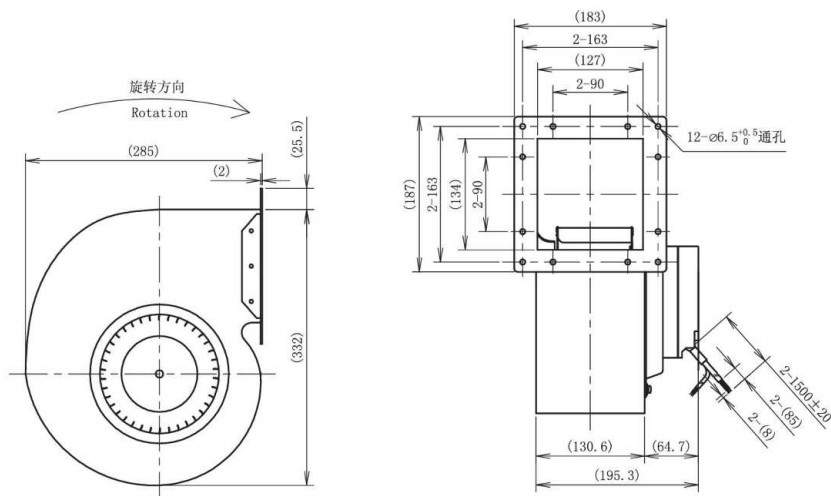

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





EC Single Inlet Blowers 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

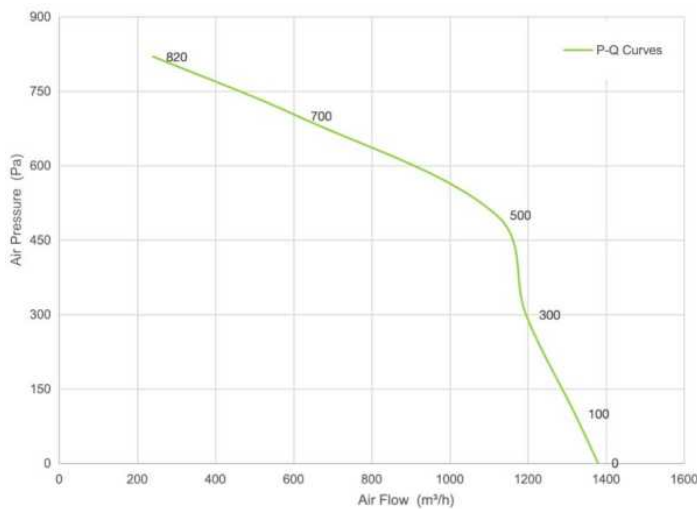

Pa	m³/h	rpm	W
600	920	1582	313
500	1050	1612	260
400	1150	1411	254
300	1200	1600	292

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E200H196-92-A0	230	50	1400	280	1380	64

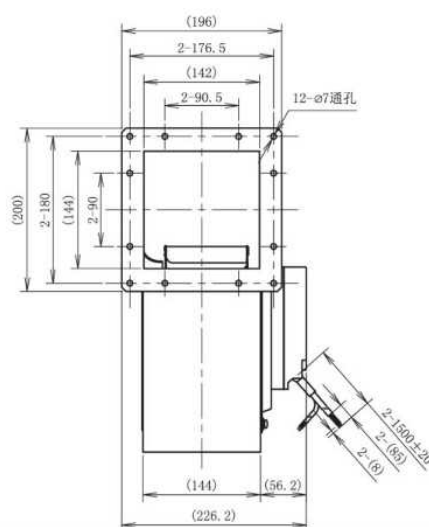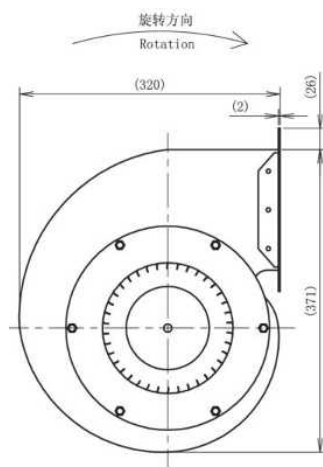

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




EC Single Inlet Blowers 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

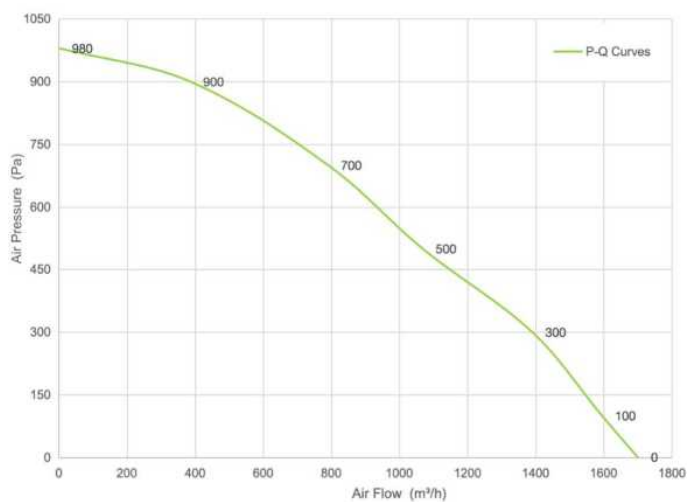

Pa	m³/h	rpm	W
700	700	1322	413
600	840	1310	390
500	1200	1211	354
400	1250	1255	402

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E225H202-102-A0	230	50	1250	400	1700	69

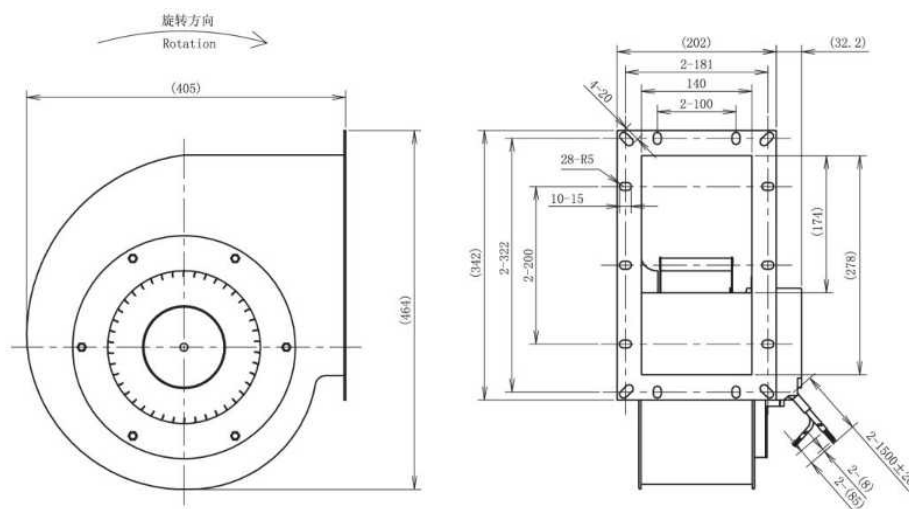

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




EC Single Inlet Blowers 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

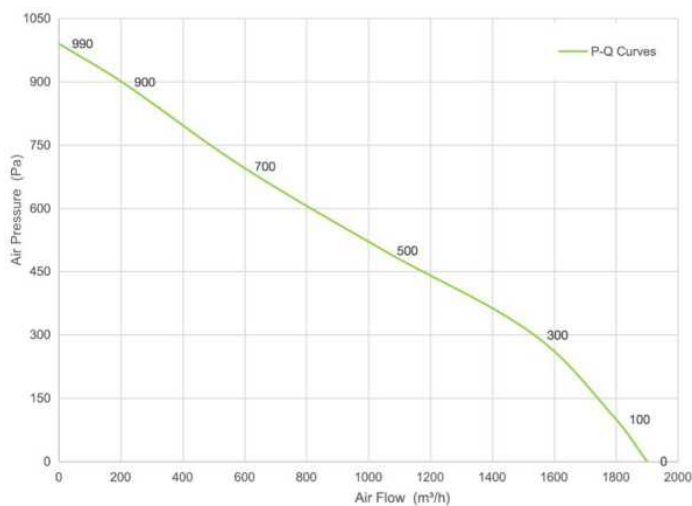

Pa	m³/h	rpm	W
700	600	1021	313
600	800	1010	330
500	1000	981	314
400	1290	910	412


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23E250H222-102-A0	230	50	950	330	1900	69

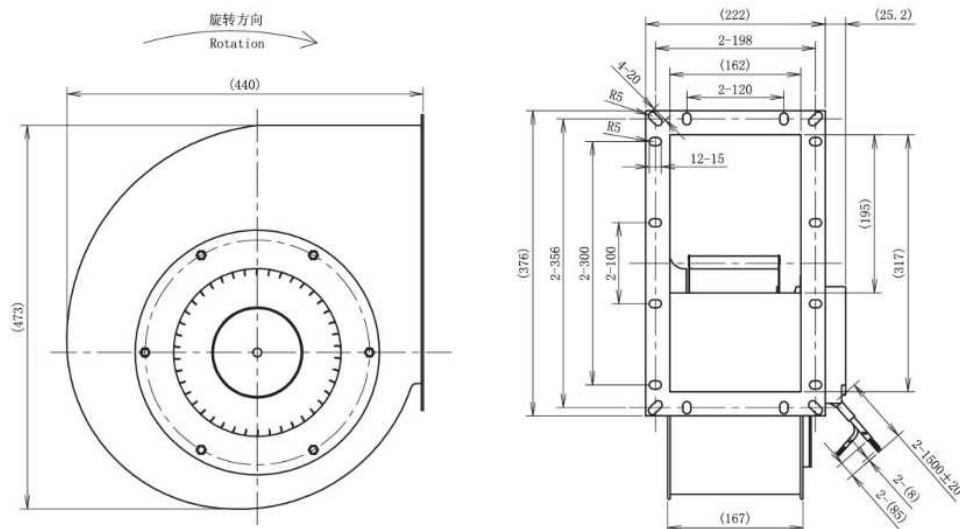





EC Single Inlet Blowers 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

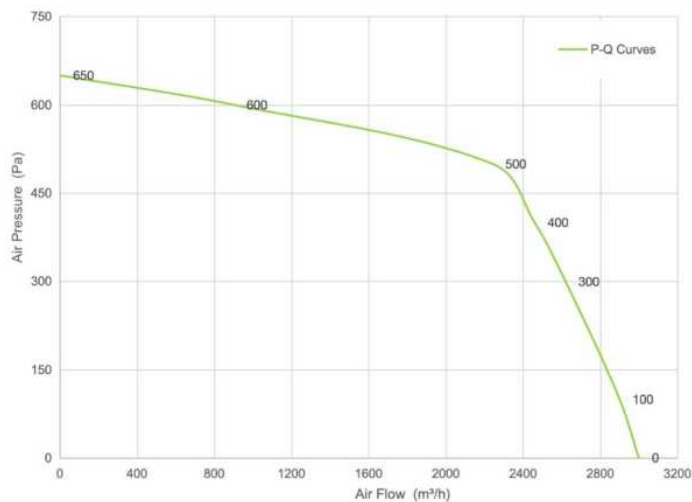

Pa	m³/h	rpm	W
500	2000	1090	950
400	2450	1150	935
300	2600	1123	914
200	2750	1140	915

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38E280H242-137-A0	230	50	1150	950	3000	79

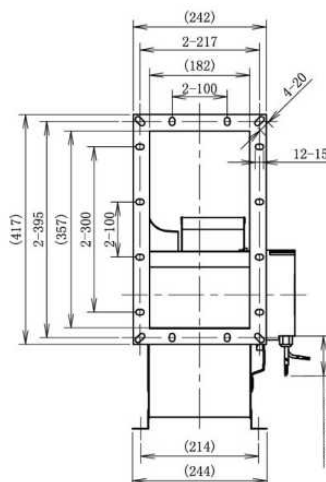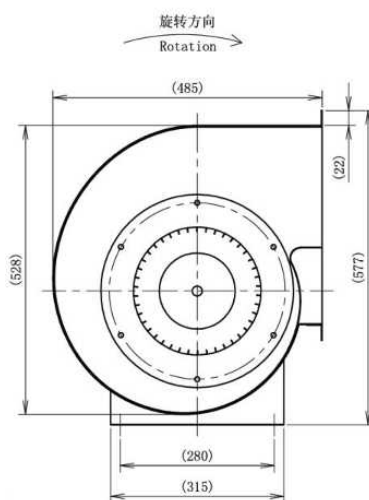




AC Single Inlet Blower







AC Single Inlet Blowers 120mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

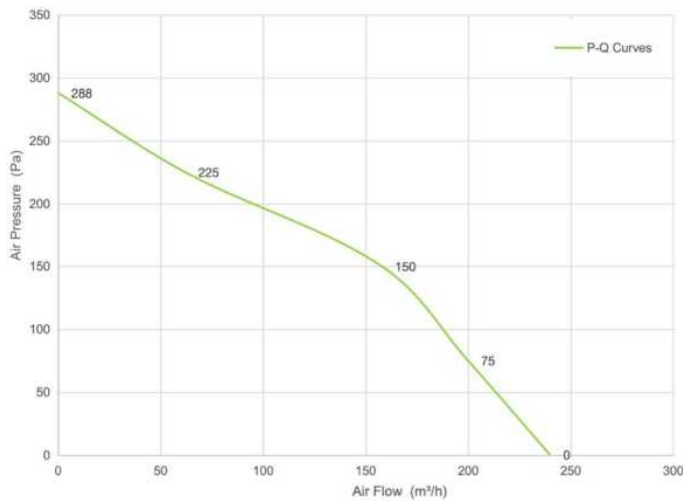

Pa	m³/h	rpm	W
100	190	2182	48
120	180	2243	47
140	169	2308	46
150	163	2330	45


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A120H115-72-00	230	50	1760	55	240	59

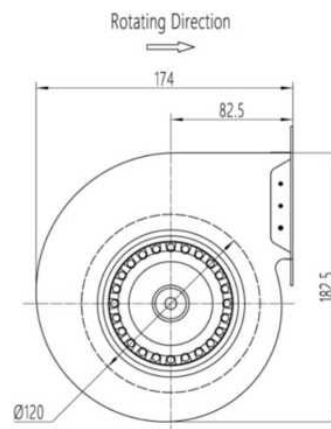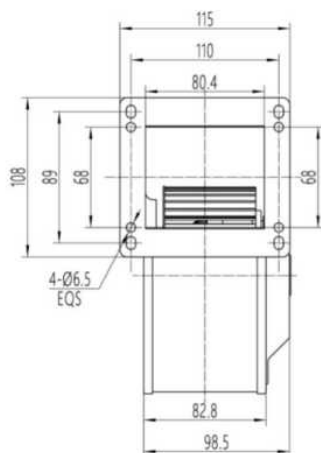




AC Single Inlet Blowers 120mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

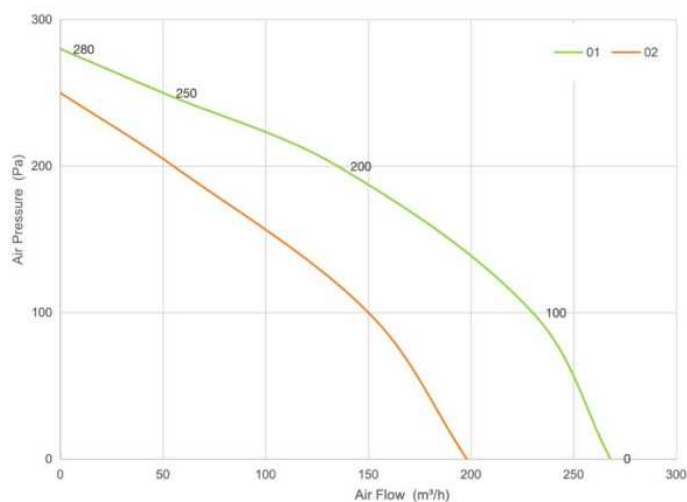

	Pa	m³/h	rpm	W
01	75	228	1972	58
	100	218	2026	57
	150	194	2176	55
02	50	177	1573	44
	75	169	1678	43
	100	160	1812	42


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A120H119-72-01	230	50	1750	62	268	59
FS23A120H119-72-02	230	50	1300	46	198	53

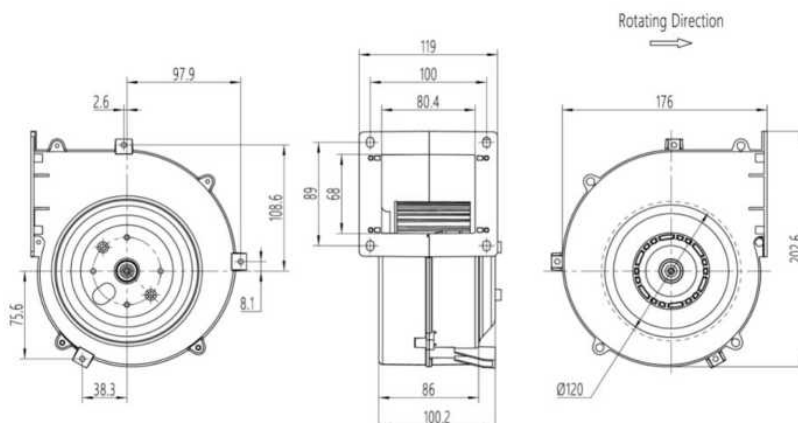




AC Single Inlet Blowers 140mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

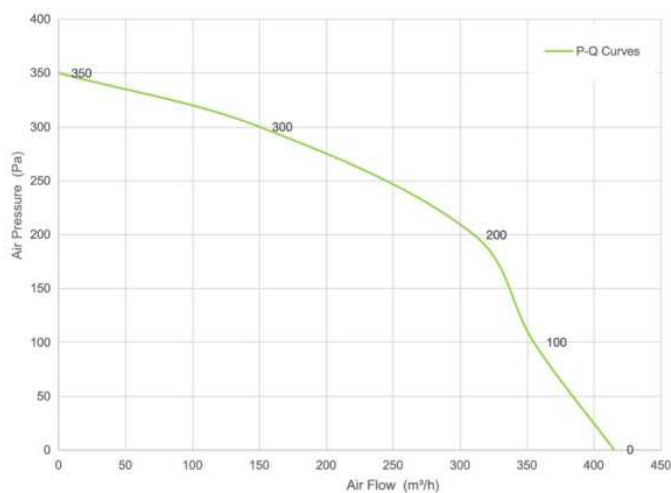

Pa	m³/h	rpm	W
120	350	2520	136
150	335	2545	132
200	310	2590	127
250	285	2620	123


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A140H115-92-00	230	50	2395	148	415	65

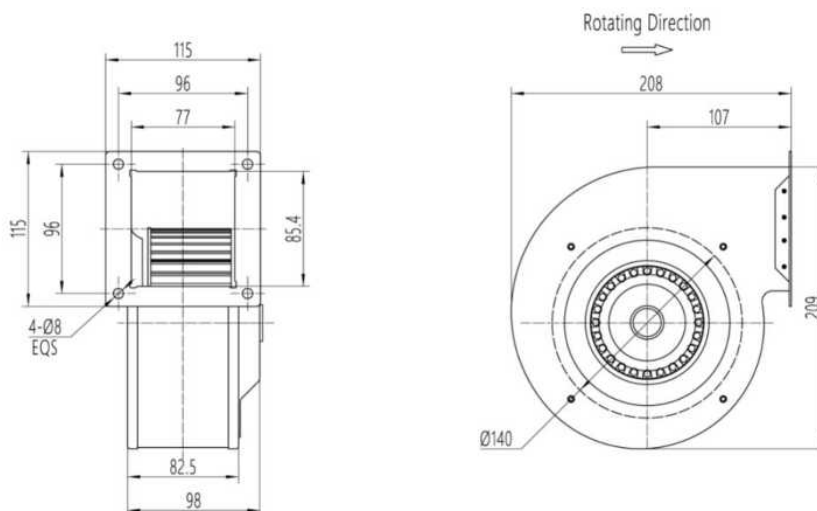




AC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

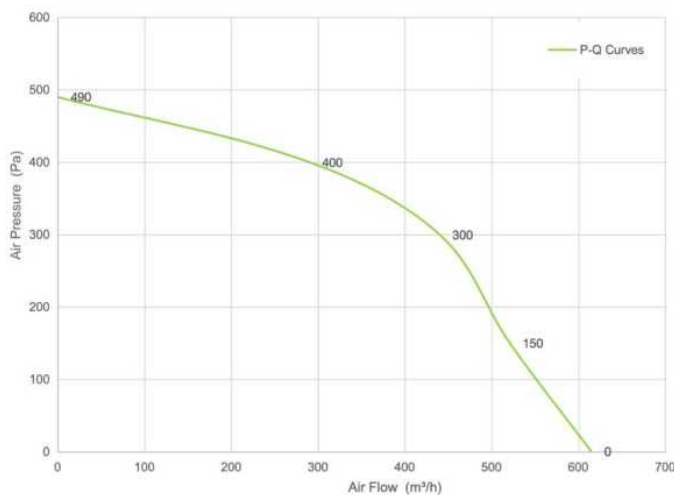

Pa	m³/h	rpm	W
250	465	2360	186
300	440	2350	179
350	385	2395	170
400	340	2450	158


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38A160H130-92-00	380	50	2080	240	615	66

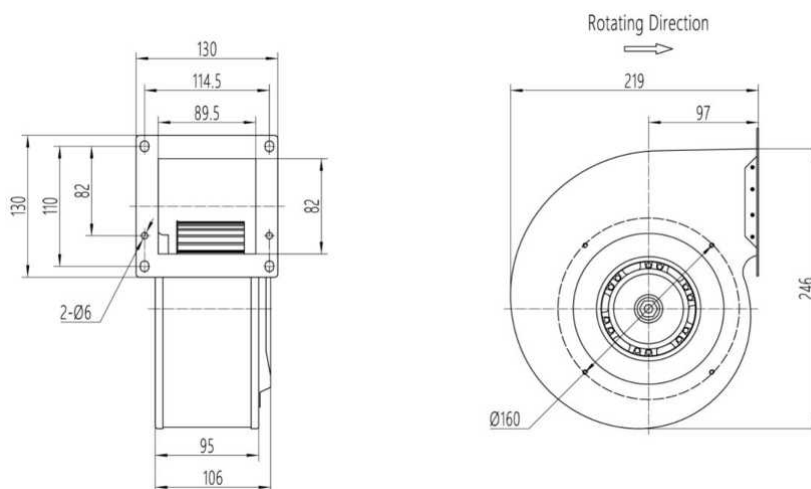




AC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

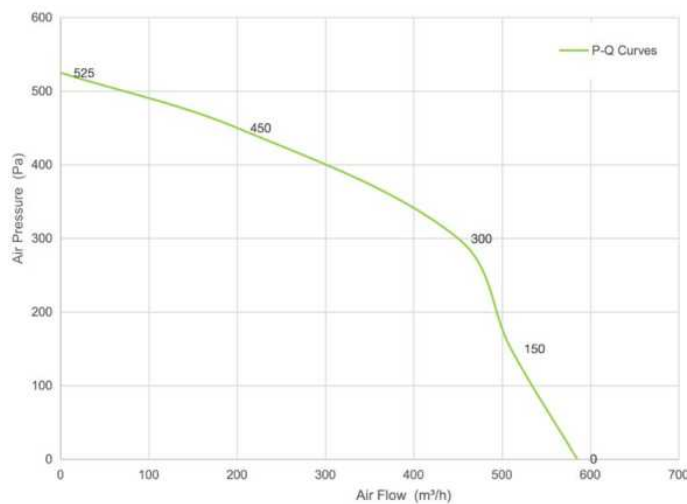

Pa	m³/h	rpm	W
200	490	2225	201
250	470	2285	194
300	450	2330	188
350	425	2385	182


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A160H130-92-00	230	50	1945	235	585	65

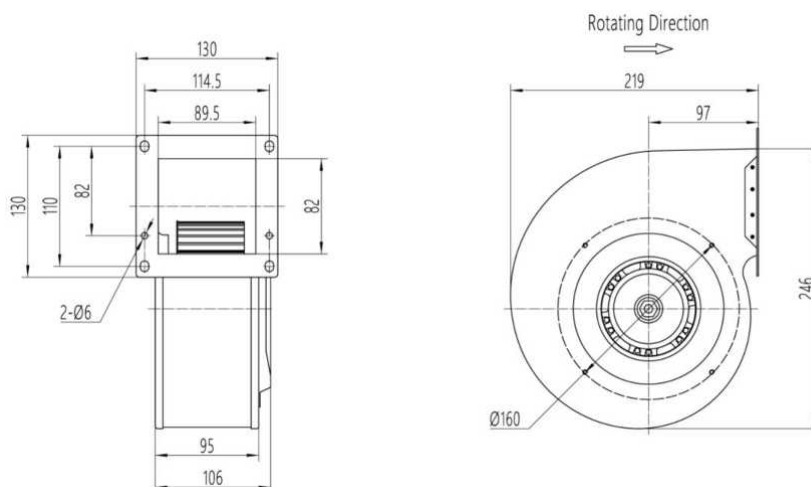





AC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

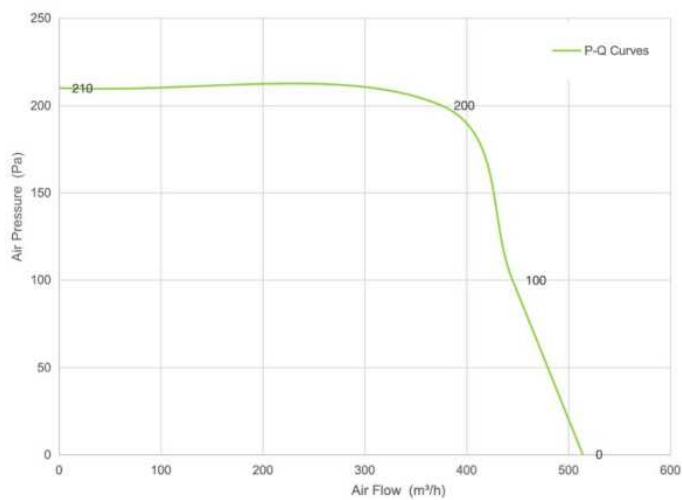

Pa	m³/h	rpm	W
100	446	1419	51
150	417	1558	56
200	390	1712	60
220	306	1746	51


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A160H169-92-01	230	50	1135	60	514	58

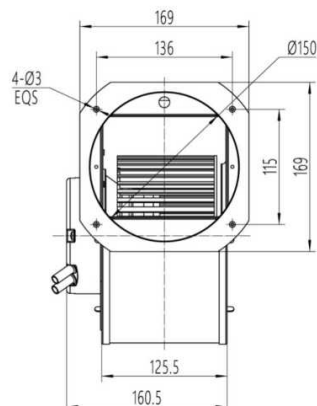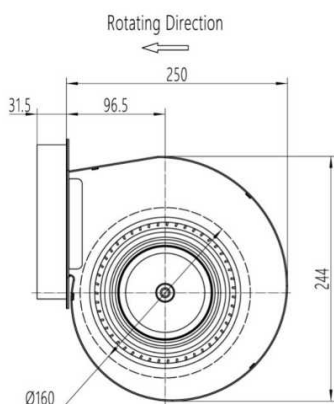





AC Single Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

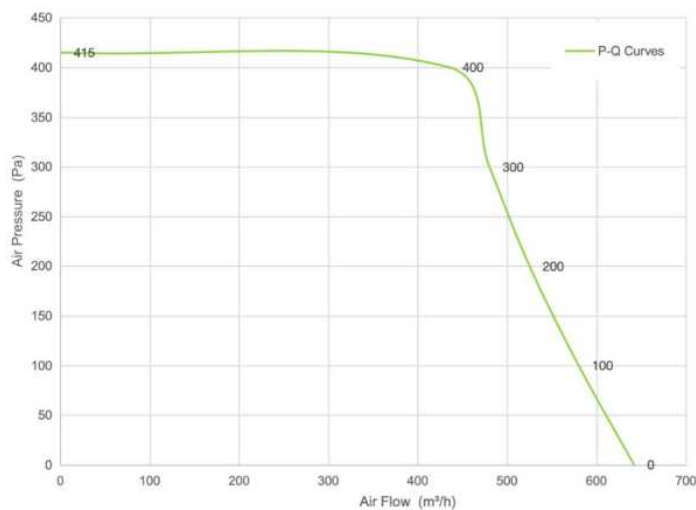

Pa	m³/h	rpm	W
300	492	2066	111
350	461	2200	117
400	434	2346	123
420	364	2358	114


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A160H169-92-02	230	50	1425	123	642	62

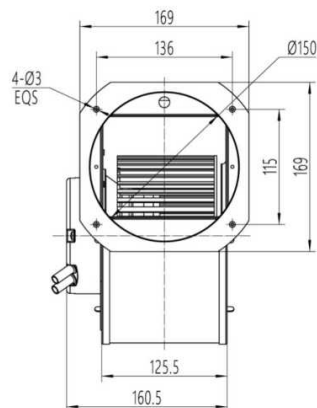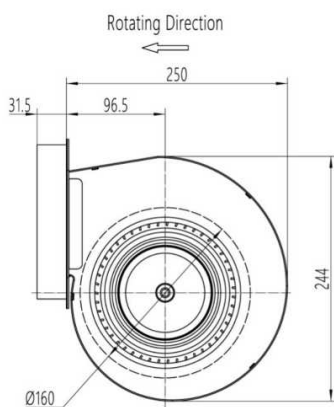




AC Single Inlet Blowers 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

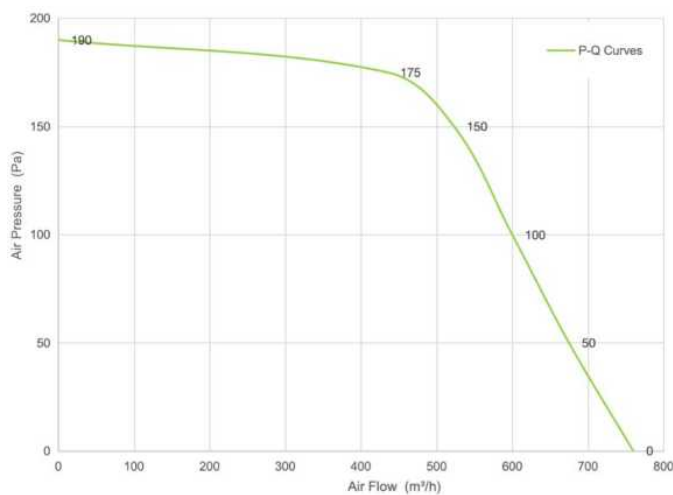

Pa	m³/h	rpm	W
135	545	1380	122
155	515	1455	121
180	420	1465	113
190	370	1475	110


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A180H169-92-00	230	50	1395	150	760	63

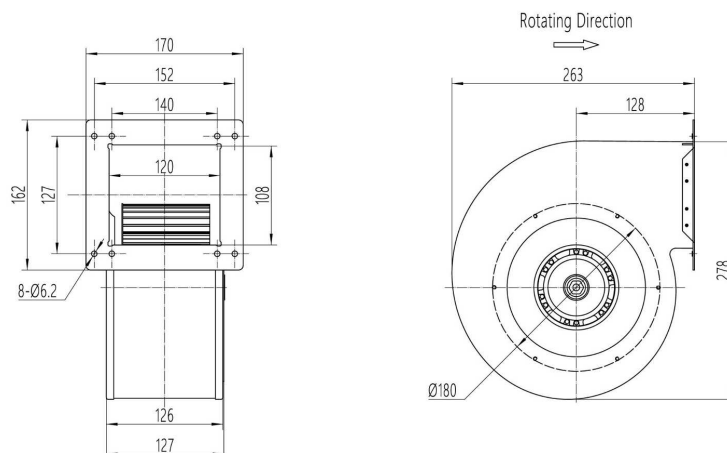




AC Single Inlet Blowers 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

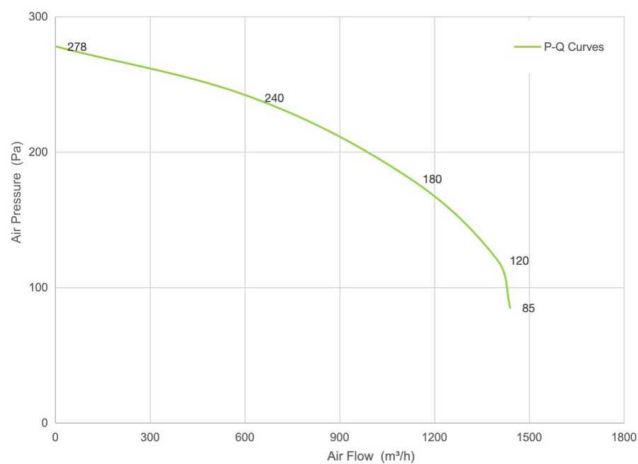

Pa	m³/h	rpm	W
200	980	1380	398
150	1265	1352	378
100	1450	1320	402


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A225H202-102-A0	230	50	1320	400	1440	73

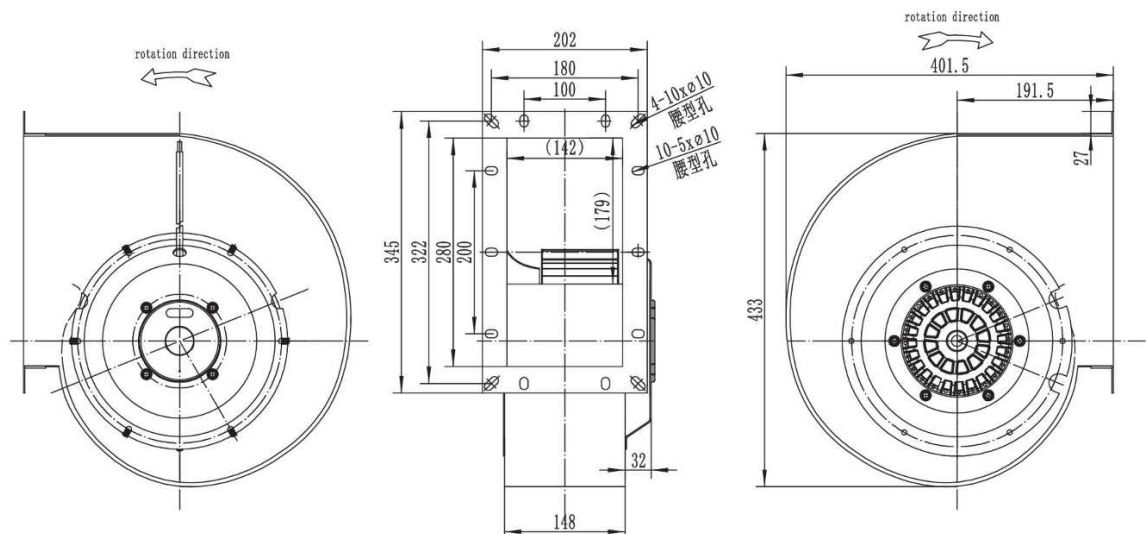




AC Single Inlet Blowers 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

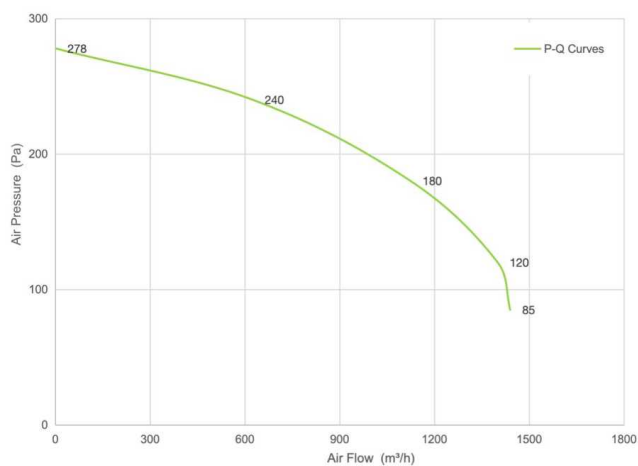

Pa	m³/h	rpm	W
200	600	1398	395
150	705	1385	396
100	800	1380	388


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38A225H202-102-A0	380	50	1390	400	1440	73

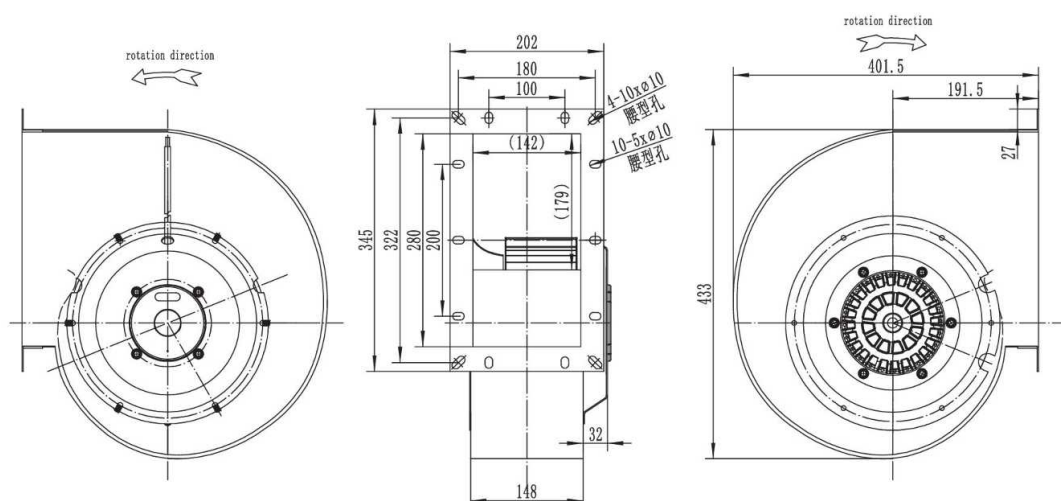




AC Single Inlet Blowers 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

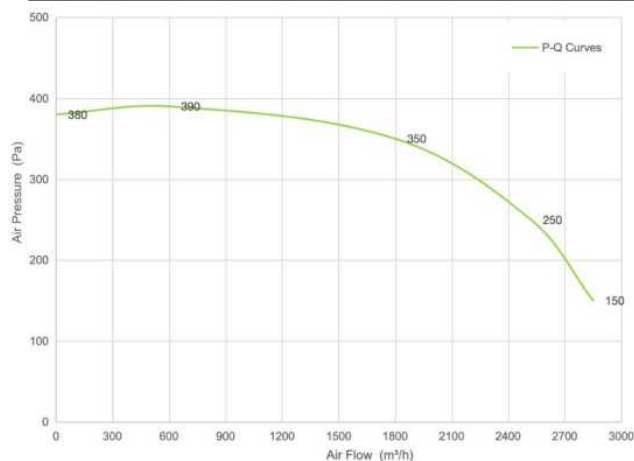

Pa	m³/h	rpm	W
350	1800	1280	876
300	2105	1212	854
250	2285	1287	812


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38A250H222-137-A0	380	50	1350	850	2800	80

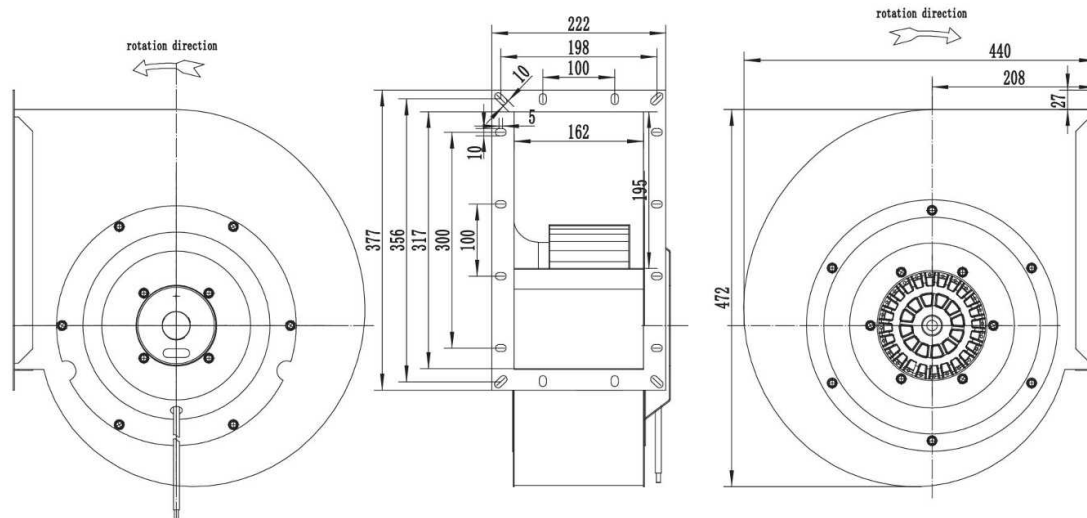




AC Single Inlet Blowers 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

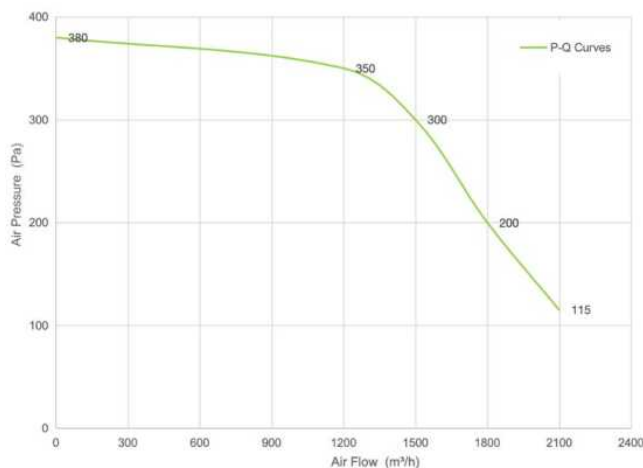

Pa	m³/h	rpm	W
350	1200	1920	623
300	1400	2024	651
250	1650	2105	643


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38A250H222-137-A1	380	50/60	1300	630	2100	74

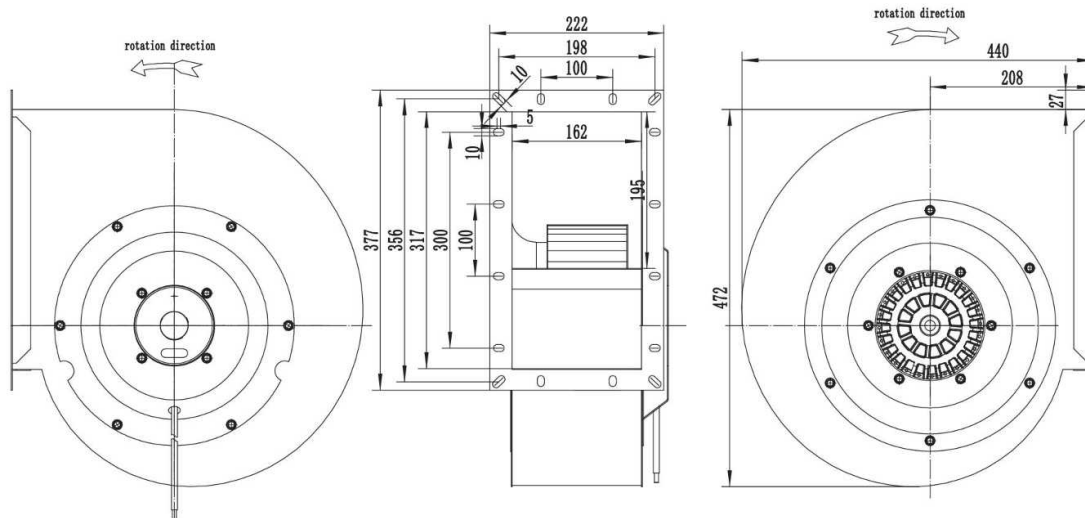




AC Single Inlet Blowers 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

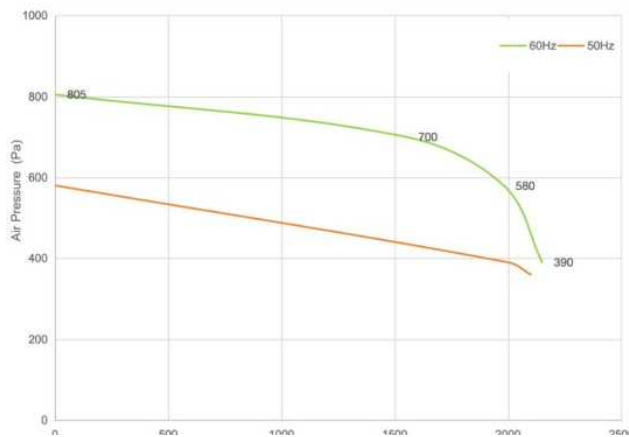

	Pa	m³/h	rpm	W
50Hz	700	1600	2012	920
	600	1920	2076	958
	500	810	2102	840
60Hz	700	1550	2196	955
	600	1950	2159	952
	500	2010	2110	943


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS23A280H172-137-A0	230	50	2450	850	2100	75
		60	2200	1000	2150	70

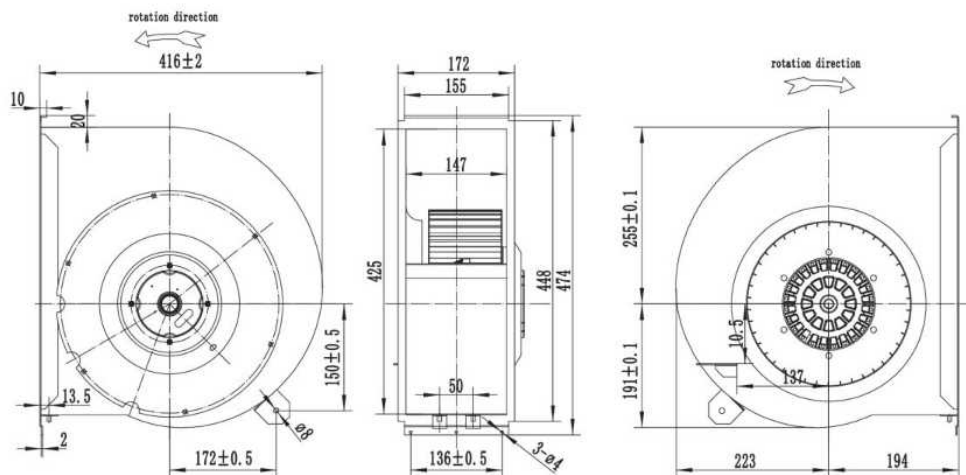




AC Single Inlet Blowers 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

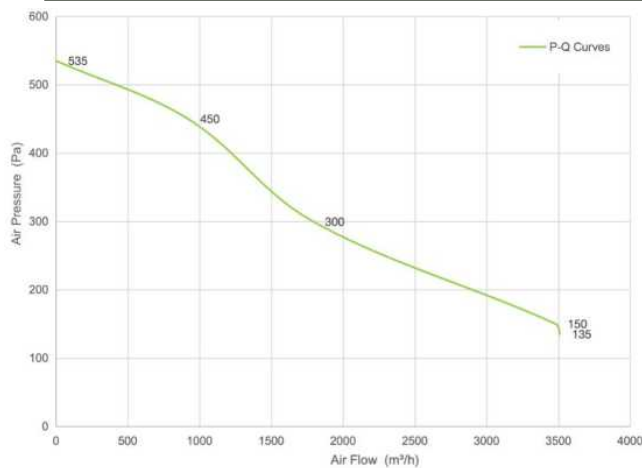

Pa	m³/h	rpm	W
400	2100	1120	1231
300	2850	1235	1276
250	3120	1287	1398


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38A280H242-137-A0	380	50	1400	1400	3510	82

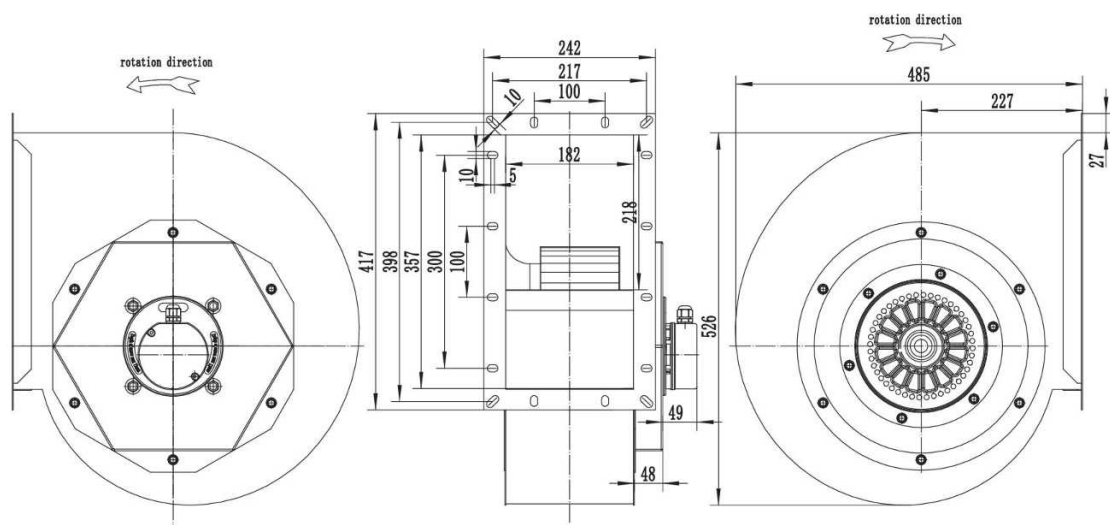




AC Single Inlet Blowers 315mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

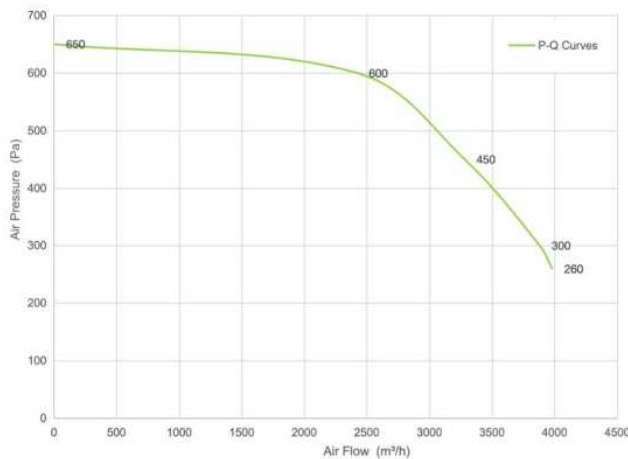

Pa	m³/h	rpm	W
500	3200	1228	2019
400	3550	1287	2102
300	3920	1312	2198

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FS38A315H262-188-A0	380	50	1350	2200	5000	85

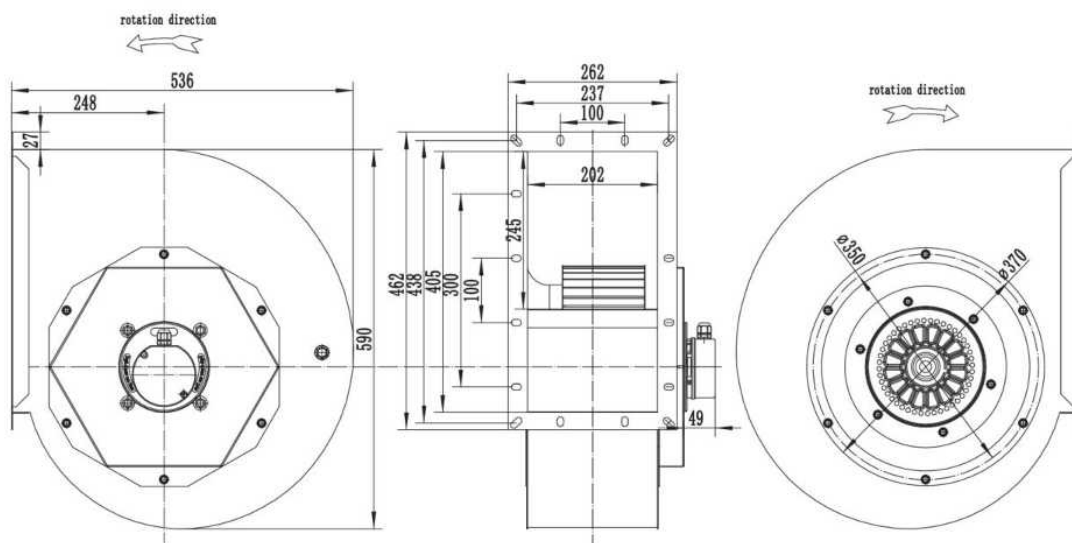




EC Double Inlet Blower







Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

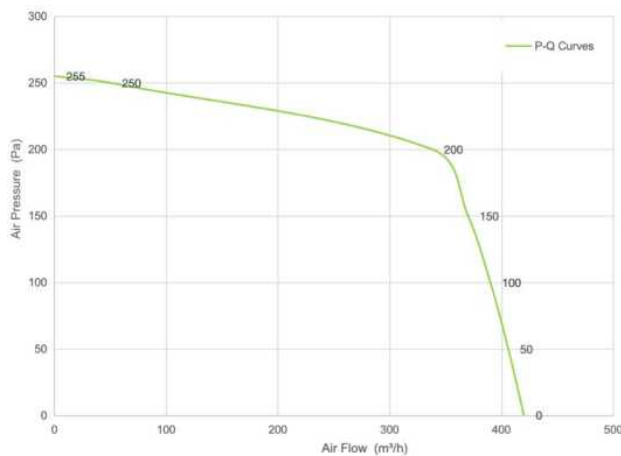

Pa	m³/h	rpm	W
200	330	2152	70
150	350	2142	71
100	380	2095	73
50	400	2012	69


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E120H180-92-A0	230	50/60	1900	70	420	59

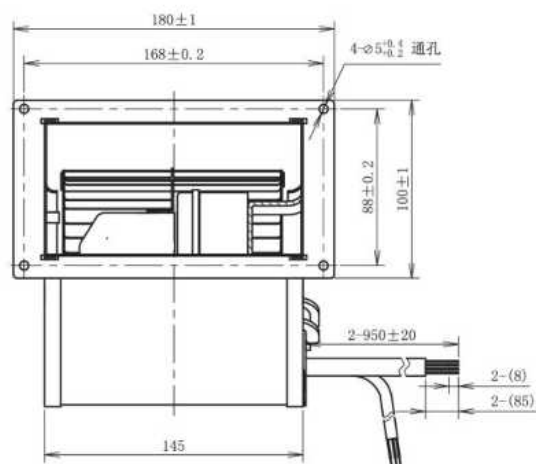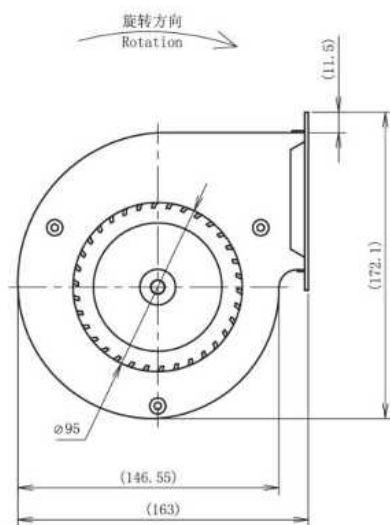




EC Double Inlet Blowers 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

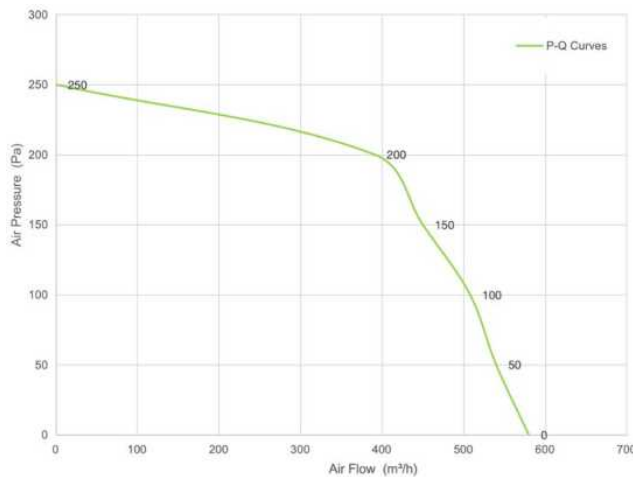

Pa	m³/h	rpm	W
200	380	1523	79
150	460	1598	79
100	500	1521	78
50	510	1589	81

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E133H254-92-A0	230	50/60	1500	80	580	59

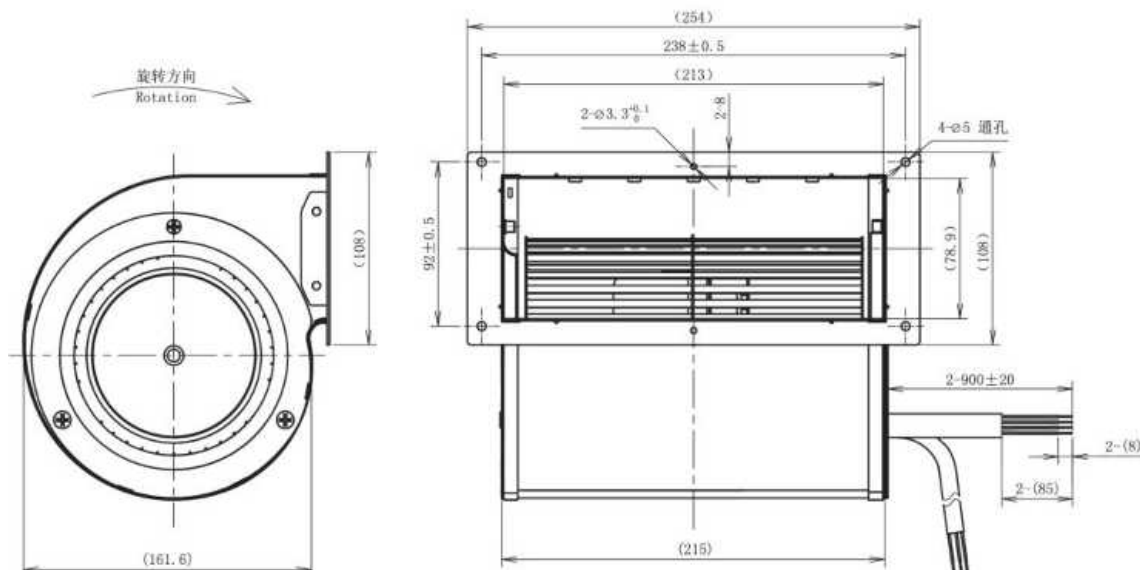

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China


Email: sales@airtekipower.com

Website: www.airtekipower.com




EC Double Inlet Blowers 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

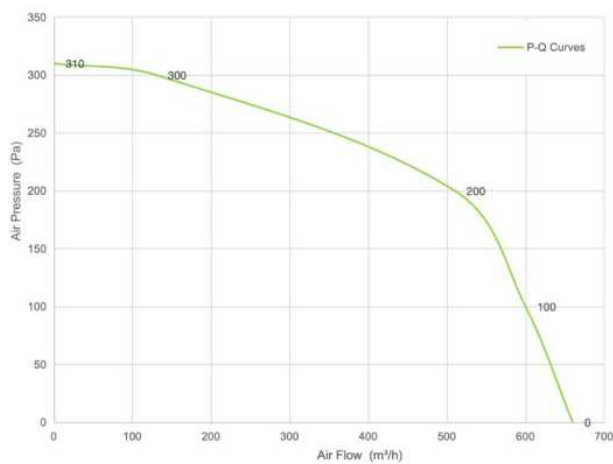

Pa	m³/h	rpm	W
250	485	1738	110
200	490	1637	123
150	520	1690	118
100	600	1721	115

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E133H254-92-A1	230	50/60	1700	115	660	60

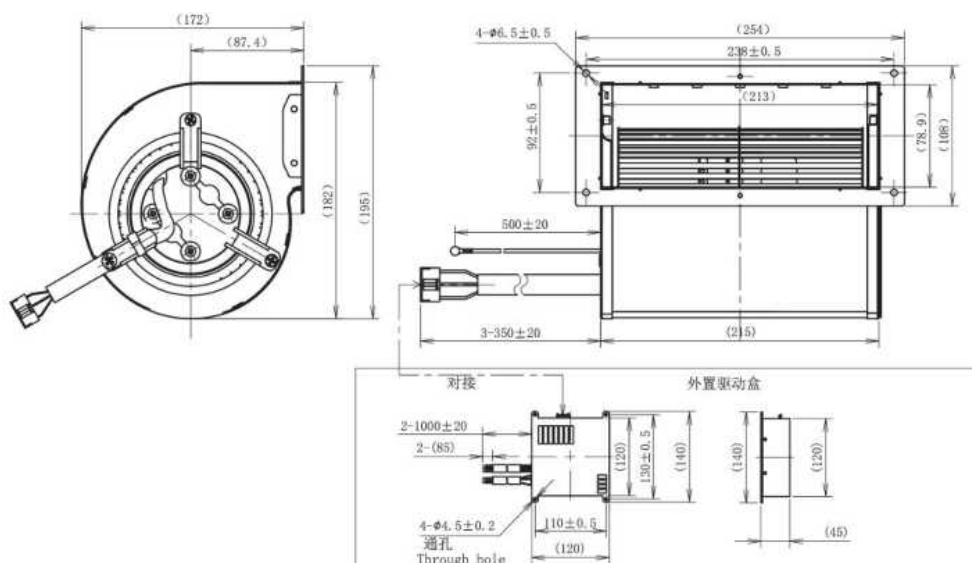

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China


Email: sales@airtekpowers.com

Website: www.airtekpowers.com




EC Double Inlet Blowers 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

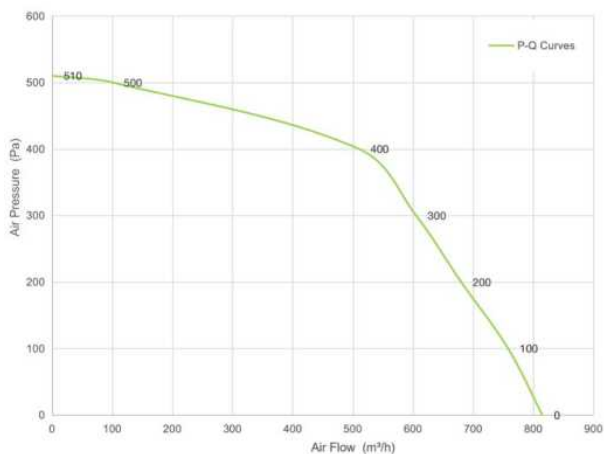

Pa	m³/h	rpm	W
400	475	1268	90
300	600	1427	83
200	630	1390	88
100	720	1211	89


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E146H309-92-A0	230	50/60	1300	80	815	61

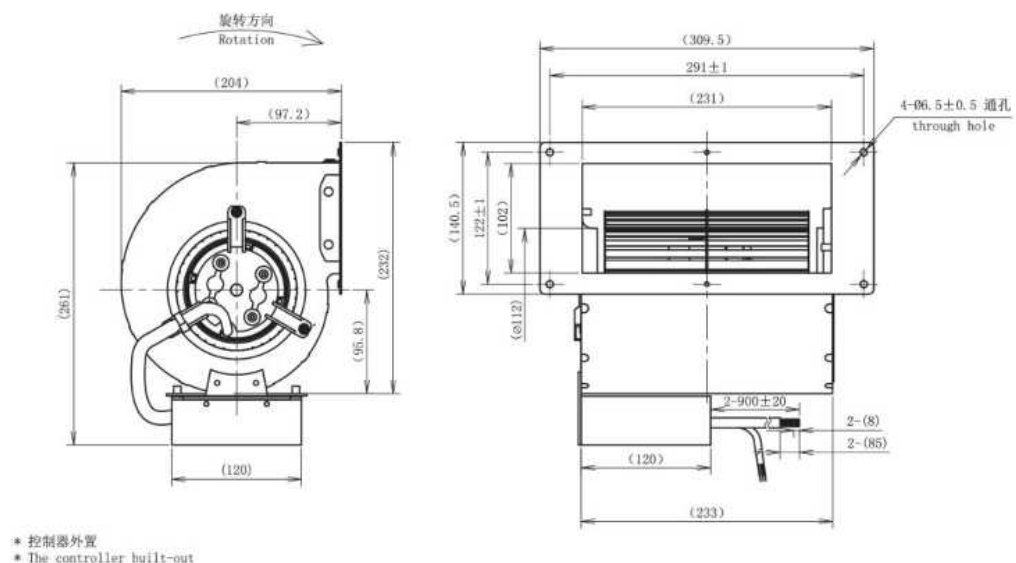




EC Double Inlet Blowers 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

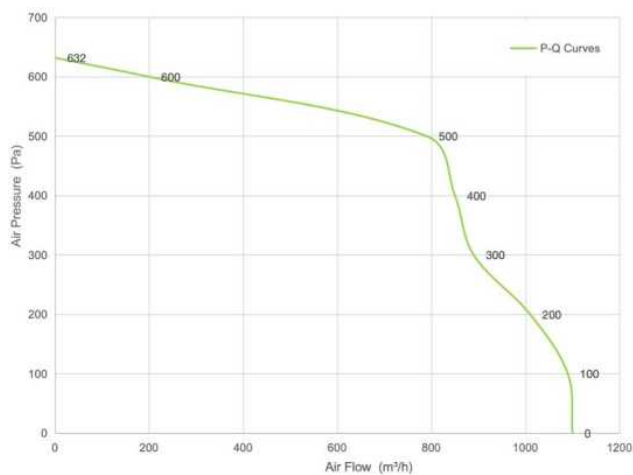

Pa	m³/h	rpm	W
500	475	1268	90
400	600	1427	83
300	630	1390	88
200	720	1211	89

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E146H309-92-A1	230	50/60	1700	165	1100	65

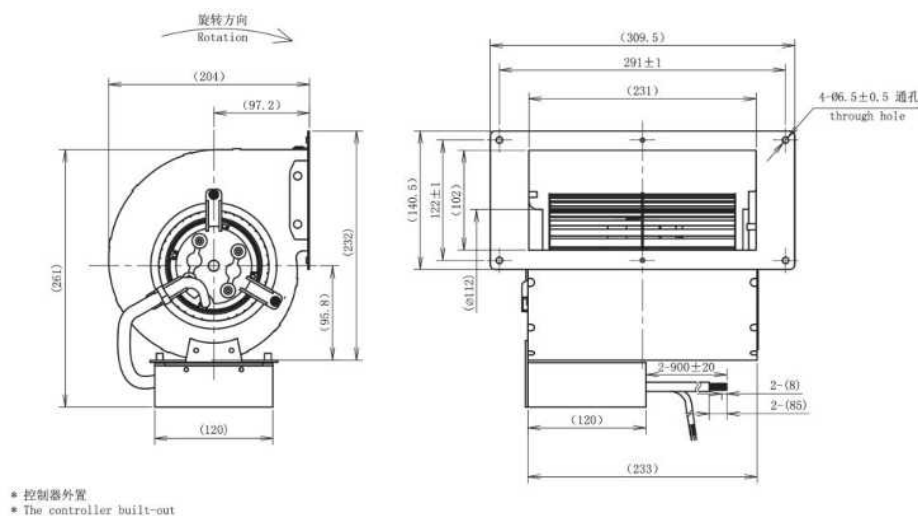


* 控制器外置
* The controller built-out




EC Double Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

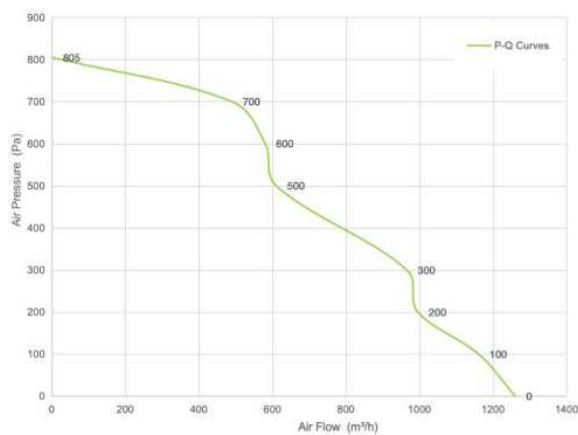

Pa	m³/h	rpm	W
600	605	1163	110
500	640	1022	119
400	750	1332	129
300	820	1219	119


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E160H310-92-A0	230	50/60	1150	120	1260	60

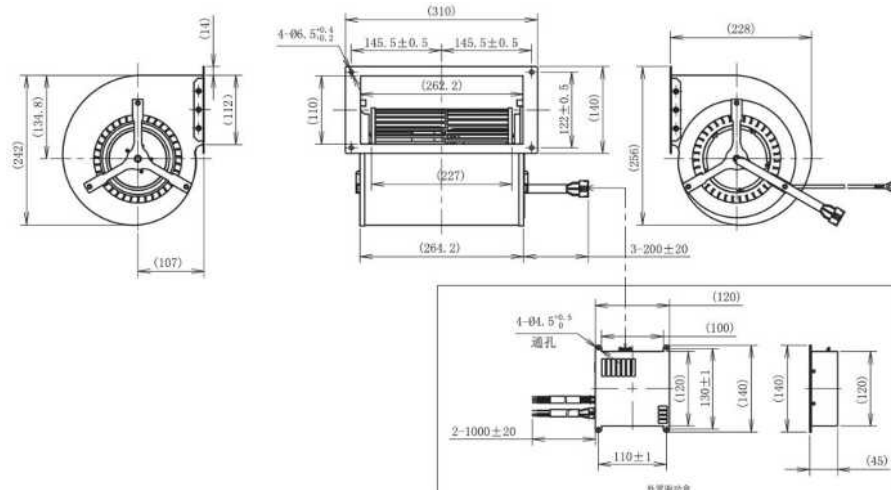




EC Double Inlet Blowers 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

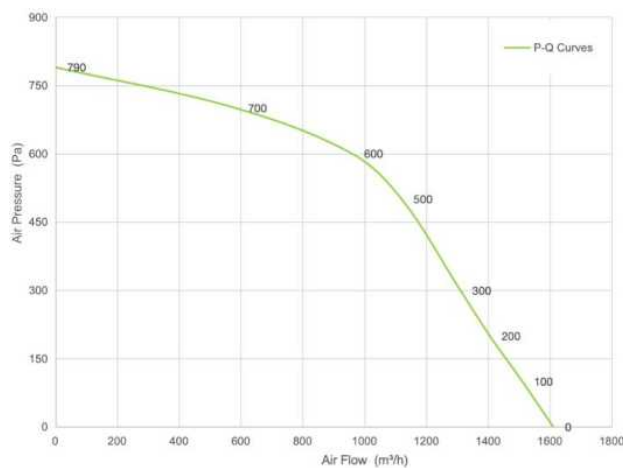

Pa	m³/h	rpm	W
600	815	1563	235
500	1128	1729	229
400	1230	1739	256
300	1336	1819	260

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E160H310-92-A1	230	50/60	1500	260	1610	70

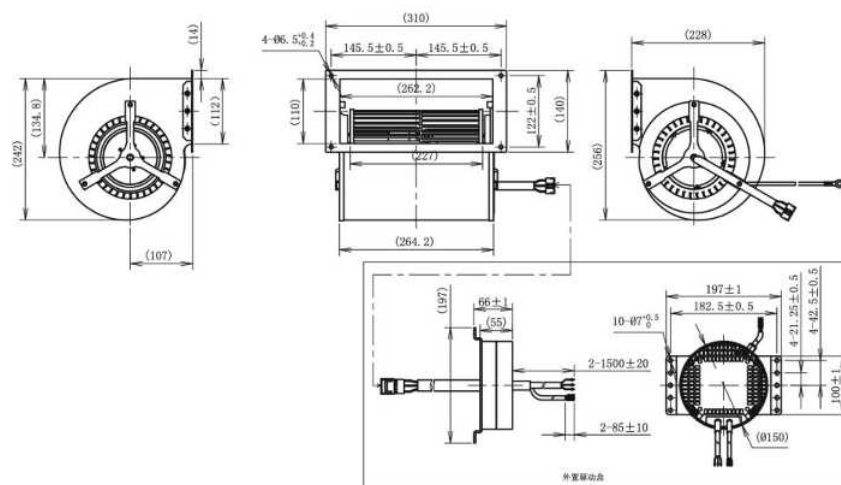

EC Double Inlet Blowers 180mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com

Website: www.airtekipower.com




Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

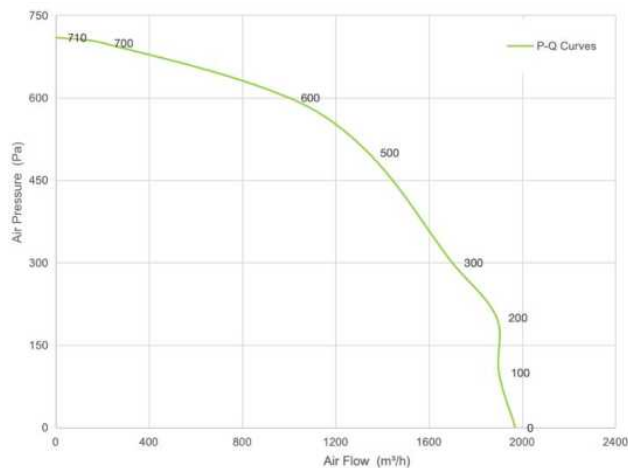

Pa	m³/h	rpm	W
600	815	1565	324
500	1310	1630	345
400	1520	1671	385
300	1623	1823	365

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E180H270-102-A0	230	50/60	1550	400	1970	74

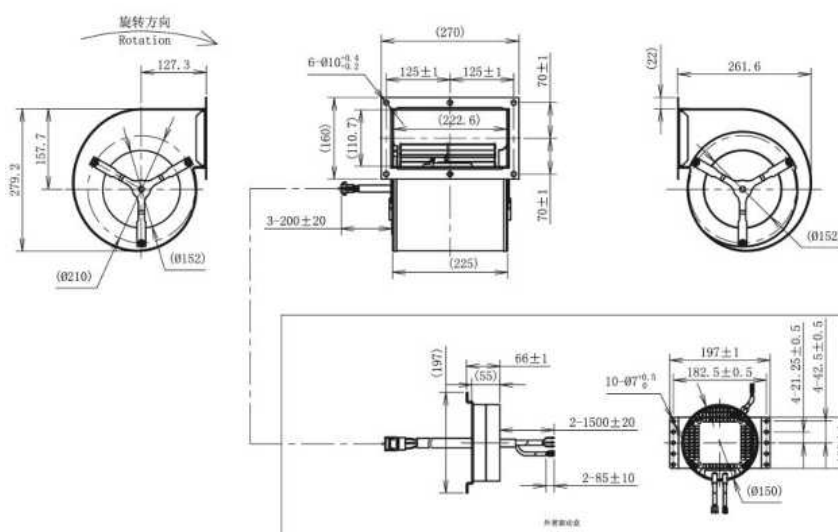

EC Double Inlet Blowers 200mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekipower.com

Website: www.airtekipower.com




Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

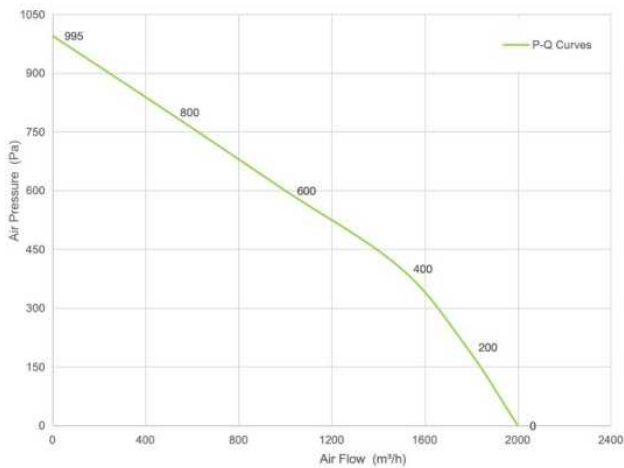

Pa	m³/h	rpm	W
600	835	1168	304
500	1280	1236	355
400	1580	1351	315
300	1725	1093	345


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E200H265-102-A0	230	50/60	1150	300	2000	64

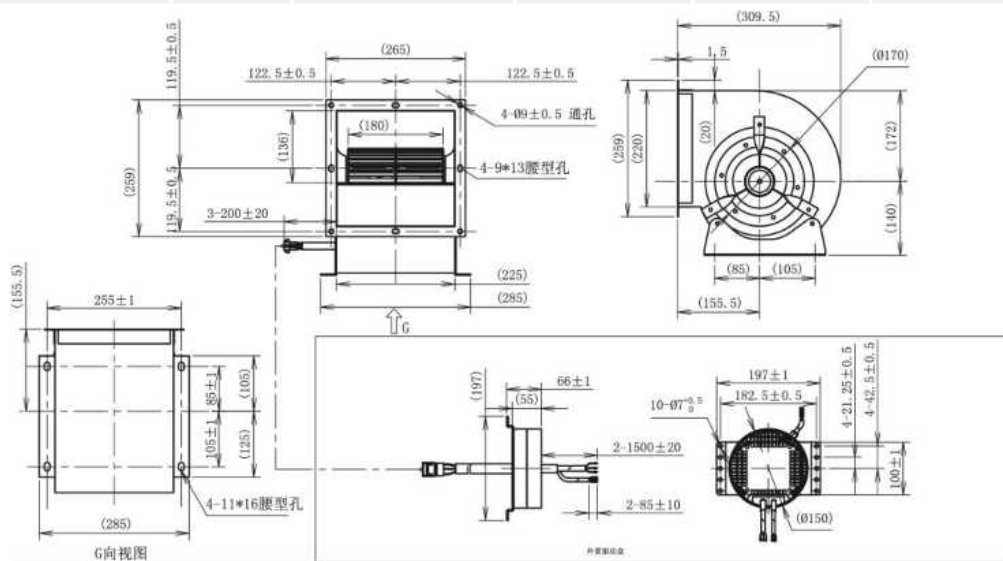




EC Double Inlet Blowers 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

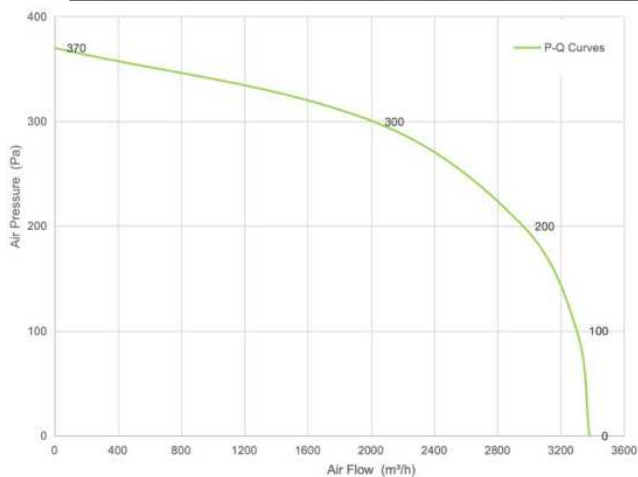

Pa	m³/h	rpm	W
300	2100	1268	645
250	2680	1332	693
200	2920	1319	718
150	3025	1293	745


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E225H298-137-A0	230	50/60	1250	750	3350	77

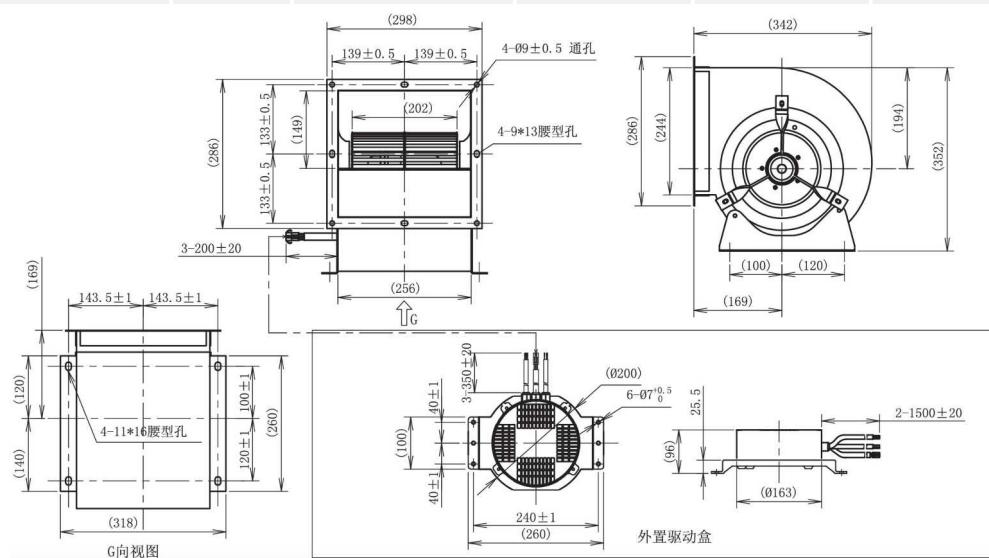




EC Double Inlet Blowers 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

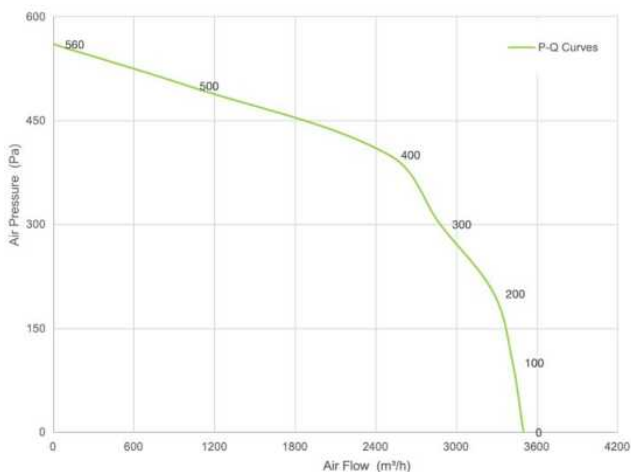

Pa	m³/h	rpm	W
400	1200	1618	985
300	2800	1682	1093
200	3120	1634	998
100	3395	1532	1051


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD38E225H290-137-A0	380	50/60	1450	1050	3500	78

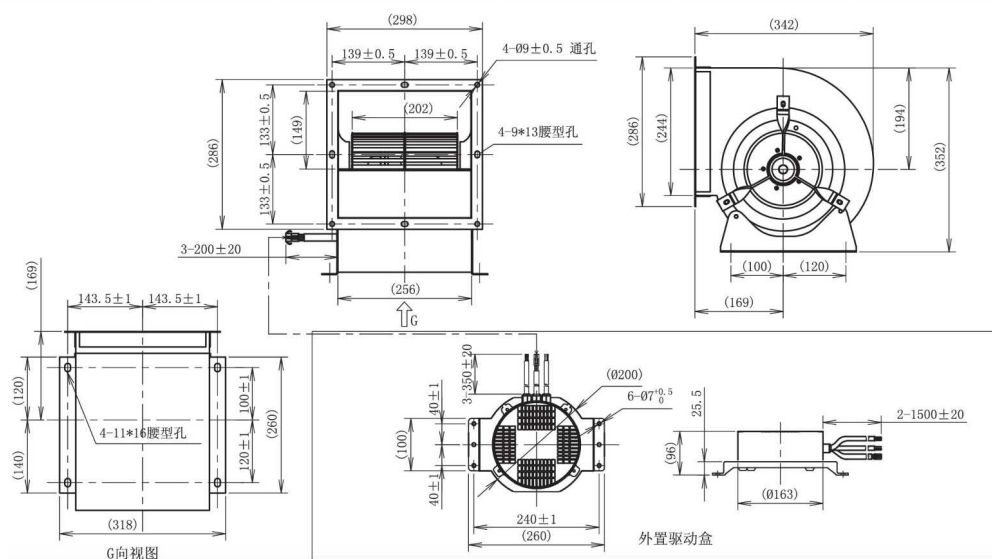




EC Double Inlet Blowers 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

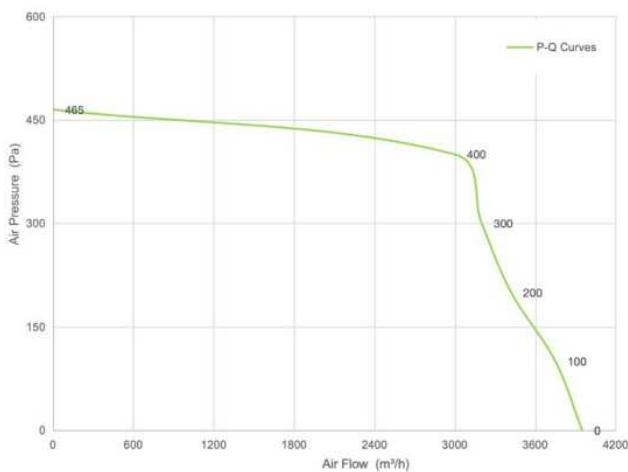

Pa	m³/h	rpm	W
400	3000	982	985
300	3200	1021	1093
200	3620	1634	998
100	3895	1532	1051

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E250H317-137-A0	230	50/60	960	750	3950	75

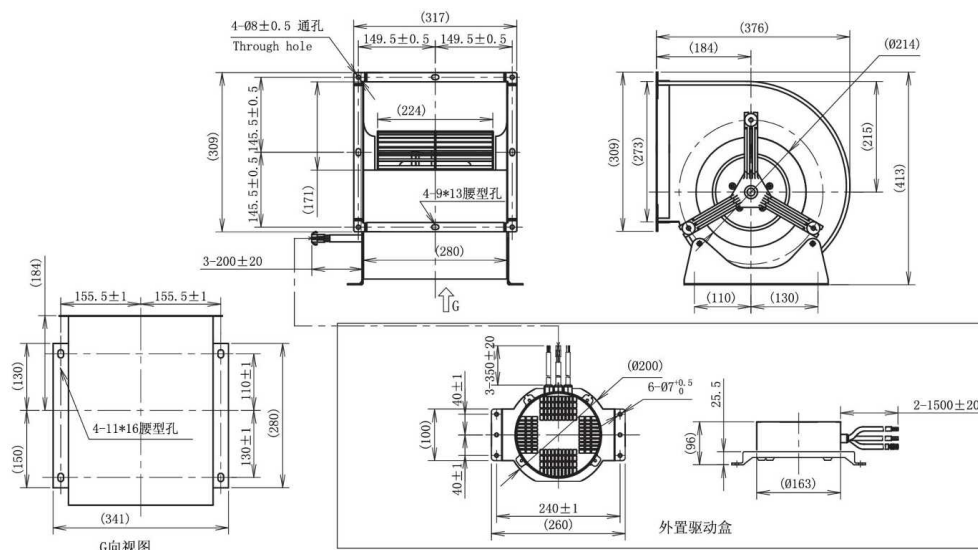

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China


Email: sales@airtekipower.com

Website: www.airtekipower.com




EC Double Inlet Blowers 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

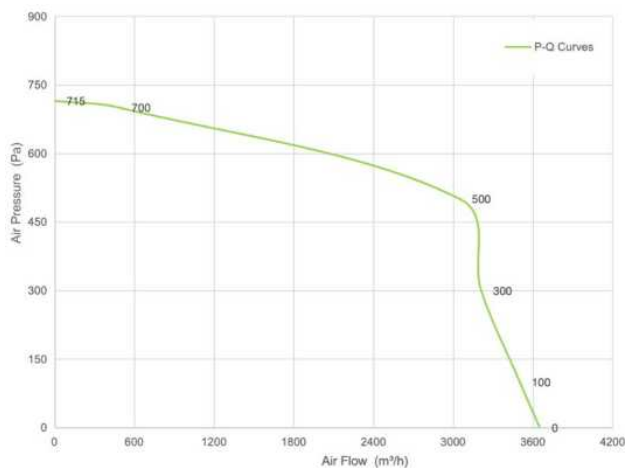

Pa	m³/h	rpm	W
600	1980	899	765
500	3120	998	693
400	3290	982	698
300	3559	1023	751


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD38E250H17-137-A0	380	50/60	920	655	3650	74

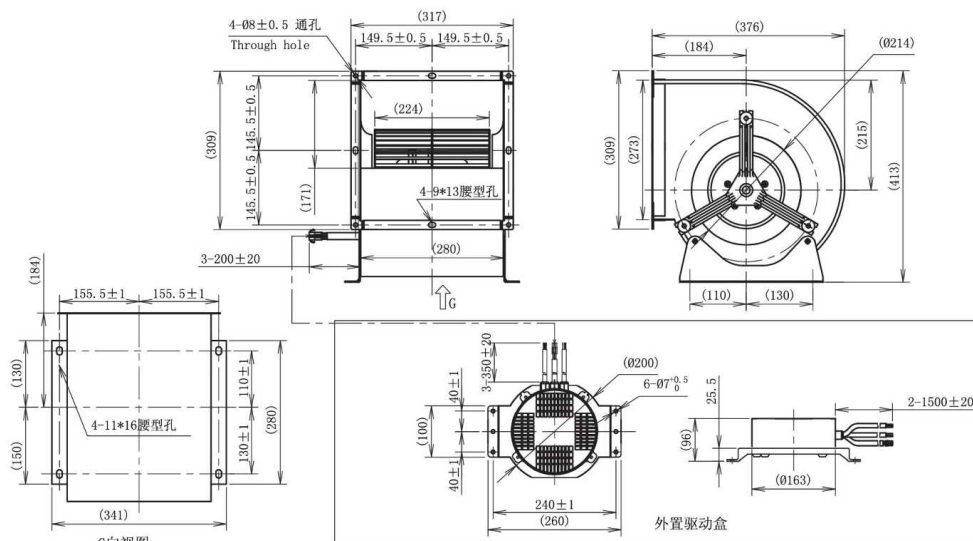




EC Double Inlet Blowers 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

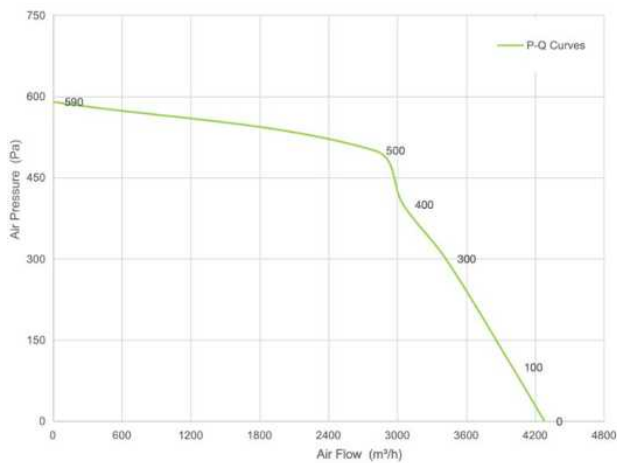

Pa	m³/h	rpm	W
500	2960	810	750
400	3280	892	723
300	3520	904	798
200	3750	910	782


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23E280H340-137-A0	230	50/60	820	750	4280	74

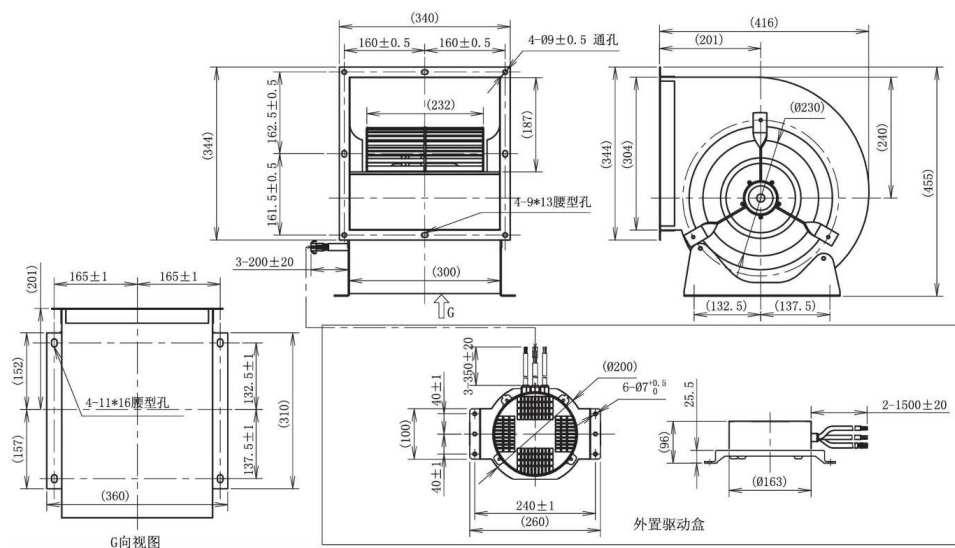




EC Double Inlet Blowers 280mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

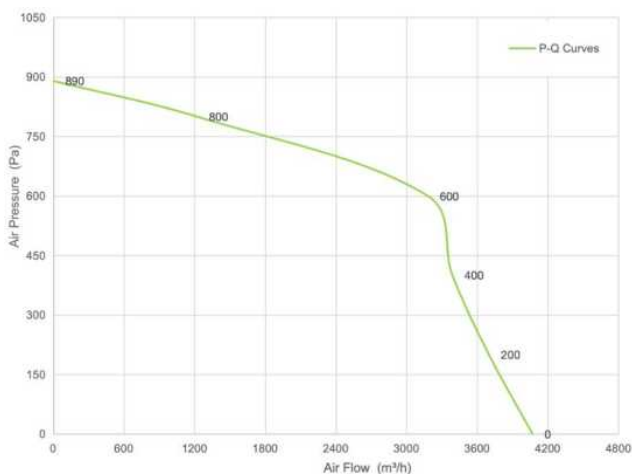

Pa	m³/h	rpm	W
700	2360	835	620
600	3170	868	635
500	3390	895	698
400	3658	930	675


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD38E280H340-137-A0	380	50/60	800	600	4070	72

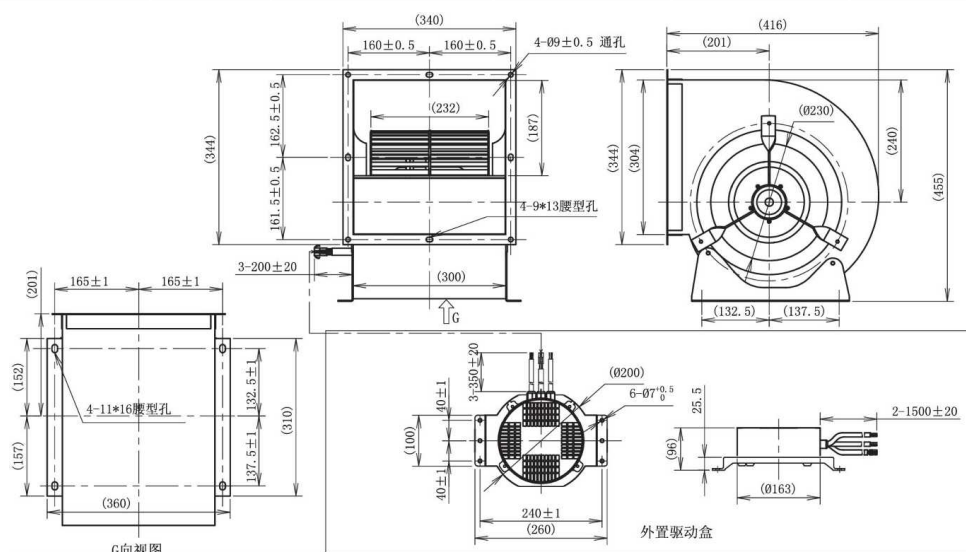




EC Double Inlet Blowers 315mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

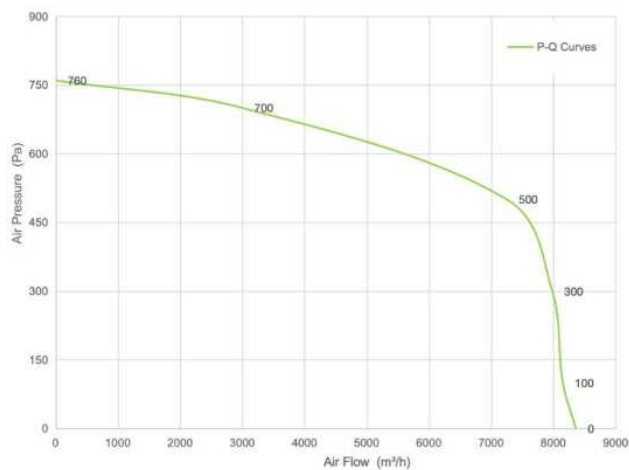


Pa	m³/h	rpm	W
600	6060	1038	2335
500	6780	1102	2668
400	7178	1098	2695
300	7589	1088	2536

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD38E315H450-188-A0	380	50/60	1070	2400	8360	81

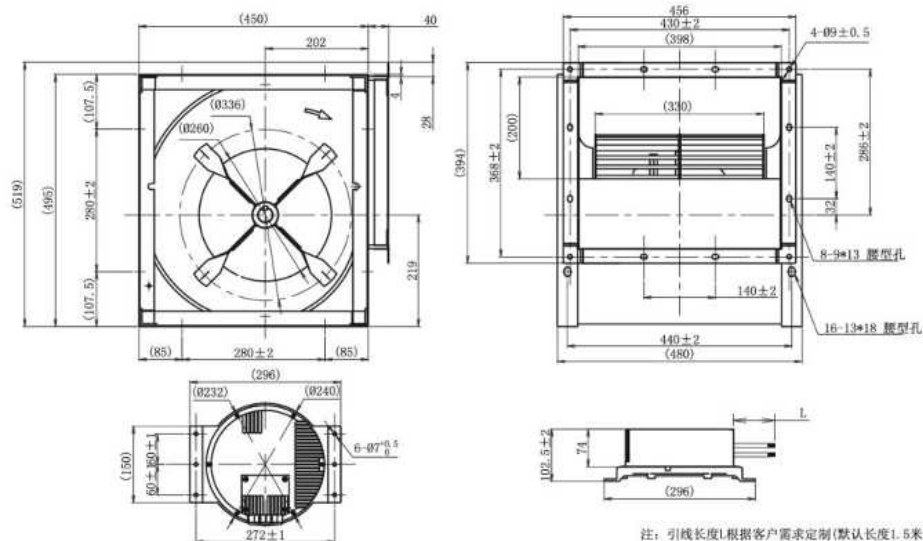


EC Double Inlet Blowers 355mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

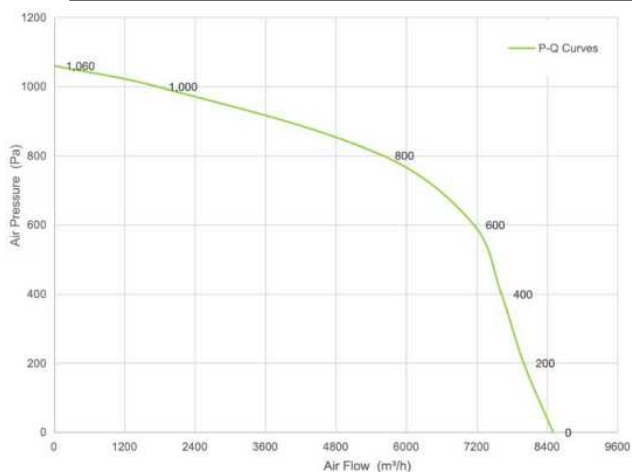

Pa	m ³ /h	rpm	W
800	5350	732	1815
700	6250	785	1887
600	7180	835	1810
500	7610	876	1756

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD38E355H431-188-A0	380	50/60	760	1700	8500	81

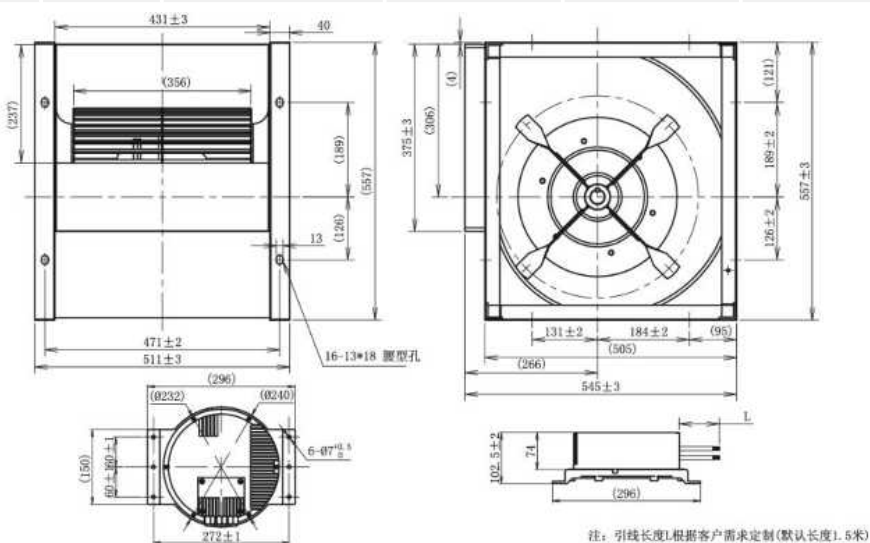

注：引线长度L根据客户需求定制(默认长度1.5米)

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





EC Double Inlet Blowers 400mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

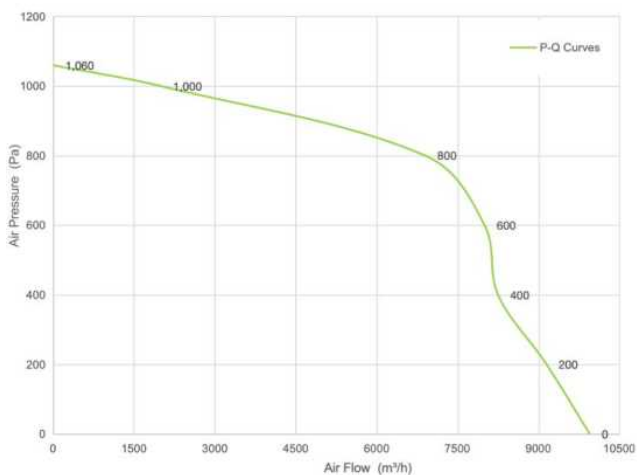

Pa	m³/h	rpm	W
800	5350	732	1815
700	6250	785	1887
600	7180	835	1810
500	7610	876	1756

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD38E400H516-188-A0	380	50/60	735	2000	9800	80

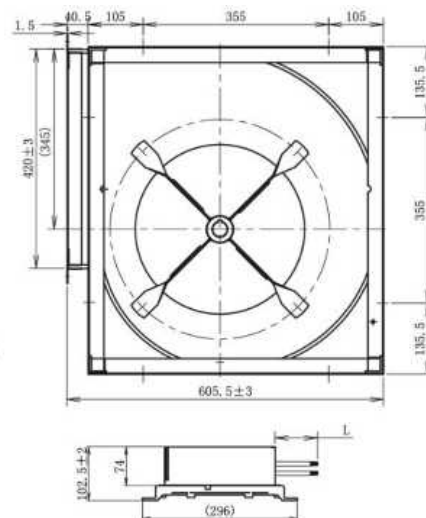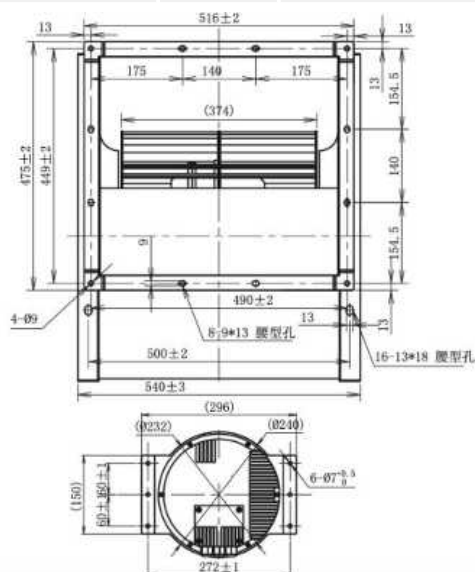

注：引线长度L根据客户需求定制(默认长度1.5米)




AC Double Inlet Blower






AC Double Inlet Blower 120mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

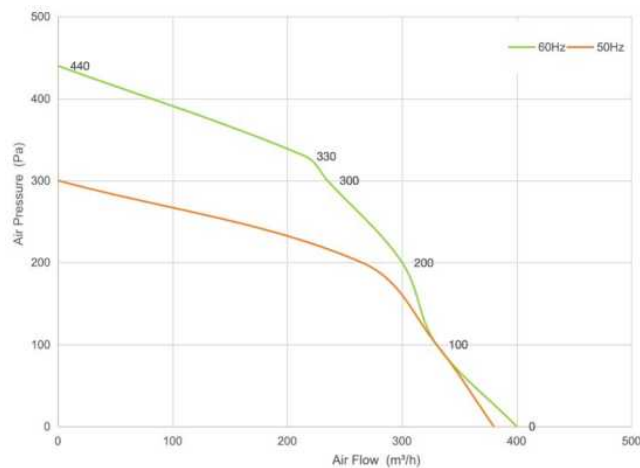

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A120H175-92-A0	230	50	2100	85	400	56
		60	2200	95	380	57

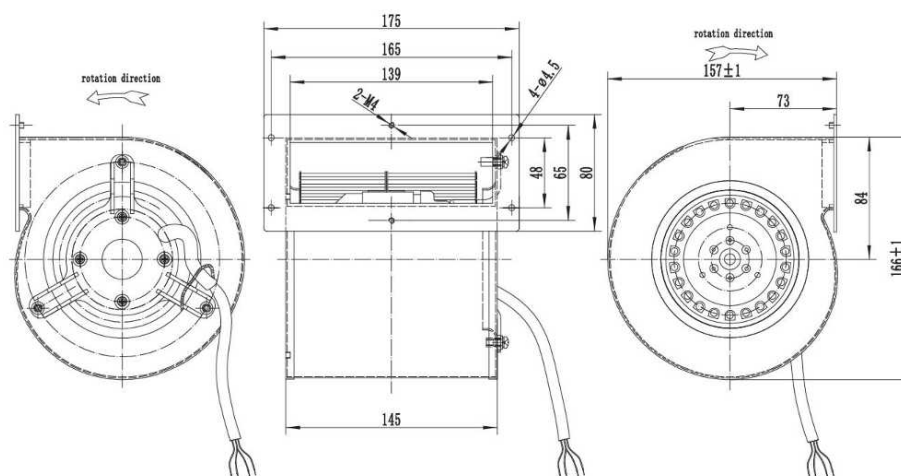

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




AC Double Inlet Blower 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

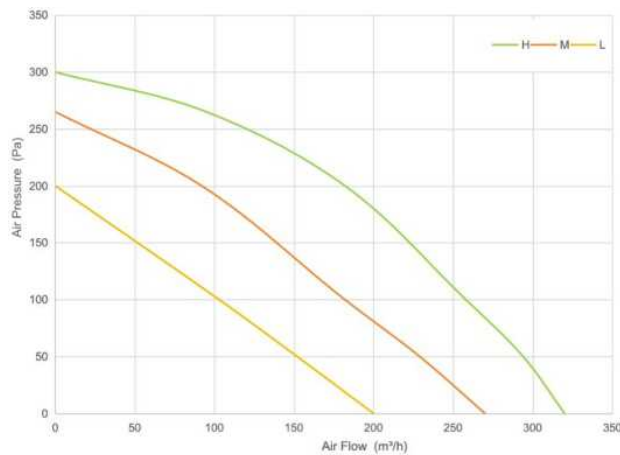

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A133H190-92-A0 3 Speeds	230	50	1450	70	320	40
			1250	60	270	35
			950	47	200	29

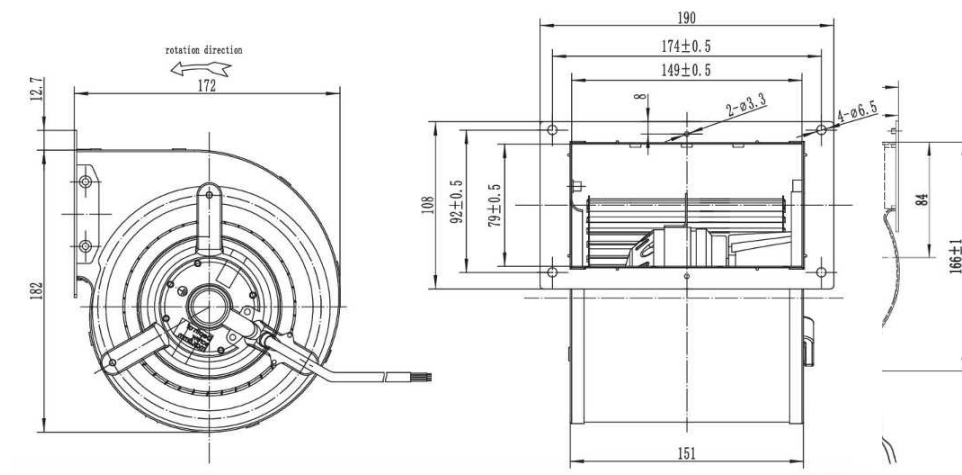

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Double Inlet Blower 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

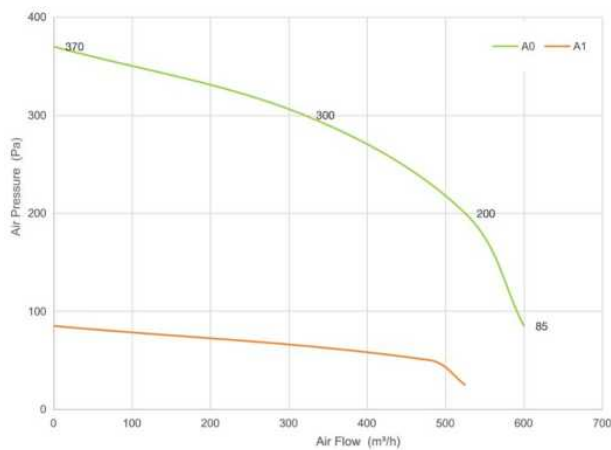

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A133H254-92-A0	230	50	1500	190	680	60
FD23A133H254-92-A1	230	50	1200	70	550	55

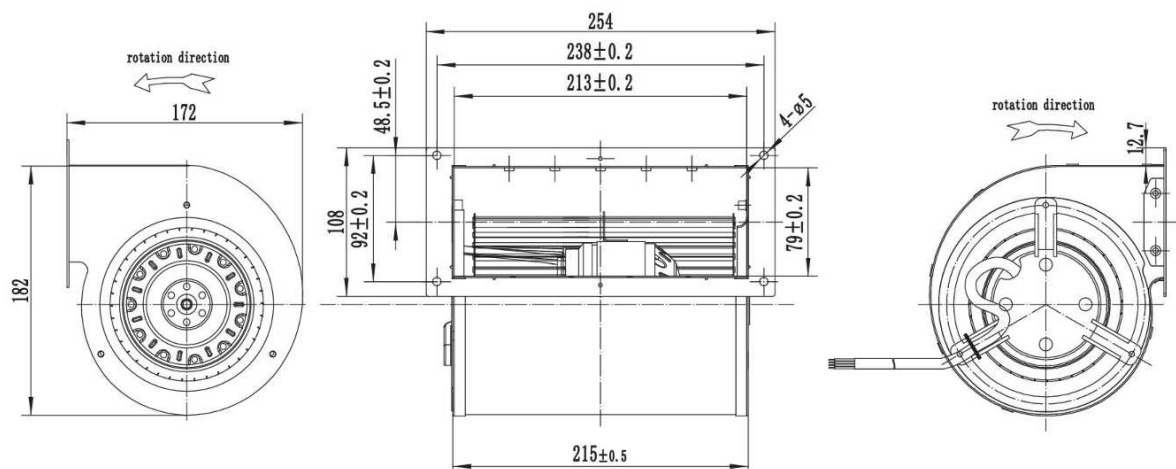

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




AC Double Inlet Blower 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

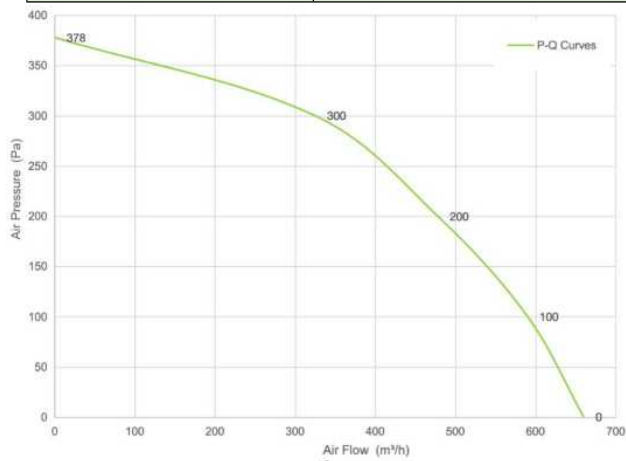

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A133H254-92-A2	230	50	1900	220	660	62

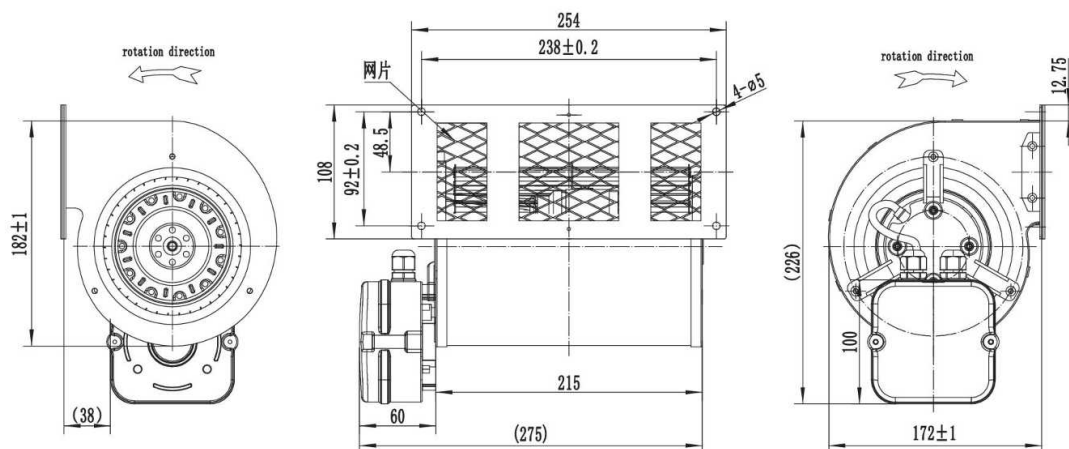

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




AC Double Inlet Blower 133mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

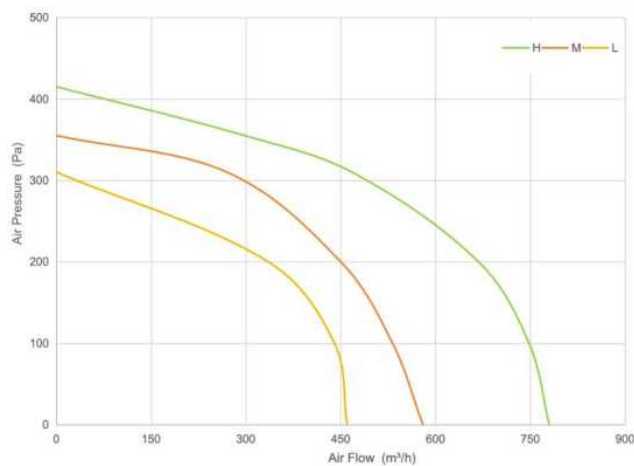

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A133H309-92-A0 3 Speeds	230	50	1200	250	780	58
			900	205	580	51
			700	175	460	46

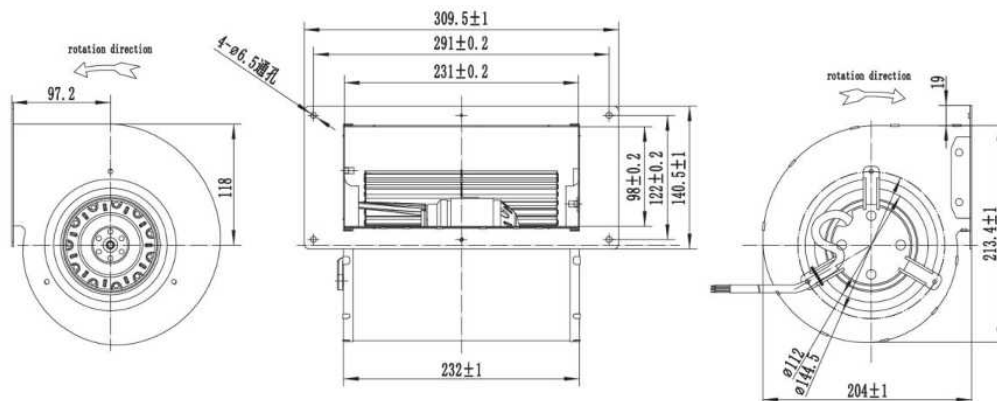

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com




AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

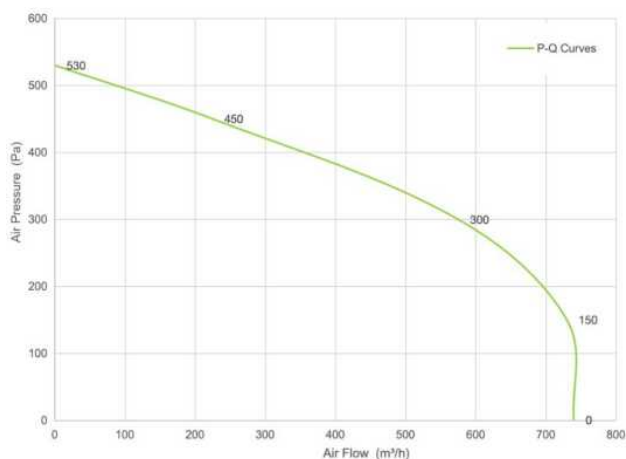

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H230-92-A0	230	50	1370	260	740	60

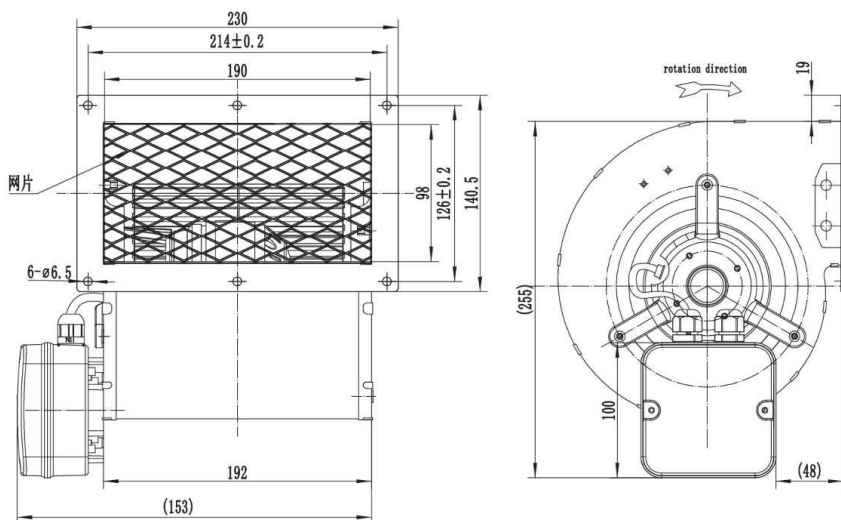

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com





AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

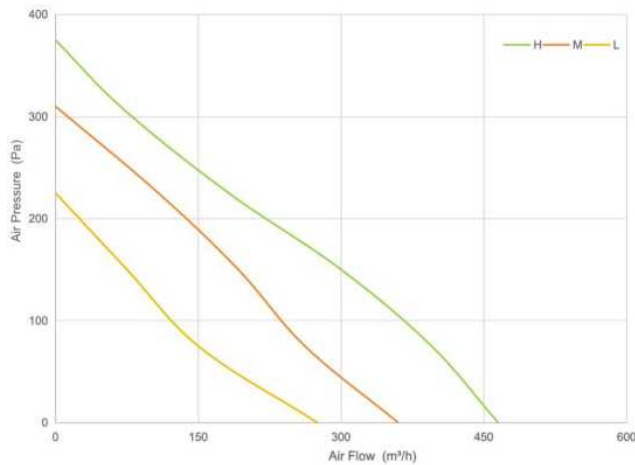

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H220-92-A0 3 Speeds	230	50	1380	105	465	40
			1120	75	360	35
			880	58	275	29

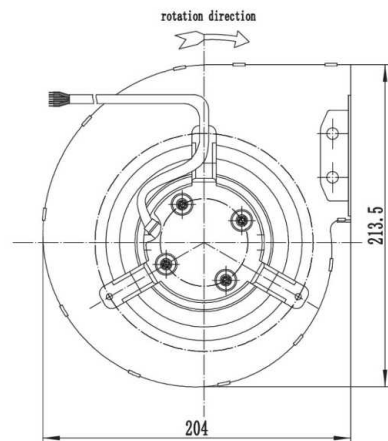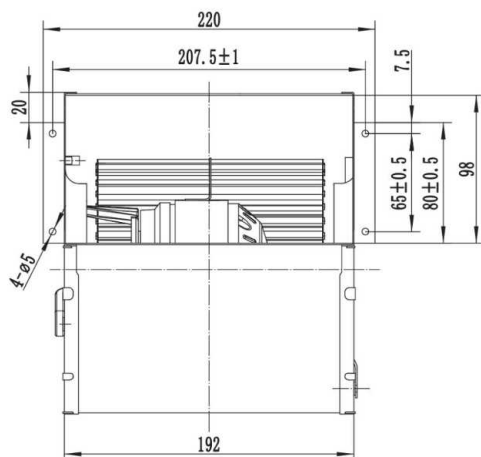

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

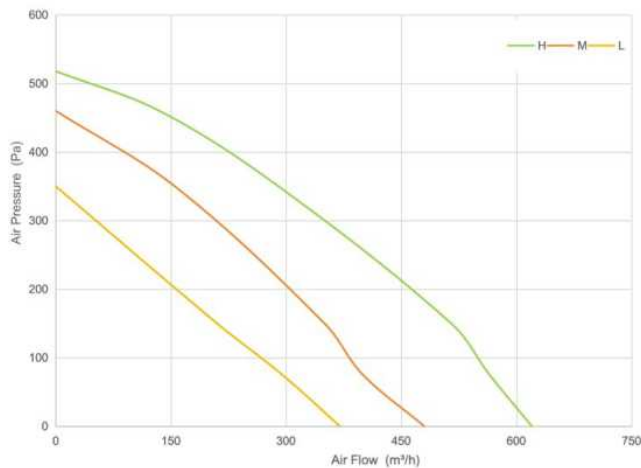

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H220-92-A1 3 Speeds	230	50	1120	250	620	50
			850	205	480	48
			650	175	370	42

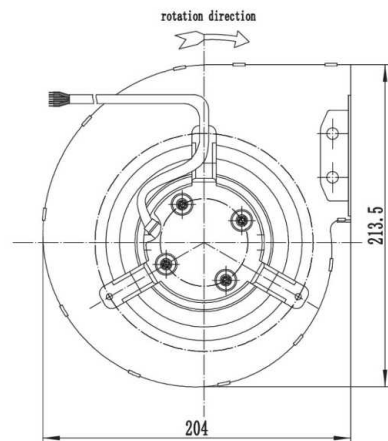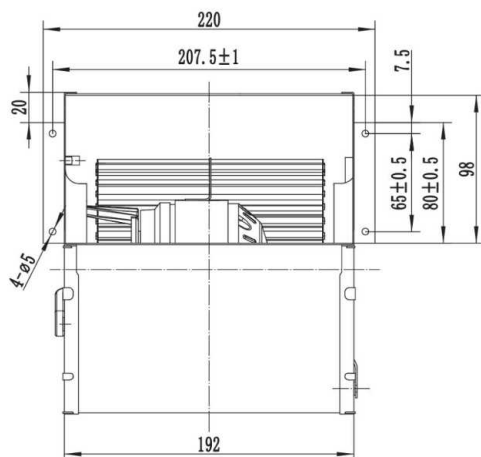

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

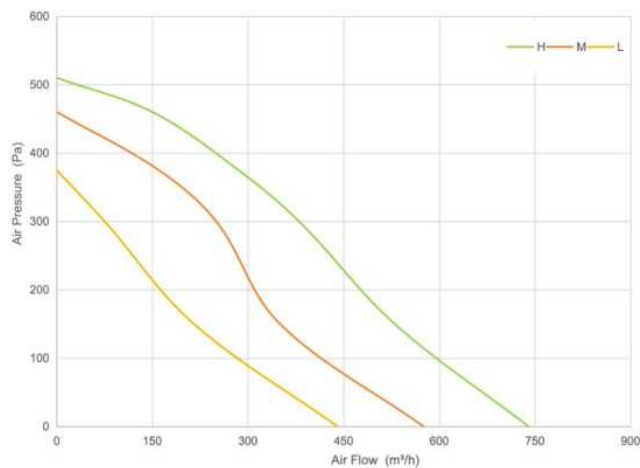

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H220-92-A2 3 Speeds	230	50	1370	260	740	60
			1030	210	575	53
			800	180	440	46

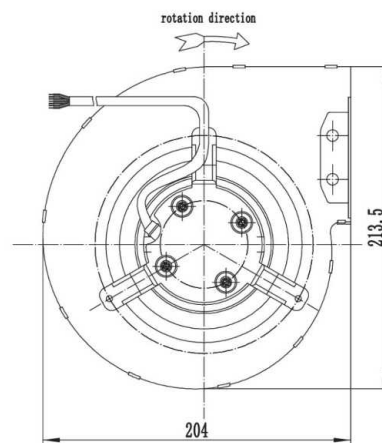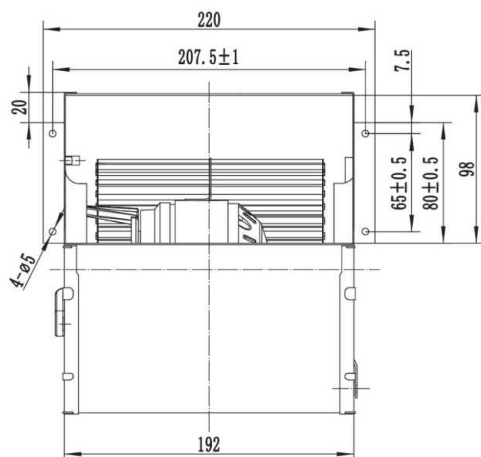

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

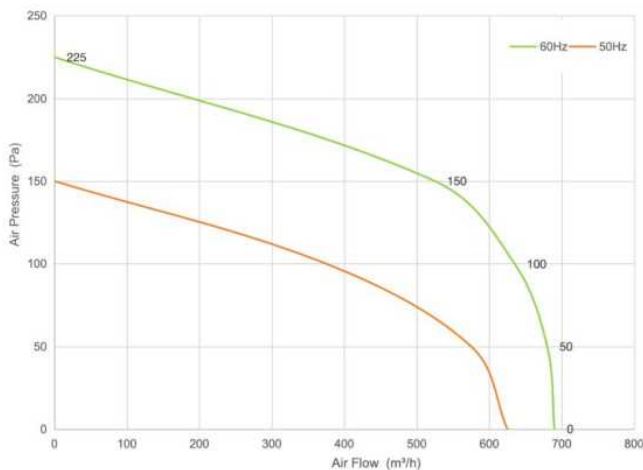

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H220-92-A3	230	50	1230	95	625	57
		60	130	110	690	60

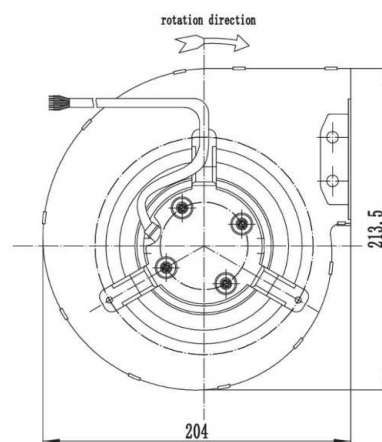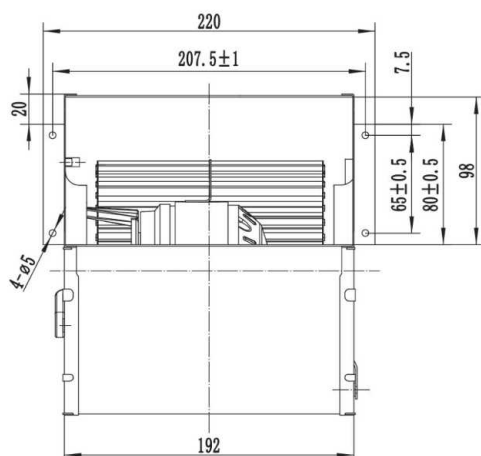

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

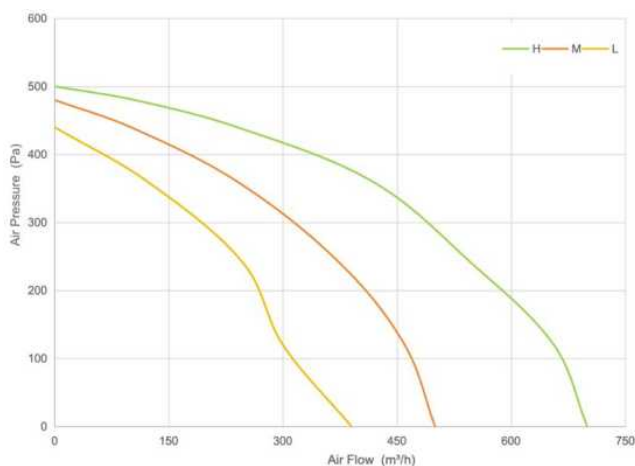

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H168-92-A0 3 Speeds	230	50	1380	235	700	57
			1030	195	500	48
			800	165	390	42

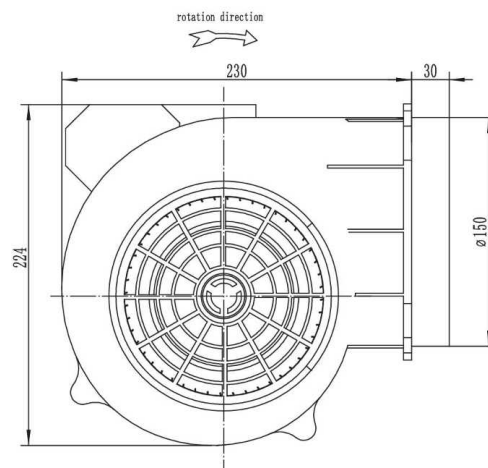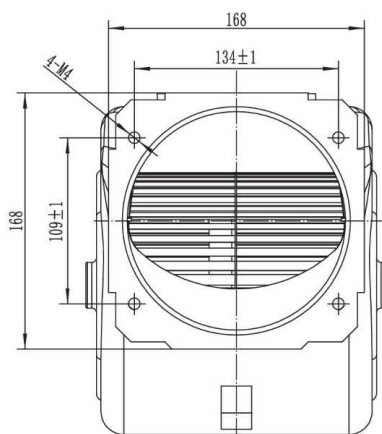

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

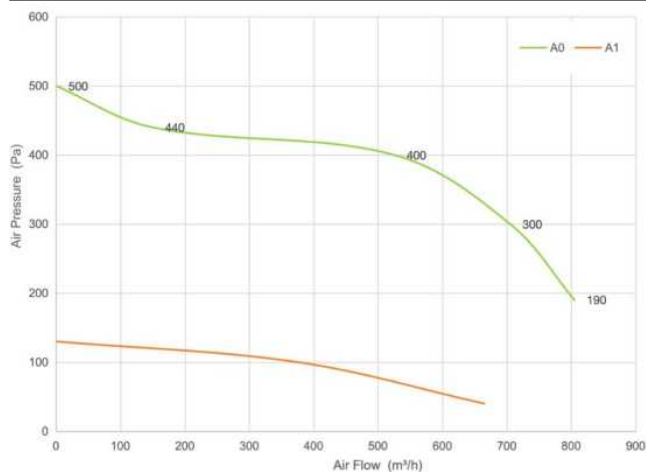

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H309-92-A0	230	50	1500	250	900	60
FD23A146H309-92-A1	230	50	1320	100	750	52

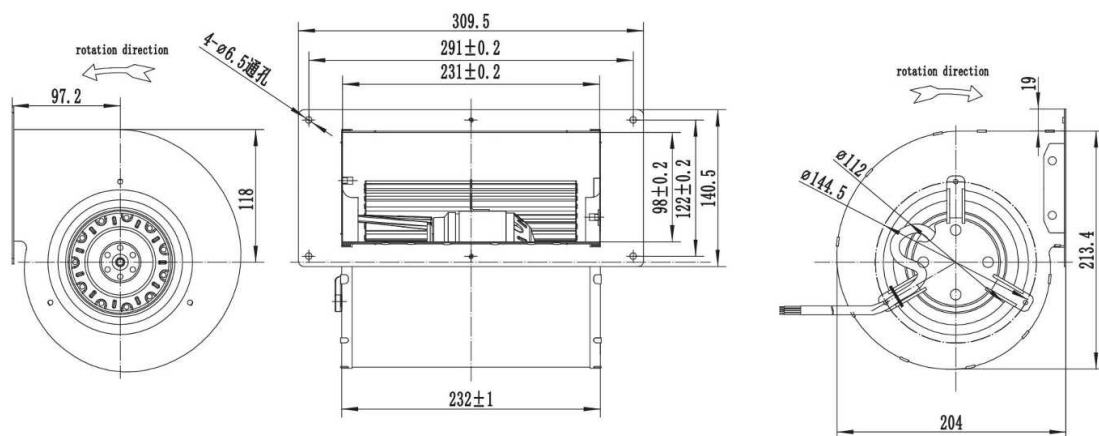

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 146mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

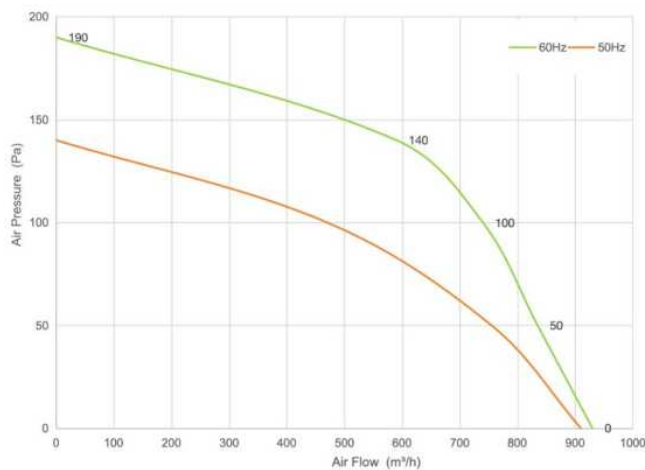


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A146H254-92-A0	230	50	1210	115	910	47
		60	1250	150	930	48

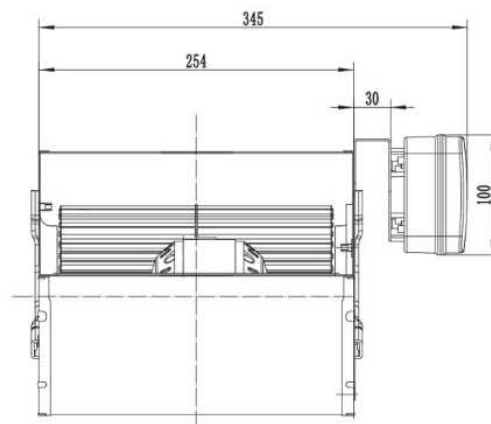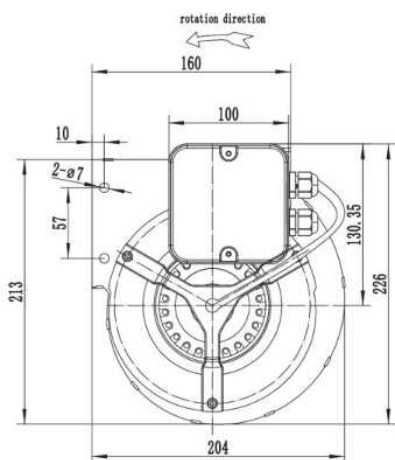




AC Double Inlet Blower 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

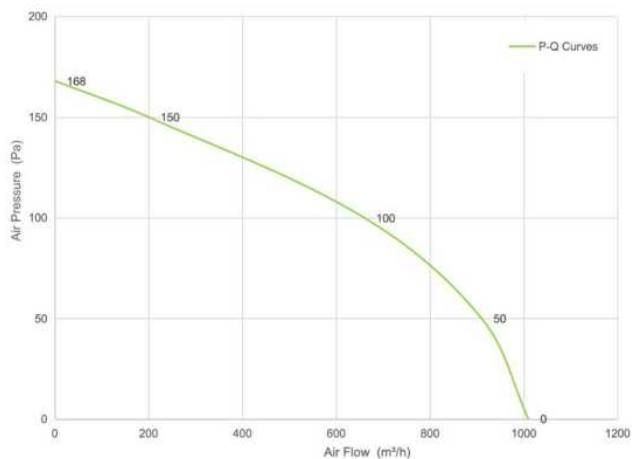

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A160H310-92-A0	230	50	1000	120	1010	54

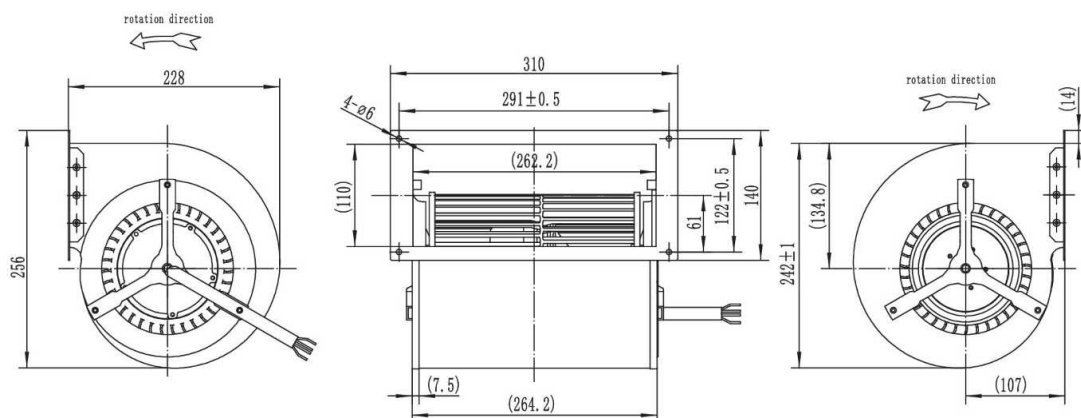

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Double Inlet Blower 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

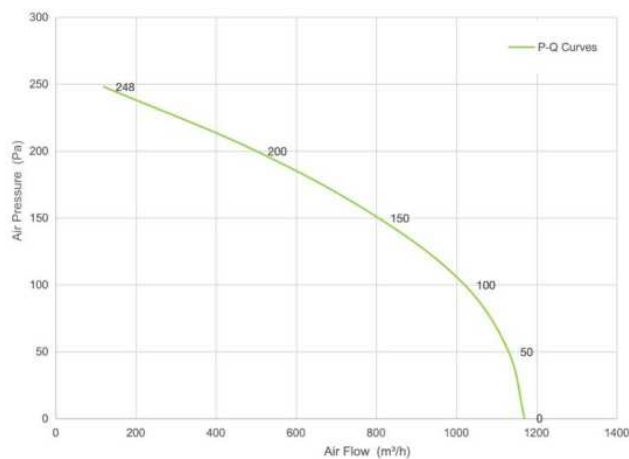

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A180H270-92-A0	230	50	1250	200	1170	63

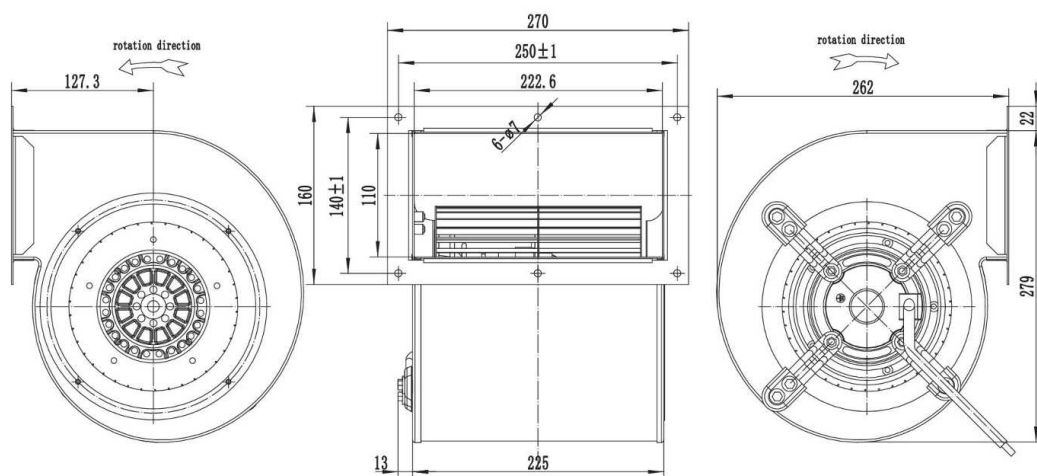

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China


Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Double Inlet Blower 180mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

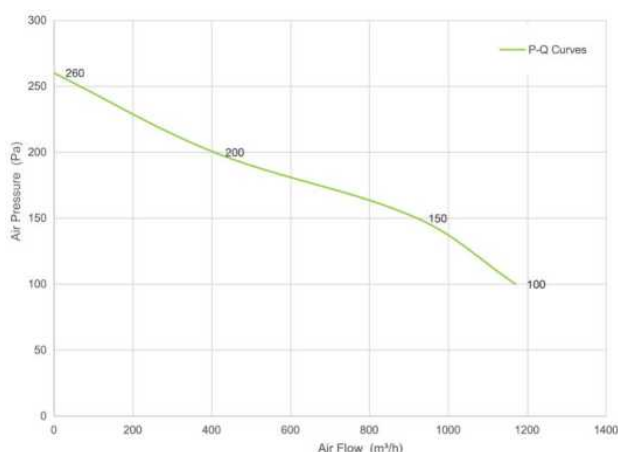

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A180H270-92-A1	230	50	1250	200	1170	63

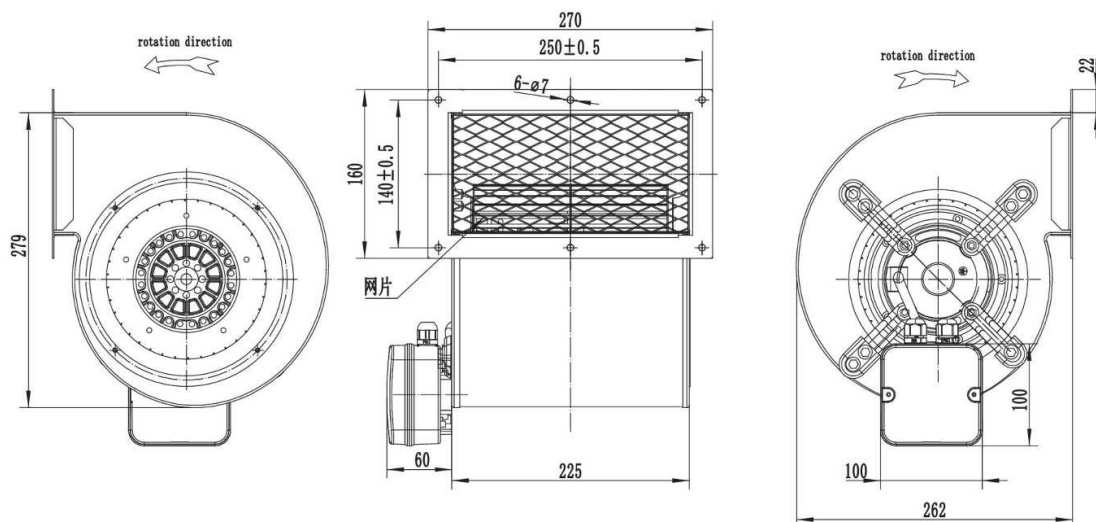

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Double Inlet Blower 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

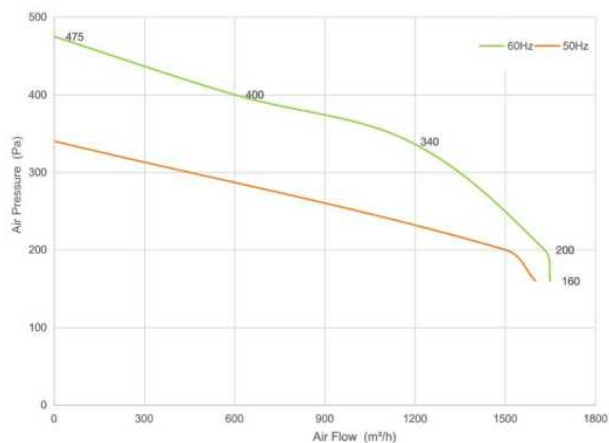

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A200H230-102-A0	230	50	1200	350	1970	68
		60	1450	410	1680	71

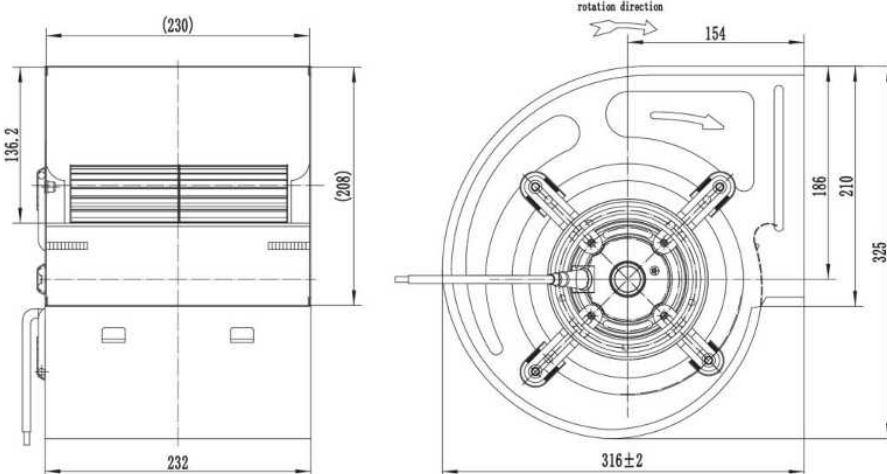

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

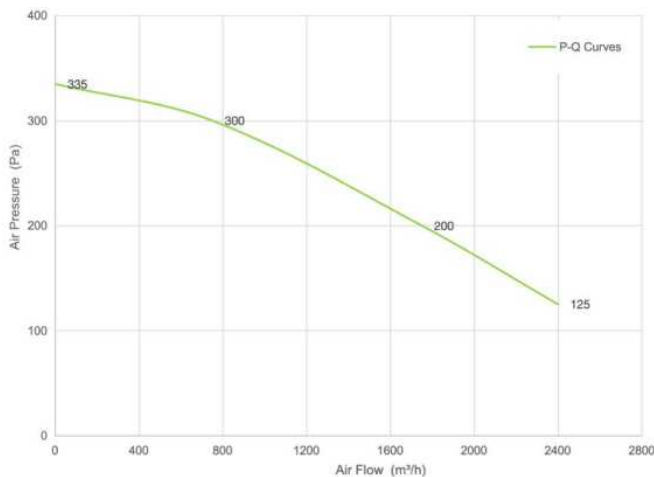


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A200H301-137-A0	230	50	1300	600	2130	75
FD38A200H301-137-A0	380	50	1300	600	2130	75

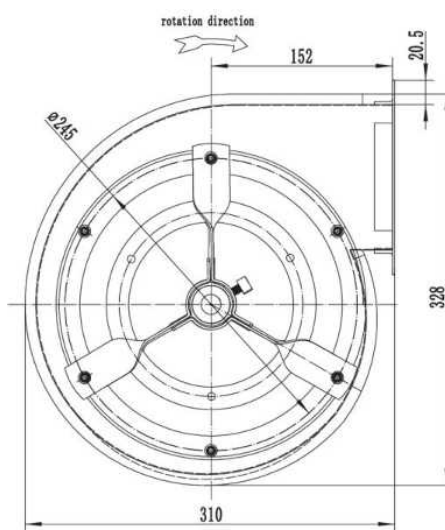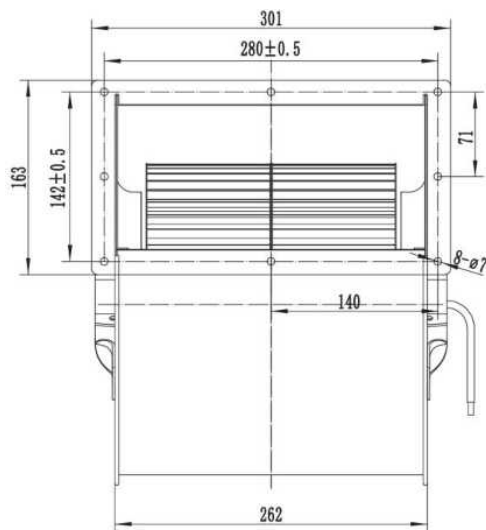





AC Double Inlet Blower 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

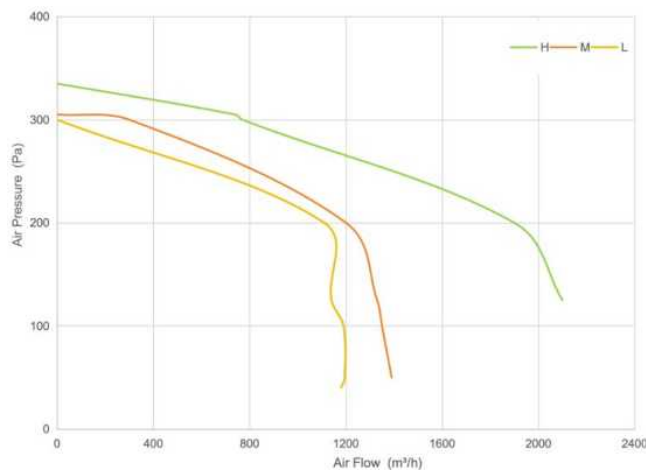

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A200H301-137-A1 3 Speeds	230	50	1280	620	2100	75
			920	360	1250	60
			810	300	1050	55

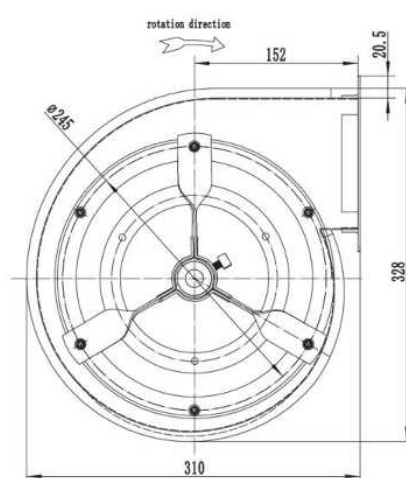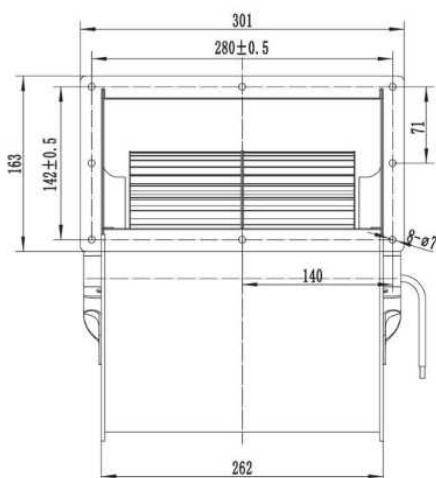

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

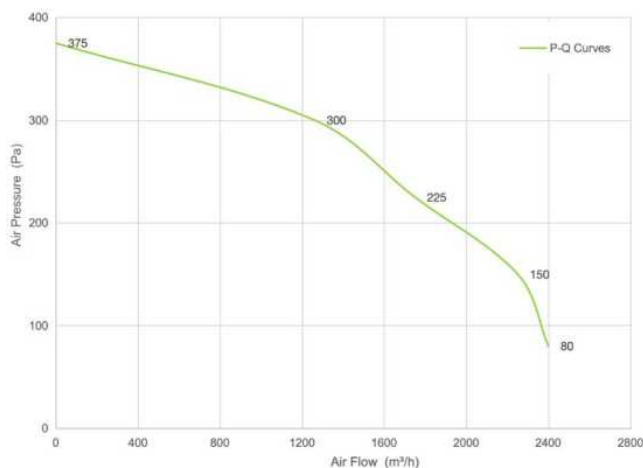

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A225H304-137-A0	230	50	1300	650	2400	75
FD38A225H304-137-A0	380	50	1300	650	2400	75

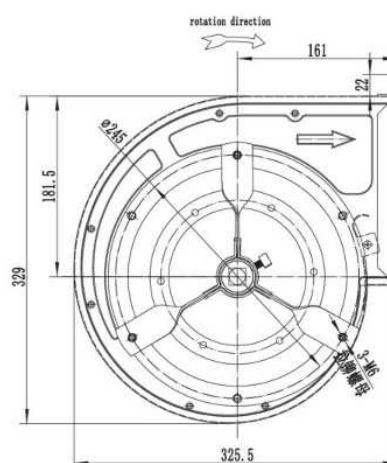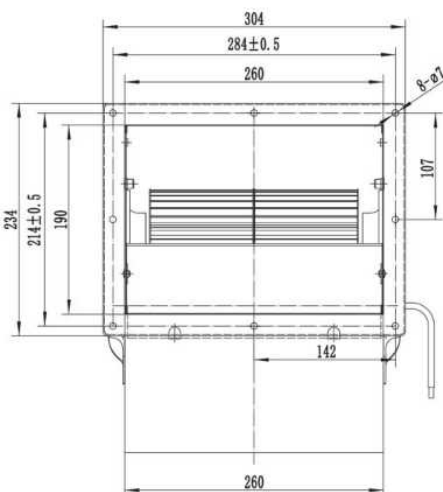

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

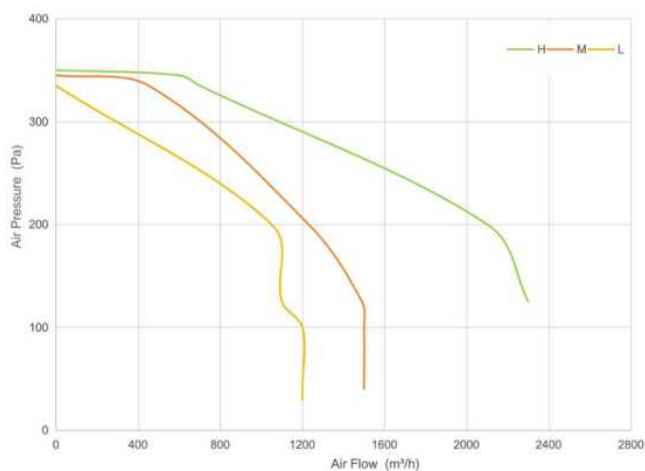

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A225H304-137-A1 3 Speeds	230	50	650	620	1290	73
			370	360	920	60
			310	300	670	56

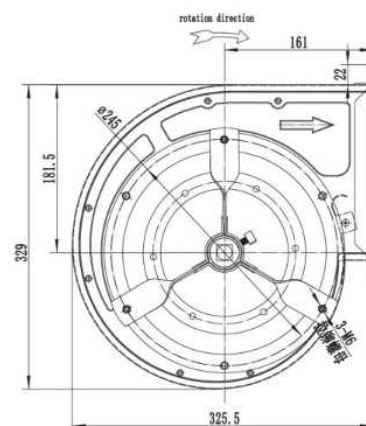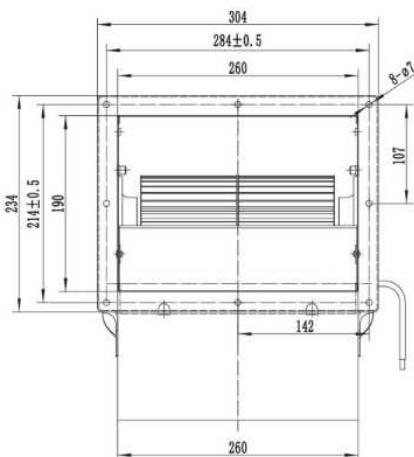

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekpower.com

Website: www.airtekpower.com





AC Double Inlet Blower 225mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

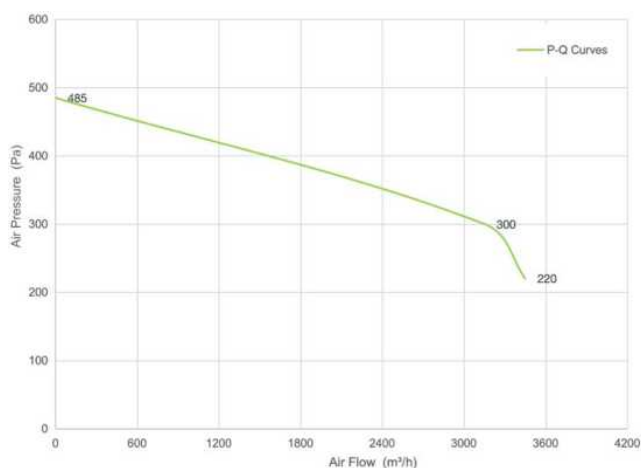

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A250H344-137-A0	230	50	1300	900	3950	77
FD38A250H344-137-A0	380	50	1300	900	3950	77

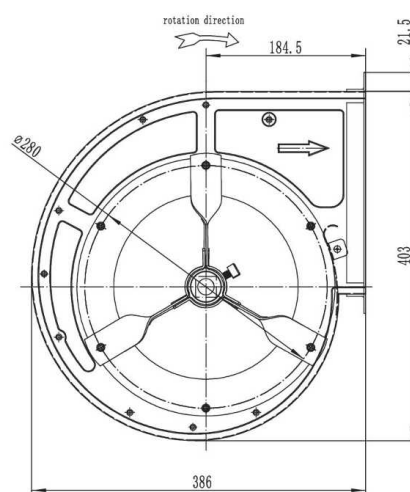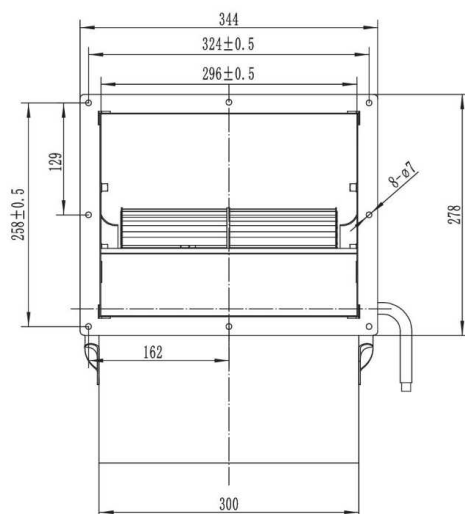

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China


Email: sales@airtekipower.com

Website: www.airtekipower.com





AC Double Inlet Blower 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

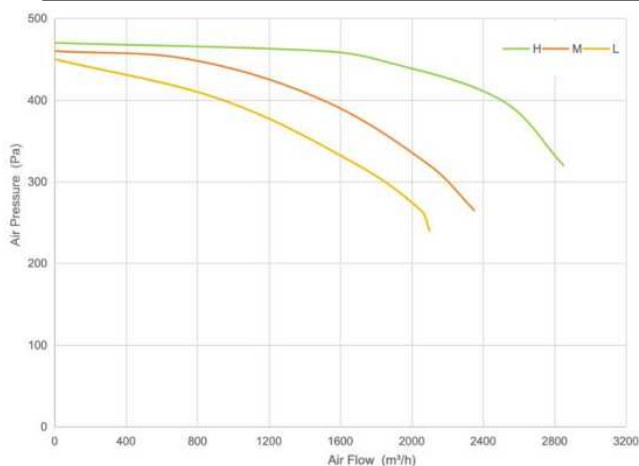

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
FD23A250H344-137-A1 3 Speeds	230	50	1300	800	3450	73
			1200	650	2600	66
			1100	500	2000	61

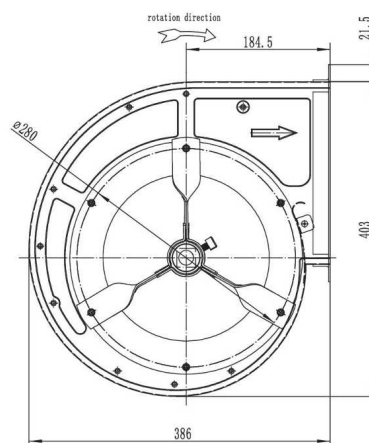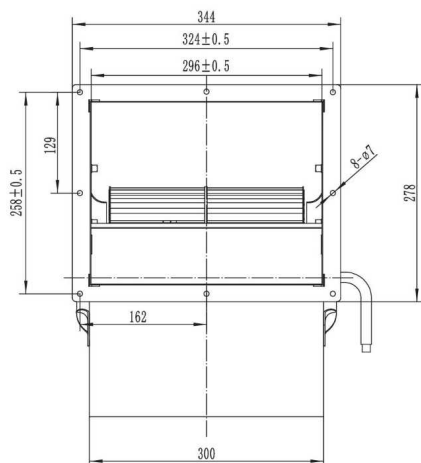

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China

Email: sales@airtekpower.com

Website: www.airtekpower.com




EC *Axial* Fan






EC Axial Fan 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

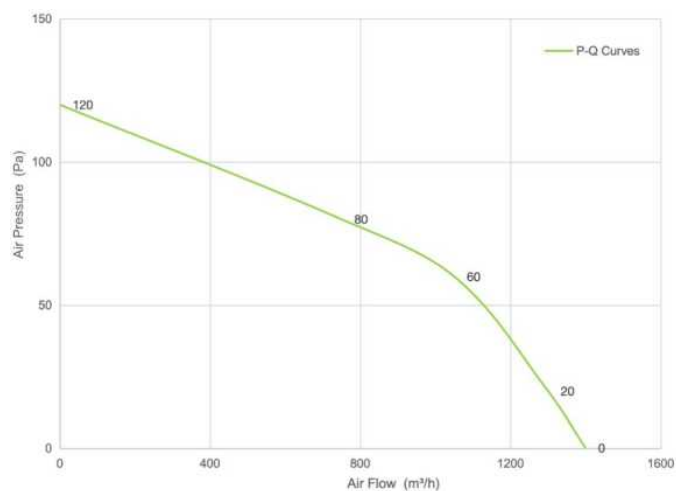


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E250S-72-C0	230	50/60	2250	61	1400	60

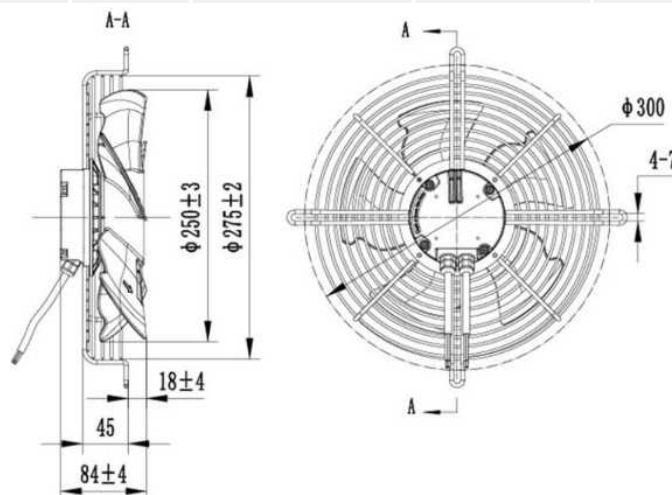




EC Axial Fan 250mm

Impeller Material	Painting Steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

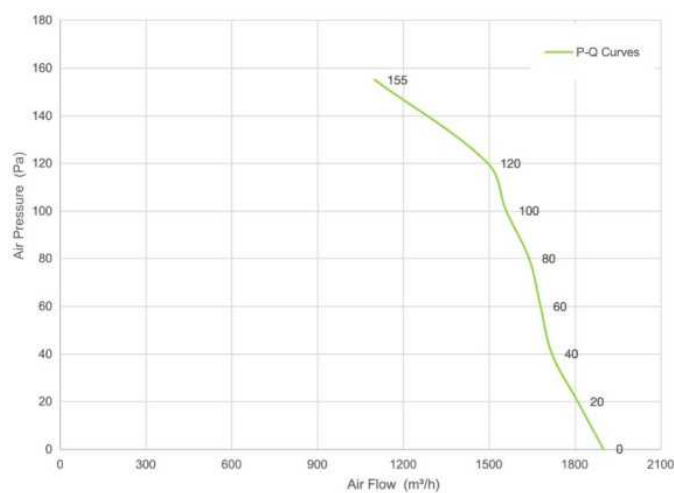


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E250S-92-C1	230	50/60	3000	120	1900	70

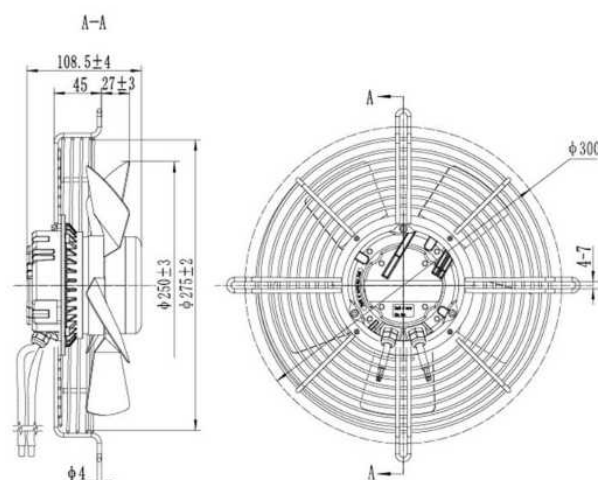




EC Axial Fan 300mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

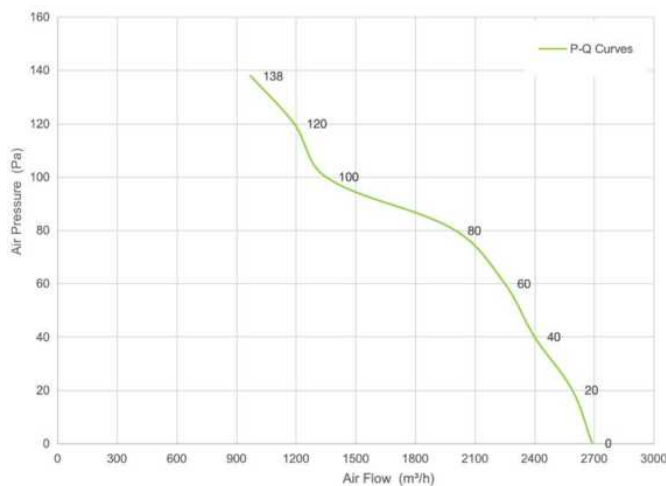


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E300S-92-C0	230	50/60	2100	126	2690	65

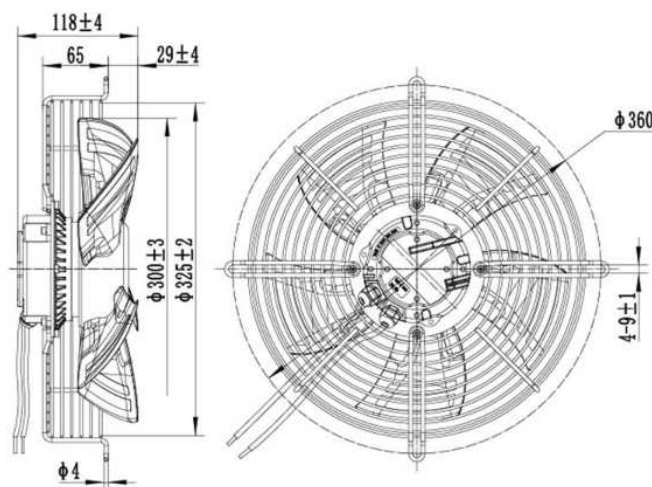




EC Axial Fan 350mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

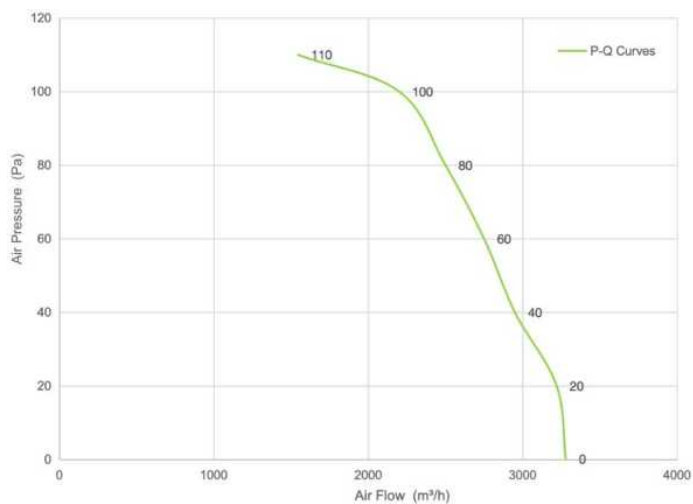


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E350S-92-C0	230	50/60	1700	139	3280	62

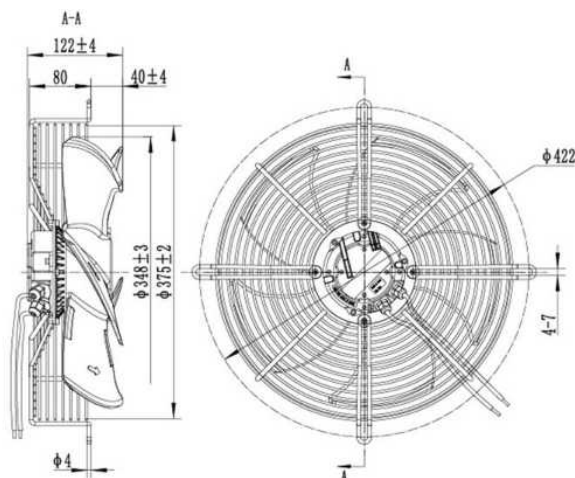




EC Axial Fan 350mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

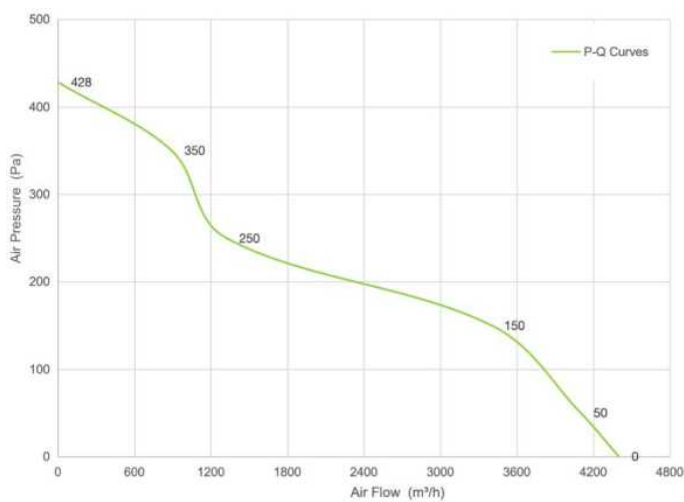



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E350S-102-C1	230	50/60	2200	414	4400	72

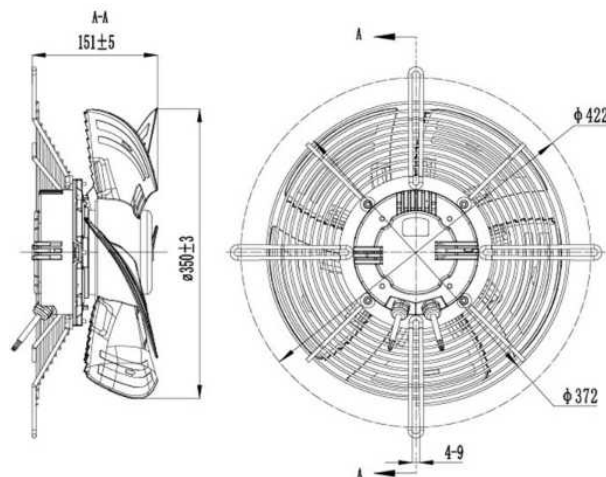




EC Axial Fan 400mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

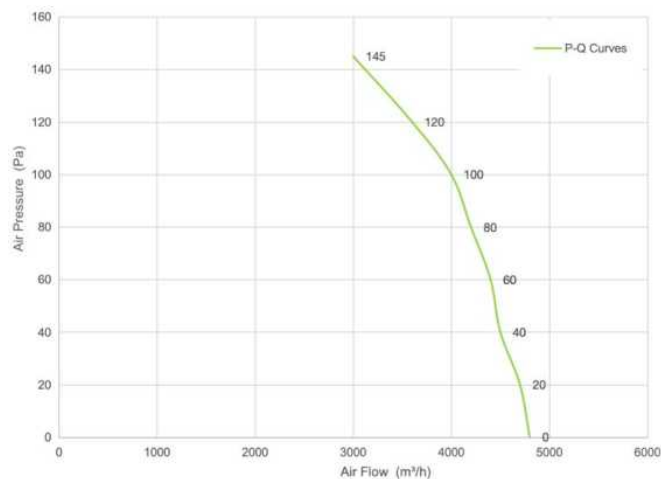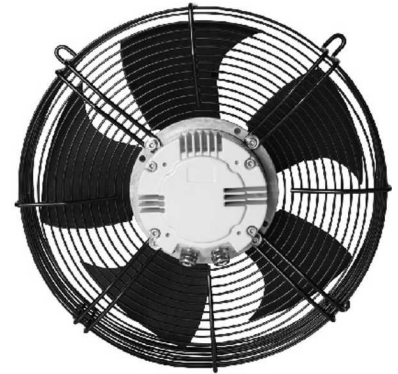



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E400S-102-C0	230	50/60	1600	273	4850	66

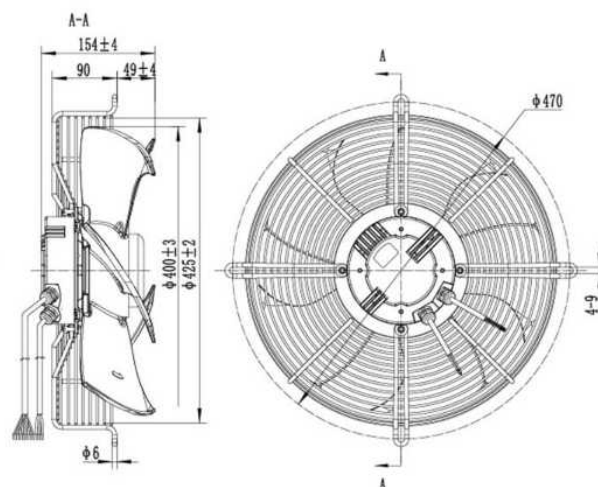




EC Axial Fan 450mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

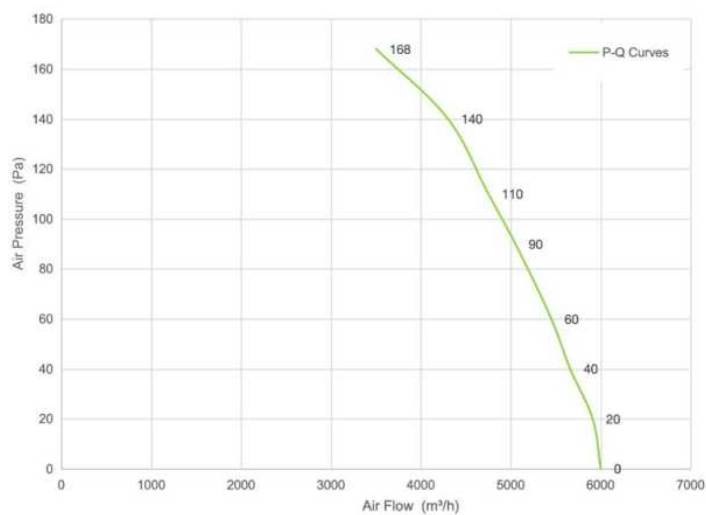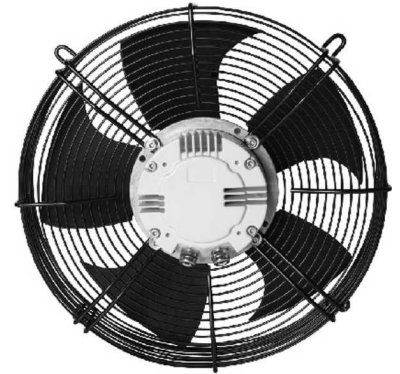



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E450S-102-C0	230	50/60	1500	332	6000	67

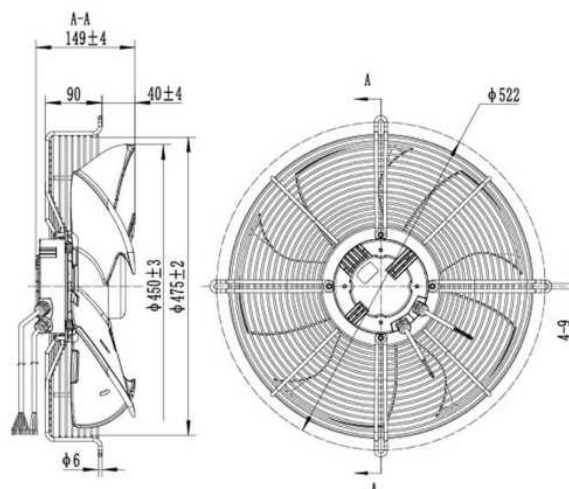




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

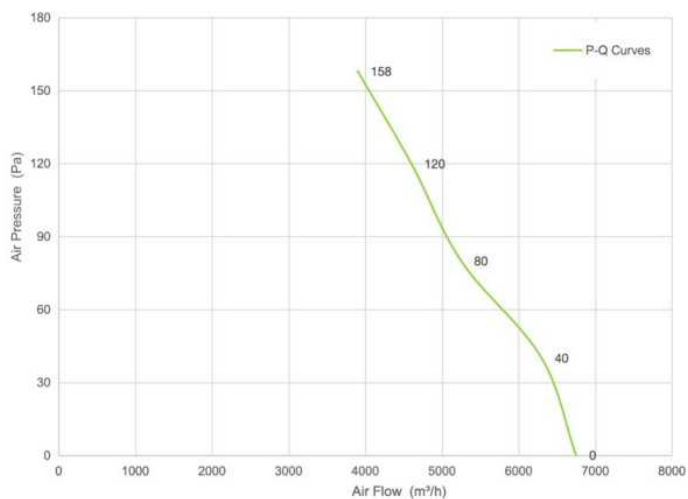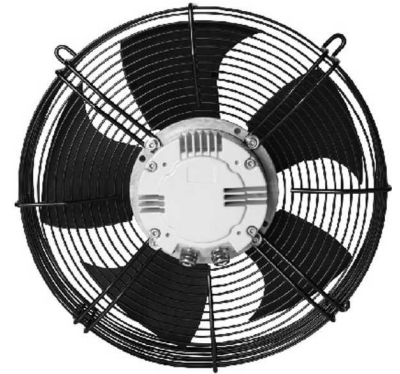


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E500S-102-C0	230	50/60	1380	343	6600	74

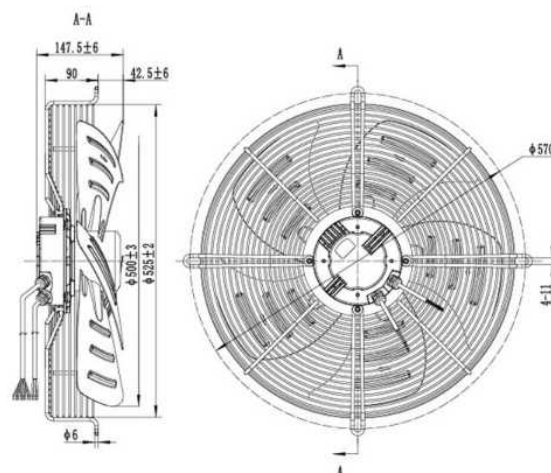




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

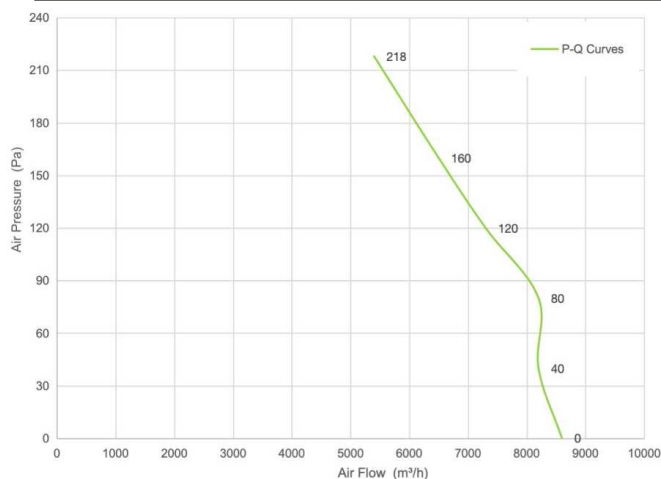


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E500S-137-C0	230	50/60	1750	498	8650	72

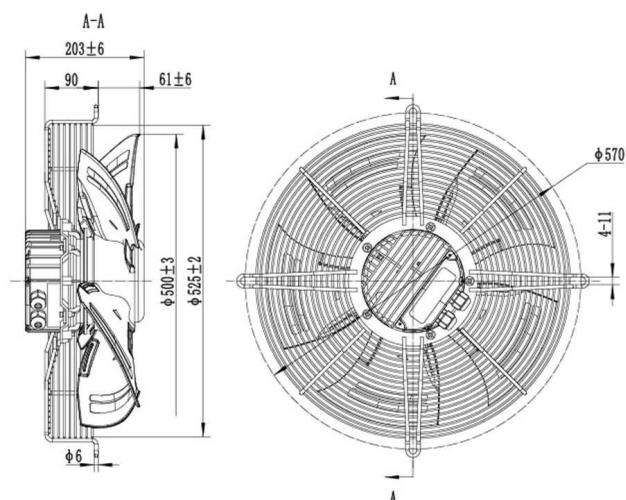




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

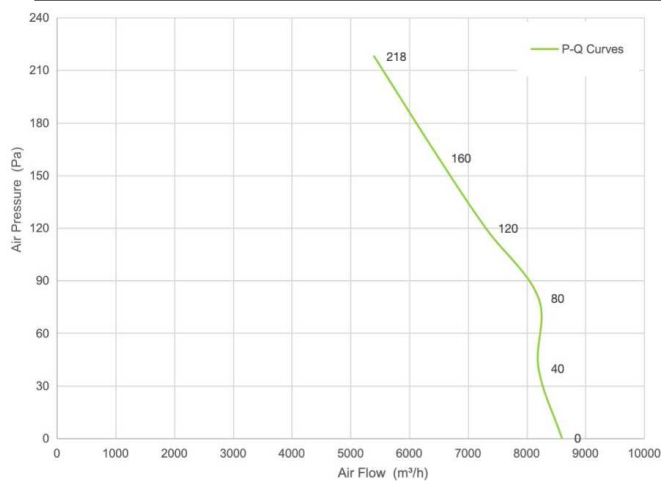


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E500S-137-C1	3 phase 230	50/60	1750	495	8650	72

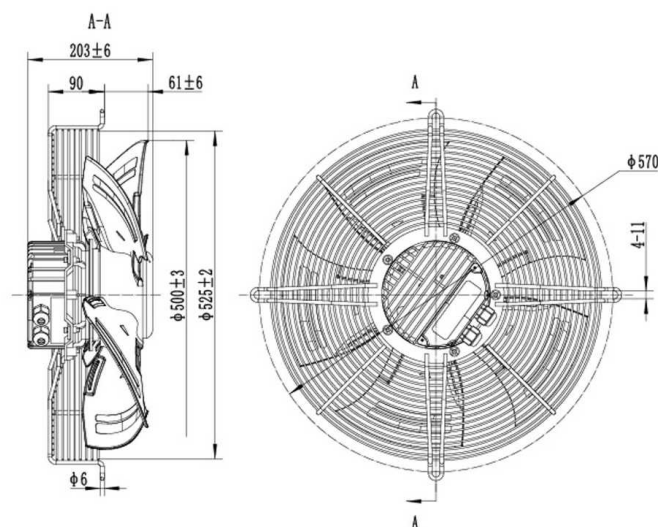




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

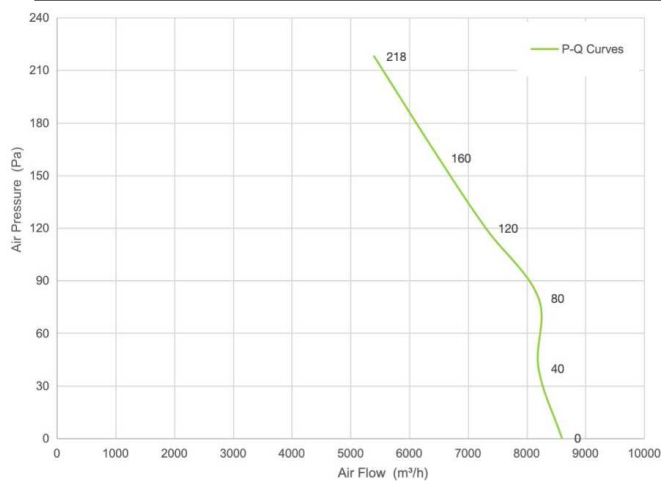



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38E500S-137-C0	380	50/60	1750	488	8650	72

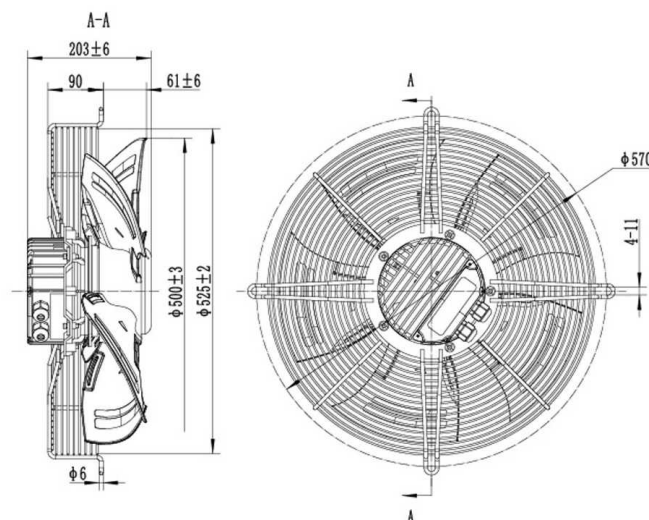




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

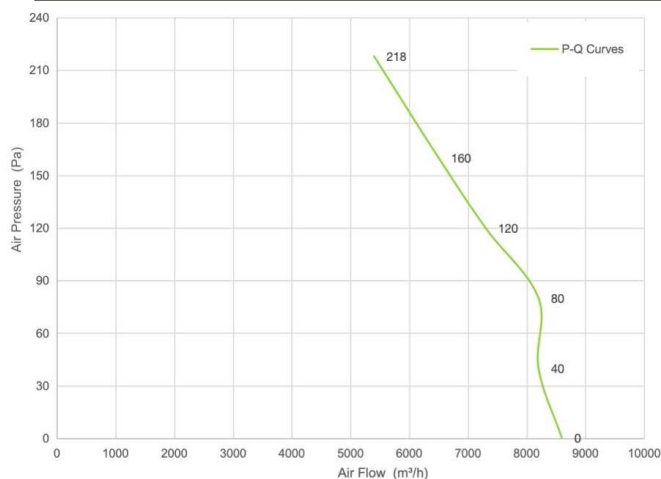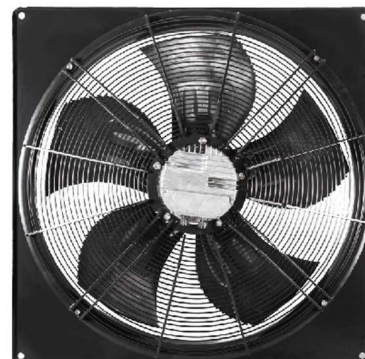



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E500S-137-C0	230	50/60	1750	498	8650	72

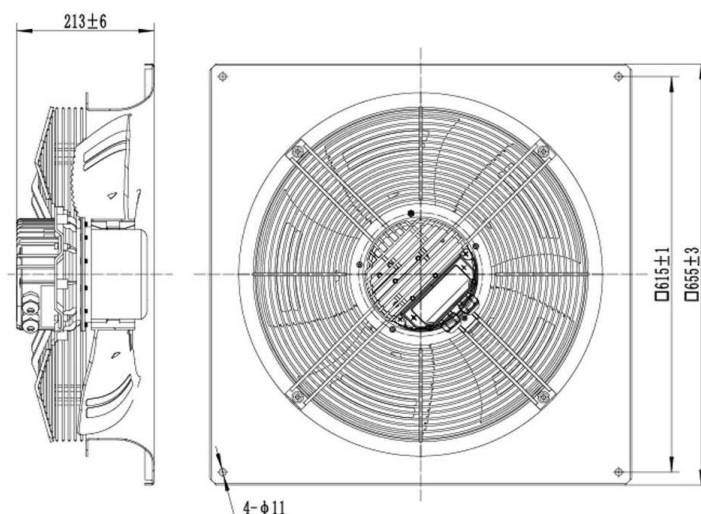




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

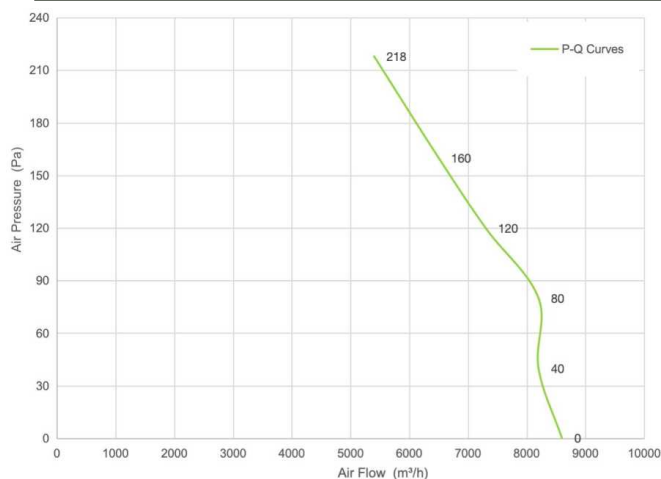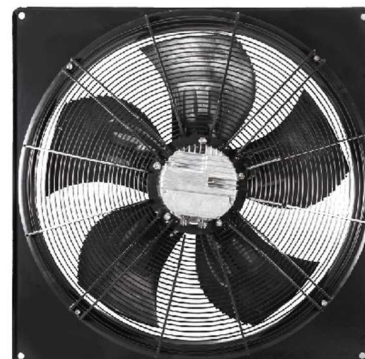



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E500S-137-C1	3 phase 230	50/60	1750	495	8650	72

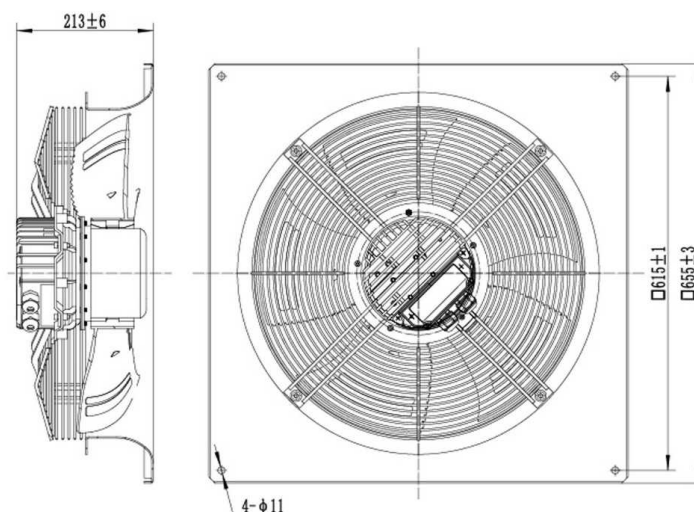




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

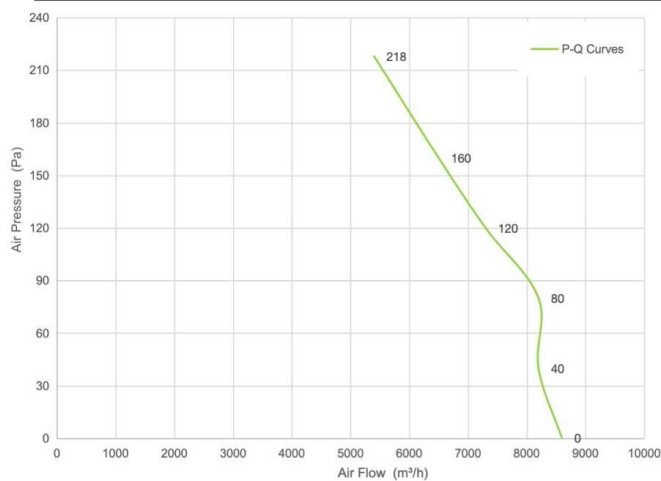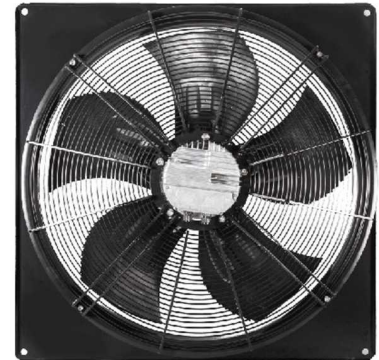


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E500S-137-C0	380	50/60	1750	488	8650	72

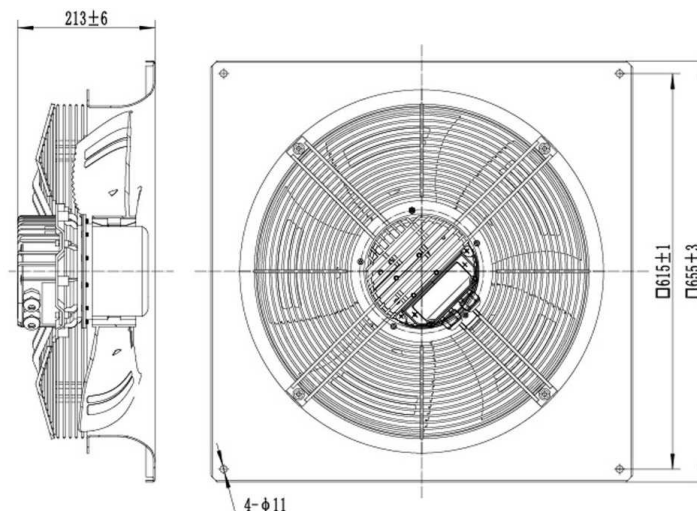




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

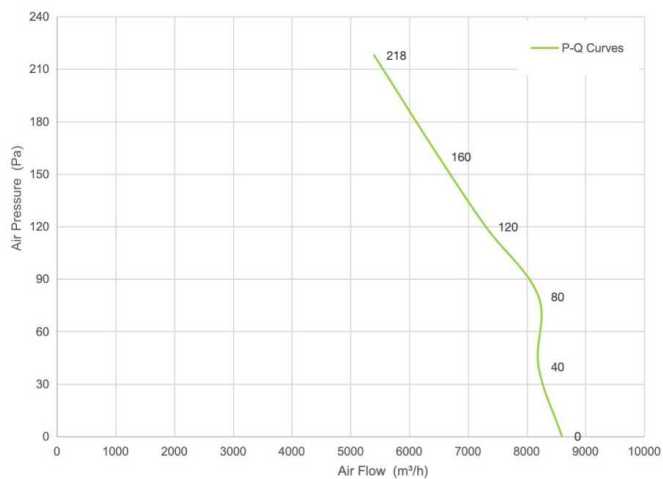


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R23E500S-137-C0	230	50/60	1750	420	8650	72

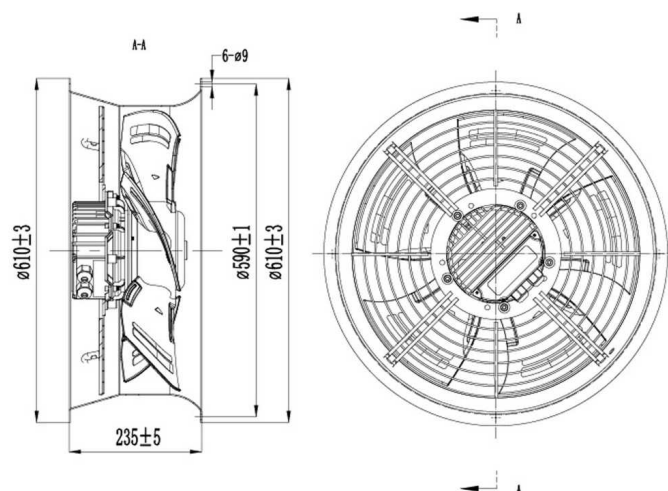




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

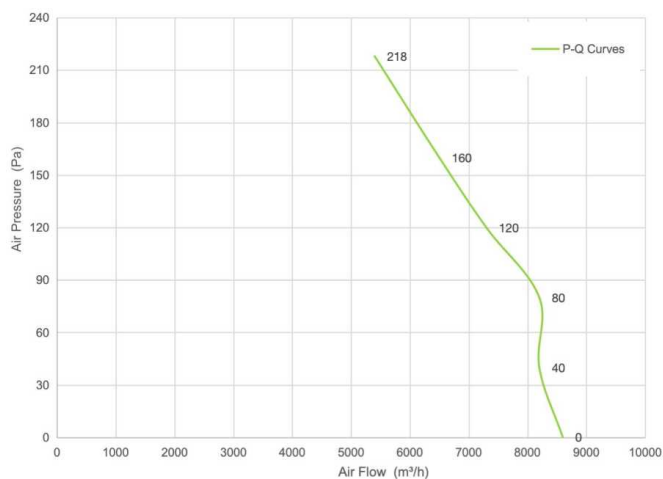


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R23E500S-137-C1	3 phase 230	50/60	1750	420	8650	72

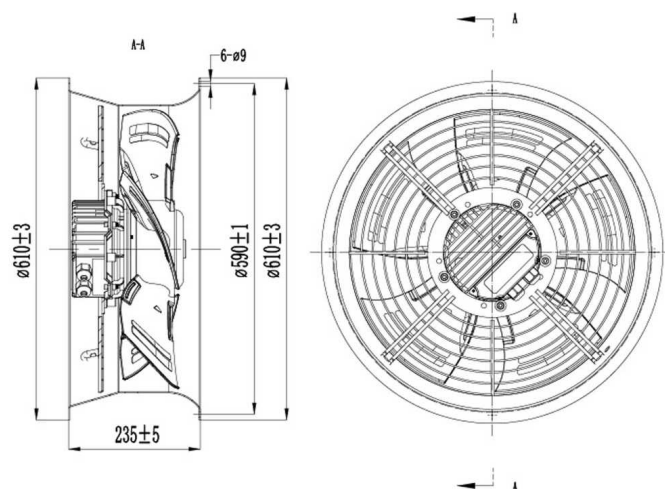




EC Axial Fan 500mm

Impeller Material	PA66 + GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

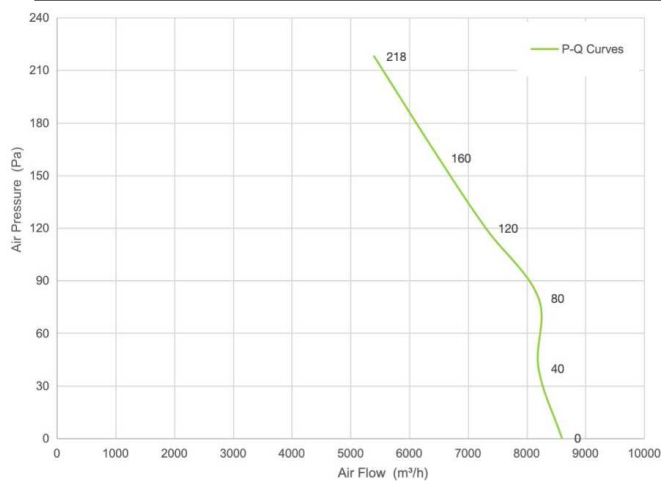


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R38E500S-137-C0	380	50/60	1750	410	8650	72

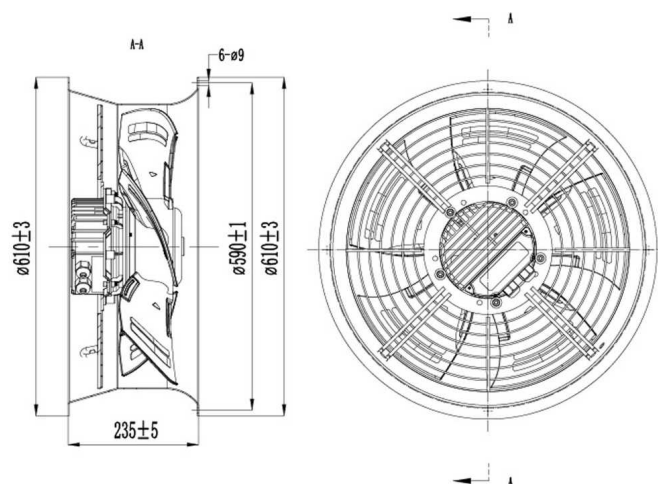




EC Axial Fan 550mm

Impeller Material	Painting Steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

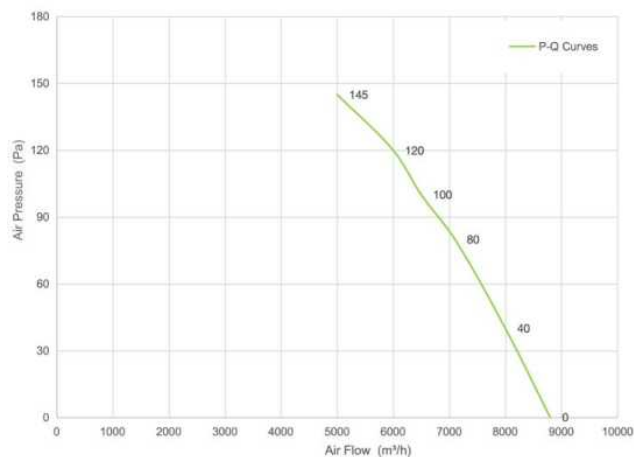


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E550S-102-C0	230	50/60	1200	445	8900	69

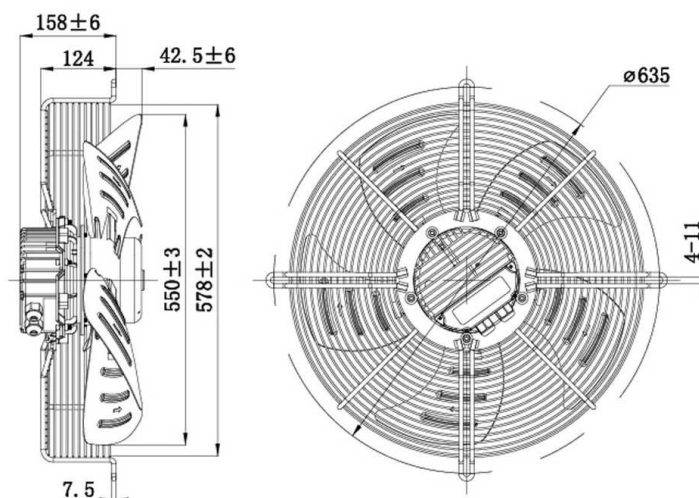




EC Axial Fan 550mm

Impeller Material	Painting Steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

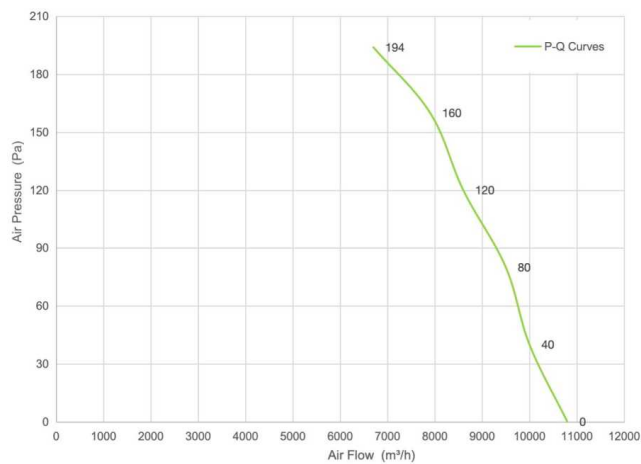


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E550S-102-C1	3 phase 230	50/60	1450	800	10800	73

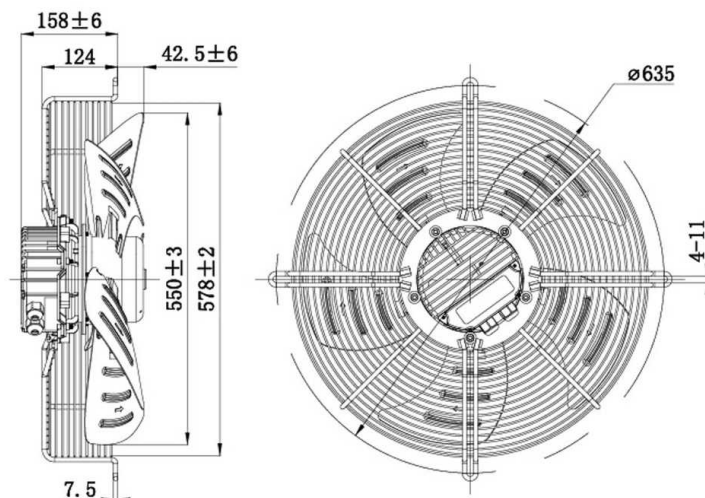




EC Axial Fan 550mm

Impeller Material	Painting Steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

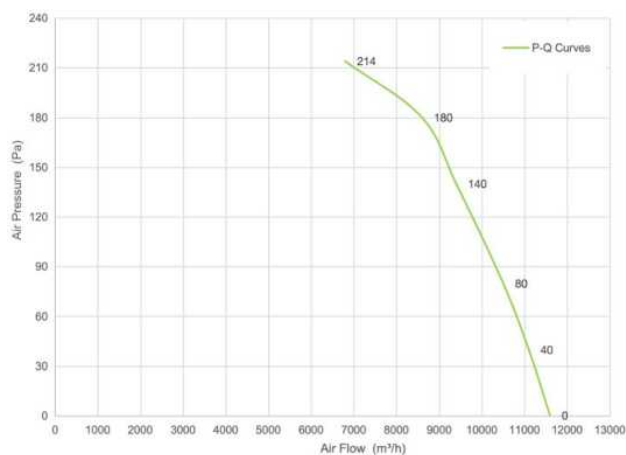



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38E550S-137-C2	380V	50/60	1580	1025	11600	75

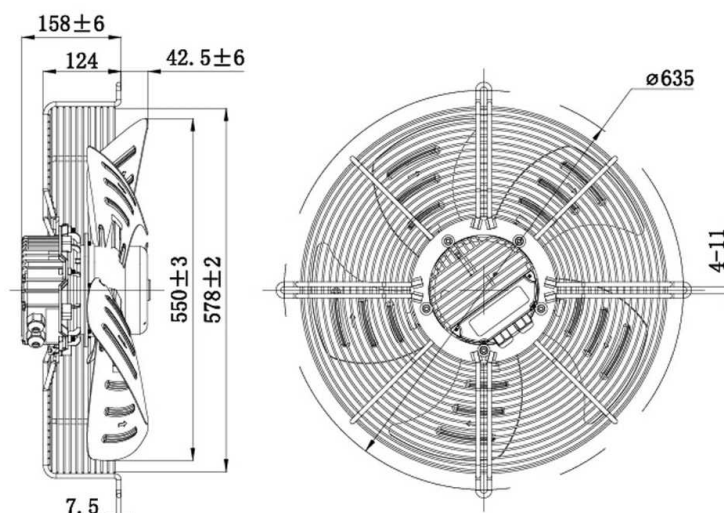




EC Axial Fan 550mm

Impeller Material	Painting Steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

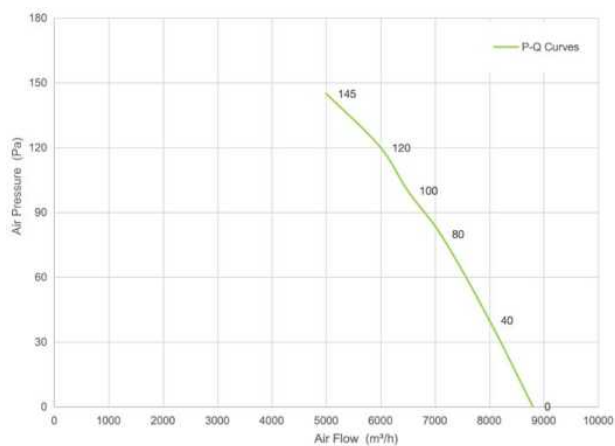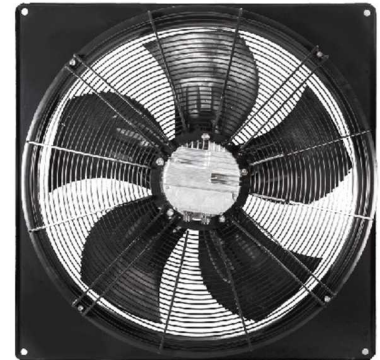



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E550S-102-C0	230	50/60	1200	445	8900	69

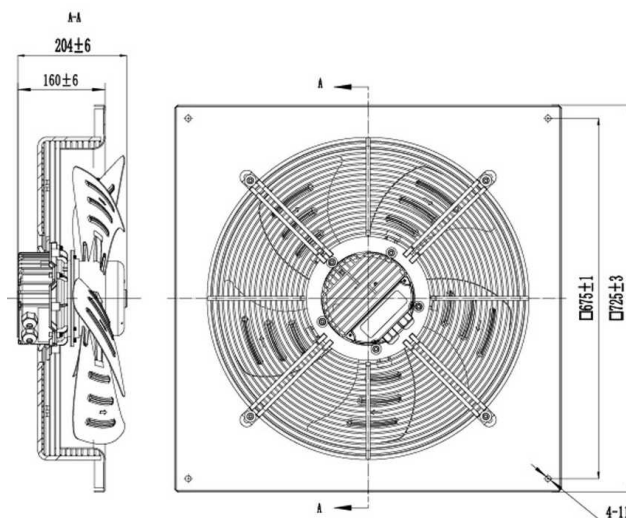



EC Axial Fan 550mm

Impeller Material	Painting Steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

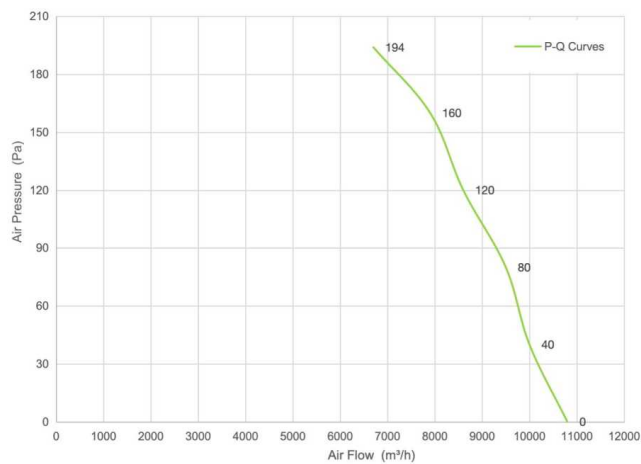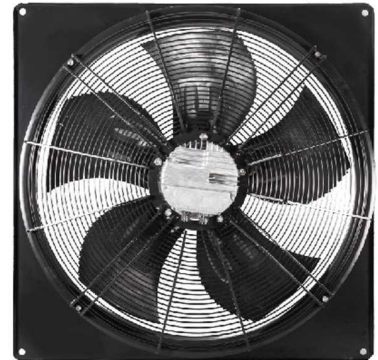

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E550S-102-C1	3 phase 230	50/60	1450	800	10800	73

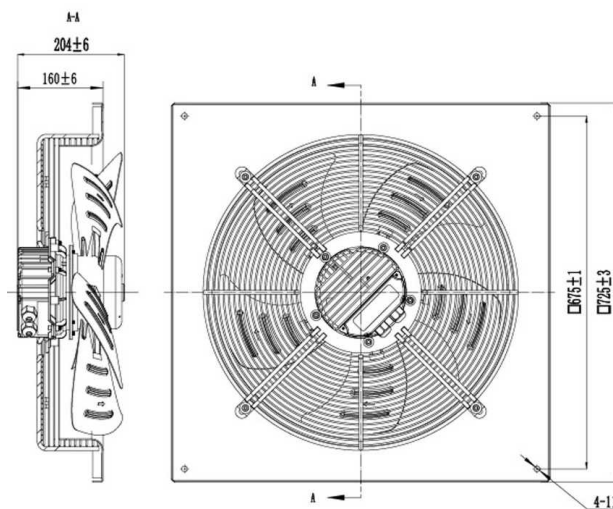




Figure 1 is a graph showing the relationship between Air Pressure (Pa) on the Y-axis and Air Flow (m³/h) on the X-axis. The Y-axis ranges from 0 to 260 Pa in increments of 20. The X-axis ranges from 0 to 13000 m³/h in increments of 1000. A green curve, labeled 'P-Q Curves', represents the relationship. The curve starts at approximately (6800, 233) and ends at (11800, 0). Key points on the curve are labeled with their corresponding Air Flow values: 233, 200, 160, 120, 90, 60, 30, and 0.


Air Flow (m³/h)	Air Pressure (Pa)
233	~233
200	~200
160	~160
120	~120
90	~90
60	~60
30	~30
0	0

Technical drawing of a fan assembly. The left view is a side elevation showing a motor on the left and a fan wheel on the right. Dimensions are given as 204 ± 6 for the total height and 160 ± 6 for the motor height. The right view is a front view of the fan wheel, showing a circular fan with multiple blades. Dimensions are given as $\varnothing 75 \pm 1$ for the inner diameter and $\varnothing 265 \pm 3$ for the outer diameter. A section line A-A is indicated at the top of the side view and at the bottom of the front view.




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

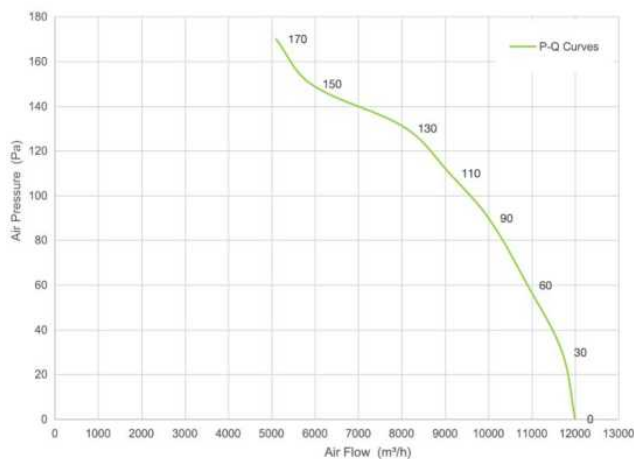


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E630S-102-C0	230	50/60	1050	614	12000	67

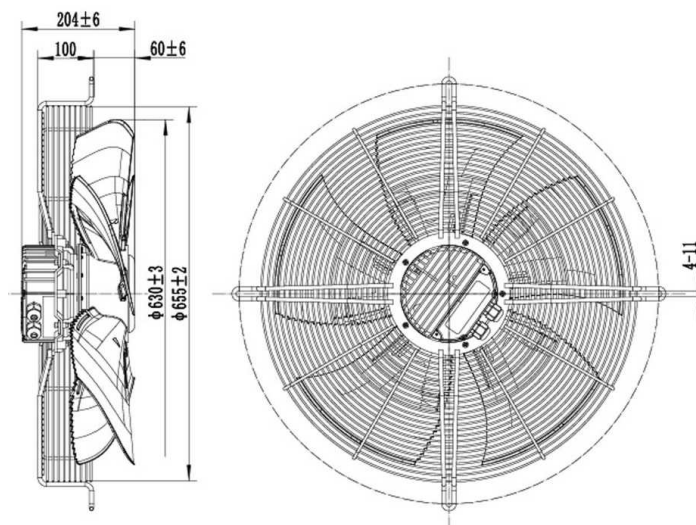




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

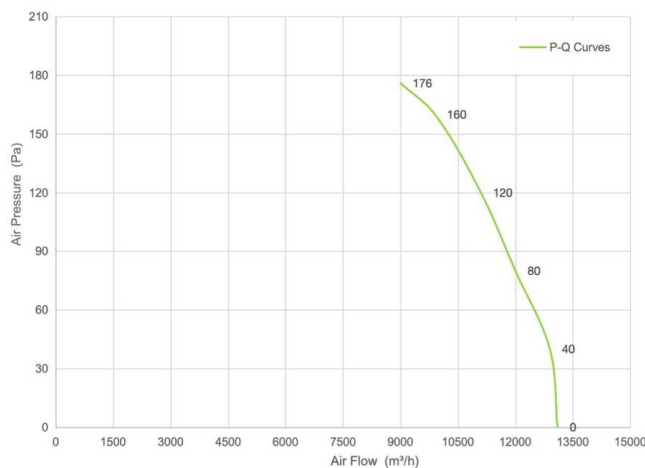


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E630S-102-C1	3 phase 230	50/60	1200	895	13100	74

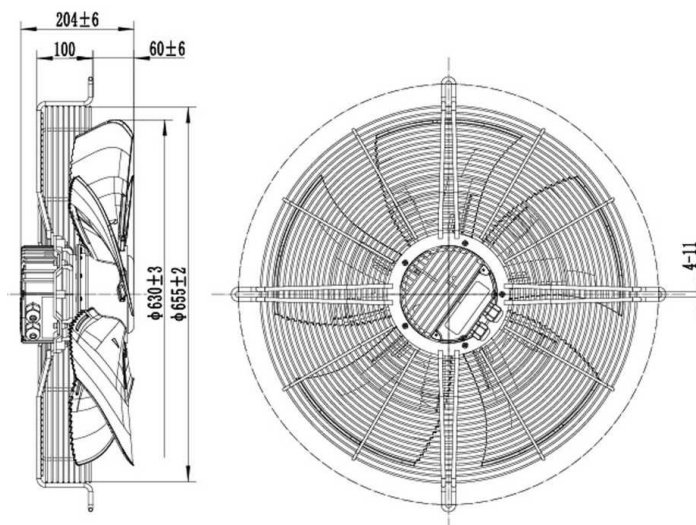




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

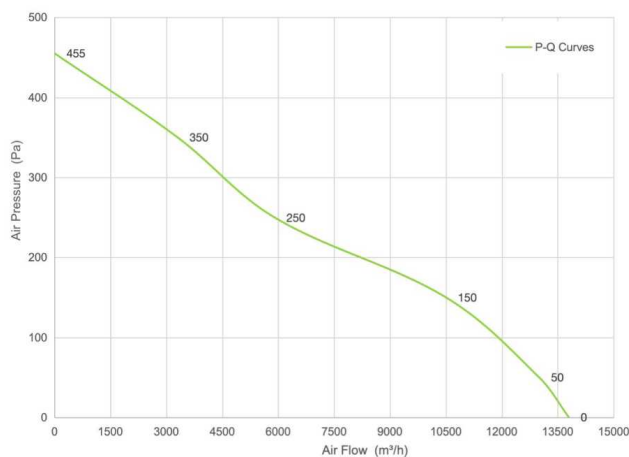


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E630S-102-C2	3 phase 230	50/60	1530	1092	13800	78

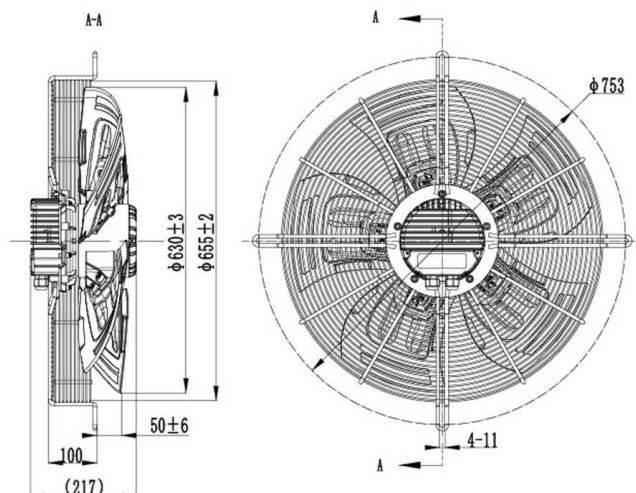




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

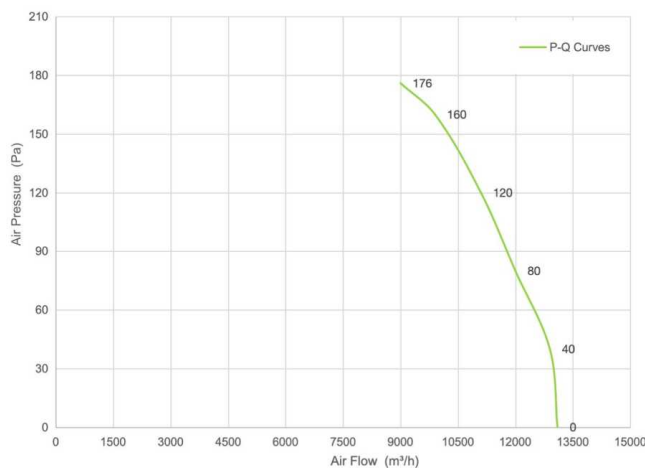


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23E630S-137-C2	3 phase 230	50/60	1200	887	13100	74

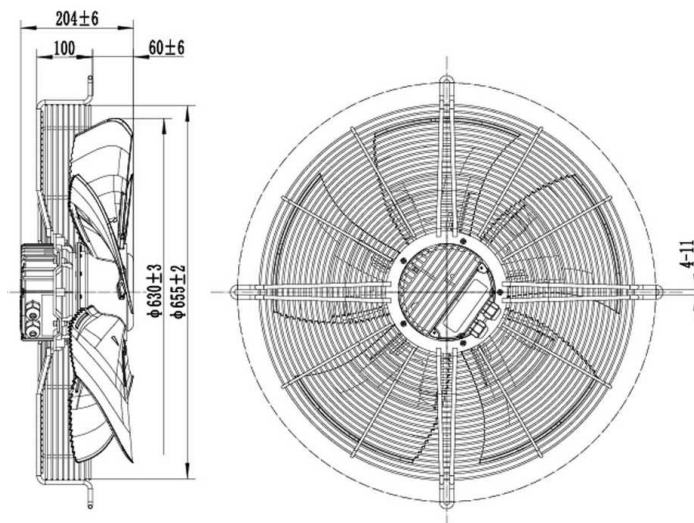




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

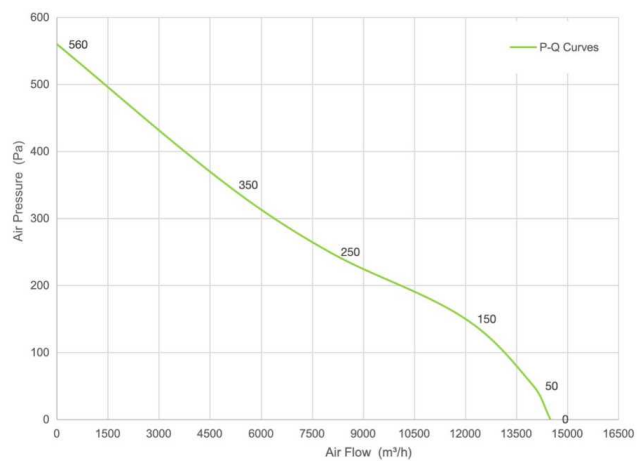



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38E630S-137-C1	380	50/60	1660	1330	14500	80

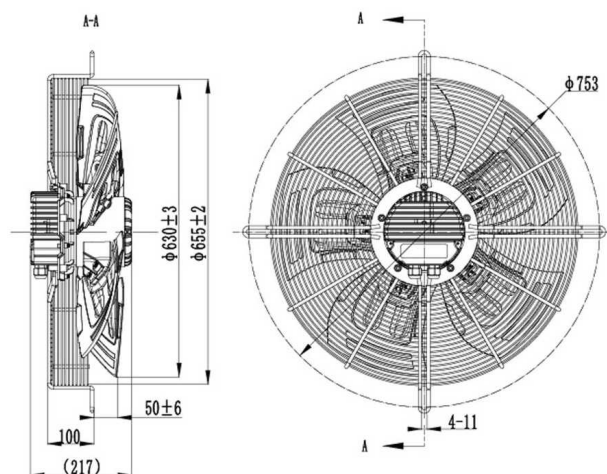




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

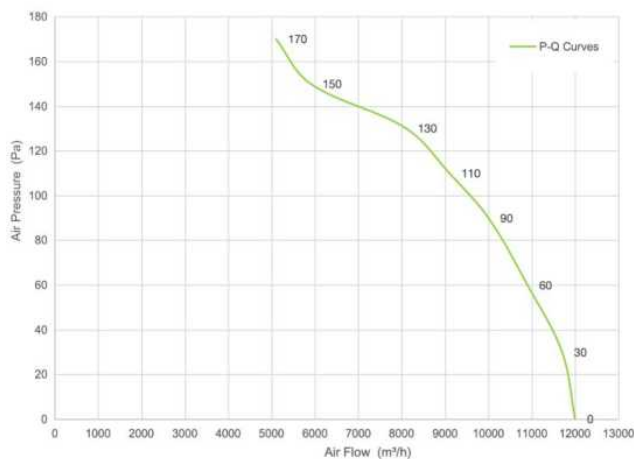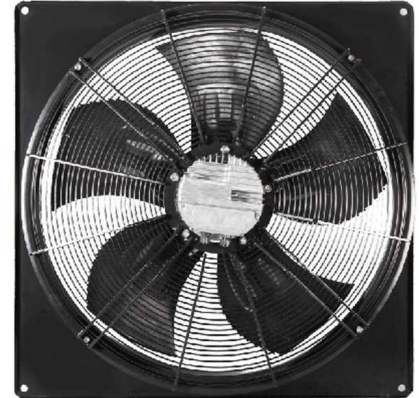



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E630S-102-C0	230	50/60	1050	614	12000	67

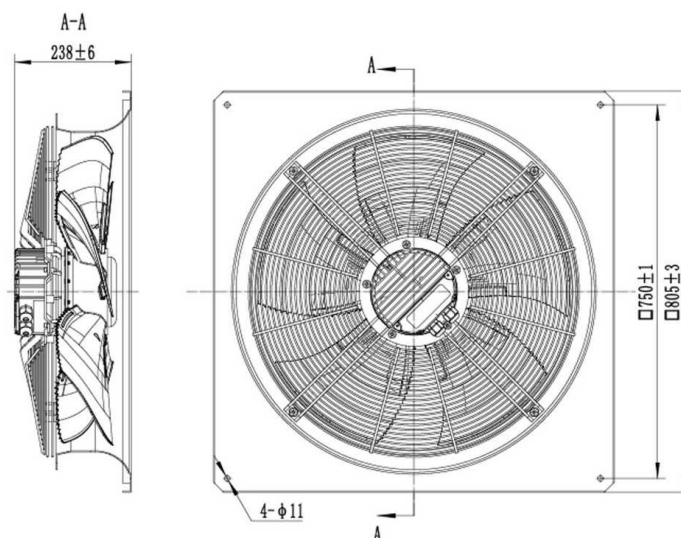




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

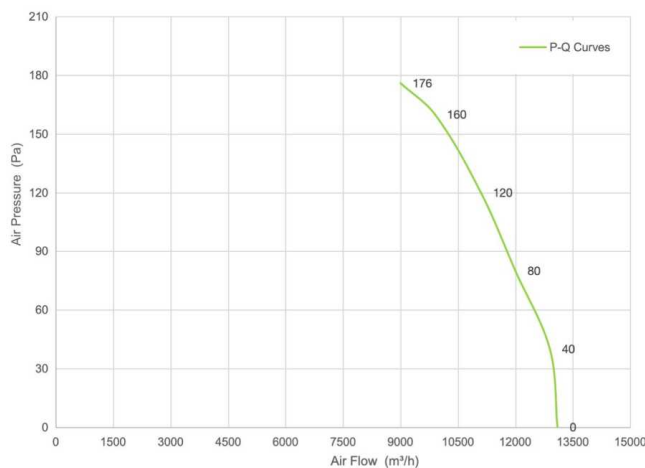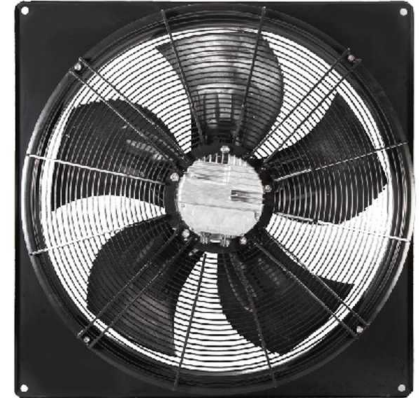



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E630S-102-C1	3 phase 230	50/60	1200	895	13100	74

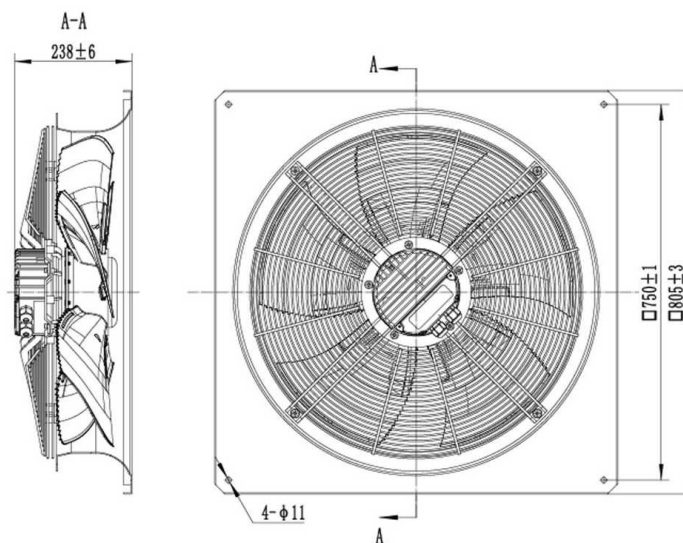




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

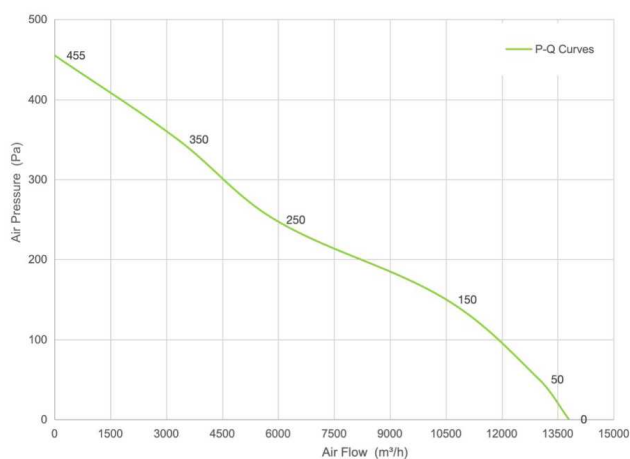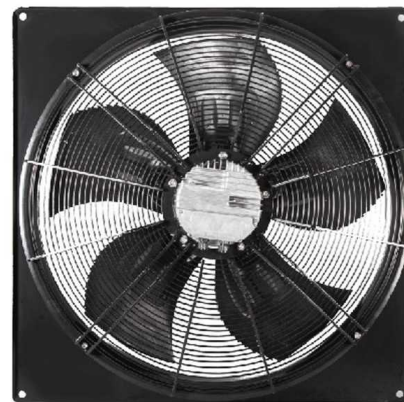



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E630S-102-C2	3 phase 230	50/60	1530	1092	13800	78

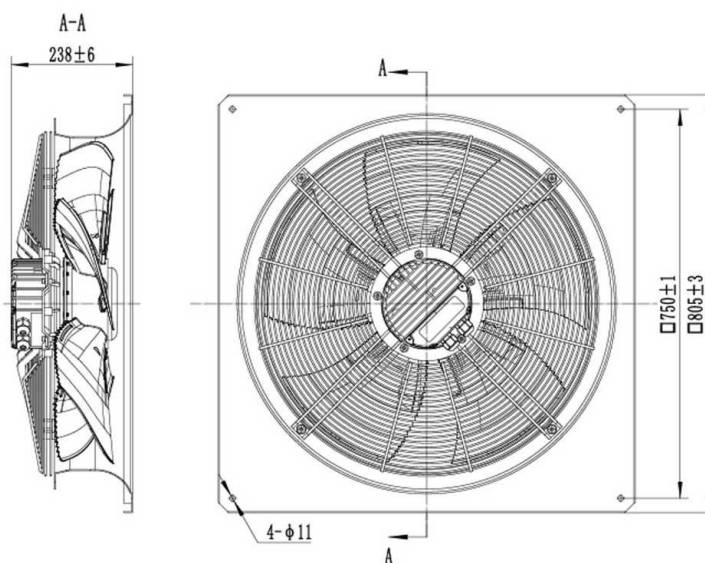




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

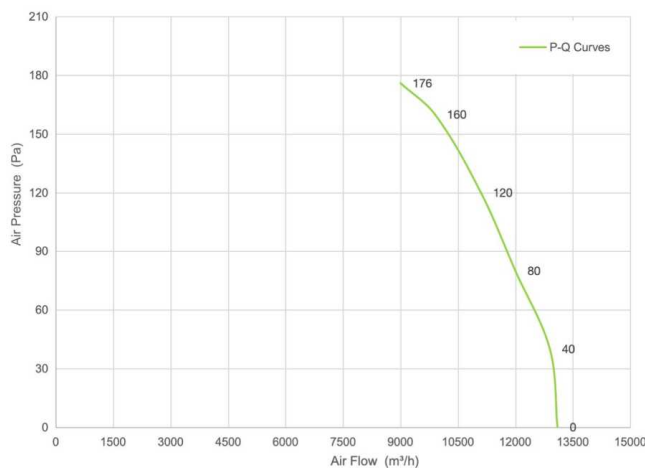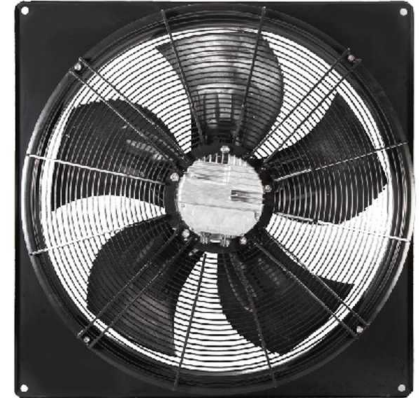



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E630S-137-C0	380	50/60	1200	887	13100	74

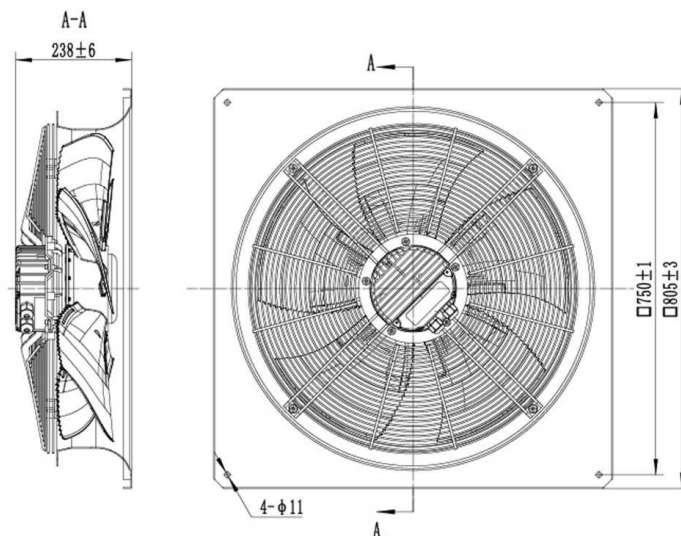




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

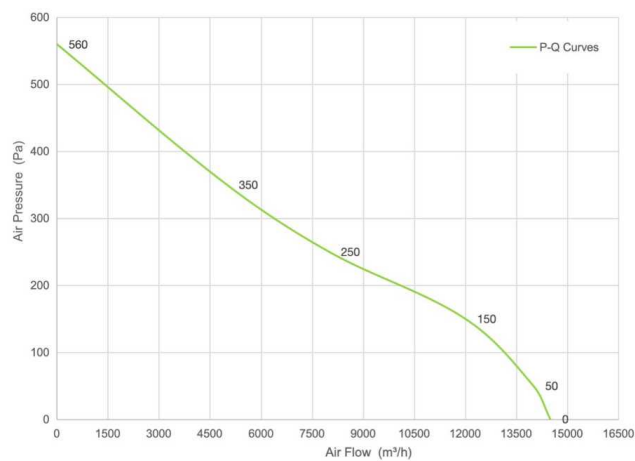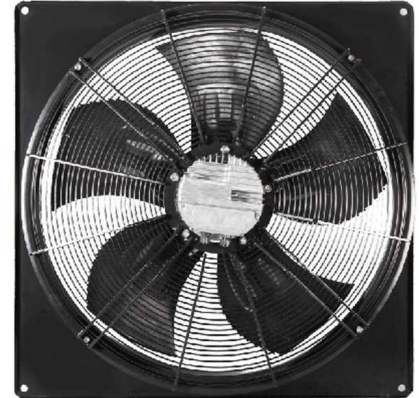



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E630S-137-C1	380	50/60	1660	1282	14500	80

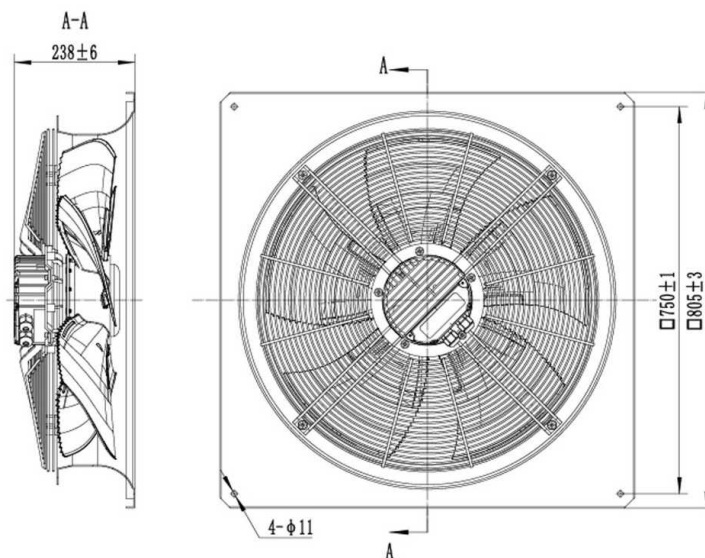




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

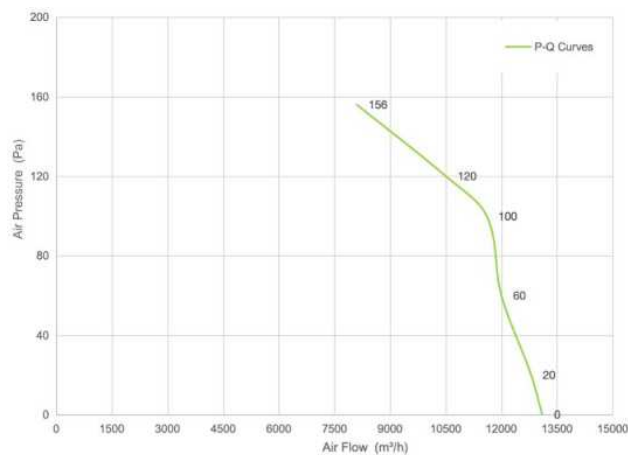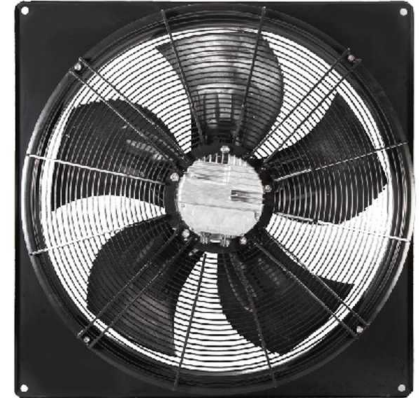



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E630S-188-C0	380	50/60	1410	1318	13100	72

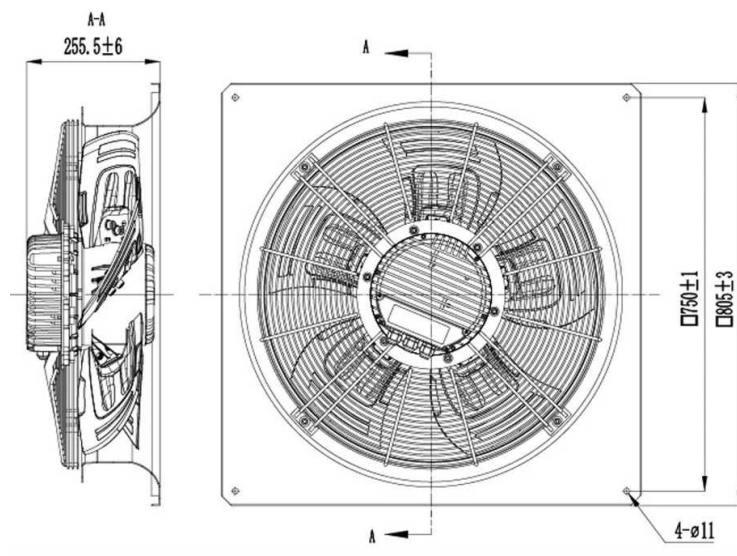




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

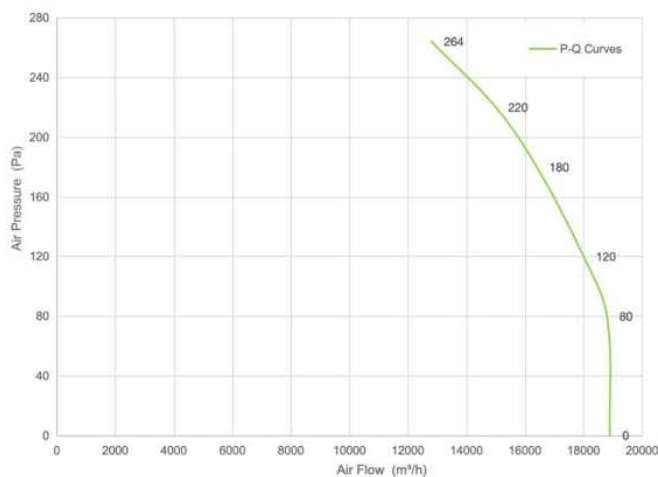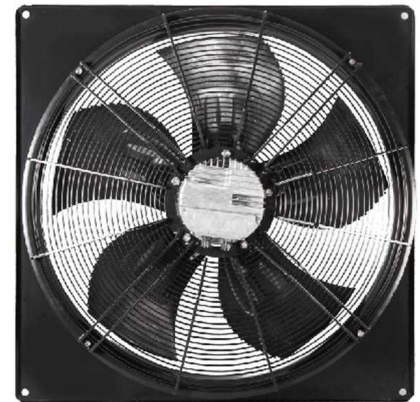


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E630S-188-C1	380	50/60	1760	2572	20800	82

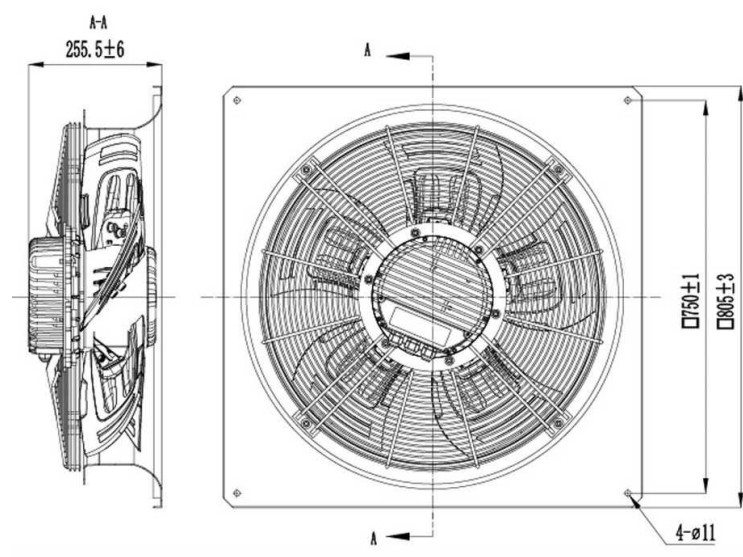




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

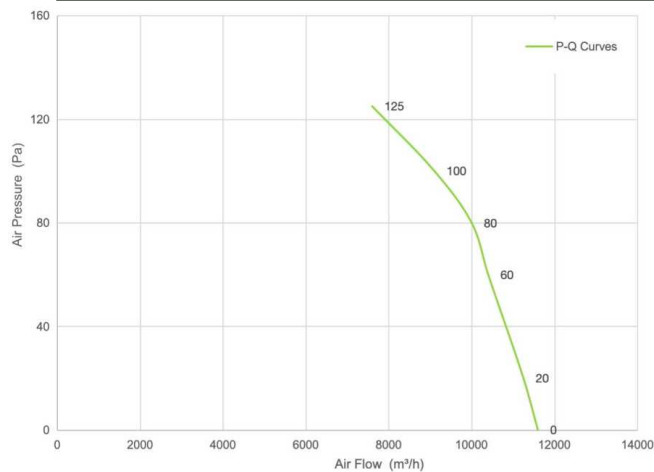


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R23E630S-102-C0	230	50/60	1050	520	11600	70

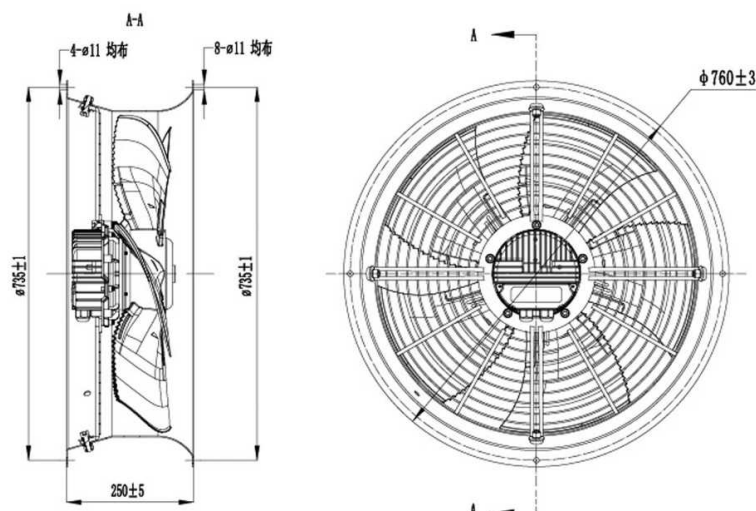





EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

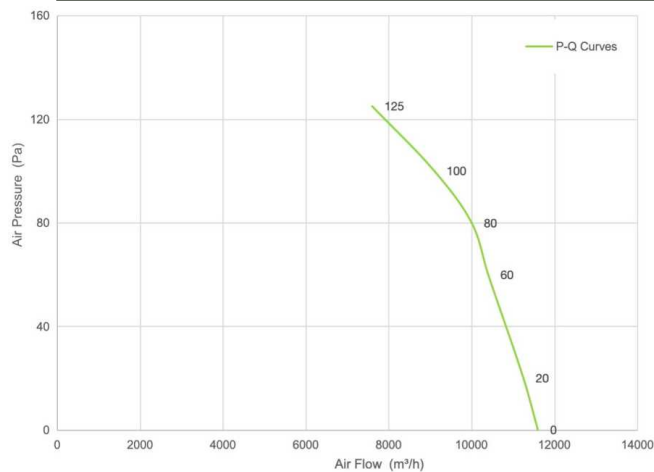


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R23E630S-102-C1	3 phase 230	50/60	1200	710	11600	70

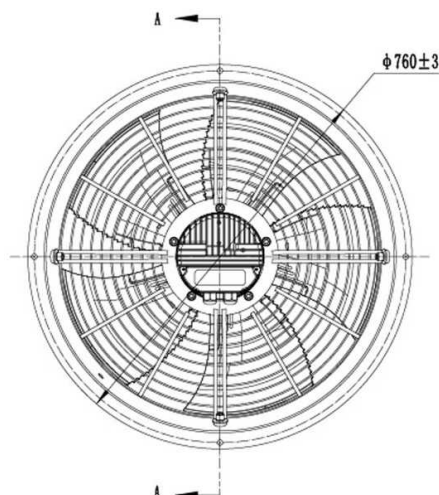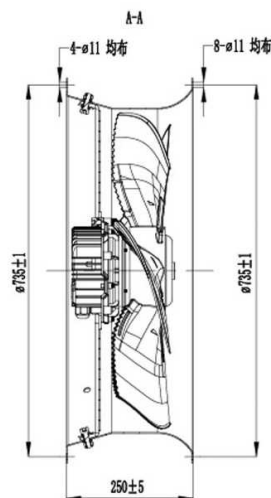




EC Axial Fan 630mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

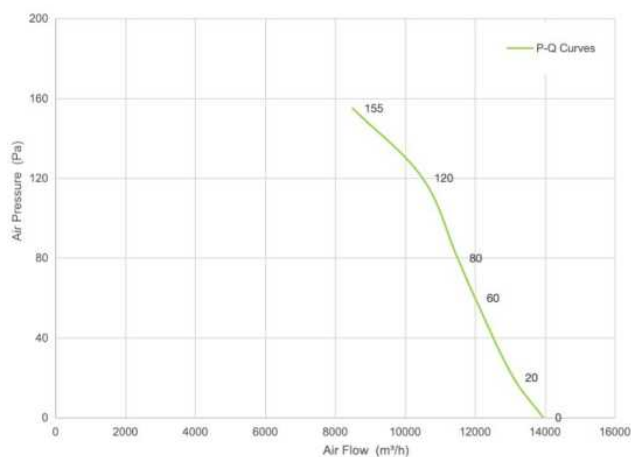



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R38E630S-137-C0	380	50/60	1200	698	13950	74

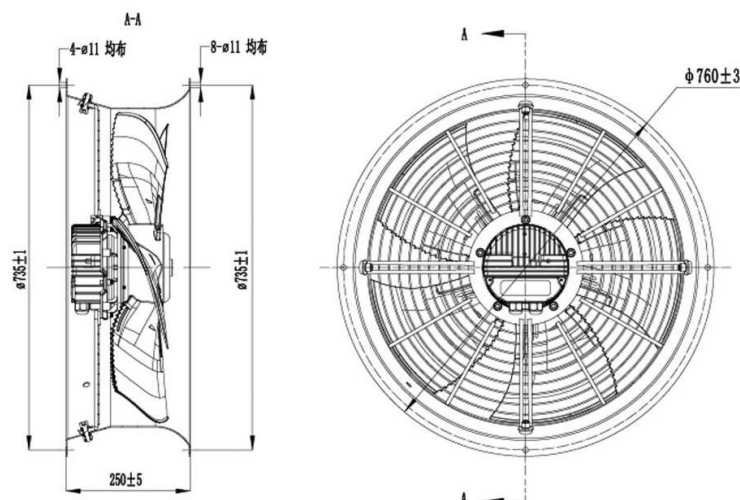




EC Axial Fan 710mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

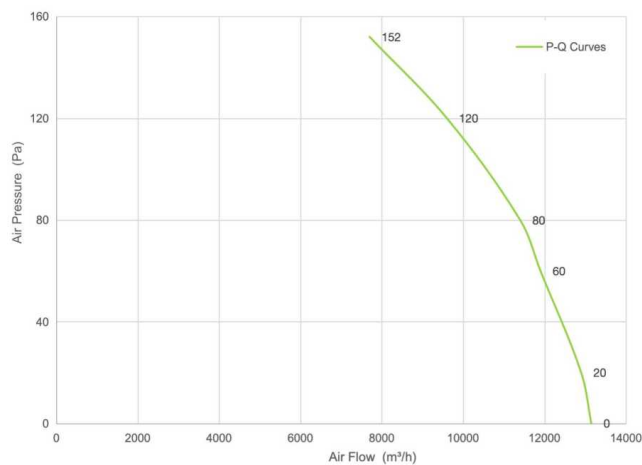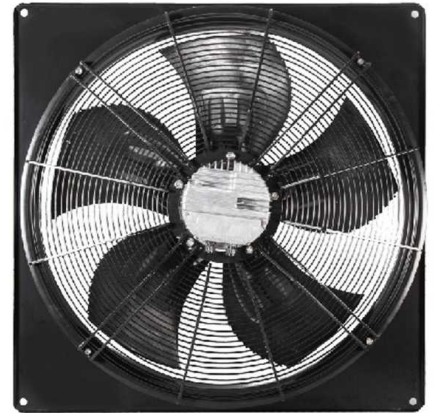



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E710S-137-C0	230	50/60	1150	662	13150	66

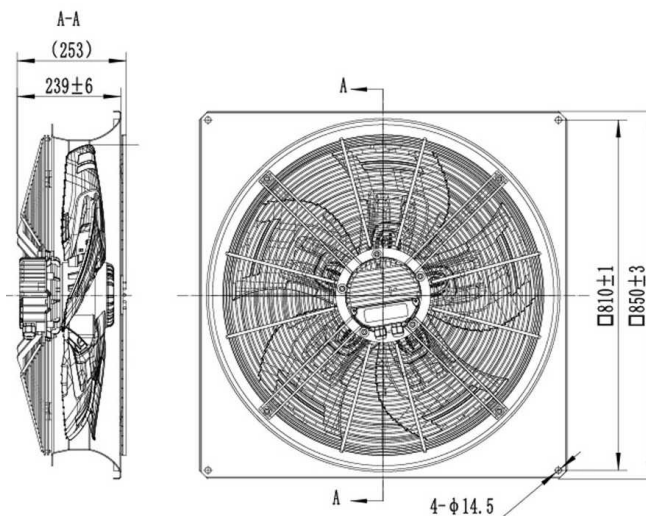




EC Axial Fan 710mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

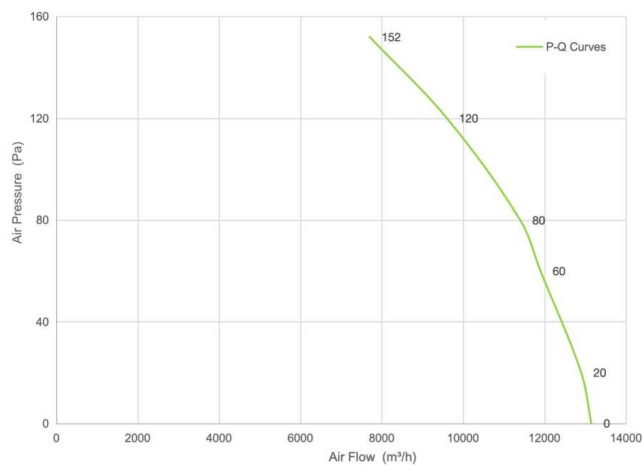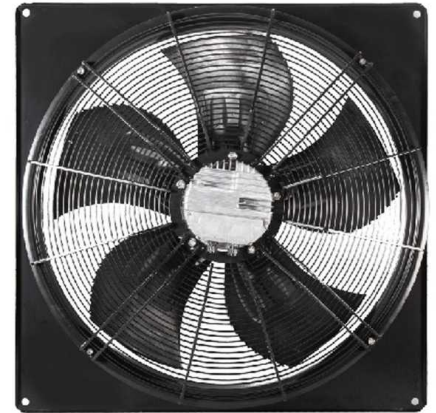


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E710S-137-C1	3 phase 230	50/60	1150	675	13150	66

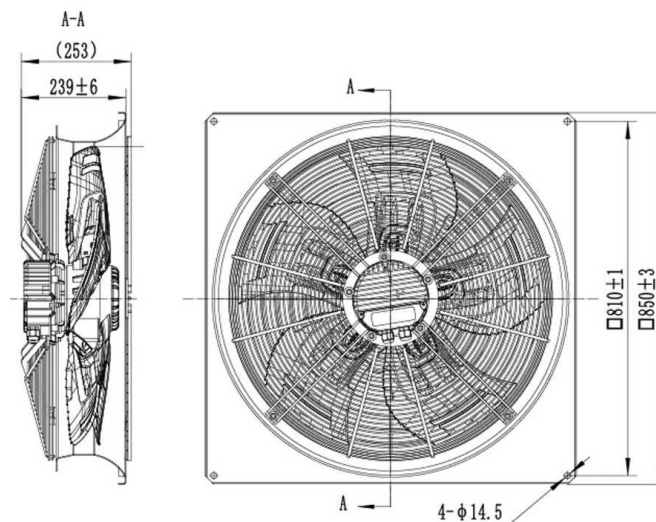




EC Axial Fan 710mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

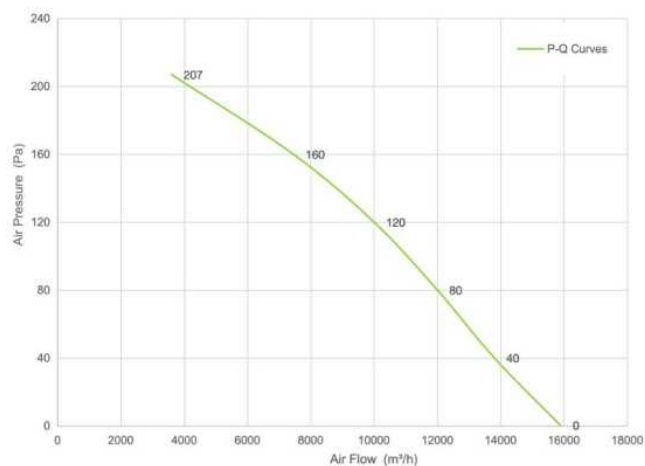



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E710S-137-C0	380	50/60	1200	694	15900	69

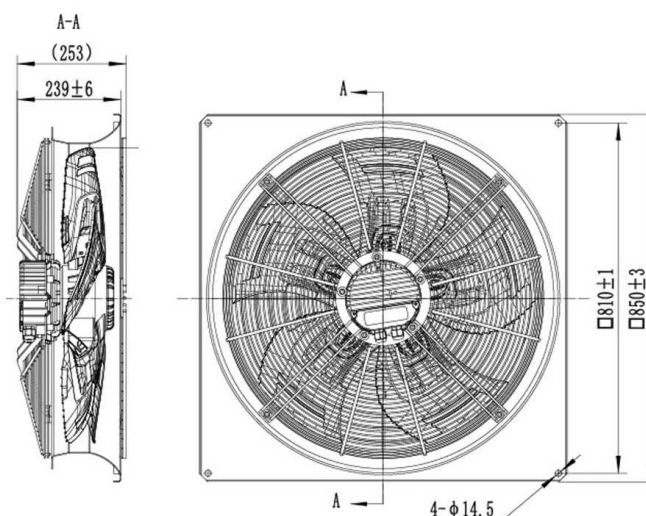




EC Axial Fan 710mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

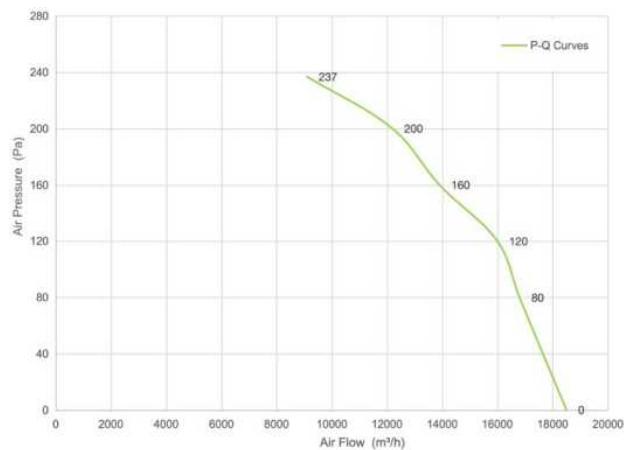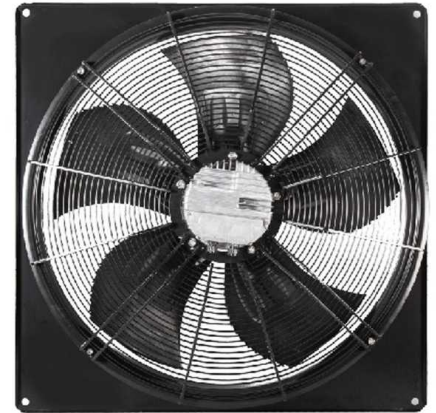



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E710S-188-C0	380	50/60	1200	1146	18500	74

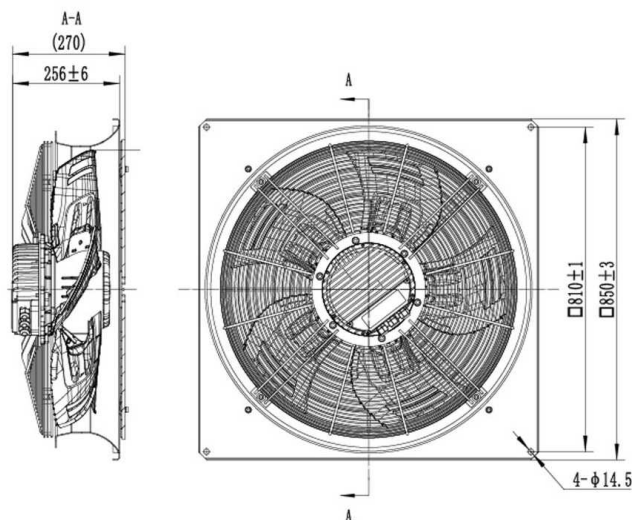




EC Axial Fan 710mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

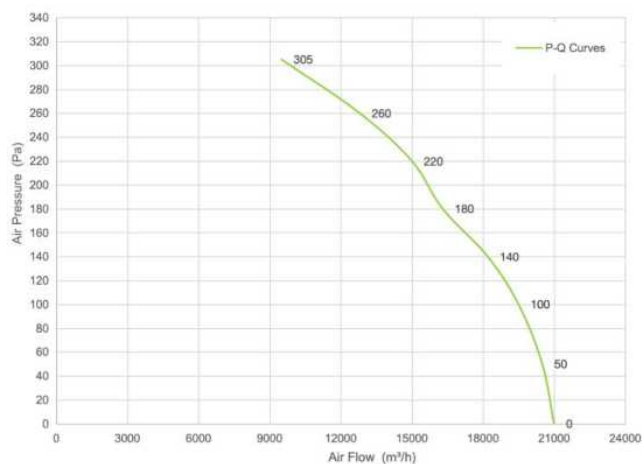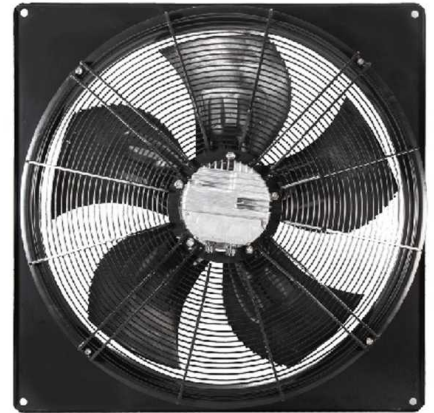



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E710S-188-C1	380	50/60	1400	1861	21200	76

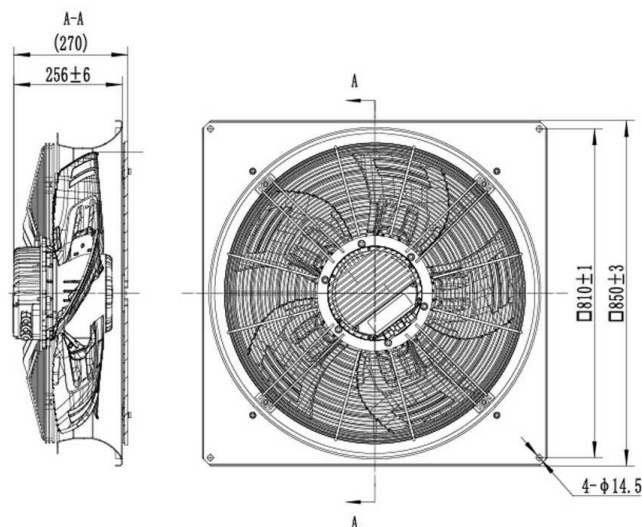




EC Axial Fan 800mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

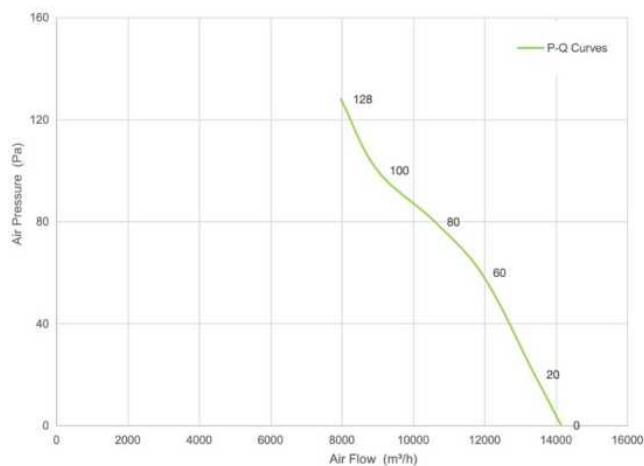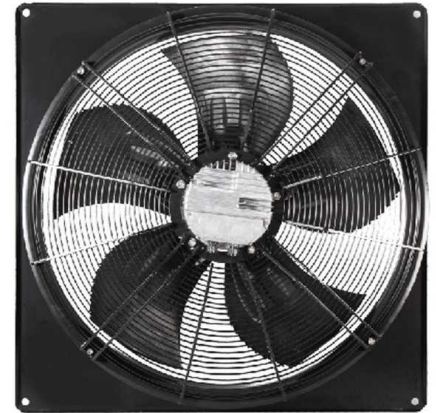



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E800S-137-C0	230	50/60	800	509	14150	65

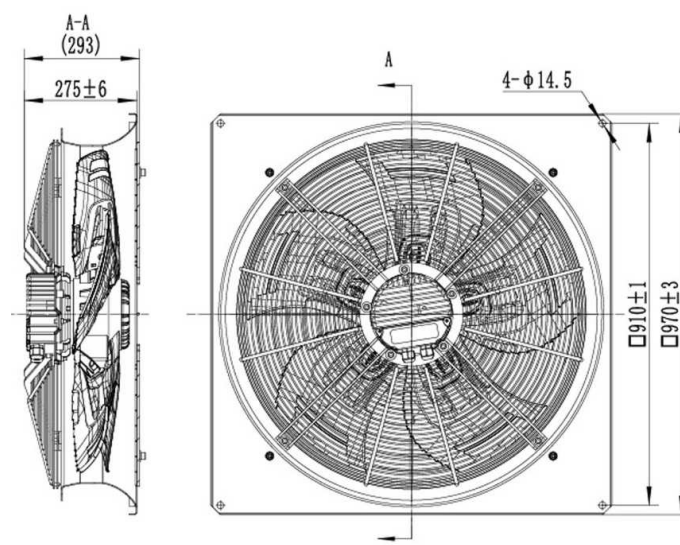




EC Axial Fan 800mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

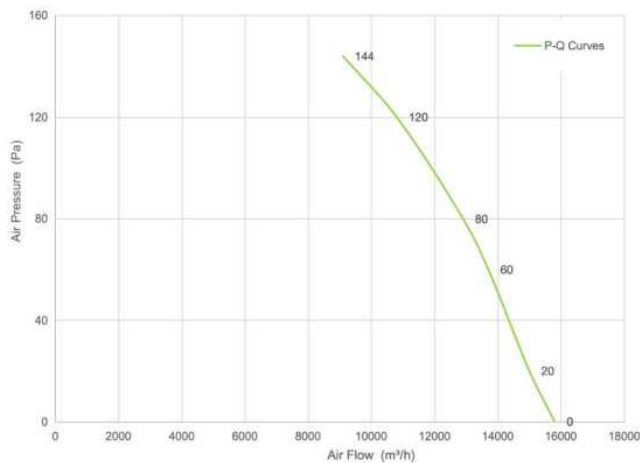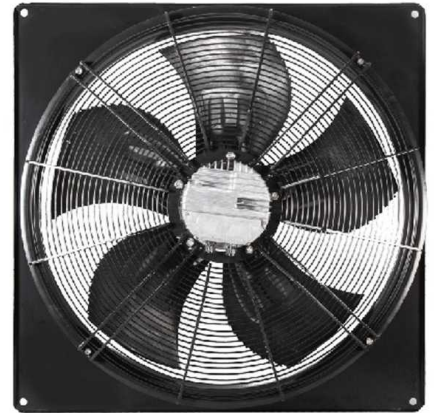



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E800S-137-C0	380	50/60	900	607	15800	70

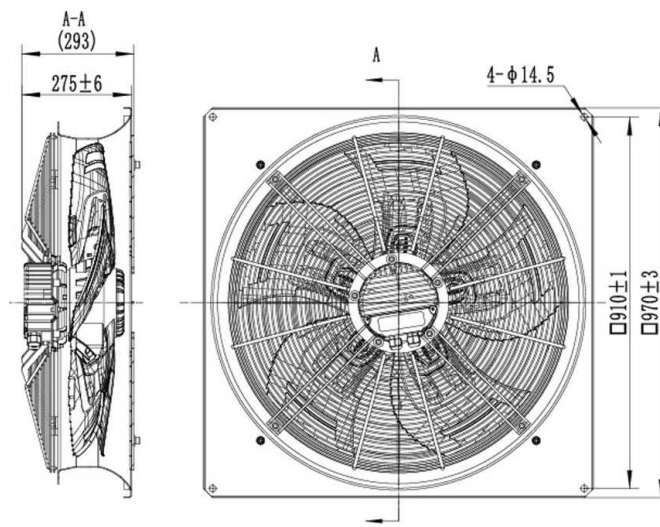




EC Axial Fan 800mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

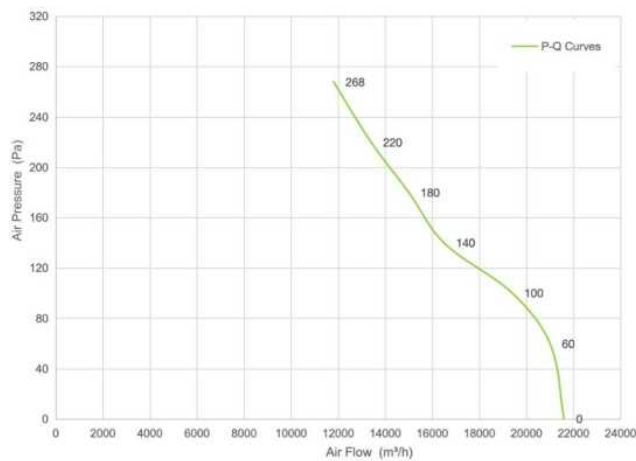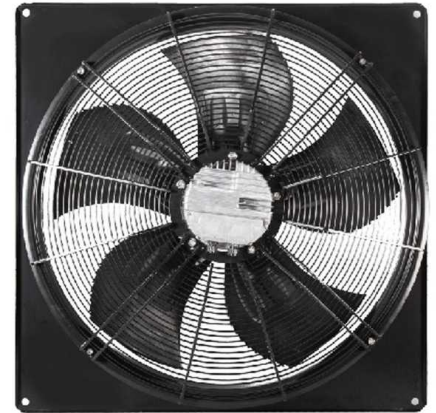


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E800S-188-C0	380	50/60	1000	1500	21600	74

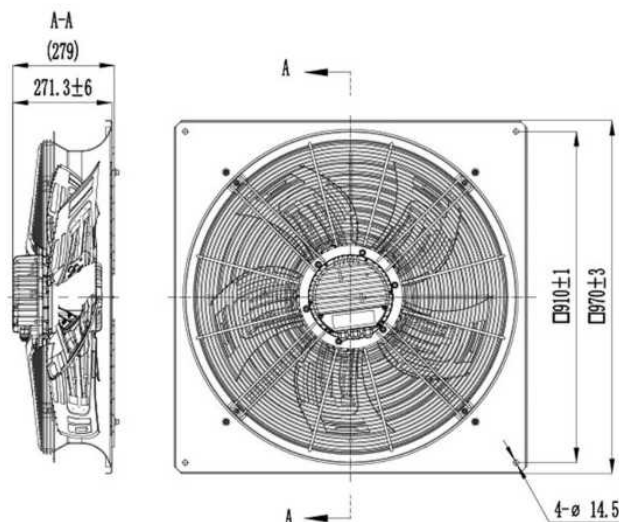




EC Axial Fan 800mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

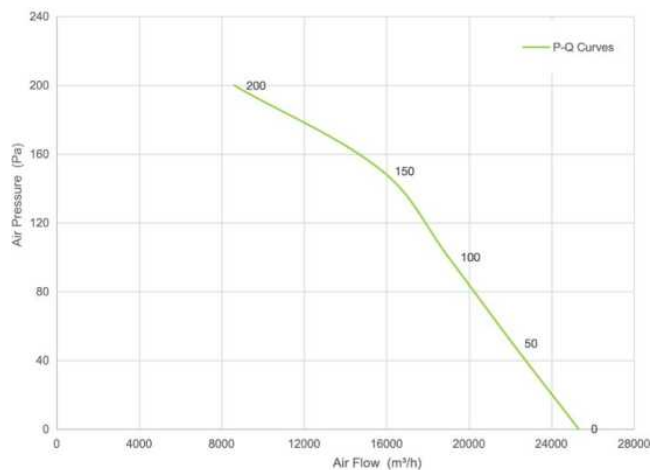


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E800S-225-01	380	50	973	1800	25320	69

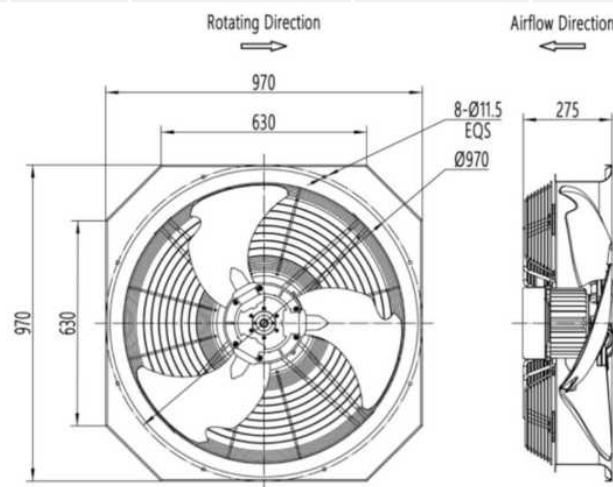




EC Axial Fan 800mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

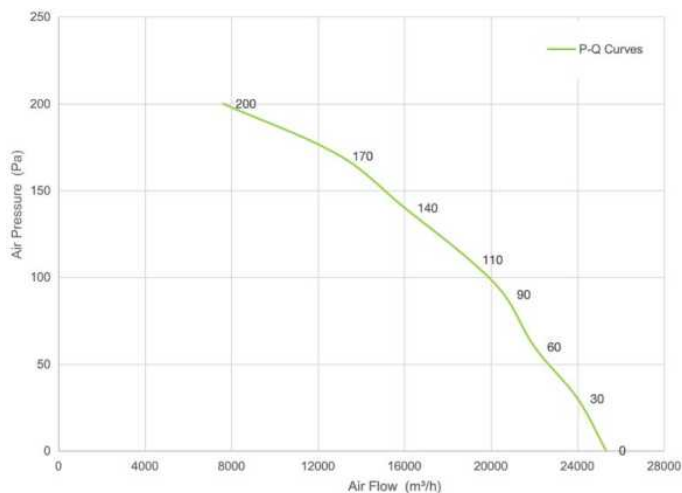


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E800S-225-02	380	50	973	1800	25320	69

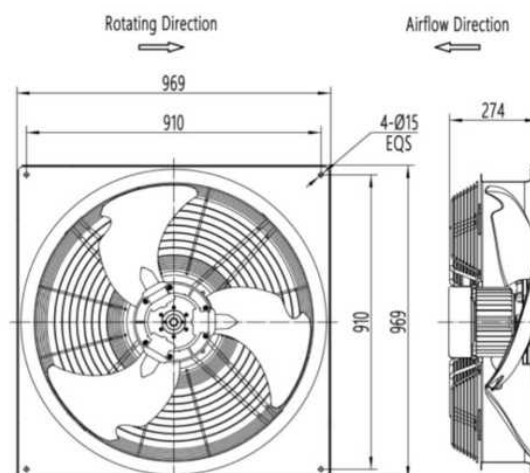




EC Axial Fan 800mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

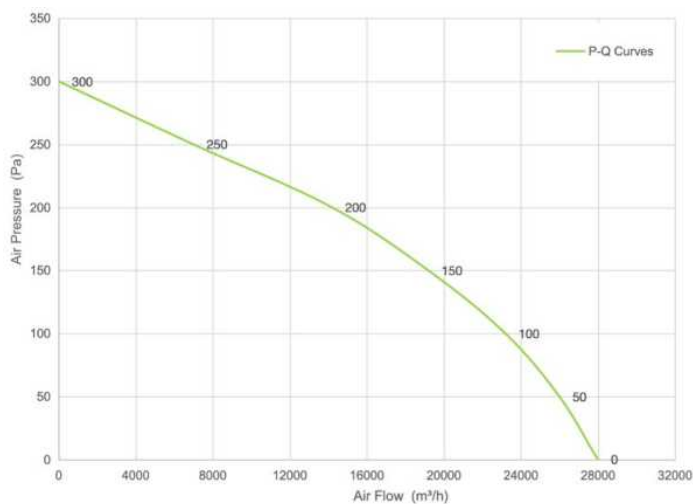


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E800S-225-03	380	50	1020	2220	28000	72

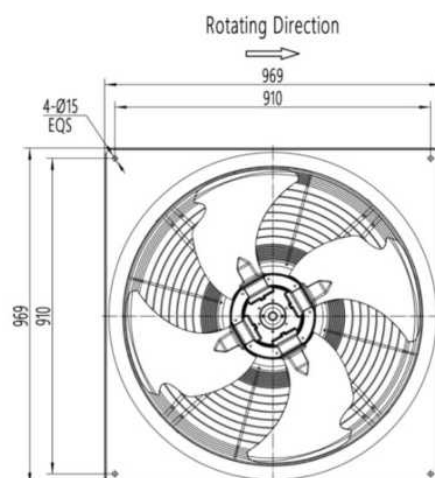




EC Axial Fan 800mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

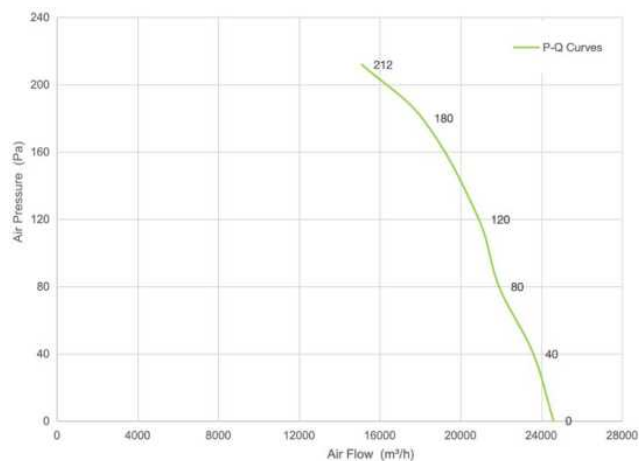


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R38E800S-188-C0	380	50/60	1000	1409	24600	72

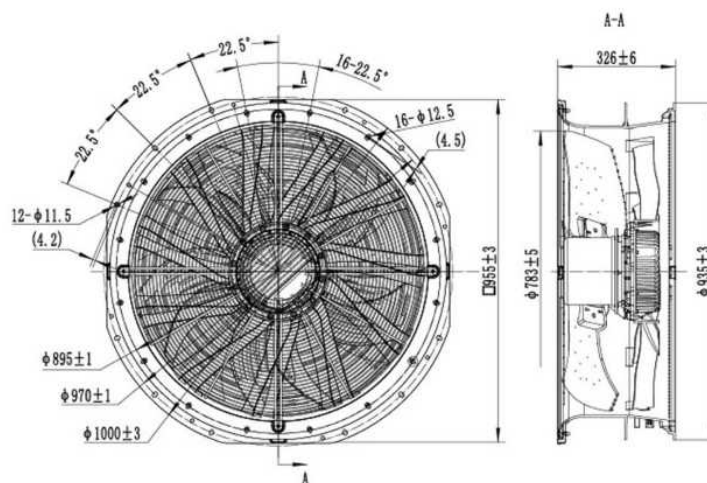





EC Axial Fan 850mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

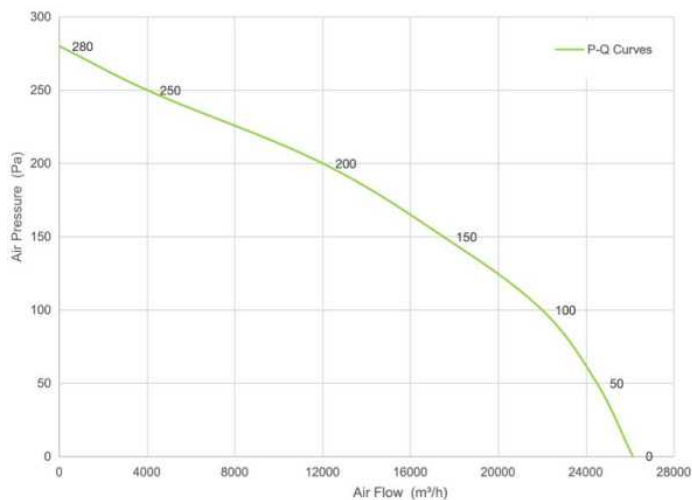

Pa	m³/h	rpm	W
100	22200	985	1847
119	20766	970	1848
146	18125	942	1839
178	14956	919	1875



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E850S-225-00	380	50	1000	1875	26136	72

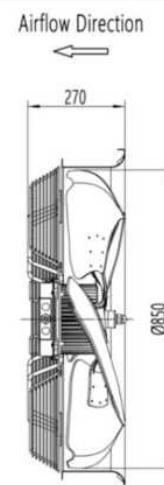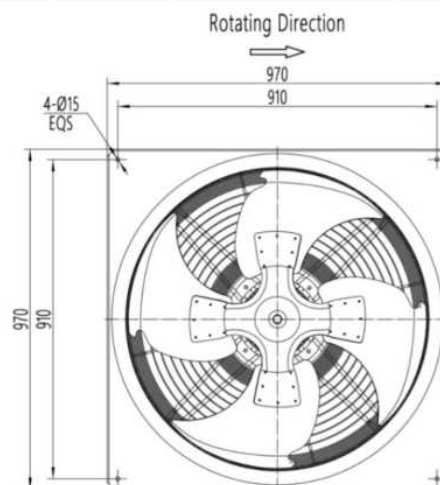




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

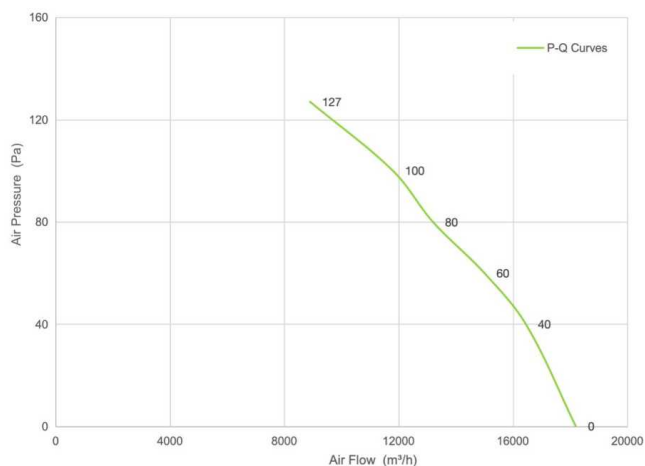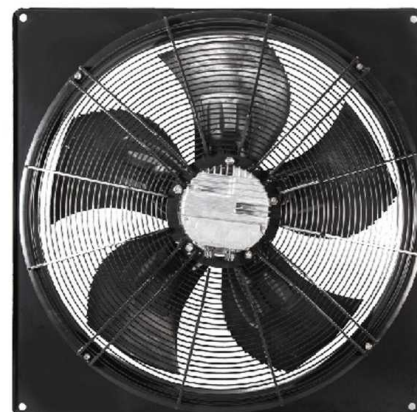



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E900S-137-C0	230	50/60	750	455	18200	72

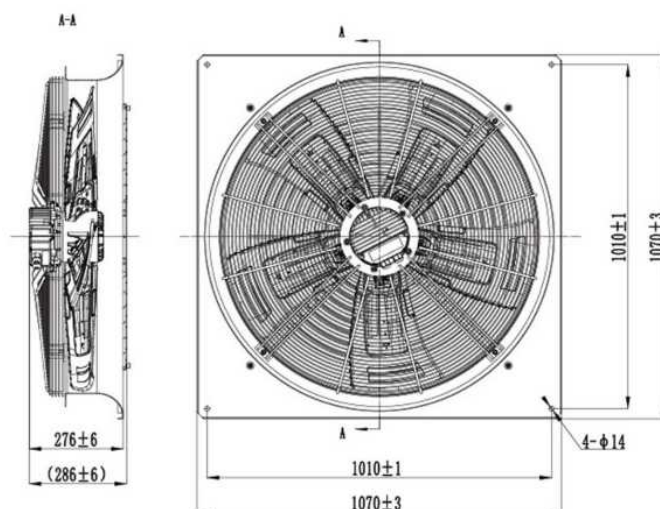




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

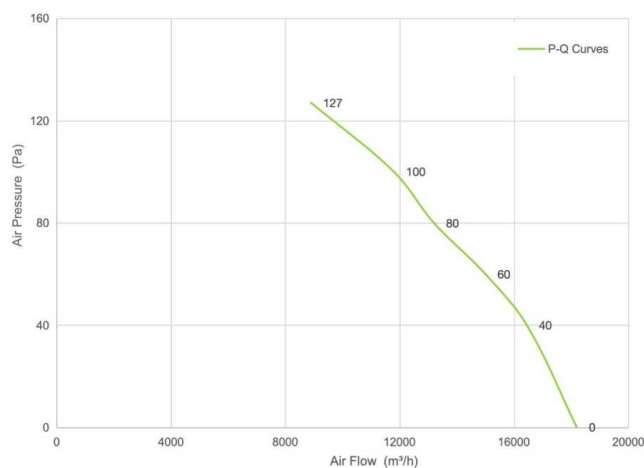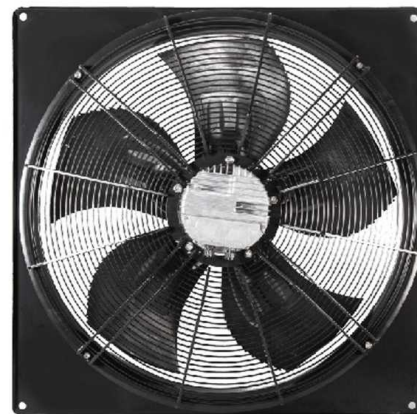



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23E900S-137-C1	3 phase 230	50/60	750	425	18000	72

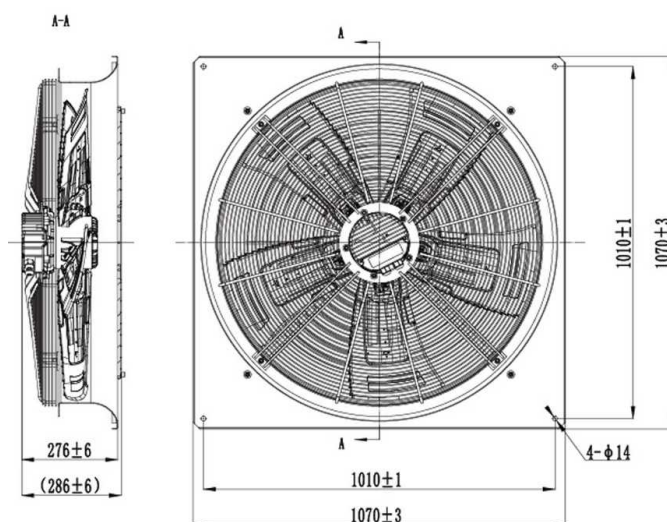




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

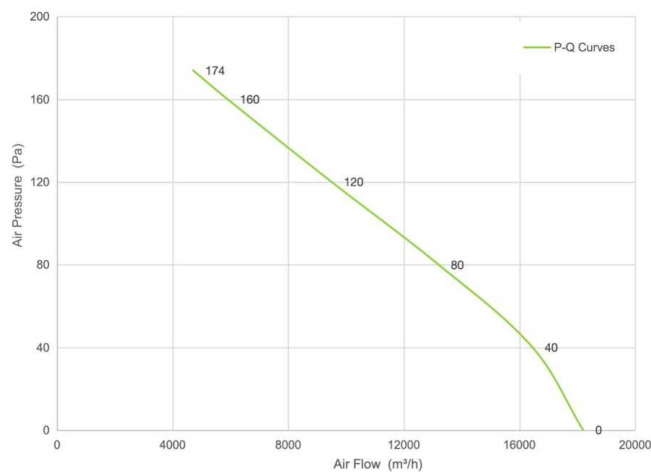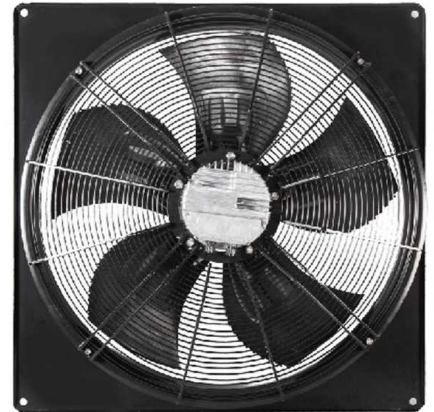



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-137-C1	380	50/60	750	415	18100	72

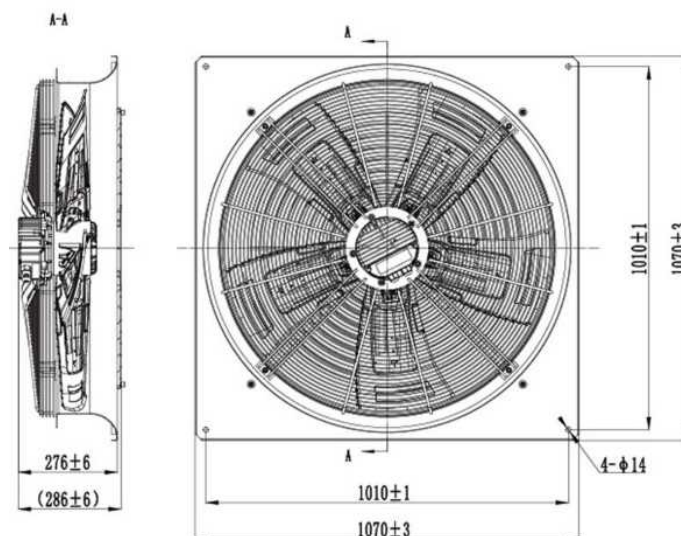




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

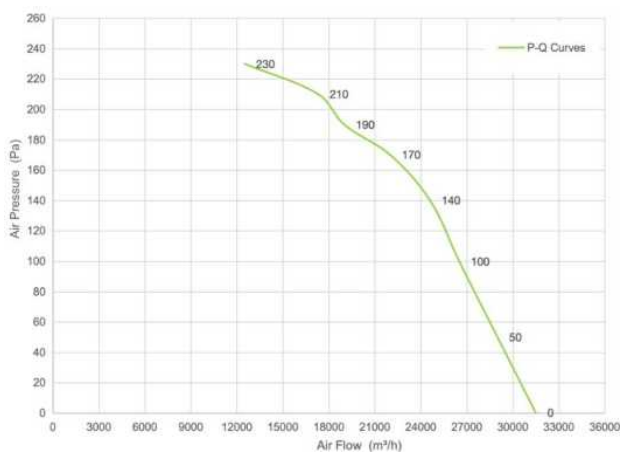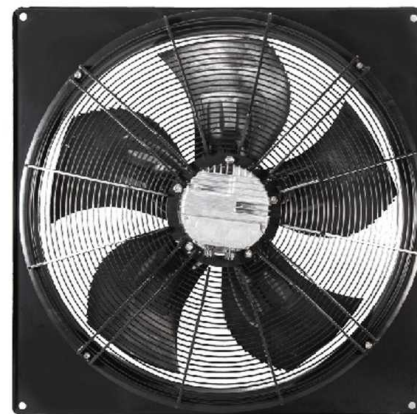



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-188-C0	380	50/60	940	1645	31500	76

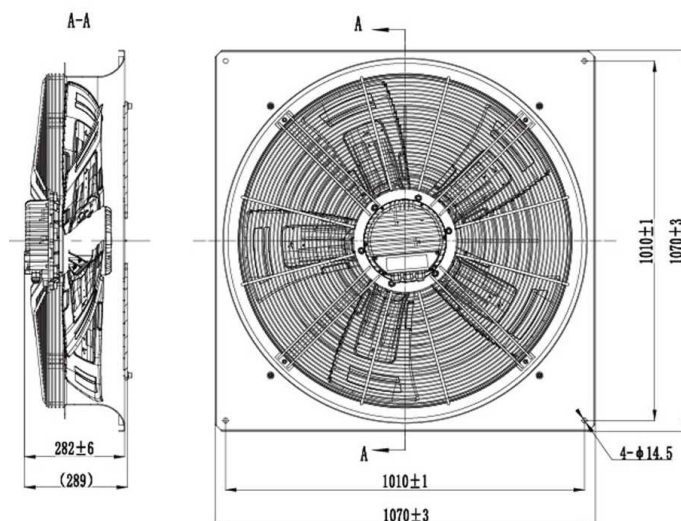




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

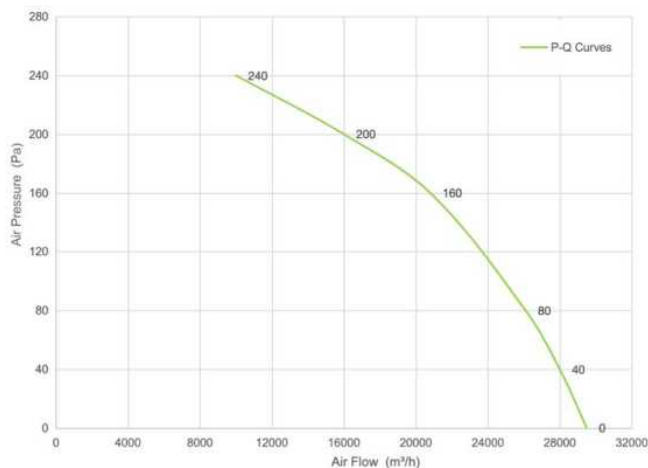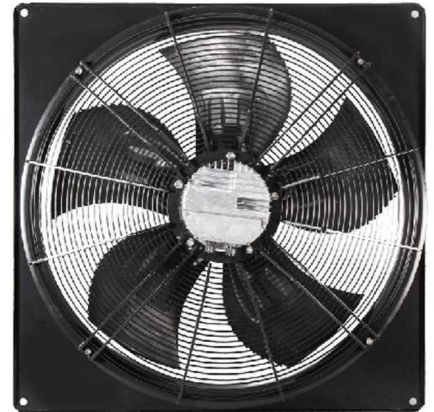



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-188-C1	380	50/60	1020	1926	29500	76

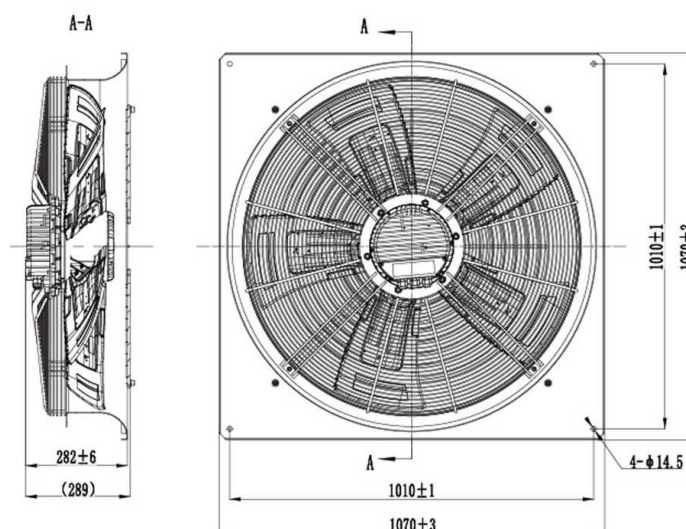




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

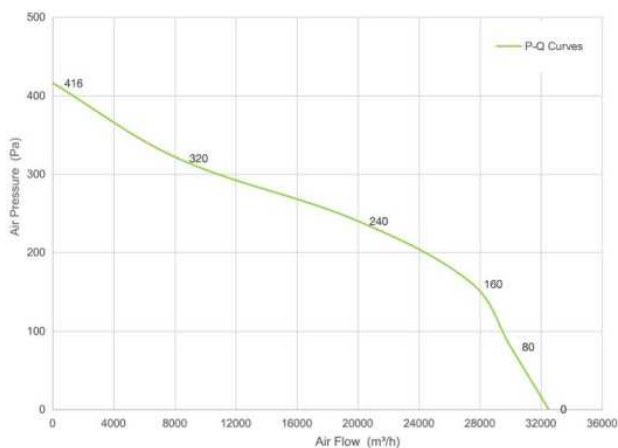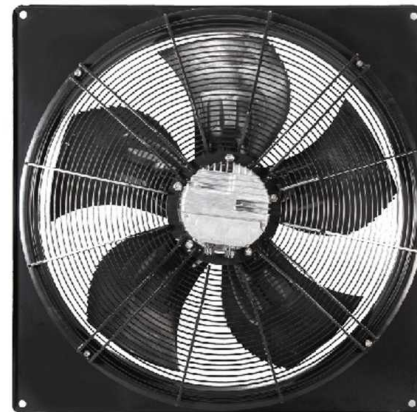



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-188-C2	380	50/60	1030	1930	32500	77

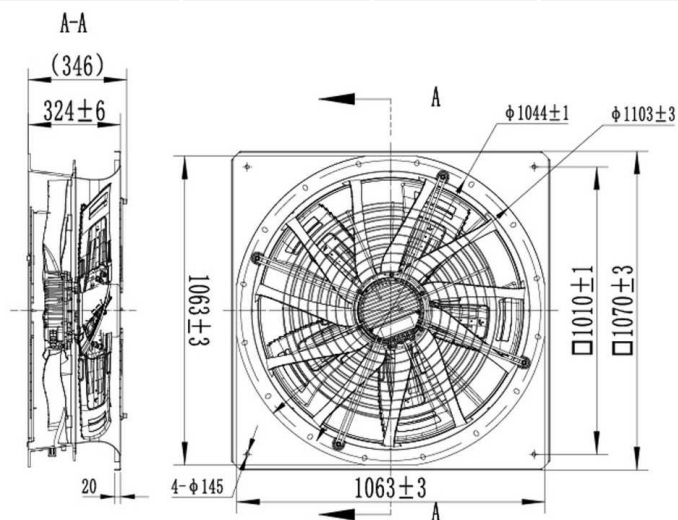




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

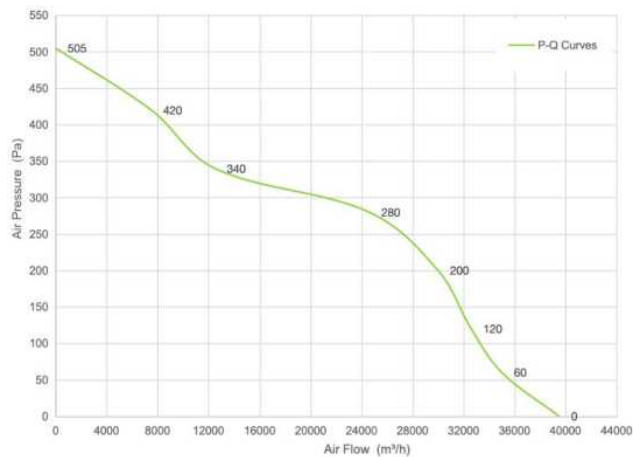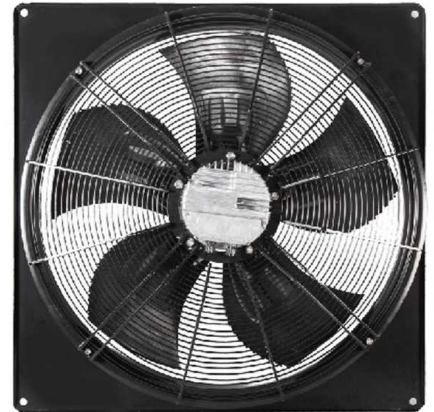



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-188-C3	380	50/60	1100	2355	39500	78

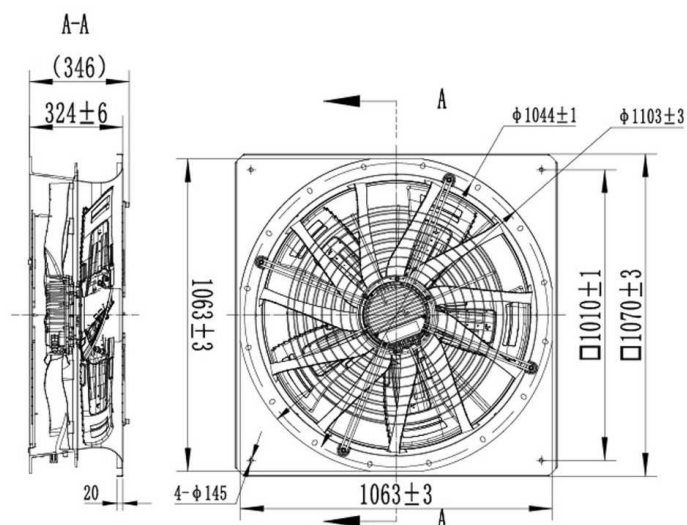




EC Axial Fan 900mm

Impeller Material	PA66 + FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

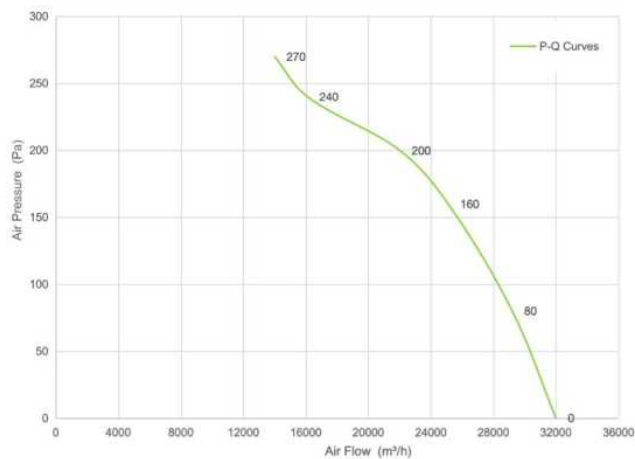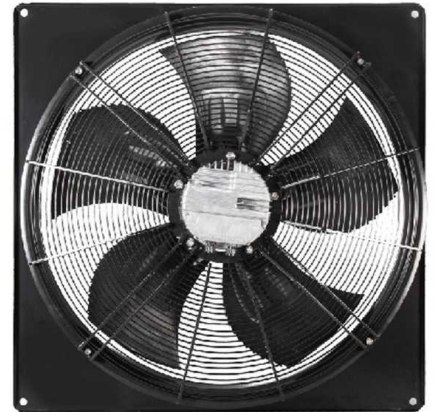


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-188-C4	380	50/60	1000	1771	32000	78

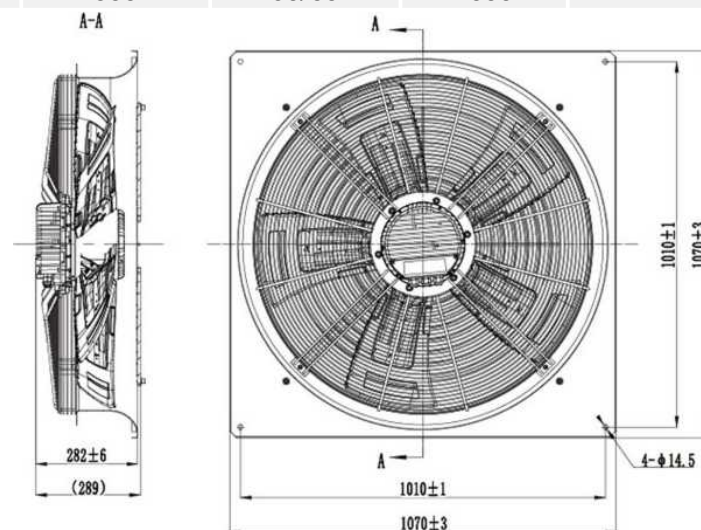




EC Axial Fan 900mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

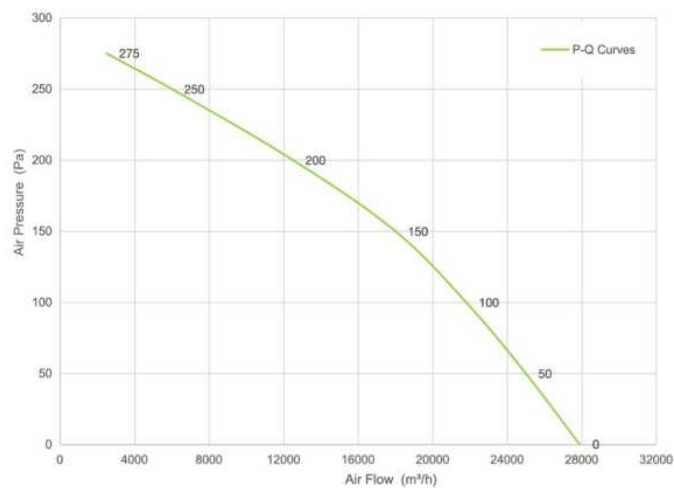


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-225-00	380	50	983	1850	27898	73

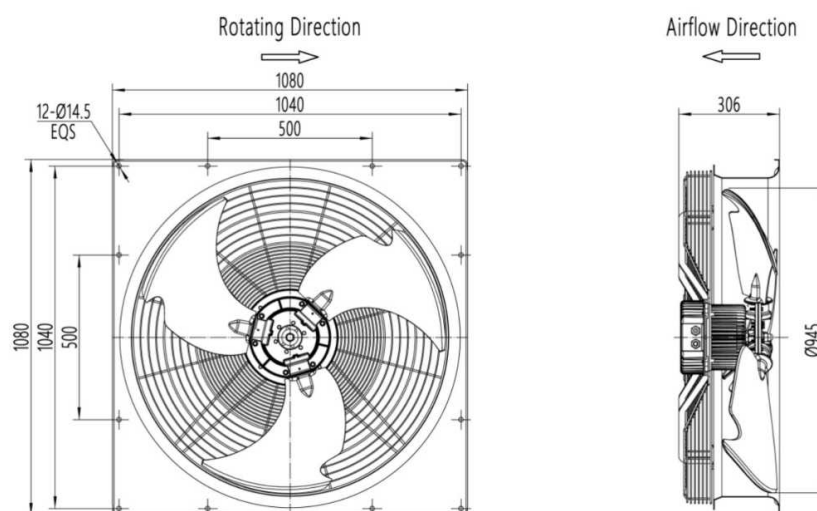




EC Axial Fan 900mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

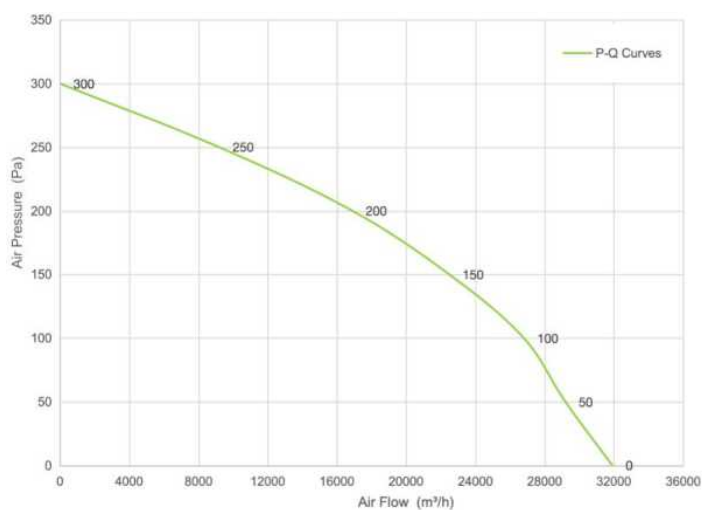

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38E900S-225-01	380	50	1005	2295	31908	75

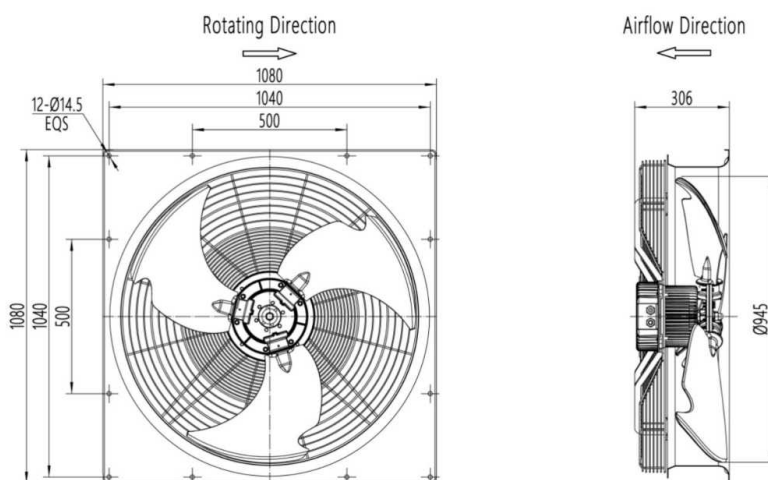




AC Axial Fan







AC Axial Fan 200mm

Impeller Material	PA66+FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

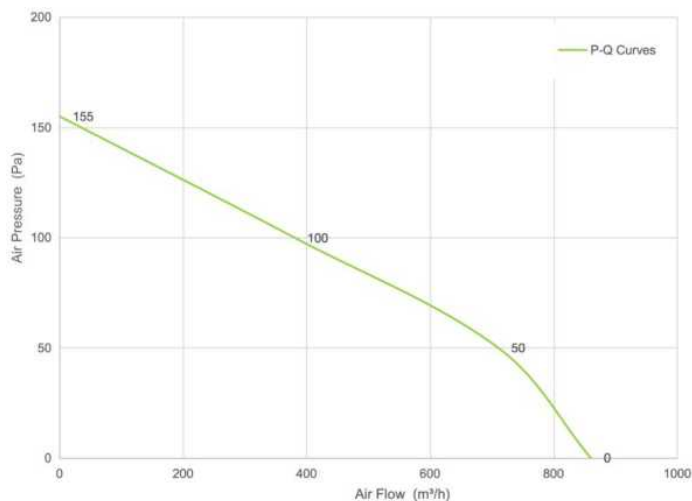


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23A200S-72-00	220	50	2820	54	865	58

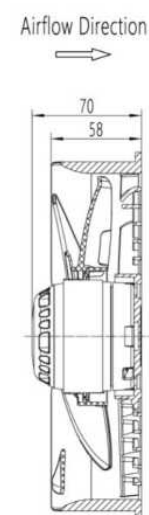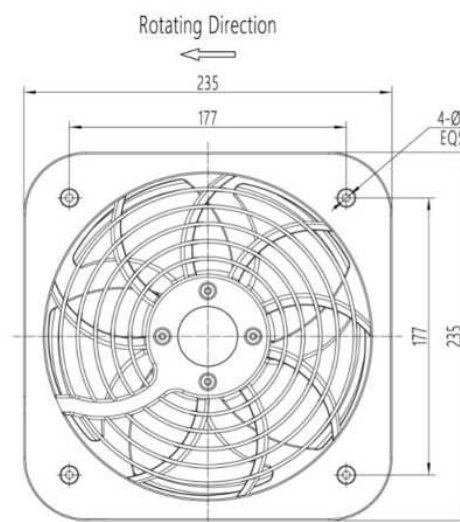




AC Axial Fan 200mm

Impeller Material	PA66+FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

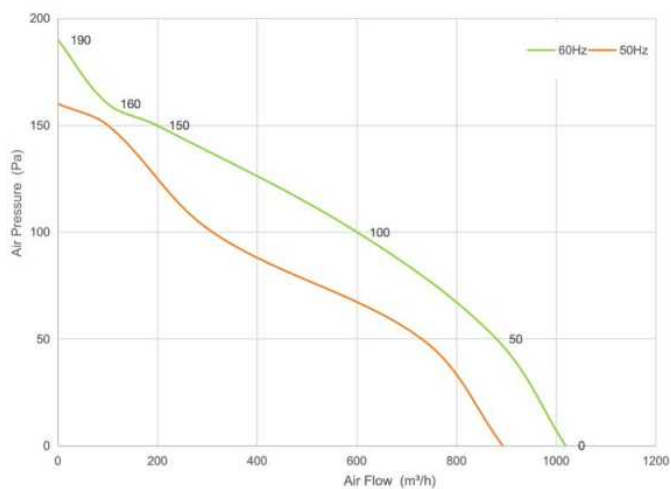

	Pa	m³/h	rpm	W
50Hz	40	779	2628	63.8
	60	711	2607	65.2
	70	658	2590	65.9
	80	591	2576	66.5
60Hz	40	902	2960	79.3
	60	840	2920	81.0
	80	760	2872	83.2
	100	631	2828	84.9


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23A200S-72-01	230	50	2680	67	893	63
	230	60	3044	85	1019	66

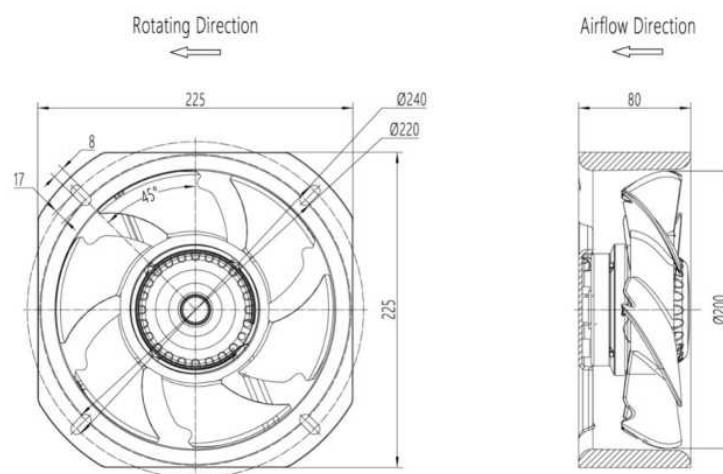





AC Axial Fan 250mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

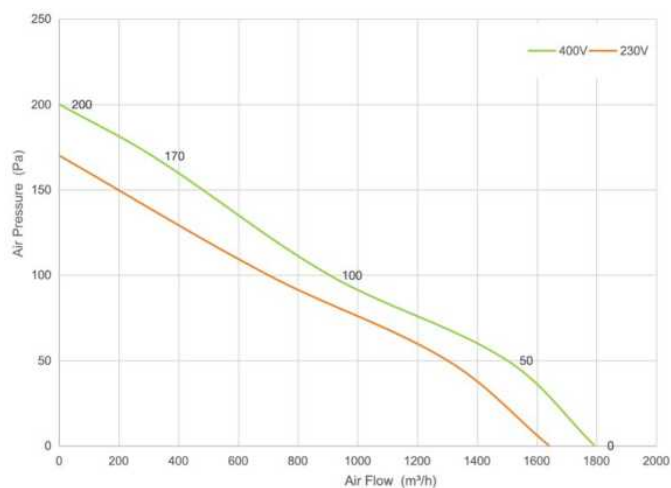

	Pa	m³/h	rpm	W
400V	35	1600	2870	103
	60	1440	2814	109
	68	1379	2802	111
	80	1254	2772	114
230V	40	1405	2606	103
	60	1262	2574	106
	80	1006	2508	112
	100	693	2481	114


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R40A250S-72-00	400	60	2945	160	1794	65
R23A250S-72-00	230	50	2665	137	1641	62

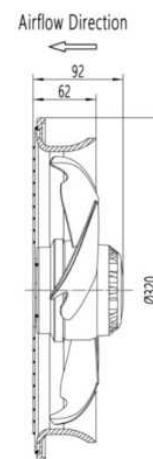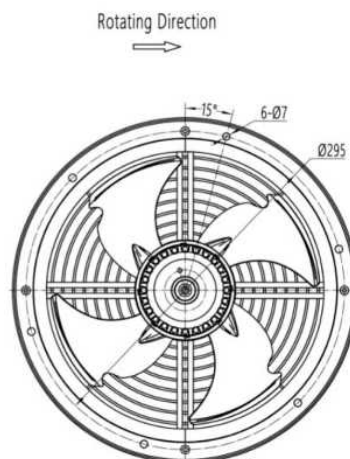



AC Axial Fan 290mm


Impeller Material	PA66+FG
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

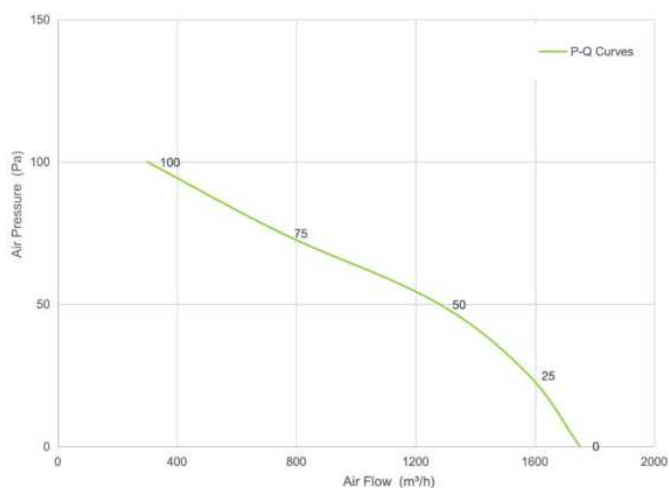

Pa	m³/h	rpm	W
40	1613	1570	73
50	1241	1510	75
60	1402	1535	76
70	894	1445	78

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
A23A290S-72-00	220	60	1585	79.8	1751	55

Rotating Direction
←

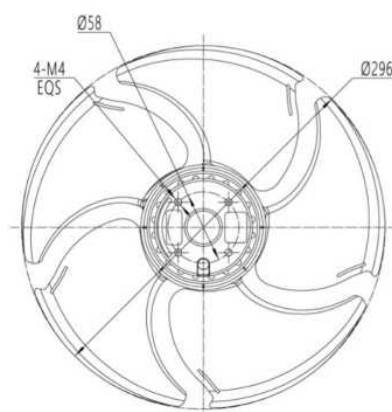


Airflow Direction
←







AC Axial Fan 300mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

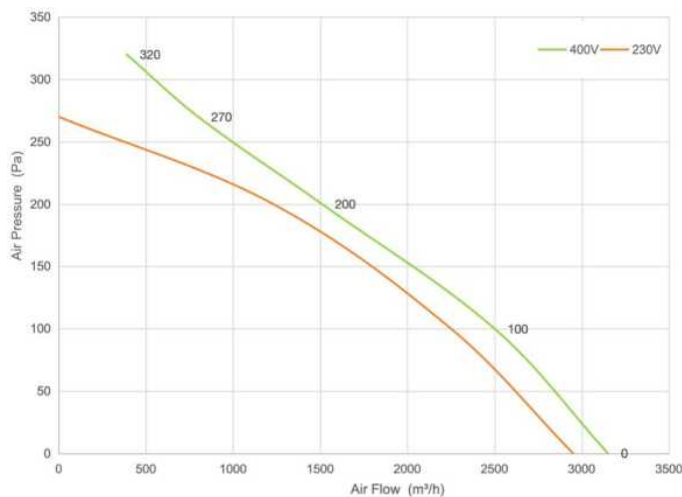

	Pa	m³/h	rpm	W
400V	80	2707	2660	276
	120	2395	2645	289
	160	2043	2620	303
	200	1595	2575	328
230V	100	2299	2642	272
	120	2130	2606	283
	140	1950	2552	292
	160	1701	2528	304



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
R40A300S-92-00	400	50	2920	390	3150	68
R23A300S-92-00	230	50	2740	417	2950	65

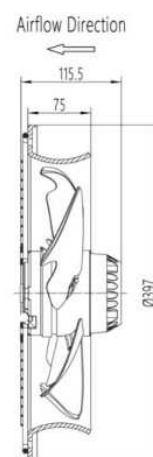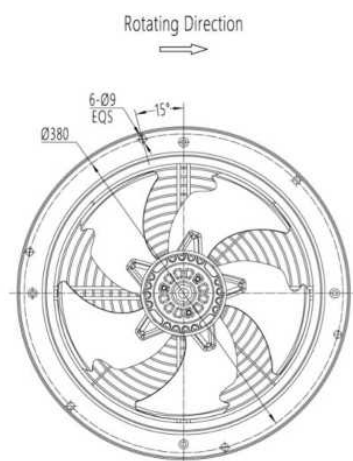





AC Axial Fan 350mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

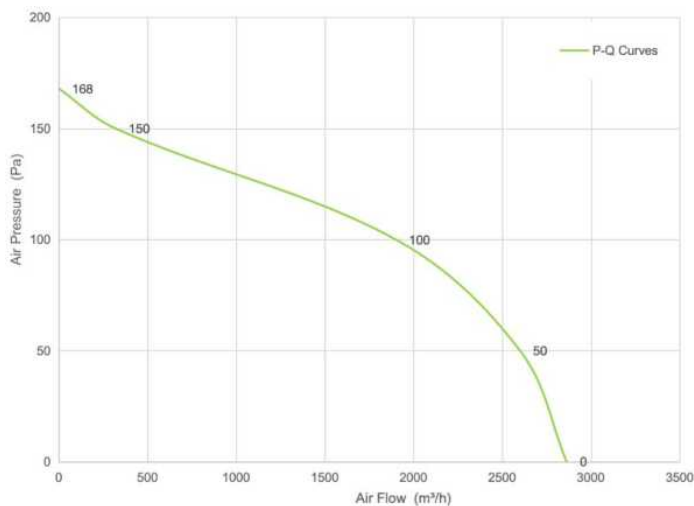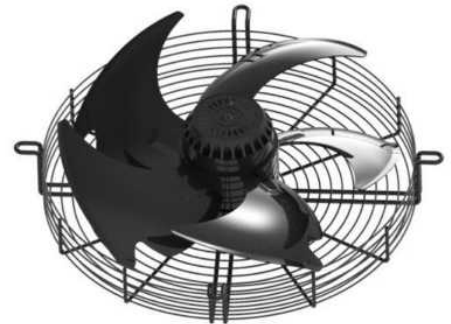

	Pa	m³/h	rpm	W
380V/ 230V	40	2360	1405	125
	60	1993	1393	135
	80	1269	1386	141
	100	1108	1373	152



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G40A350S-92-00	380	50	1425	185	2863	62
G23A350S-92-00	230	50	1425	185	2863	62

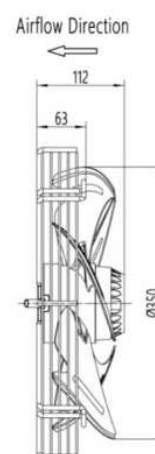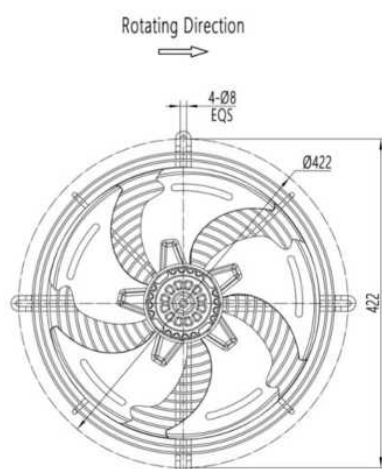




AC Axial Fan 400mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

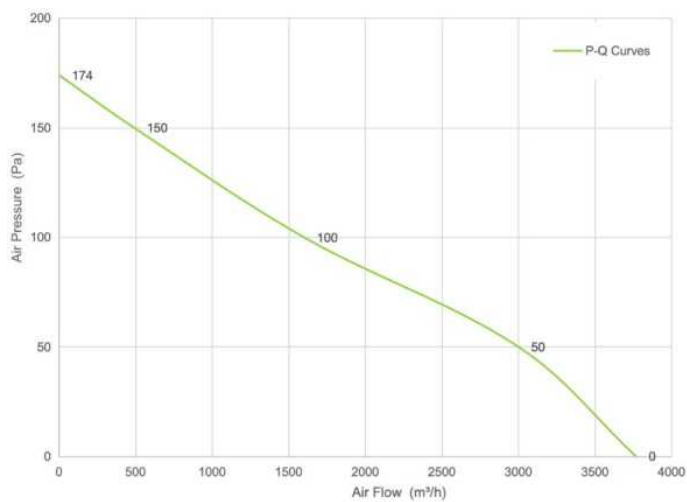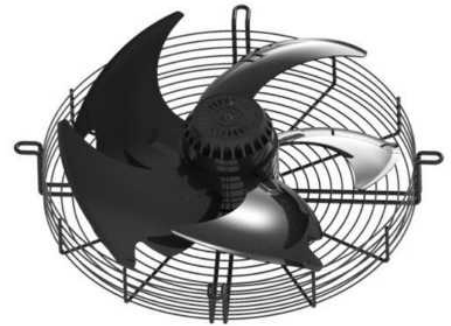

Pa	m³/h	rpm	W
40	3230	1380	155
60	2790	1388	168
80	2225	1342	188
100	1624	1333	194



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23A400S-102-00	230	50	1400	270	3768	66

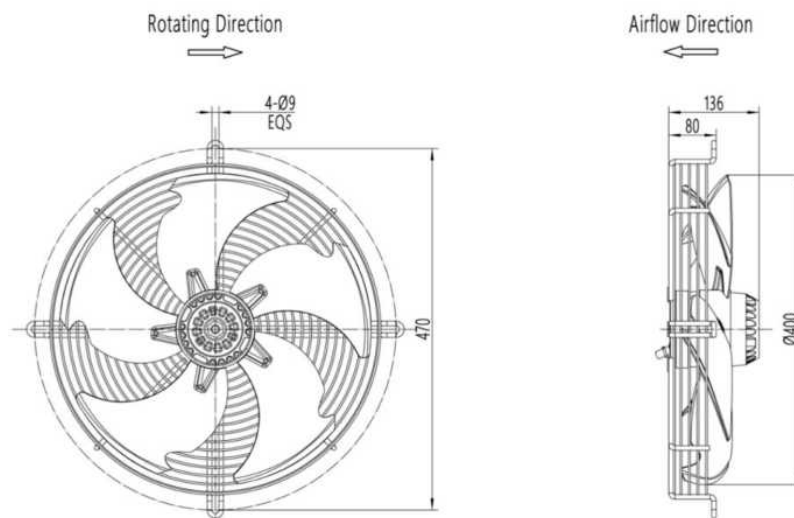





AC Axial Fan 450mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

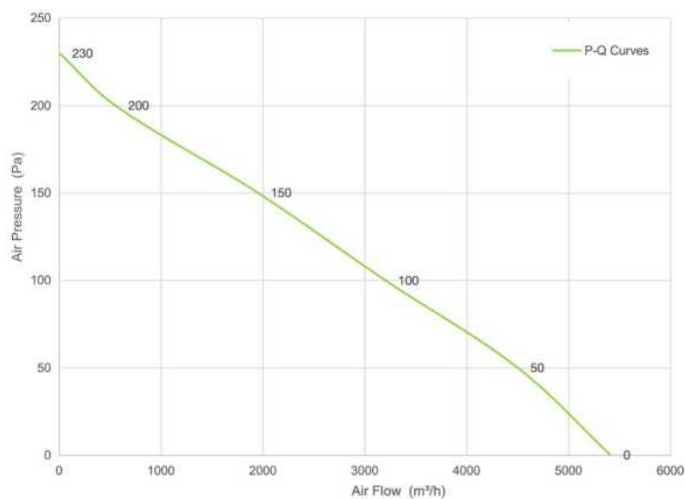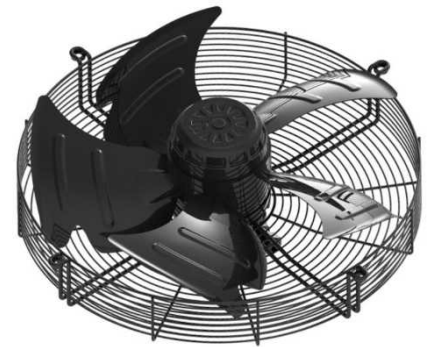

Pa	m³/h	rpm	W
60	4324	1364	279
80	3850	1353	297
100	3336	1334	318
120	2728	1320	340



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A450S-102-00	380	50	1398	479	5411	63

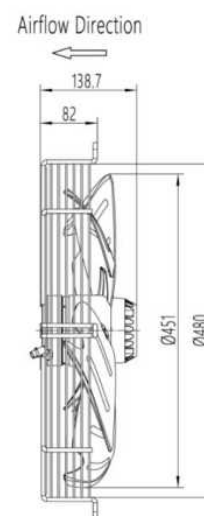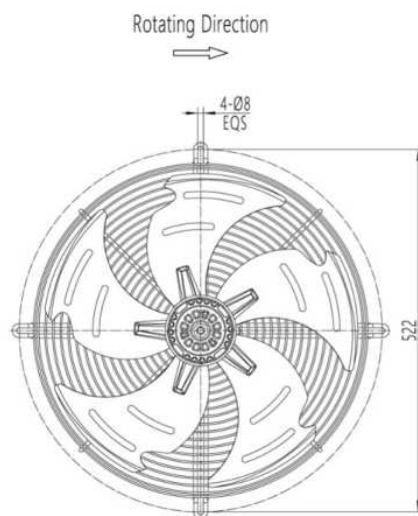





AC Axial Fan 500mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

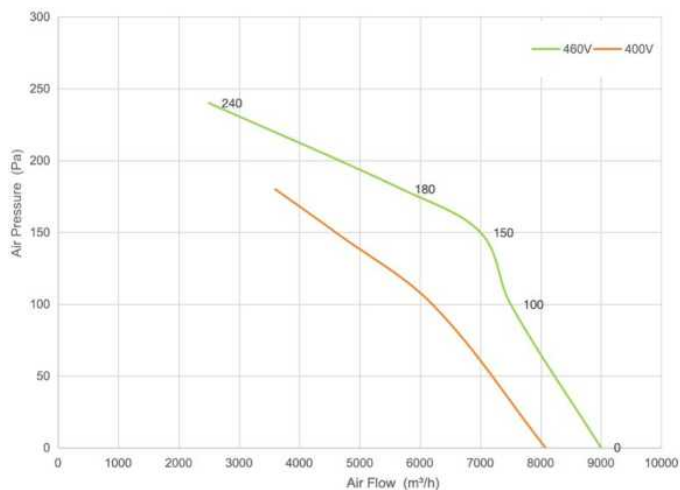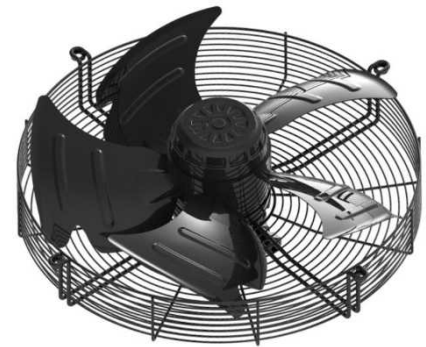

	Pa	m³/h	rpm	W
460V	120	7000	1575	840
	160	6300	1550	912
	200	5000	1530	955
400v	100	6300	1384	600
	120	5850	1380	620
	160	4450	1370	653



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G40A500S-102-00	460	60	1620	955	9000	72
	400	50	1410	655	8080	69

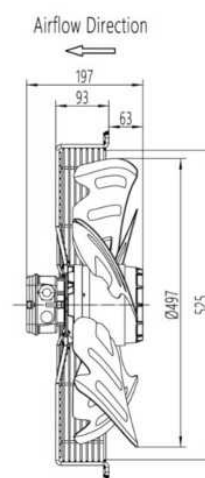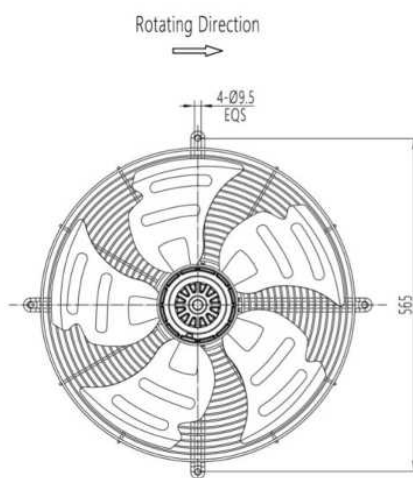





AC Axial Fan 550mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

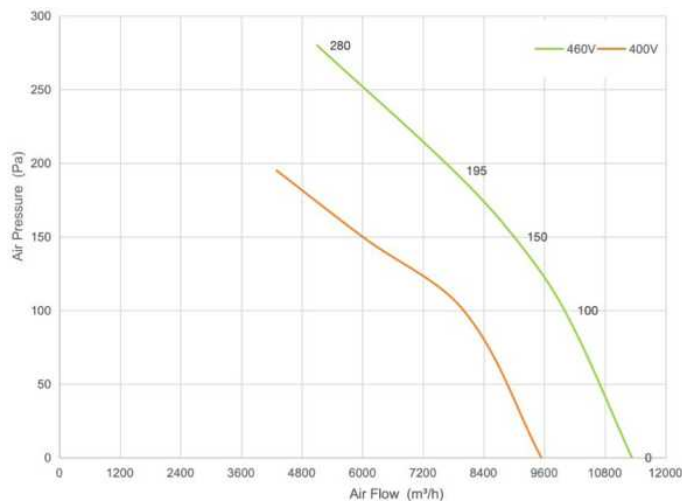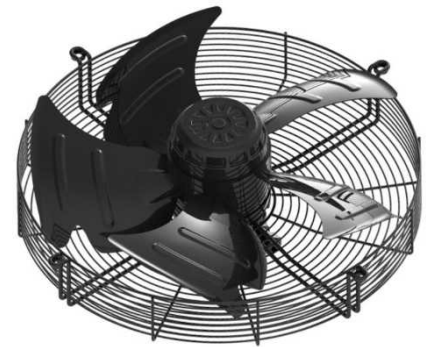

	Pa	m³/h	rpm	W
A	120	9553	1750	1186
	150	8886	1742	1244
	180	8189	1728	1303
	240	6514	1714	1396
B	80	8310	1414	778
	100	7828	1410	805
	120	7327	1403	844
	150	6137	1396	893


Model	Curve	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G40A550S-138-00	A	460	60	1785	1420	11335	74
	B	400	50	1440	922	9540	72

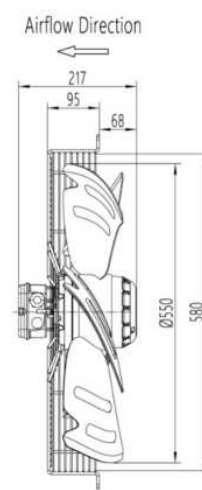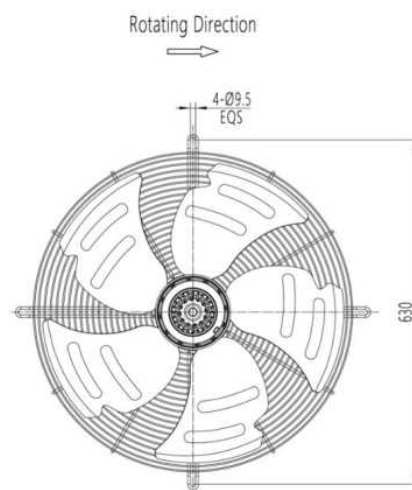




AC Axial Fan 630mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

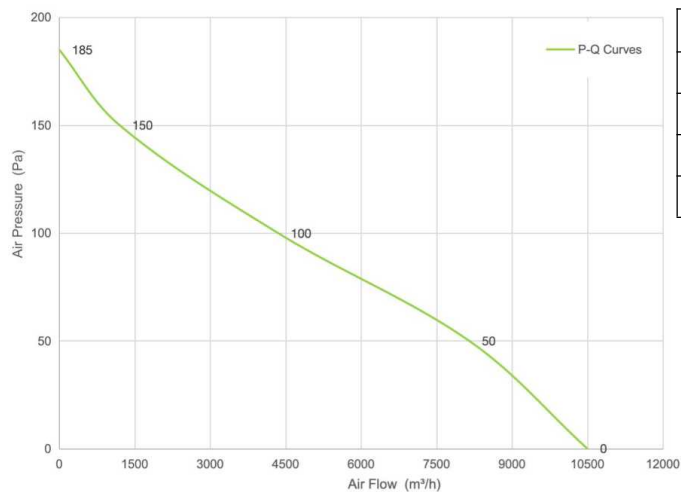

Pa	m³/h	rpm	W
35	9000	906	540
60	7800	895	572
75	6500	873	630
100	4580	872	655

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S23A630S-155-00	230	50	925	785	10500	67

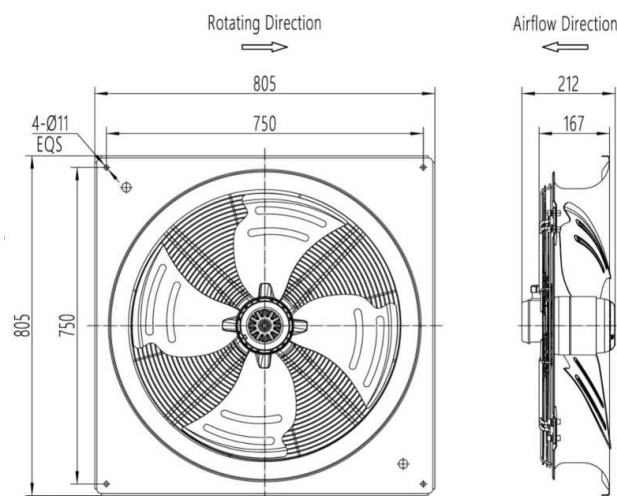

AC Axial Fan 630mm


1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China

Email: sales@airtekpowers.com

Website: www.airtekpowers.com




Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

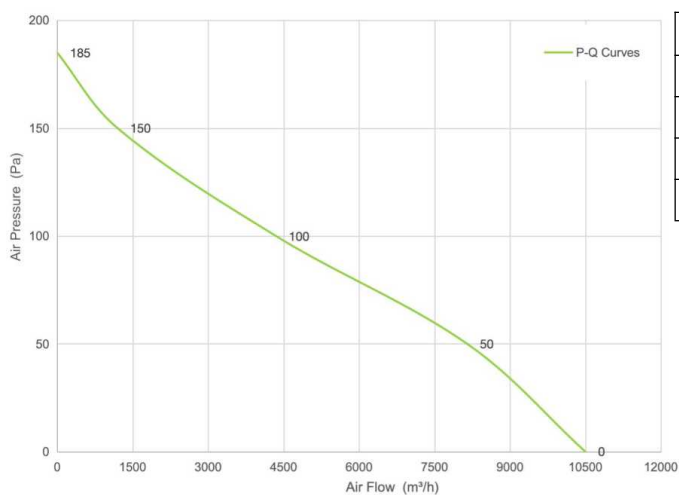

Pa	m³/h	rpm	W
35	9000	906	540
60	7800	895	572
75	6500	873	630
100	4580	872	655


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G23A630S-155-00	230	50	925	785	10500	67

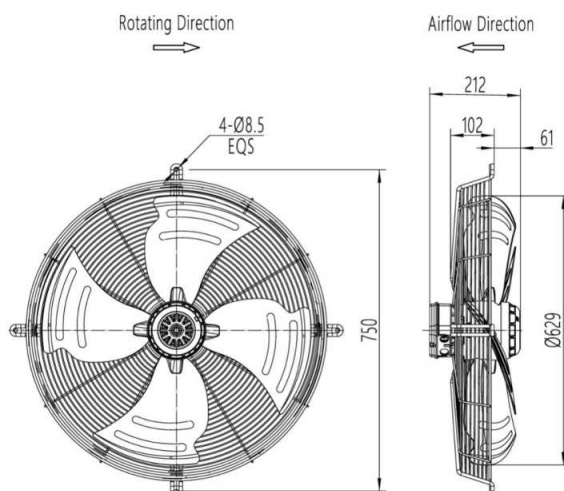




AC Axial Fan 630mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

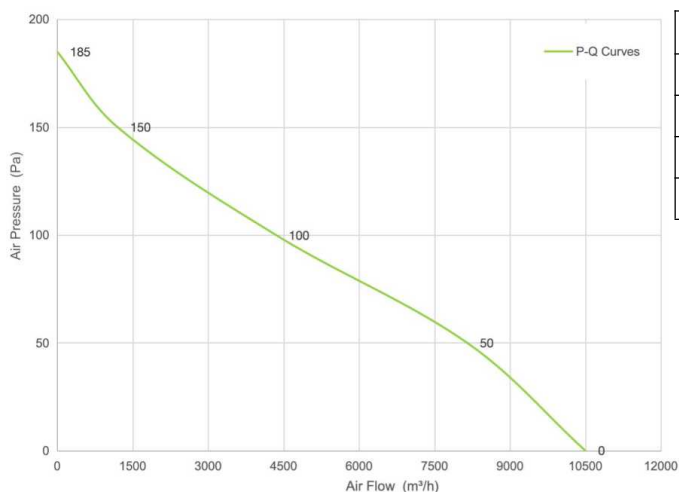

Pa	m³/h	rpm	W
35	9000	906	540
60	7800	895	572
75	6500	873	630
100	4580	872	655



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38A630S-155-00	380	50	925	785	10500	67

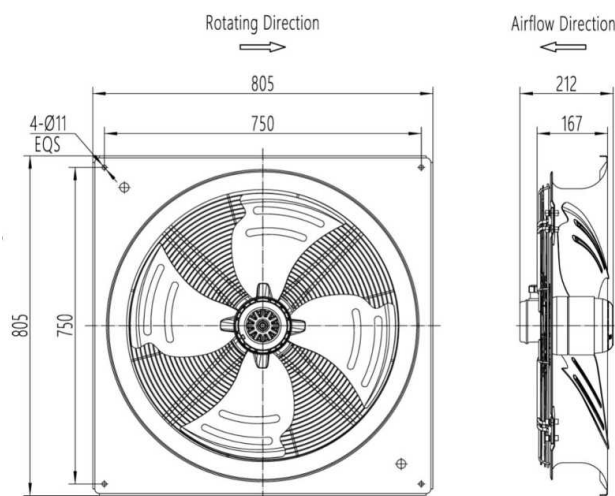




AC Axial Fan 630mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

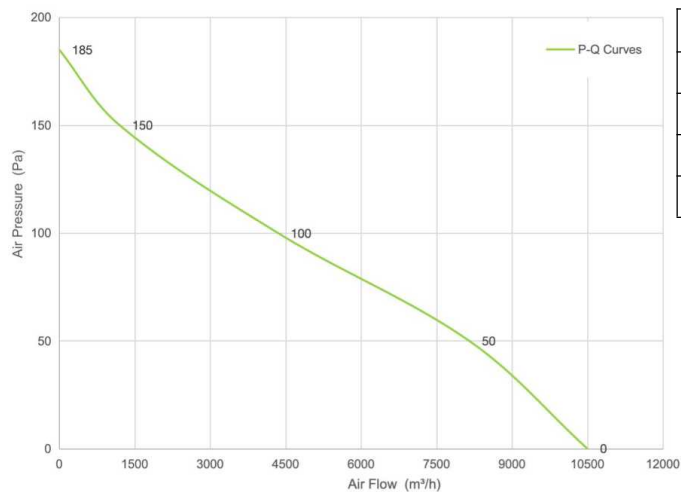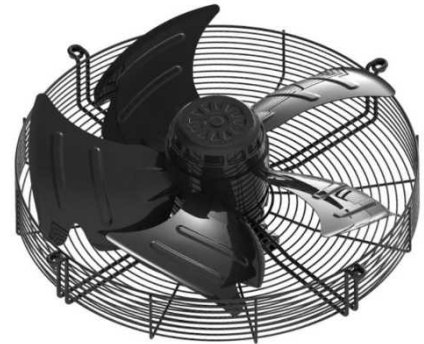

Pa	m³/h	rpm	W
35	9000	906	540
60	7800	895	572
75	6500	873	630
100	4580	872	655


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A630S-155-00	380	50	925	785	10500	67

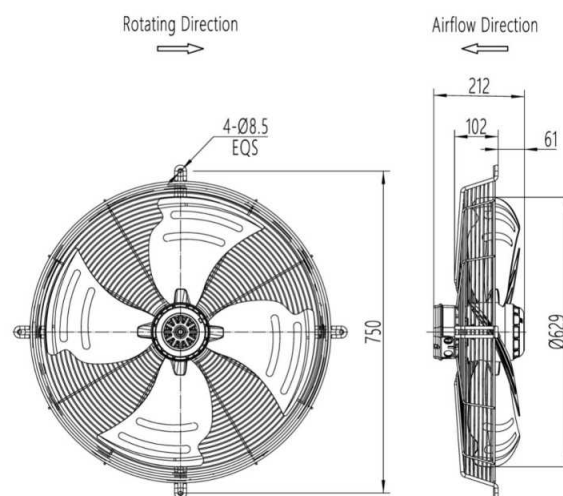





AC Axial Fan 630mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

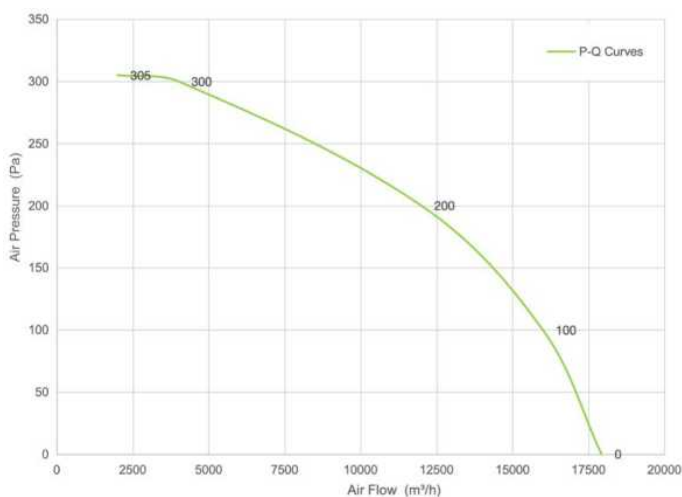

Pa	m³/h	rpm	W
142	15269	1380	2230
160	14509	1375	2256
179	13782	1370	2312
201	12503	1360	2441


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A630S-188-00	380	50	1398	2550	17933	76

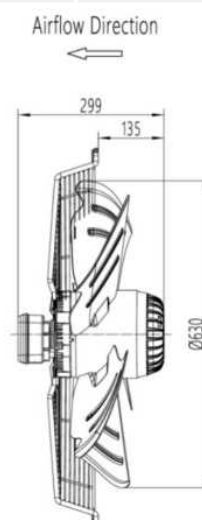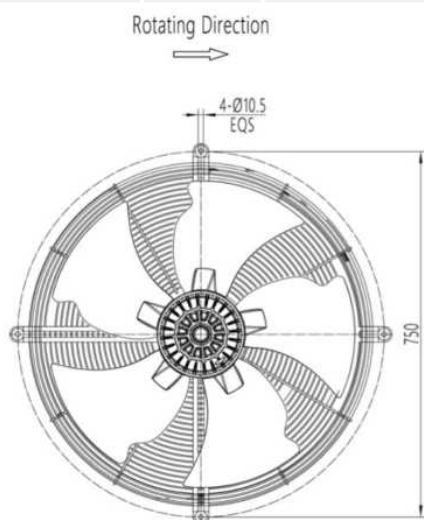




AC Axial Fan 710mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

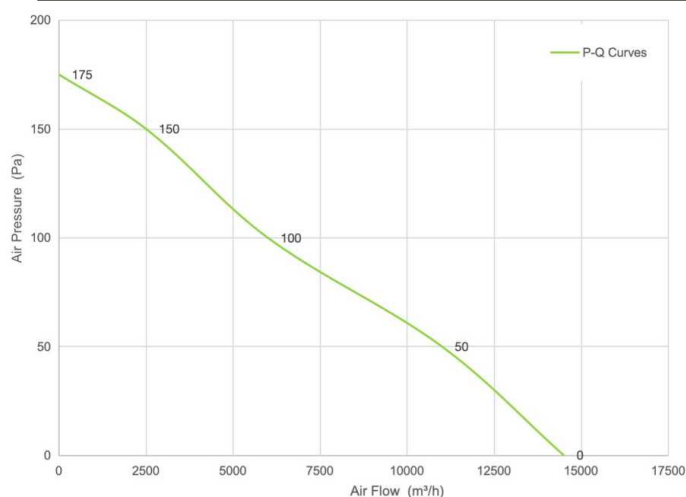

Pa	m³/h	rpm	W
60	10538	702	822
70	9198	752	806
80	8576	763	800
90	6395	748	779

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38A710S-155-00	380	50	880	775	14500	71

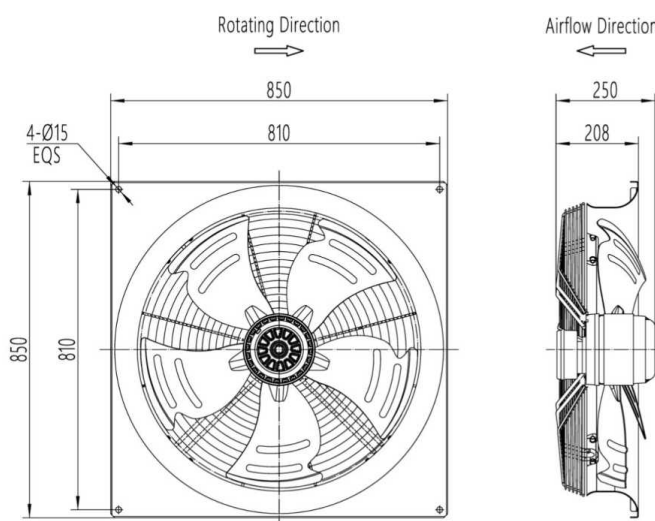

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu, China



Email: sales@airtekipower.com

Website: www.airtekipower.com




AC Axial Fan 710mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

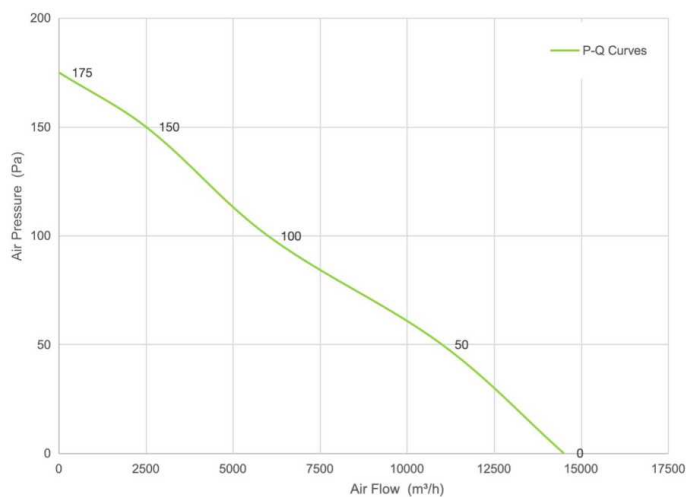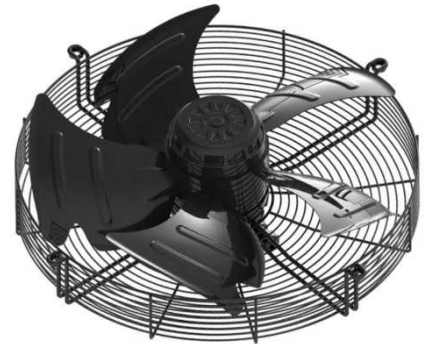

Pa	m³/h	rpm	W
60	10538	702	822
70	9198	752	806
80	8576	763	800
90	6395	748	779


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A710S-155-00	380	50	880	775	14500	71

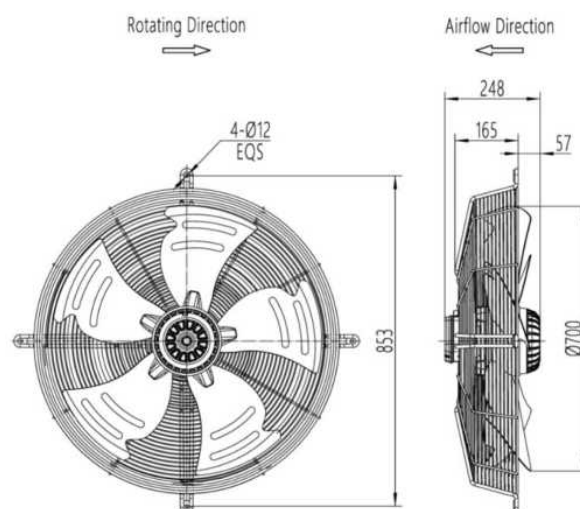




AC Axial Fan 710mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

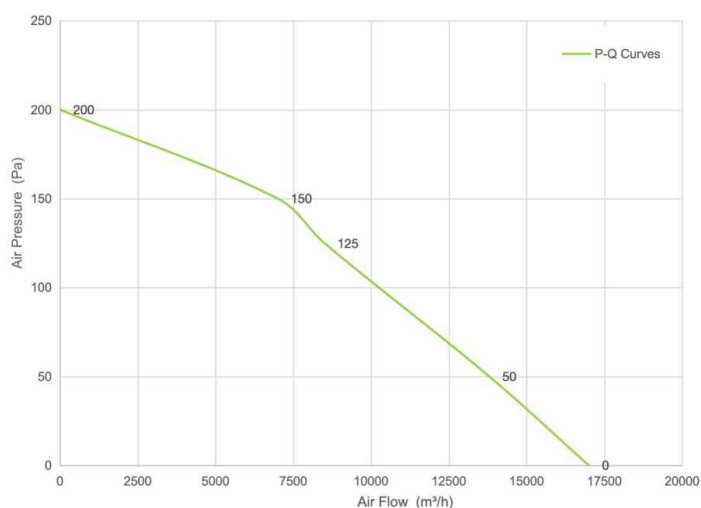

Pa	m³/h	rpm	W
90	11280	893	939
100	10592	917	938
110	10058	935	973
120	7657	906	938


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38A710S-155-01	380	50	960	980	17000	72

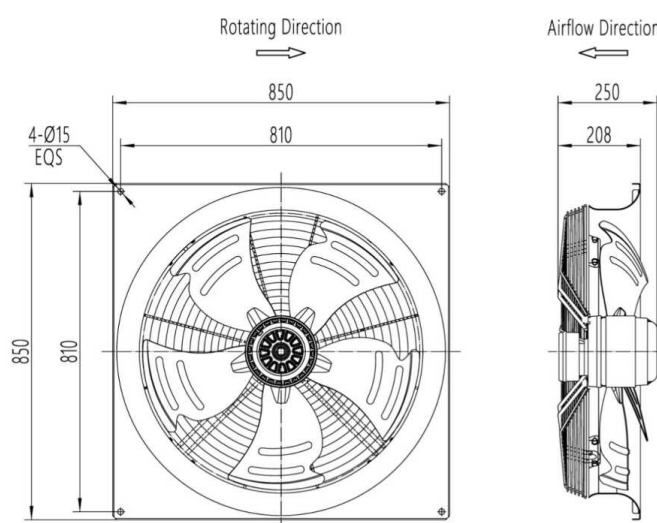




AC Axial Fan 710mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

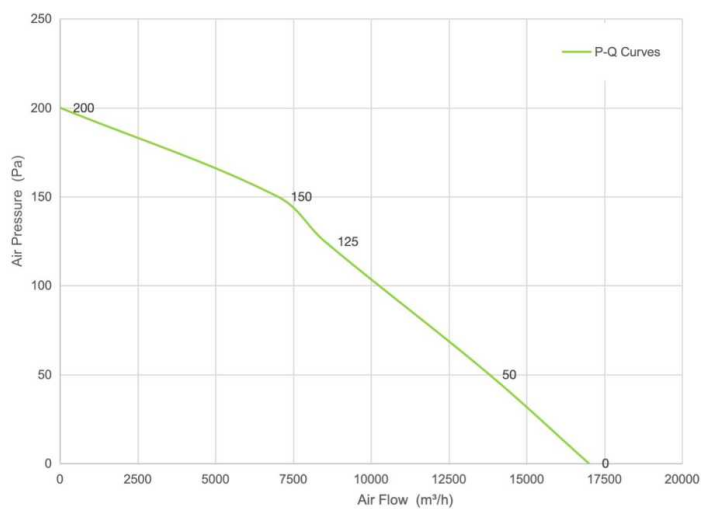

Pa	m³/h	rpm	W
90	11280	893	939
100	10592	917	938
110	10058	935	973
120	7657	906	938


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A710S-155-01	380	50	960	980	17000	72

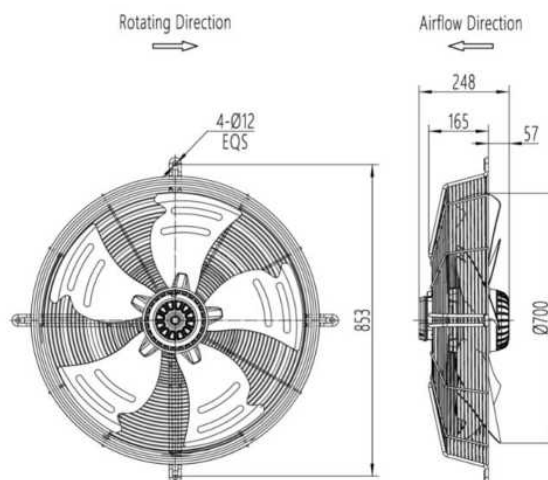





AC Axial Fan 710mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 55
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

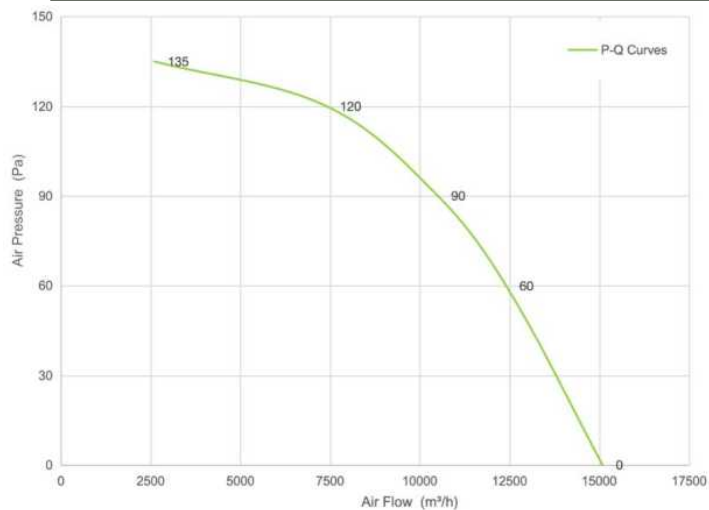

Pa	m³/h	rpm	W
70	11840	927	849
80	11030	925	872
90	10390	922	891
100	9600	917	921


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38A710S-180-01	380	50	940	920	15090	72

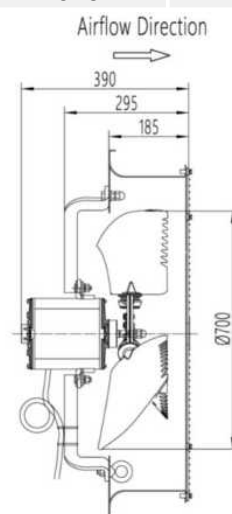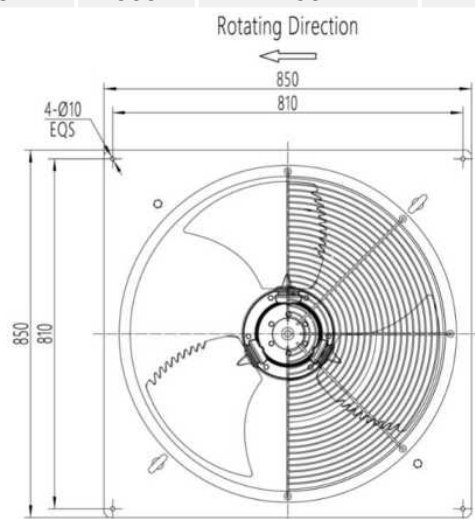




AC Axial Fan 800mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

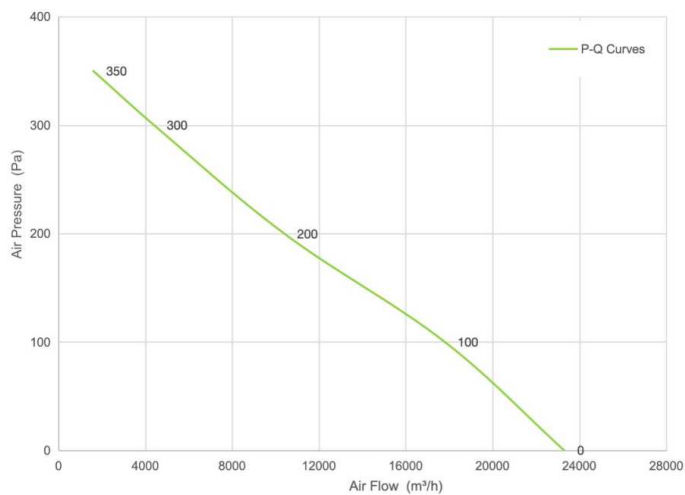

Pa	m³/h	rpm	W
120	16130	897	2186
150	14304	893	2263
180	12499	893	2250
200	10455	896	2223



Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38A800S-225-00	380	50	920	2265	23300	78.9

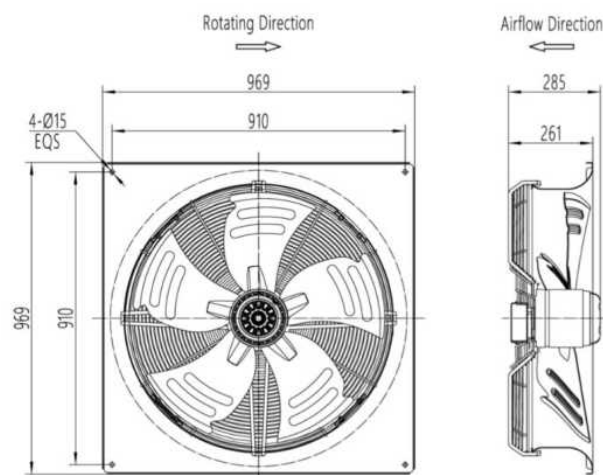




AC Axial Fan 800mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

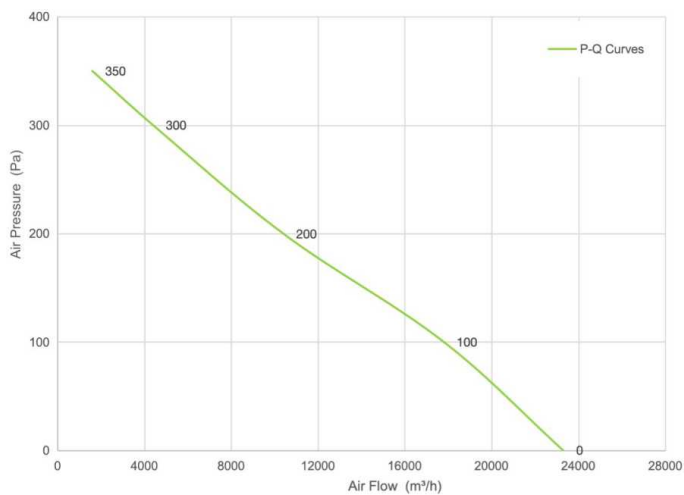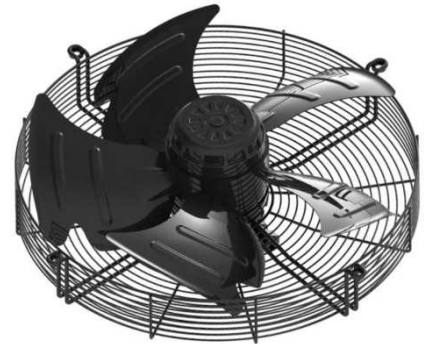

Pa	m³/h	rpm	W
120	16130	897	2186
150	14304	893	2263
180	12499	893	2250
200	10455	896	2223

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A800S-225-00	380	50	920	2265	23300	78.9

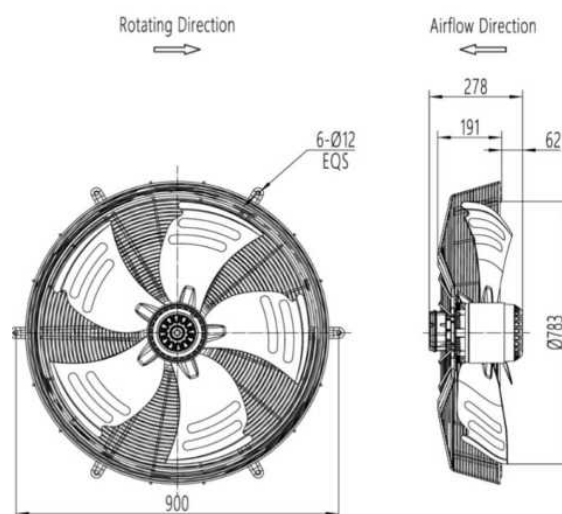

1-2507 Xinghongdasha, No.225, Suhong Road Suzhou Industrial Park, Suzhou, Jiangsu,China



Email: sales@airtekipower.com

Website: www.airtekipower.com





AC Axial Fan 800mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

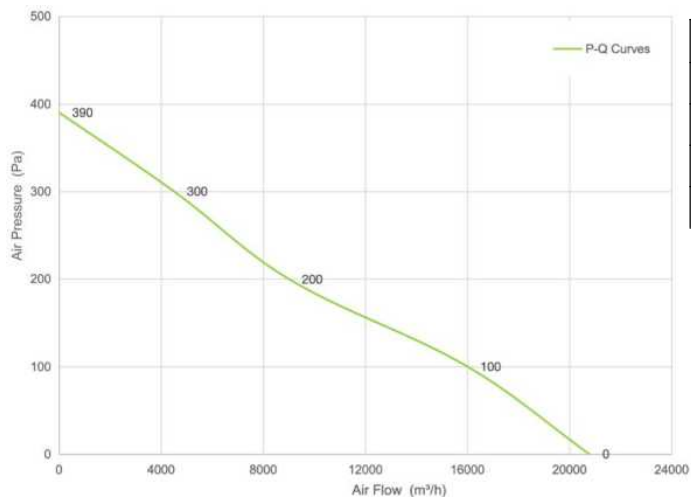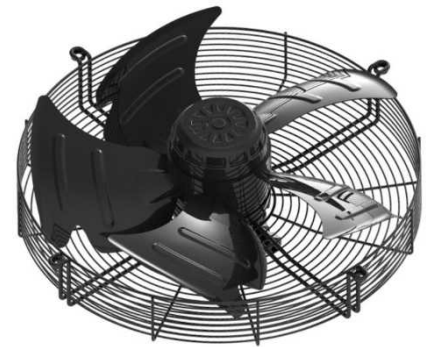

Pa	m³/h	rpm	W
80	17576	1074	1430
100	16481	1064	1512
120	15152	1052	1613
141	13172	1032	1739


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
G38A800S-225-01	380	50	1100	2530	20778	75

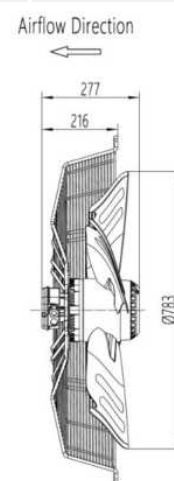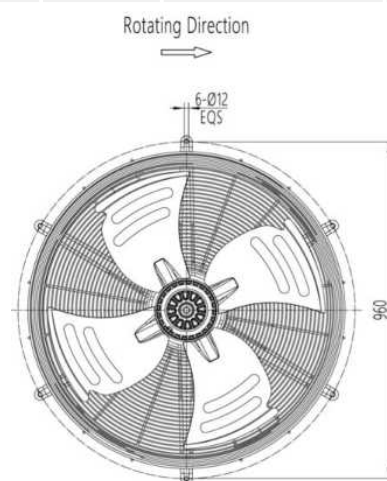





AC Axial Fan 900mm

Impeller Material	Cold rolled steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	10-50Hz
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

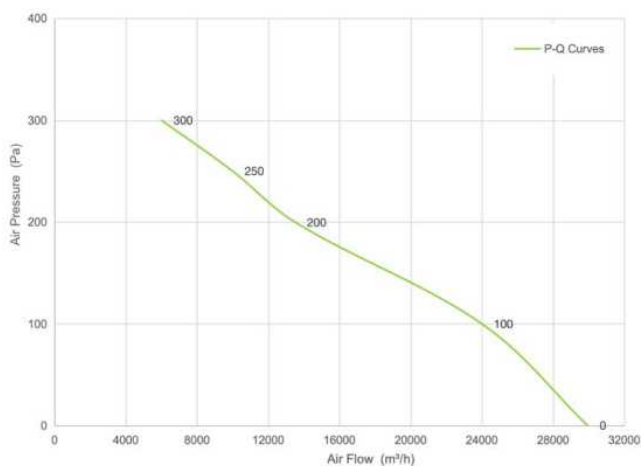

Pa	m³/h	rpm	W
80	25568	941	1876
100	23807	934	2097
119	22097	928	2185
140	20416	925	2339

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
S38A900S-225-00	380	50	930	2855	29945	74

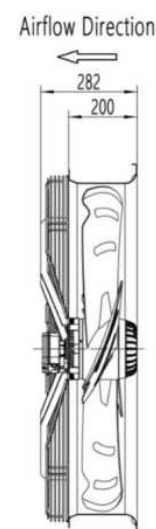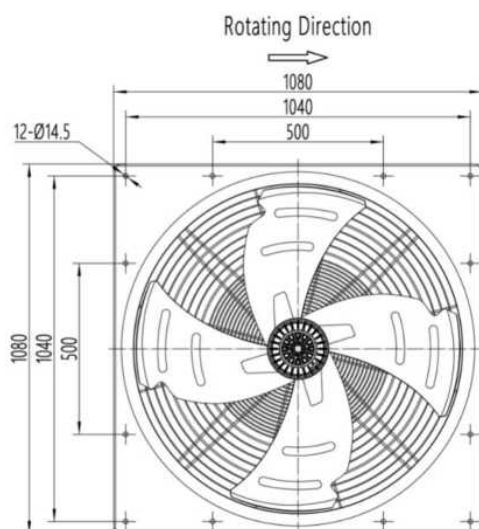




EC Duct Fan






EC Duct Fan 100mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

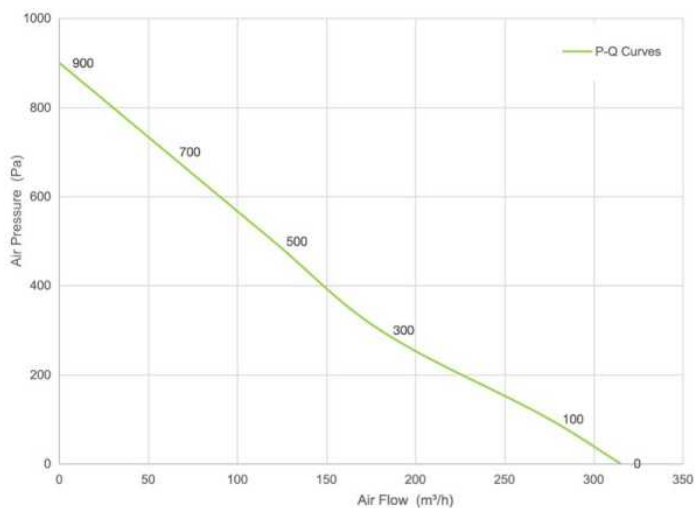

Pa	m³/h	rpm	W
400	150	2850	80
300	180	2987	79
200	210	3123	79


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E190D100-92-00	220	50/60	3200	80	315	72

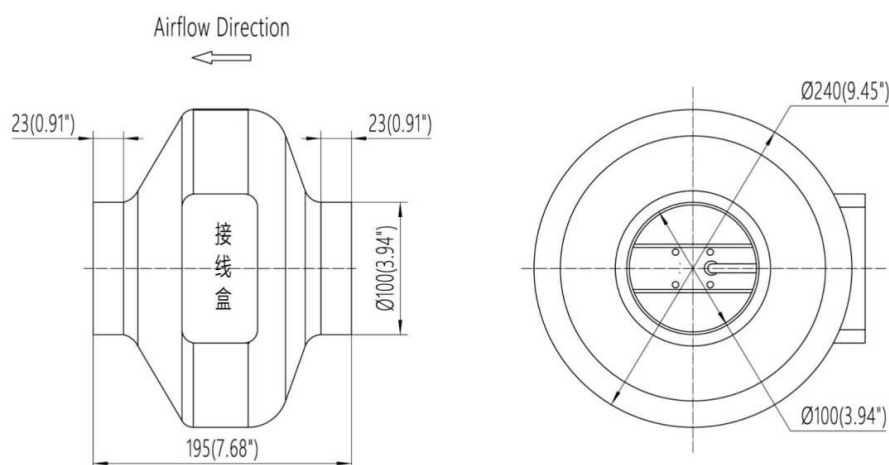



EC Duct Fan 125mm



Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

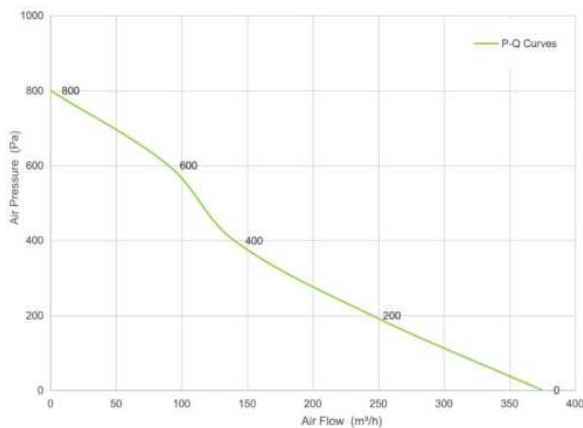

Pa	m³/h	rpm	W
400	145	3452	80
300	210	3485	83
200	250	3512	80

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E220D125-92-00	220	50/60	3400	85	375	69


Airflow Direction

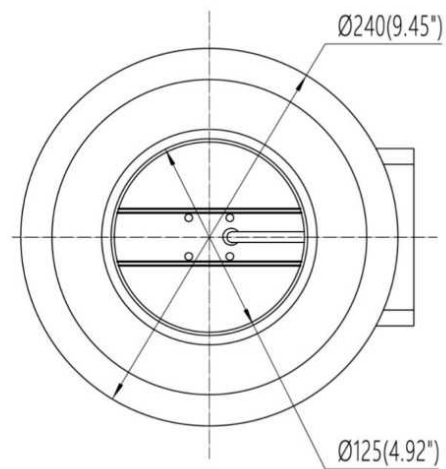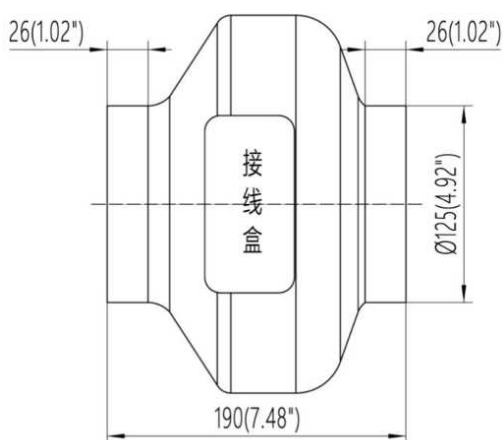



EC Duct Fan 150mm



Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

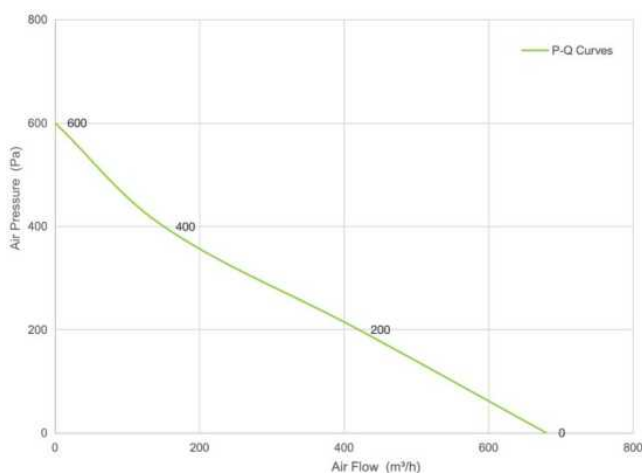

Pa	m³/h	rpm	W
400	150	2530	82
300	280	2677	85
200	420	2714	87

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E225D150-92-00	220	50/60	2650	85	680	65


Airflow Direction

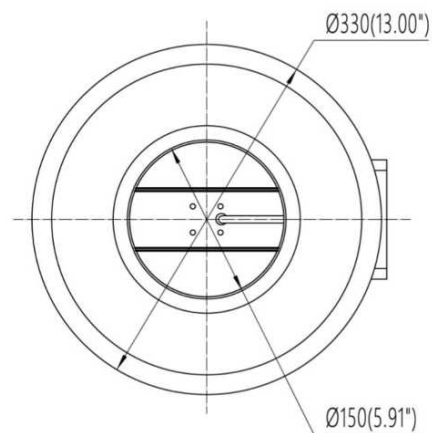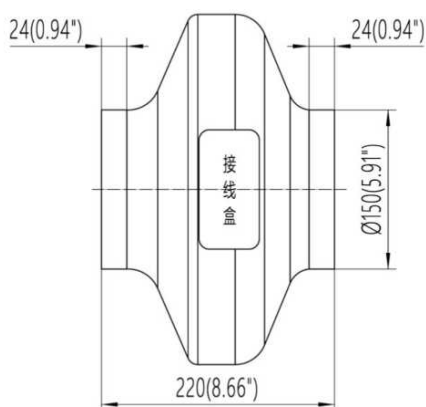




EC Duct Fan 160mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

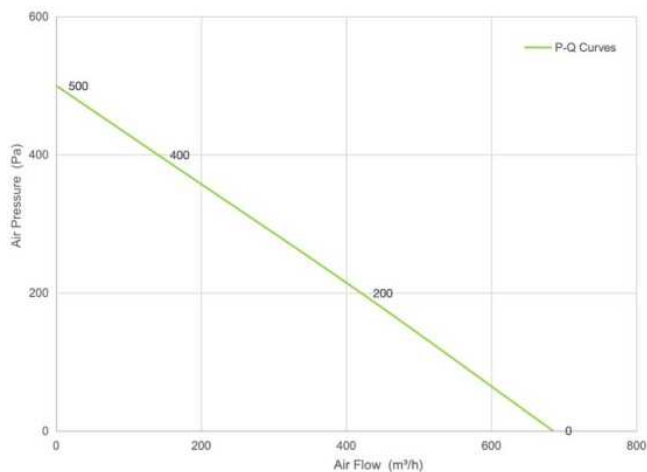

Pa	m³/h	rpm	W
400	140	2619	68
300	280	2752	68
200	419	2839	65


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E225D160-92-00	220	50/60	2750	85	665	68

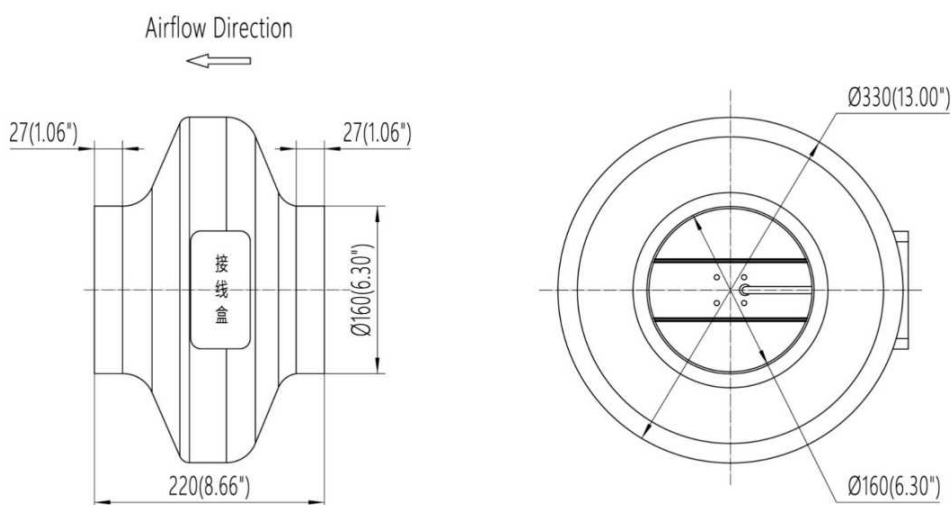



EC Duct Fan 200mm



Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

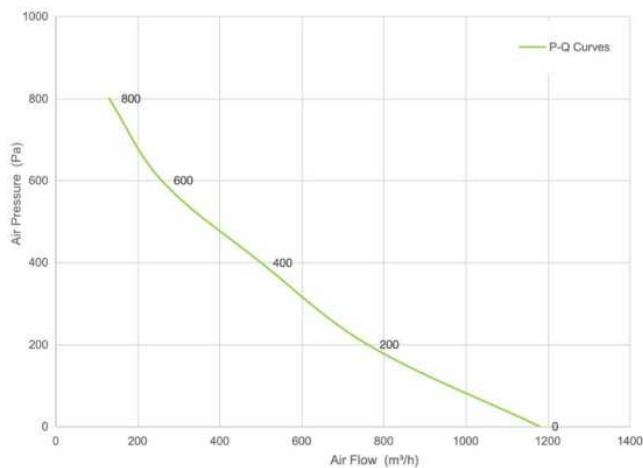

Pa	m³/h	rpm	W
600	270	2567	165
500	350	2609	171
400	500	2679	169

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E250D200-92-00	220	50/60	2700	170	1190	71


Airflow Direction

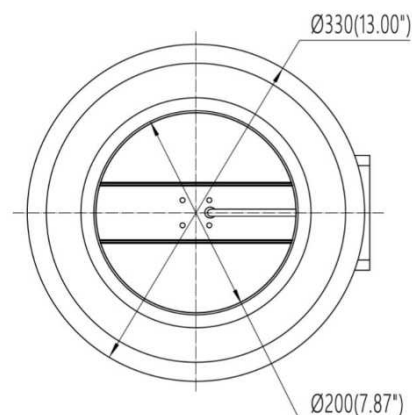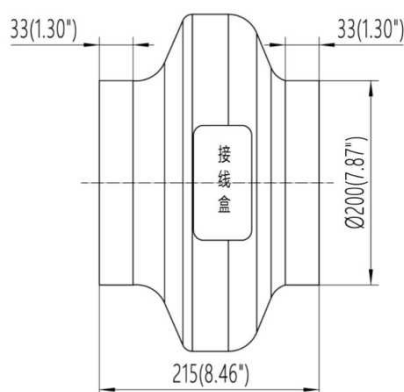





EC Duct Fan 250mm

Impeller Material	PA66+GF
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

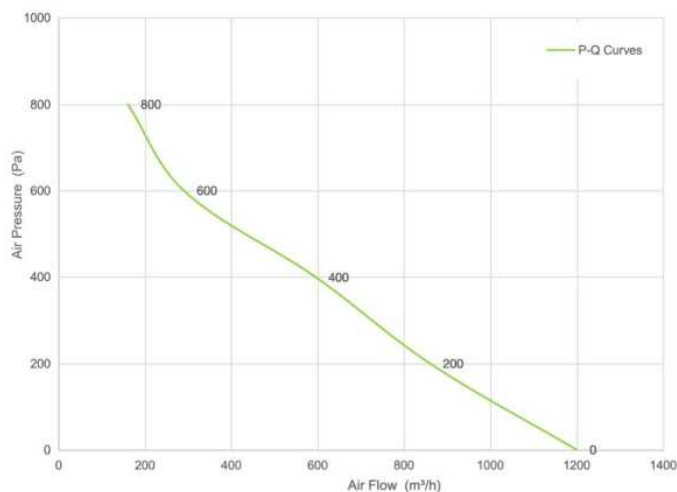

Pa	m³/h	rpm	W
600	290	2613	167
500	485	2698	169
400	550	2788	171


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E250D250-92-00	220	50/60	2700	170	1200	72

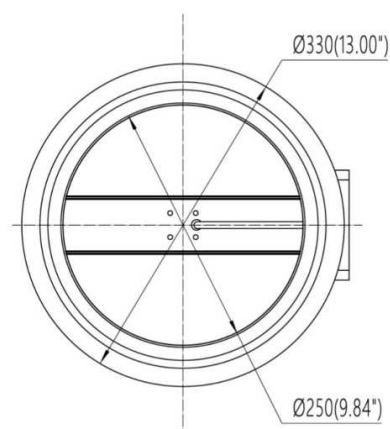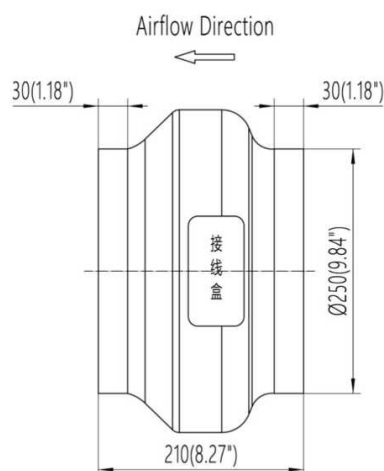




EC Duct Fan 315mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	0-10VDC/PWM (Control input 4-20mA)
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-25~+60℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

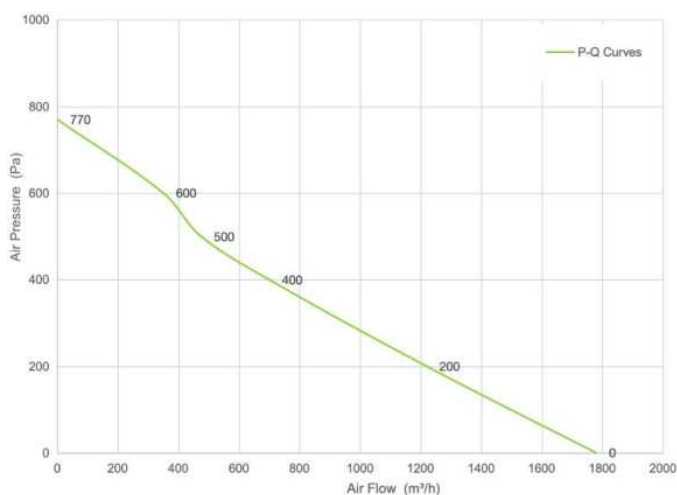

Pa	m³/h	rpm	W
500	420	2618	190
400	710	2659	205
300	1033	2707	209

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23E280D315-92-00	220	50/60	2700	220	1780	77

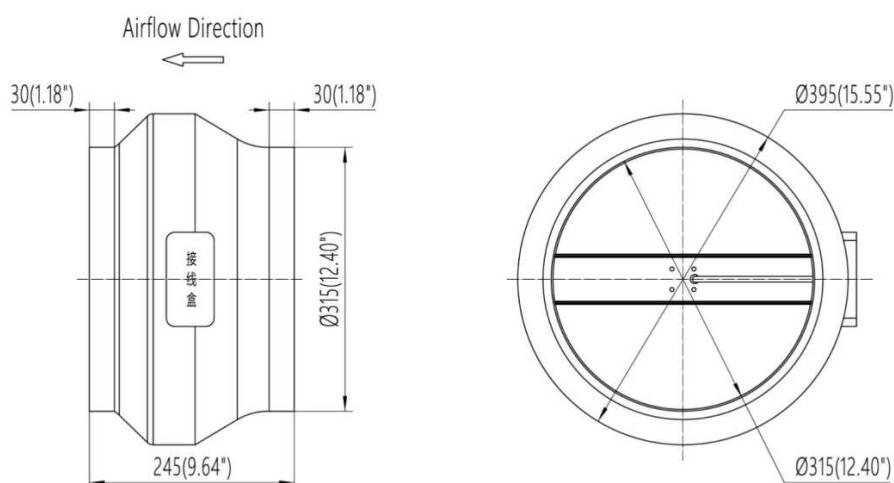




AC Duct Fan






AC Duct Fan 100mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

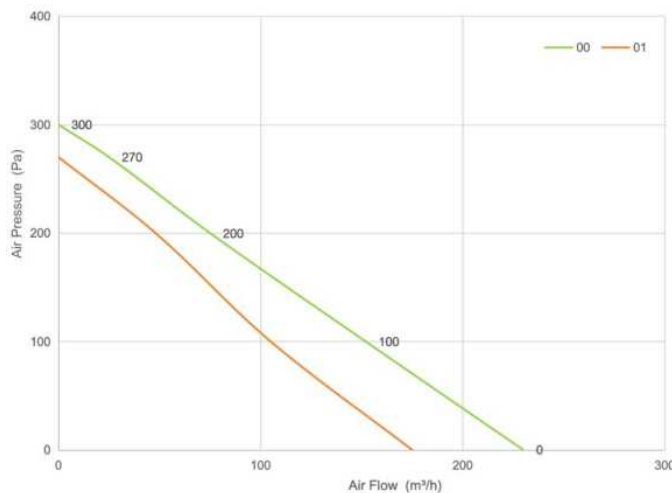

	Pa	m³/h	rpm	W
00	0	235	2335	50
	40	200	2355	49
	80	170	2385	48
01	0	180	2095	44
	20	160	2120	44
	45	140	2150	43


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A190D100-92-00	220	50	2335	50	235	64
D23A190D100-92-01	220	50	2095	44	180	58

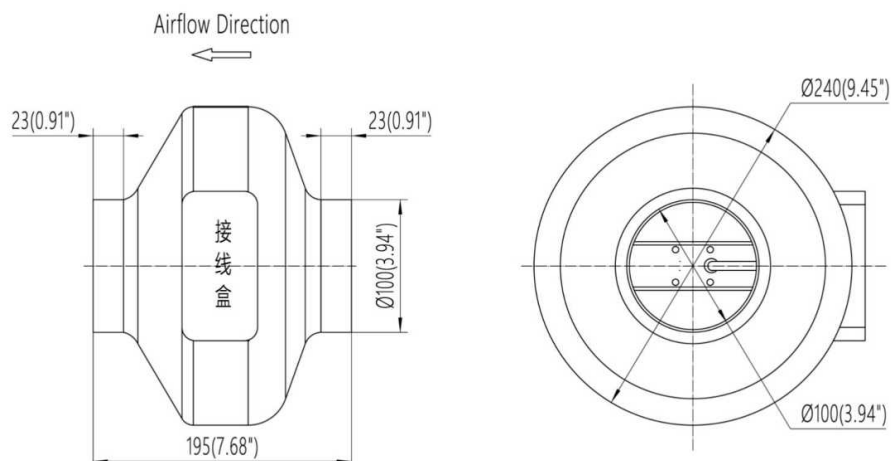




AC Duct Fan 125mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

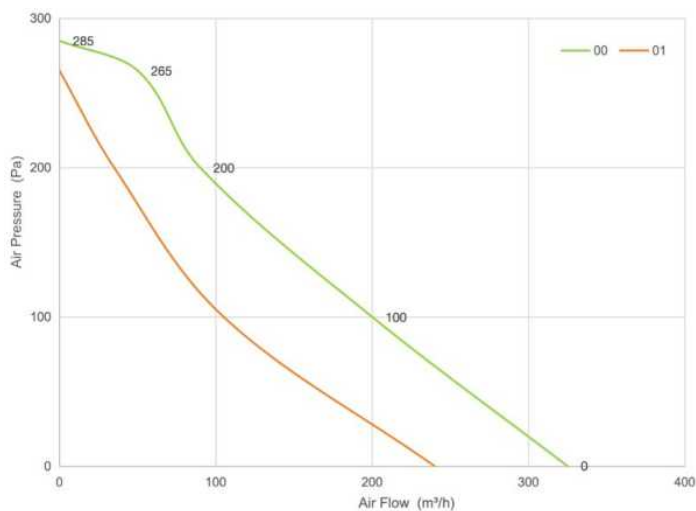

	Pa	m³/h	rpm	W
00	0	325	2275	51
	40	270	2270	51
	79	220	2300	50
01	0	245	1720	44
	40	175	1740	44
	80	125	1890	42


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A190D125-92-00	220	50	2275	51	325	63
D23A190D125-92-01	220	50	1720	44	245	56

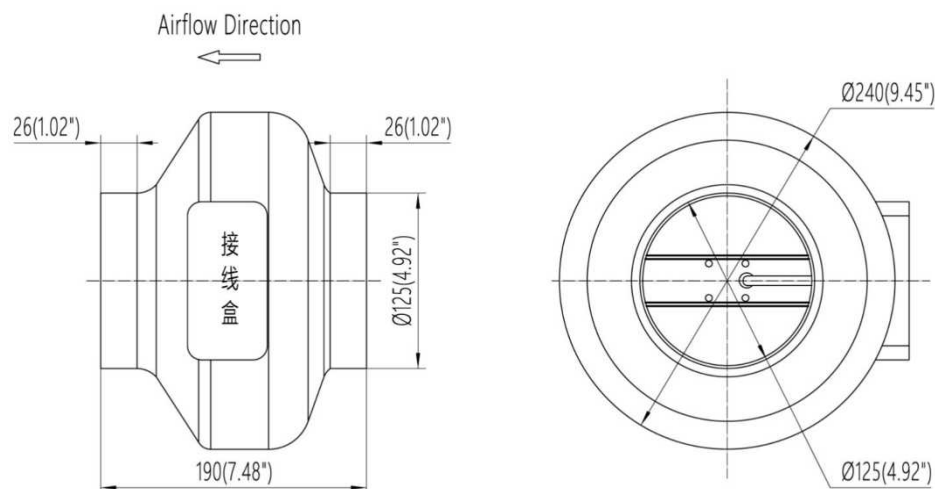




AC Duct Fan 150mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

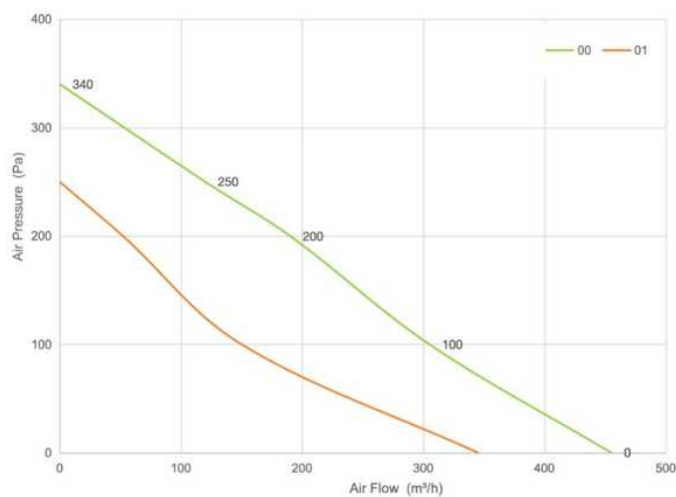

	Pa	m³/h	rpm	W
00	0	466	2250	65
	40	400	2170	67
	80	350	2090	69
01	0	355	1730	57
	40	260	1500	59
	65	200	1420	60


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A225D150-92-00	220	50	2250	70	465	68
D23A225D150-92-01	220	50	1730	60	355	62

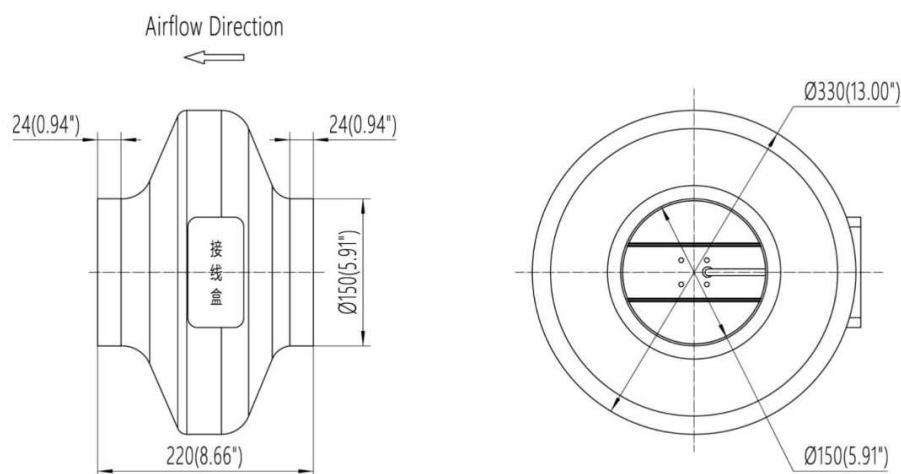




AC Duct Fan 160mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

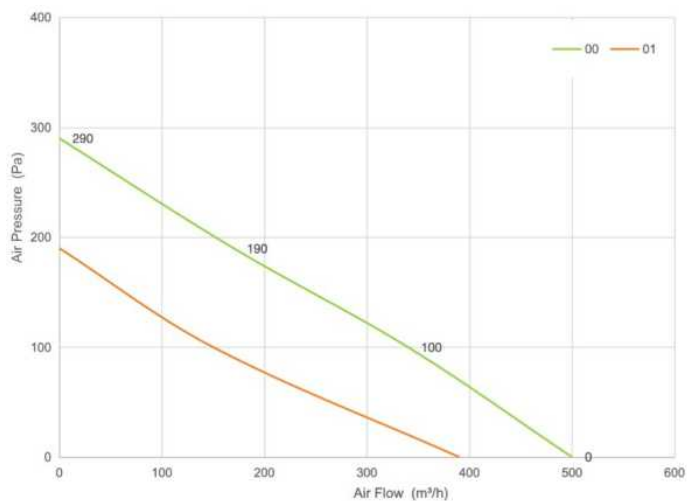

	Pa	m³/h	rpm	W
00	0	495	2310	64
	40	435	2235	65
	80	370	2130	68
01	0	395	1850	56
	40	290	1610	59
	80	185	1470	60


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A225D160-92-00	220	50	2310	70	495	70
D23A225D160-92-01	220	50	1850	60	395	65

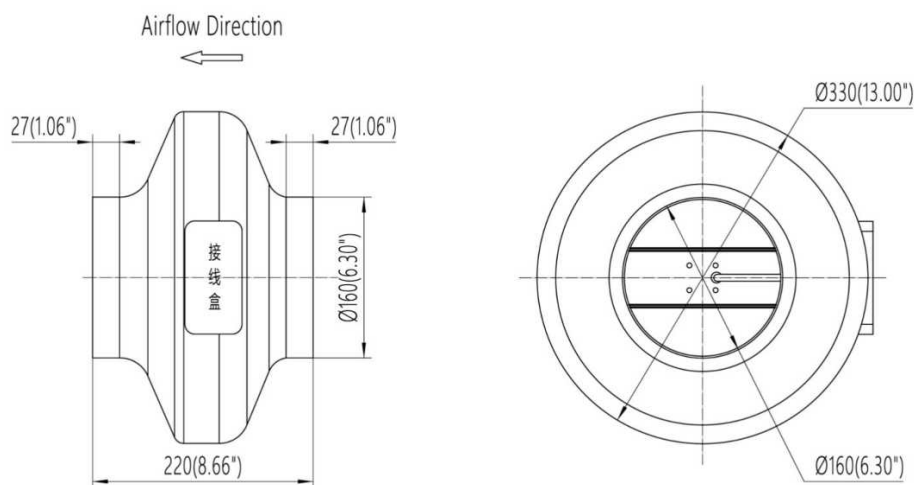




AC Duct Fan 200mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

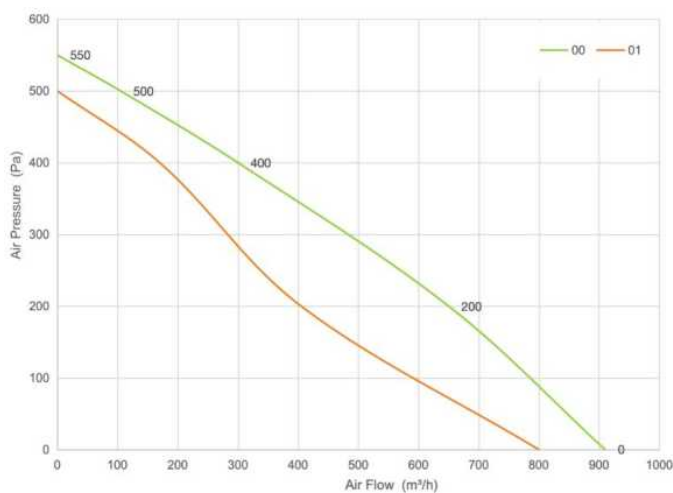

	Pa	m³/h	rpm	W
00	0	920	2545	163
	50	850	2530	165
	150	730	2475	174
01	0	815	2255	156
	80	675	2145	166
	160	485	2000	172


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A250D200-92-00	220	50	2545	175	920	72
D23A250D200-92-01	220	50	2255	175	815	70

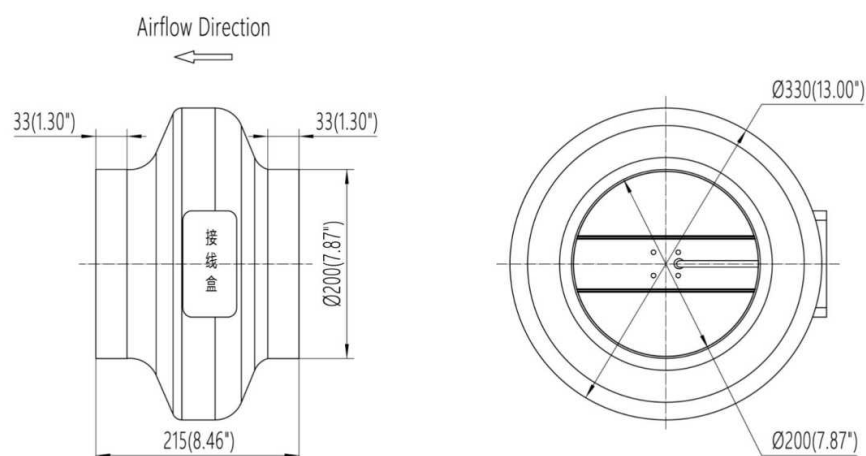




AC Duct Fan 250mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

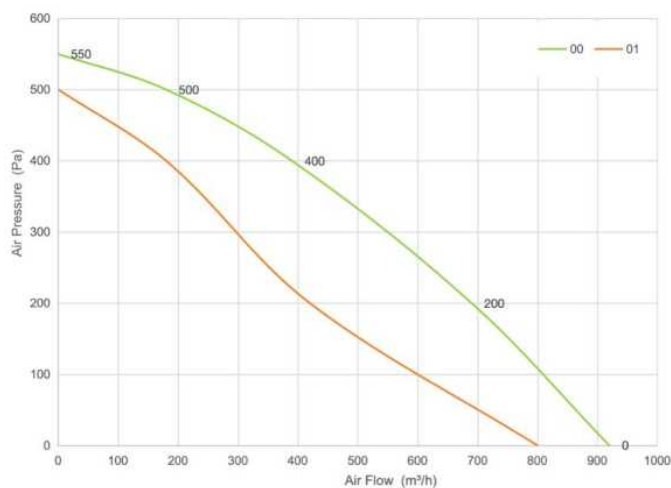

	Pa	m³/h	rpm	W
00	0	920	2765	156
	100	805	2725	168
	200	690	2680	177
01	0	830	2495	131
	100	655	2330	152
	200	435	2155	166


Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A250D250-92-00	220	50	2765	180	920	71.3
D23A250D250-92-01	220	50	2495	170	830	69.7

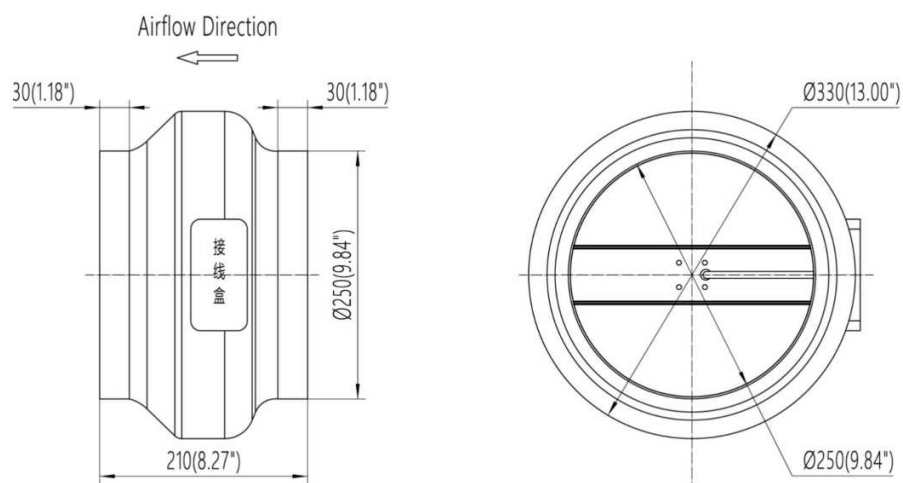




AC Duct Fan 315mm

Impeller Material	Galvanized sheet steel
Direction of rotation:	Clockwise, seen on rotor
Control Signal:	Motor wiring speed regulation
Protection Class:	IP 54
Insulation class:	F
Bearing:	Maintenance-free Ball bearings
Approval:	CCC, CE, RoHS
Amb.Temp:	-40~+65℃
Mounting Position:	Horizontal or Vertical
Operation Mode	S1
Protection	Current limitation, Stall protection, Soft start protection, Open phase protection, Overheating protection, Over/ Under voltage protection

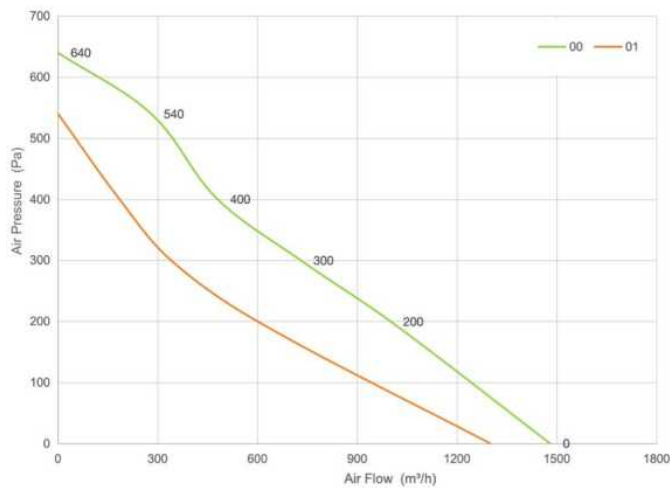

	Pa	m³/h	rpm	W
00	0	1490	2415	206
	150	1145	2355	243
	300	700	2105	252
01	0	1325	2190	197
	150	720	1725	232
	300	350	1935	214

Model	Voltage [V]	Frequency [Hz]	Speed [rpm]	Max Power [W]	Max Airflow [m³/h]	Noise [dB(A)]
D23A280D315-92-00	220	50	2415	255	1490	73.0
D23A280D315-92-01	220	50	2190	235	1325	71.3

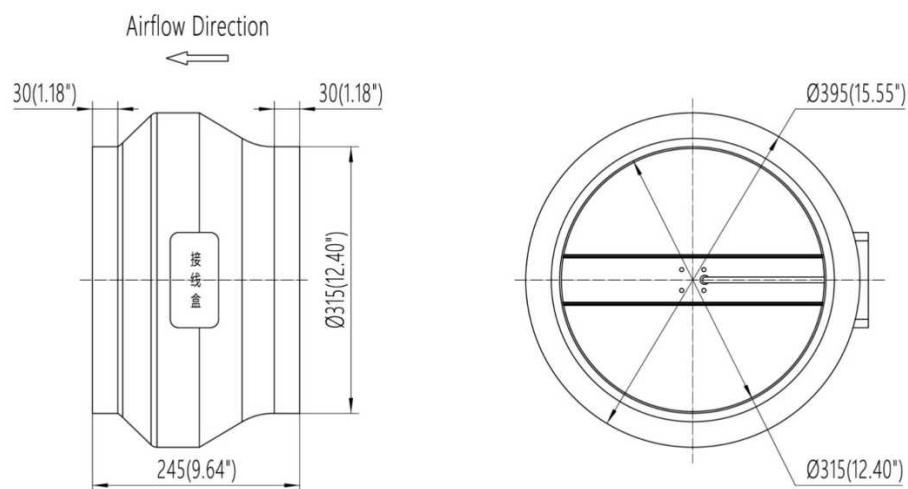



Airtek Power Solution (Suzhou) Co., Ltd.

Email: sales@airtekpower.com Website: www.airtekpower.com

Address: No.225, Suhong Road, Suzhou Industrial Park, Suzhou, Jiangsu, China