


LWBE-225 Serise



Product Characteristic


- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: B
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM

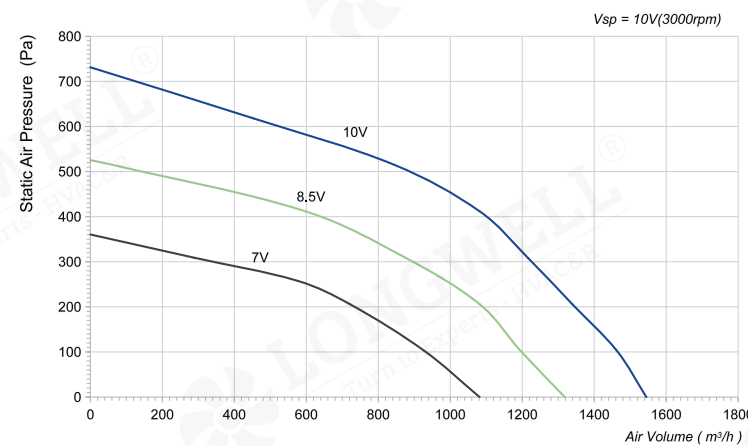

Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-092NS-12	230	160	1.1	1545	731	3000	71

LWBE-225 Serise

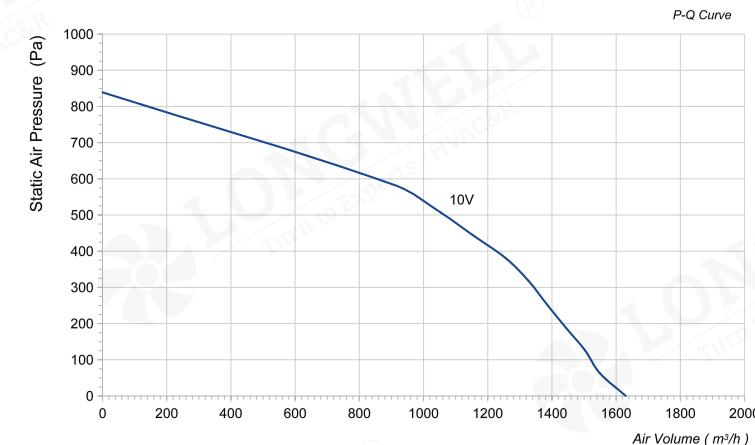



Product Characteristic

- Impeller Material: PA6+GF
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G225-092NS-13	230	315	1.87	1630	839	3500	71

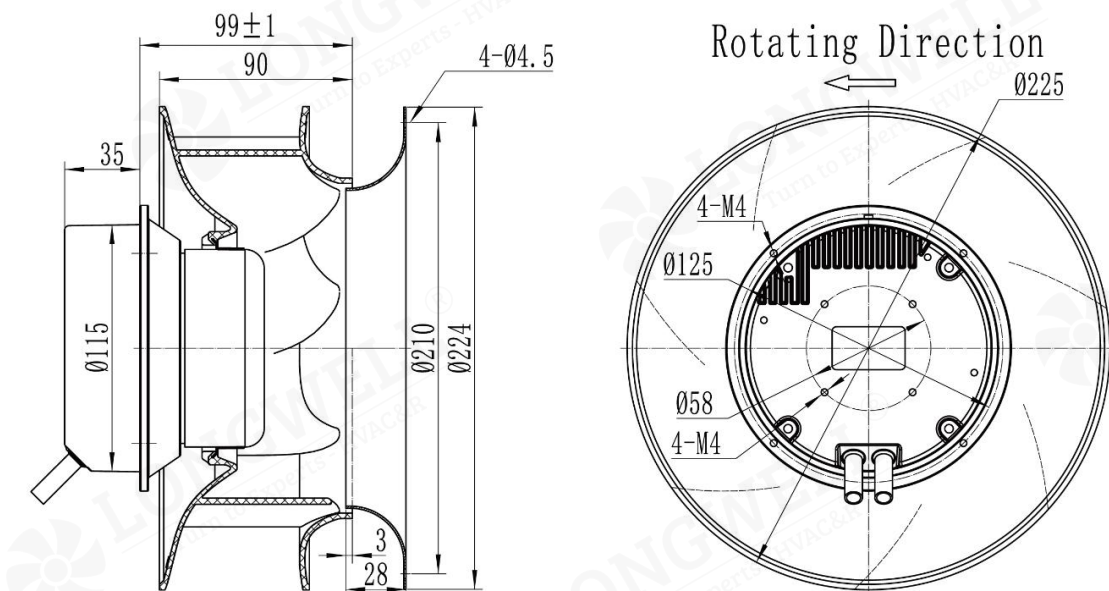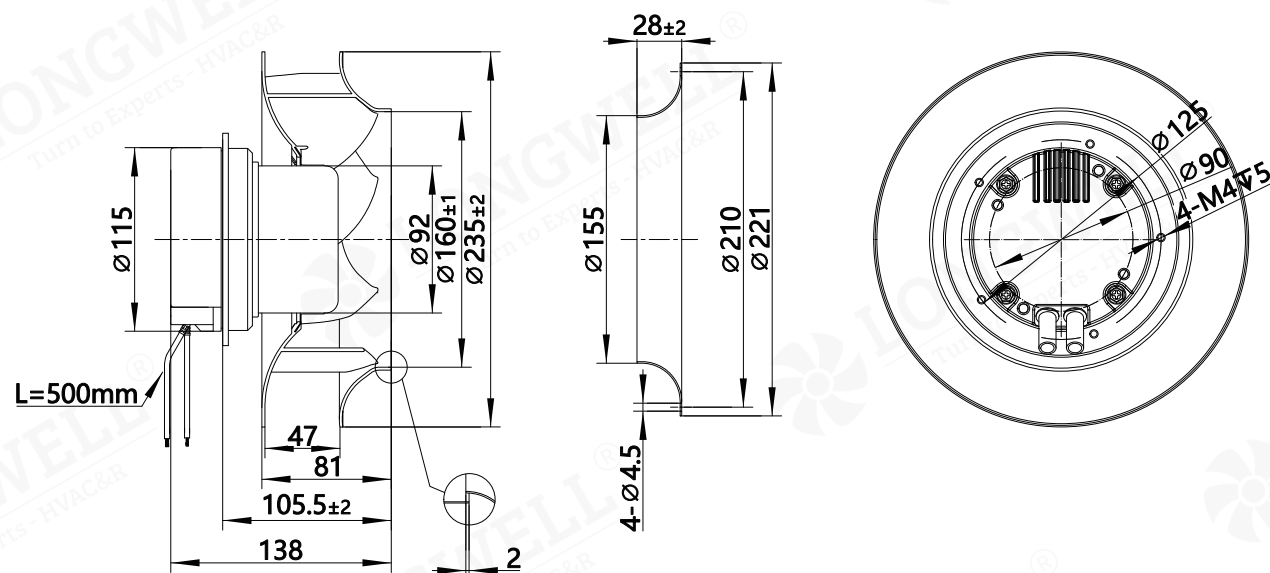

LWBE-250 Serise

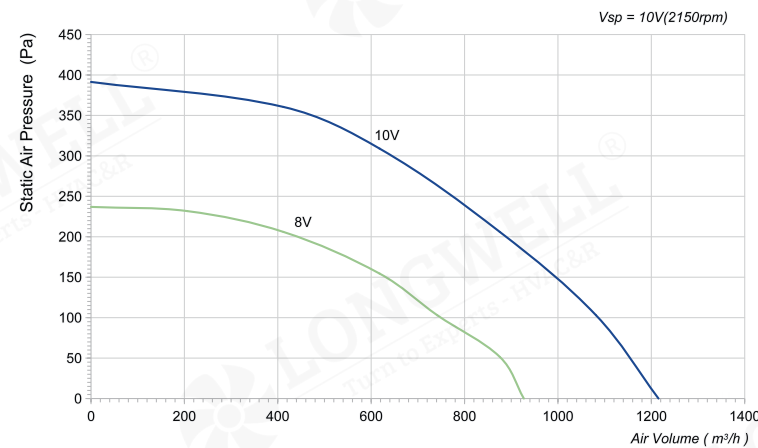



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: B
- Operation Temperature: -25 °C ~ +60 °C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072NS-29	230	90	0.8	1215	391	2150	68

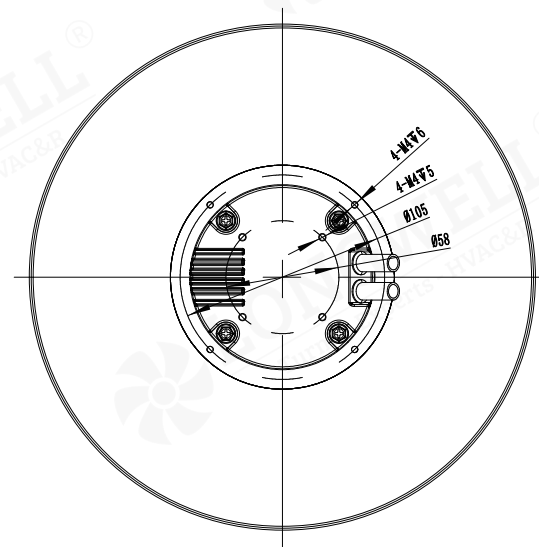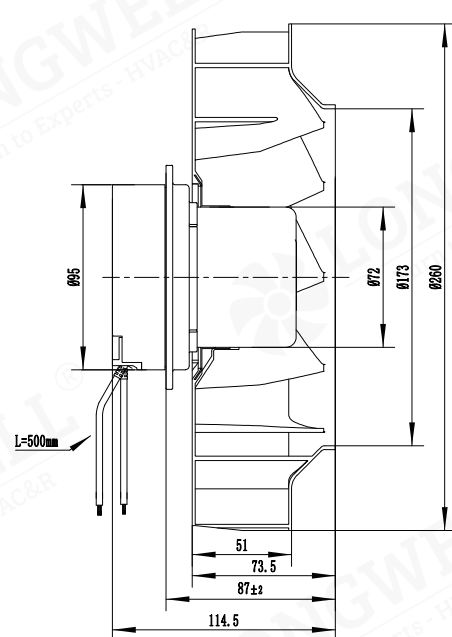

LWBE-250 Serise

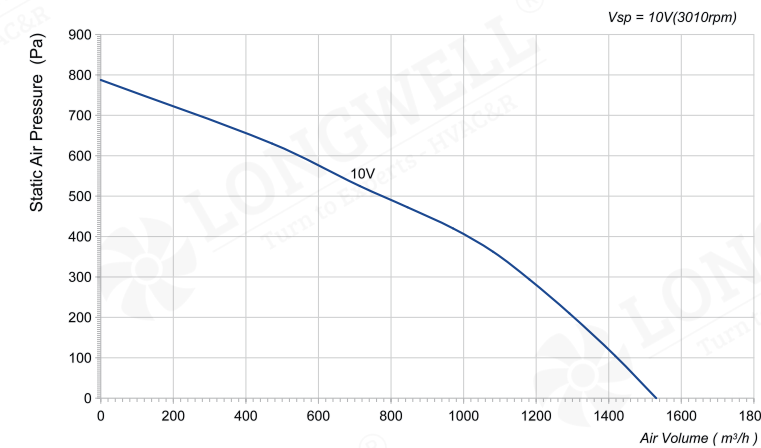



Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-092NS-12	230	140	0.6	1531	785	3010	72.1

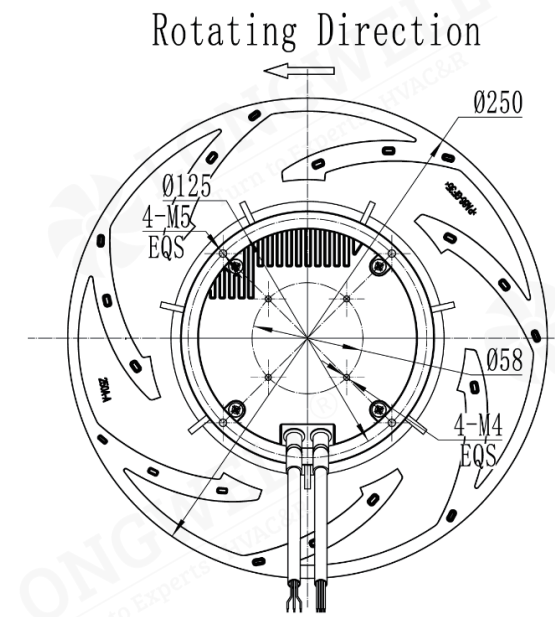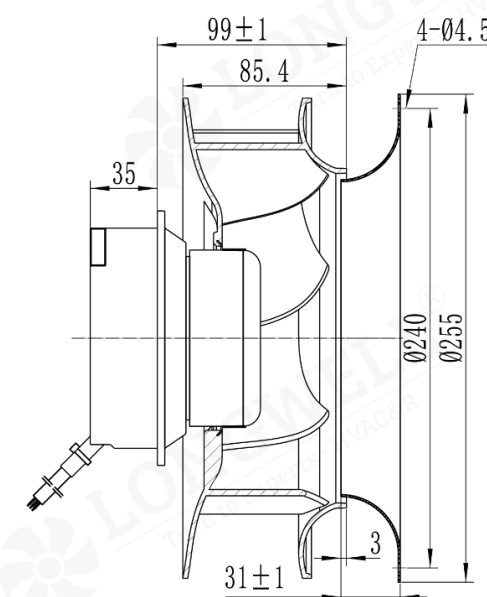

LWBE-250 Serise

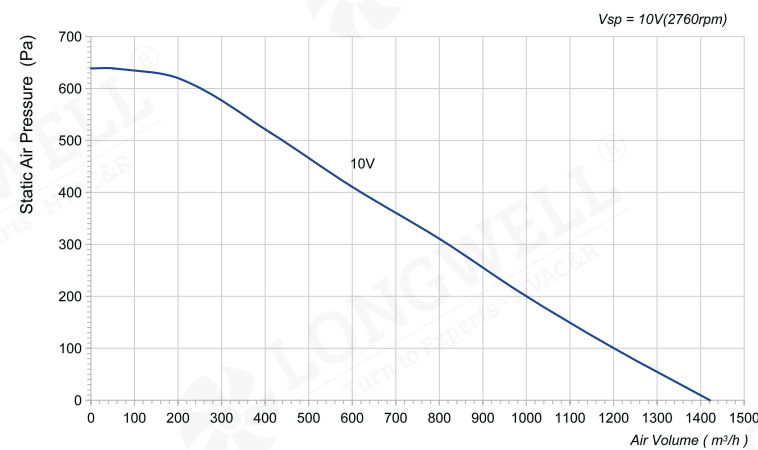


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072NS-21	230	140	1.1	1421	639	2760	77

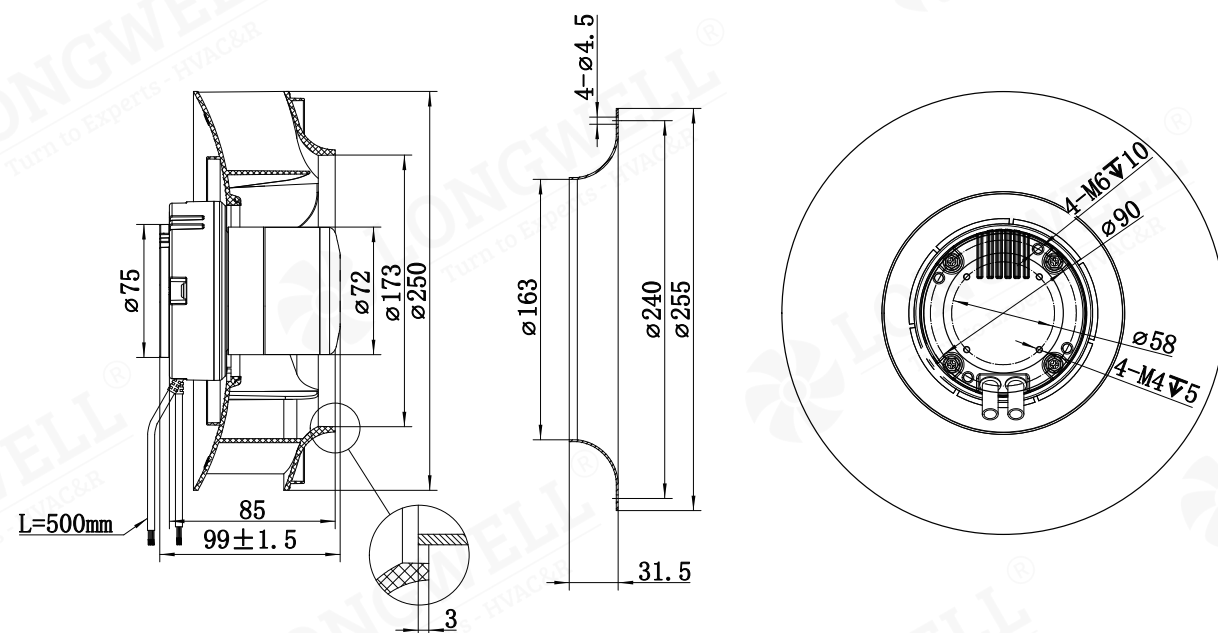

LWBE-250 Serise

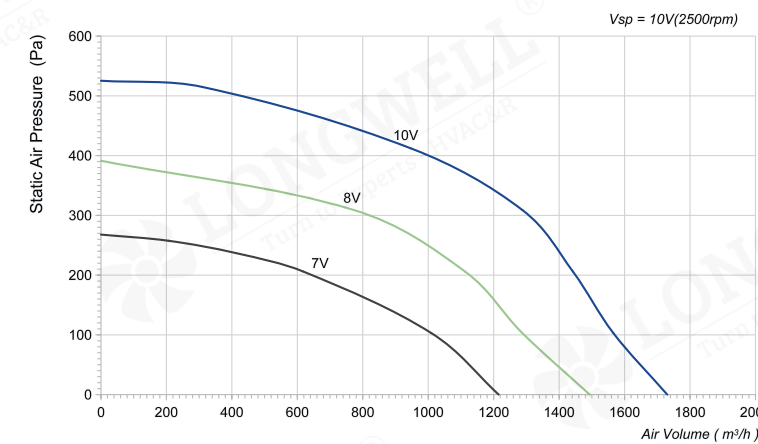


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: B
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-092NS-22	230	145	1	1730	525	2500	74

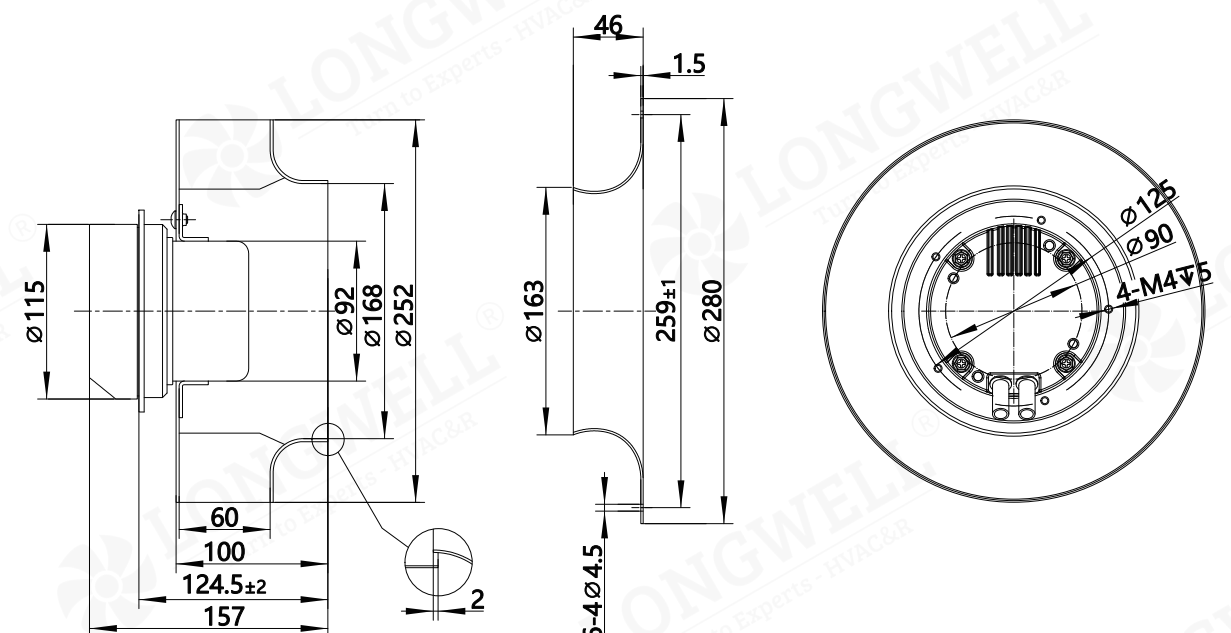

LWBE-250 Serise

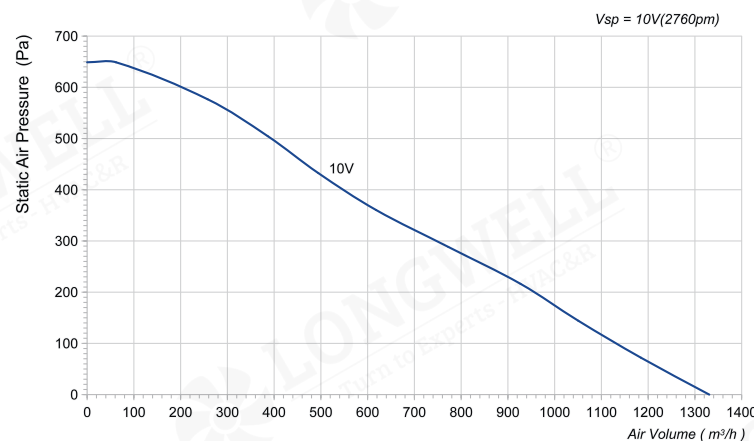


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 115V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-072NU-20	115	160	2.28	1331	649	2760	68

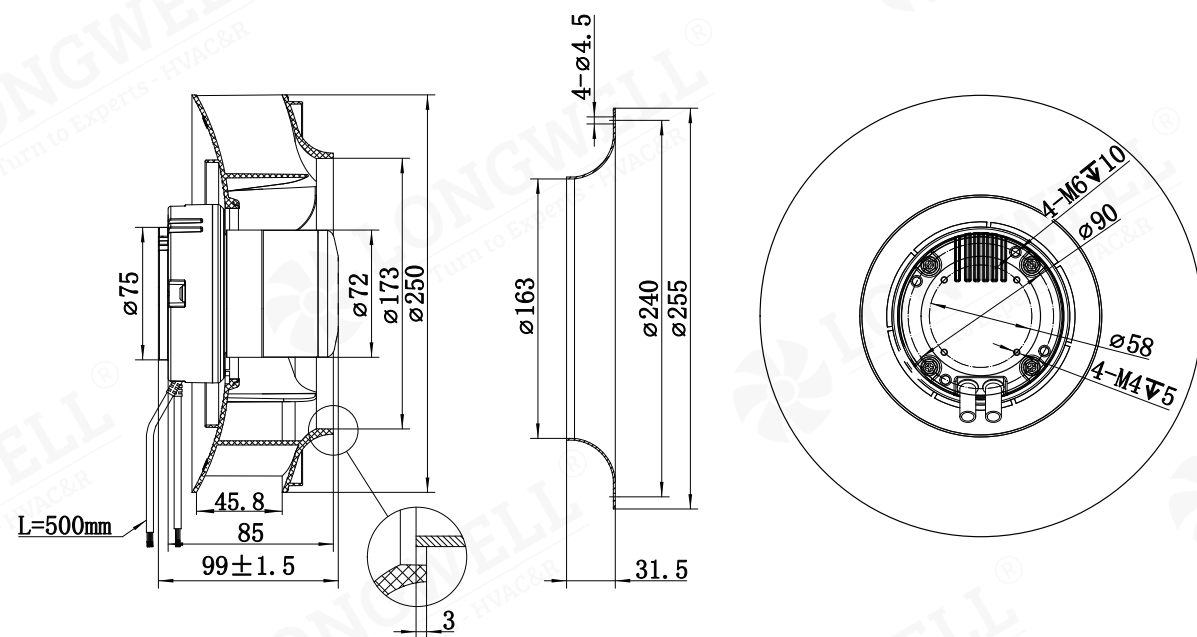

LWBE-250 Serise

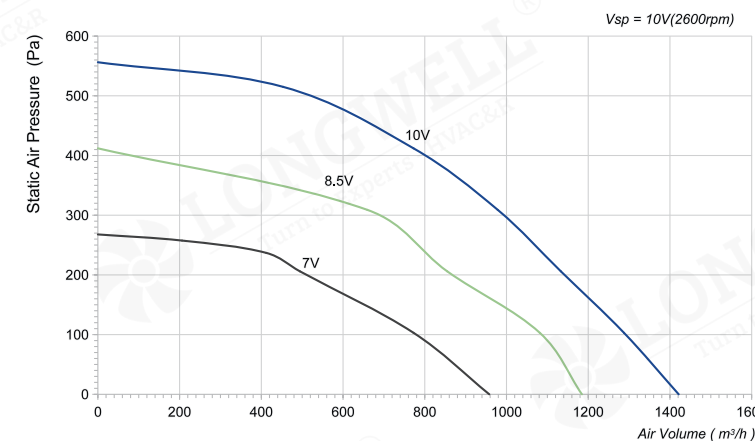


Product Characteristic

- Impeller Material: Plastic PA66
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: B
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-092NS-23	230	170	1.1	1421	556	2600	69

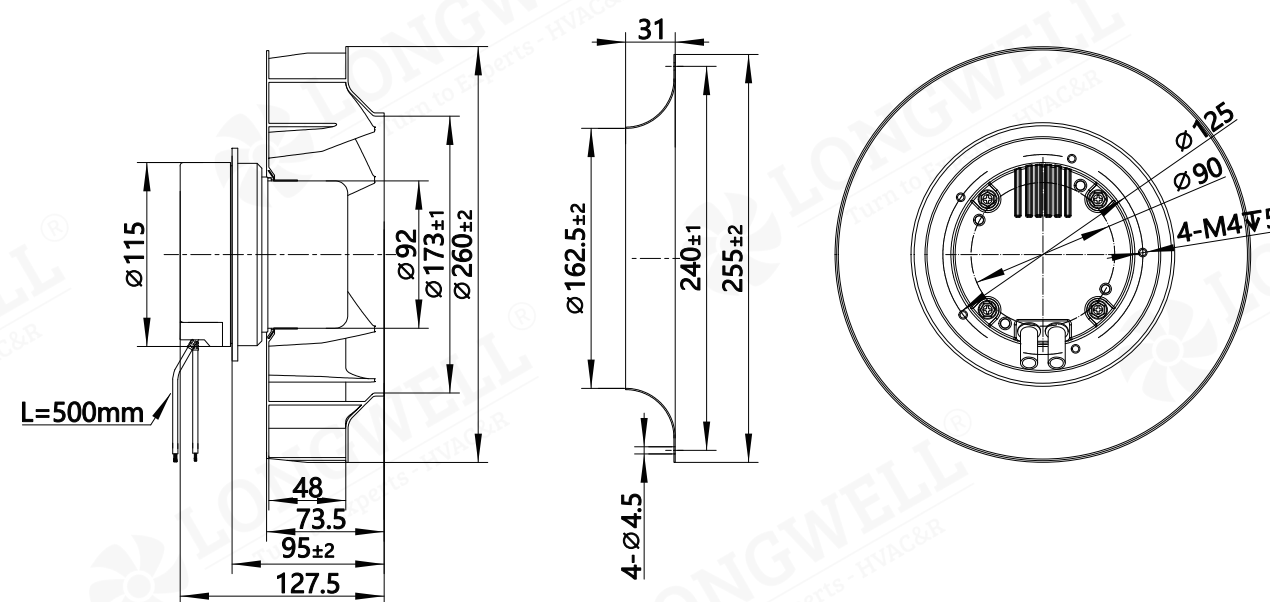

LWBE-250 Serise

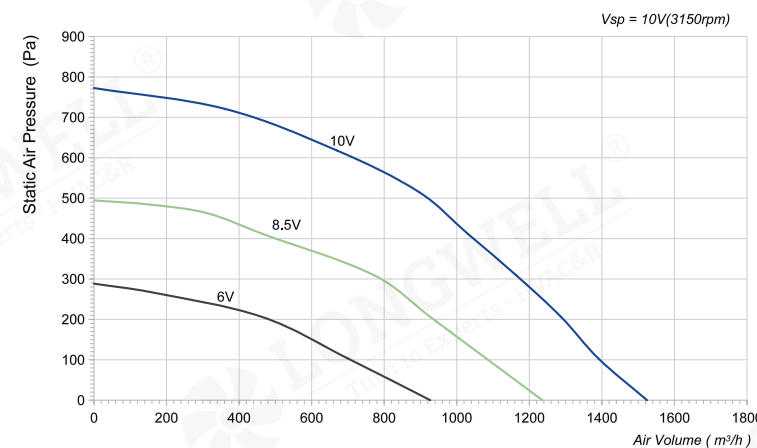


Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| ● Impeller Material: | Galvanised sheet steel | ● Supply Voltage: | 230V,50/60Hz |
| ● Direction of Rotation: | Clockwise,seen on rotor | ● Mode of Operation: | S1 |
| ● Protection Class: | IP44 | ● Insulation Class: | F |
| ● Mounting Position: | Horizontal or Vertical | ● Operation Temperature: | -25 °C ~ +60 °C |
| ● Bearing: | Maintenance-free ball bearings | ● Technical Features: | Control input 0-10VDC/PWM |
| ● Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-102NS-24	230	240	1.6	1524	773	3150	78

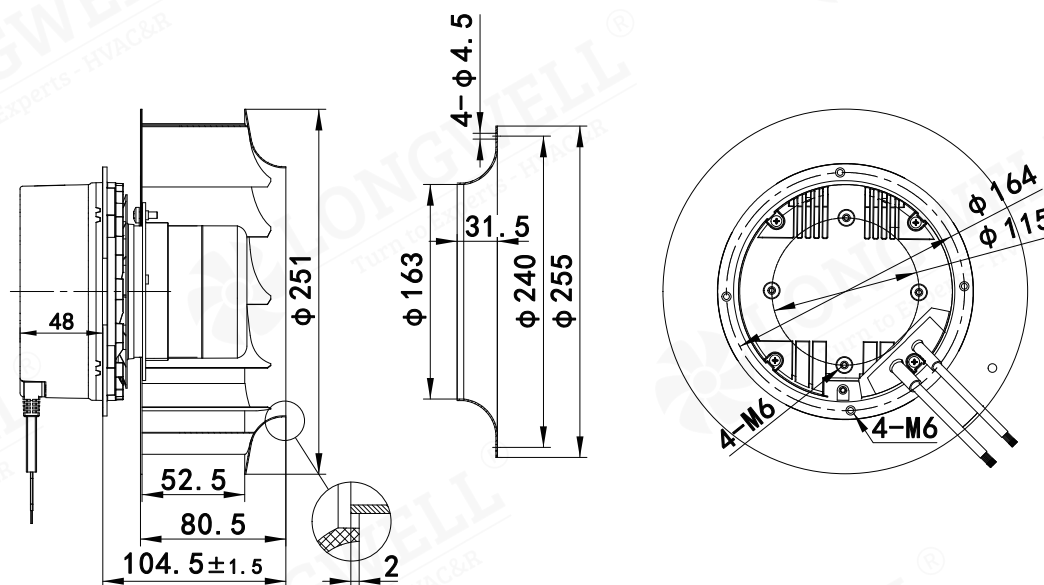

LWBE-250 Serise

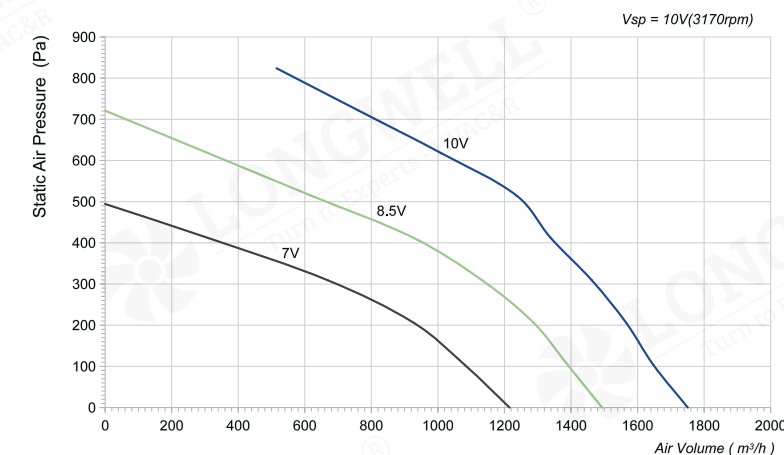


Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Aluminum Alloy | • Supply Voltage: | 230V,50/60Hz |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP44 | • Insulation Class: | B |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-102NS-25	230	270	1.2	1751	824	3170	84

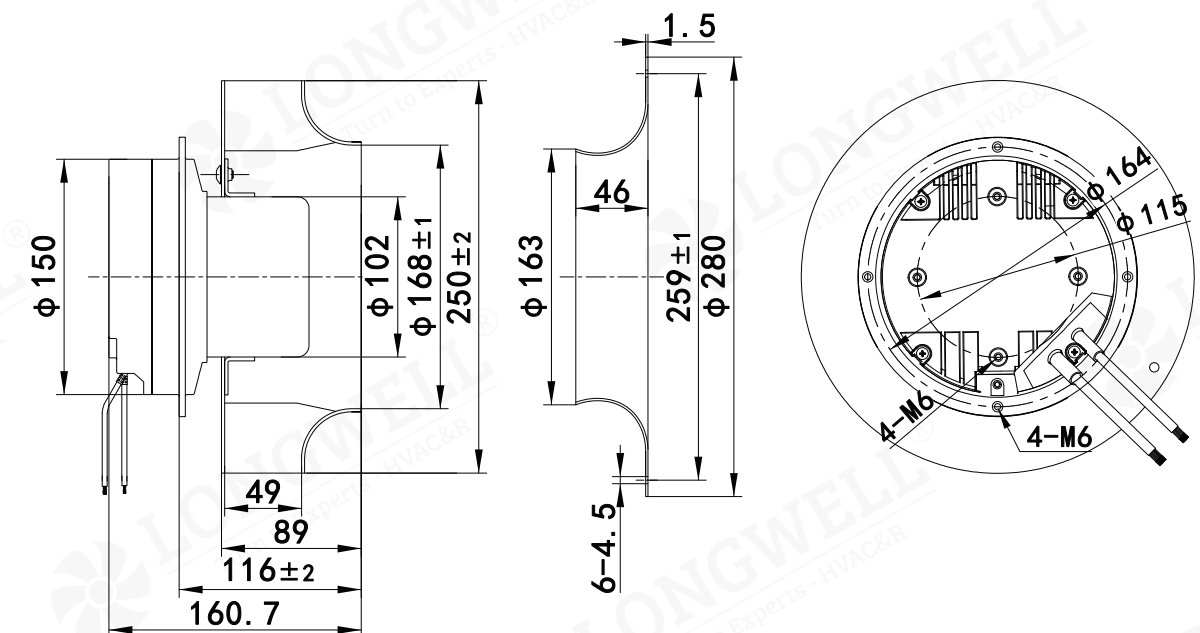

LWBE-250 Serise

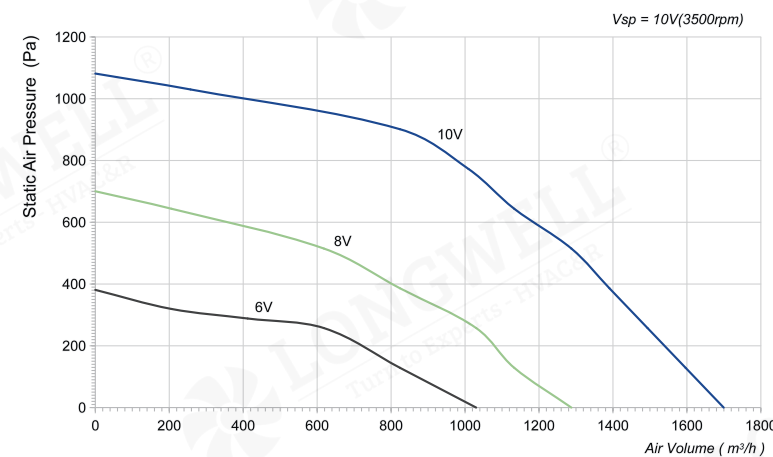


Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| ● Impeller Material: | Aluminum Alloy | ● Supply Voltage: | 230V,50/60Hz |
| ● Direction of Rotation: | Clockwise,seen on rotor | ● Mode of Operation: | S1 |
| ● Protection Class: | IP44 | ● Insulation Class: | F |
| ● Mounting Position: | Horizontal or Vertical | ● Operation Temperature: | -25 ℃ ~ +60 ℃ |
| ● Bearing: | Maintenance-free ball bearings | ● Technical Features: | Control input 0-10VDC/PWM |
| ● Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G250-102NS-26	230	370	2.6	1700	1082	3500	82

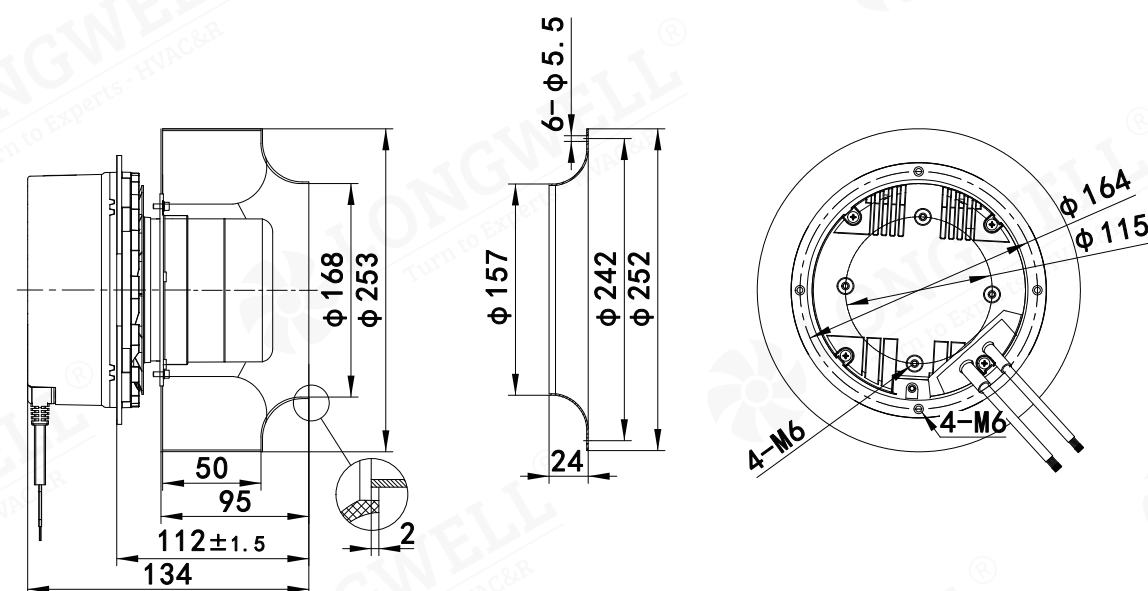

LWBE-270 Serise

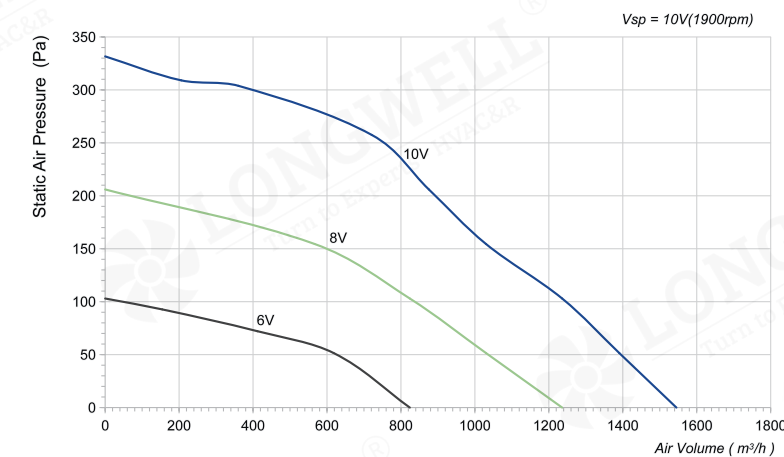


Product Characteristic

- | | | | |
|--------------------------|---|--------------------------|---------------------------|
| • Impeller Material: | Aluminum Alloy | • Supply Voltage: | 230V,50/60Hz |
| • Direction of Rotation: | Clockwise,seen on rotor | • Mode of Operation: | S1 |
| • Protection Class: | IP44 | • Insulation Class: | F |
| • Mounting Position: | Horizontal or Vertical | • Operation Temperature: | -25 C ~ +60 C |
| • Bearing: | Maintenance-free ball bearings | • Technical Features: | Control input 0-10VDC/PWM |
| • Protection: | Tach output,Locked-Rotor protection Reverse Polarity,Over-voltage protection,Soft Start | | |




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G270-092NS-02	230	150	1.3	1545	332	1900	68

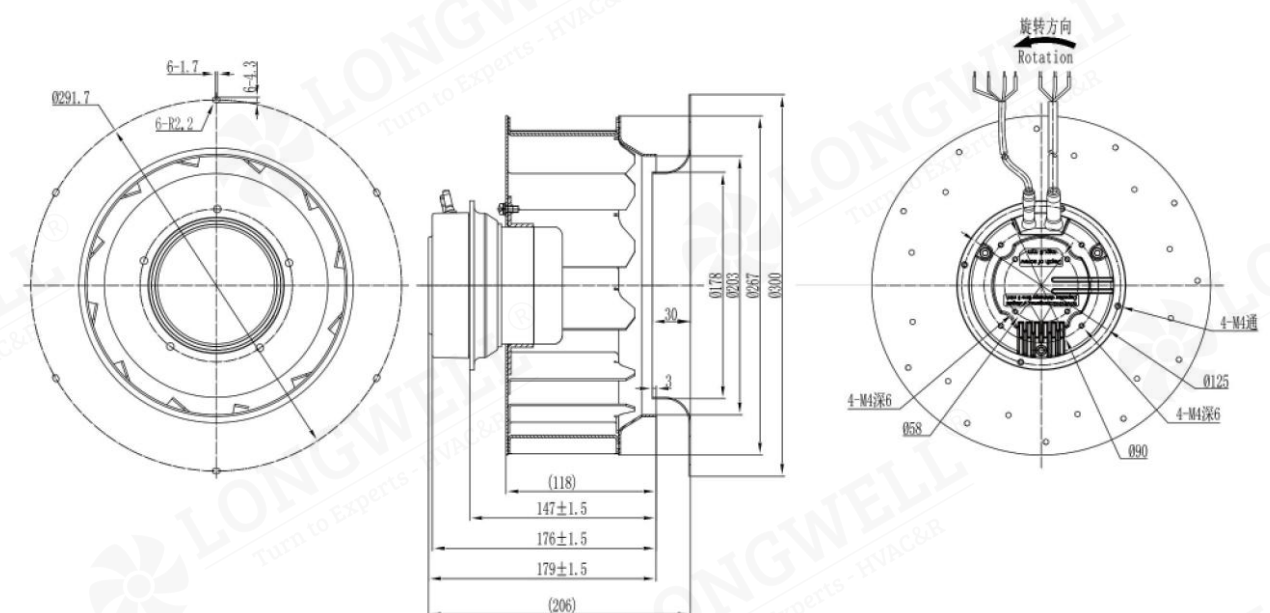

LWBE-270 Serise

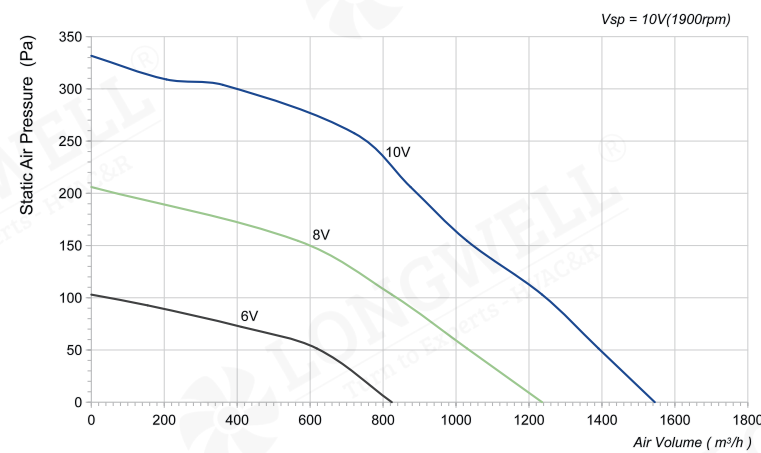

Product Characteristic


- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 115V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G270-092NU-01	115	170	2.3	1545	332	1900	68

LWBE-280 Serise

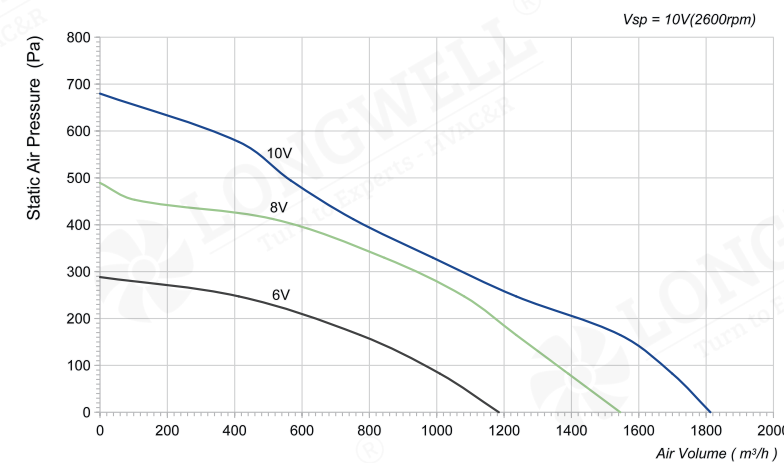



Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-092NS-12	230	165	1.25	1813	680	2600	74

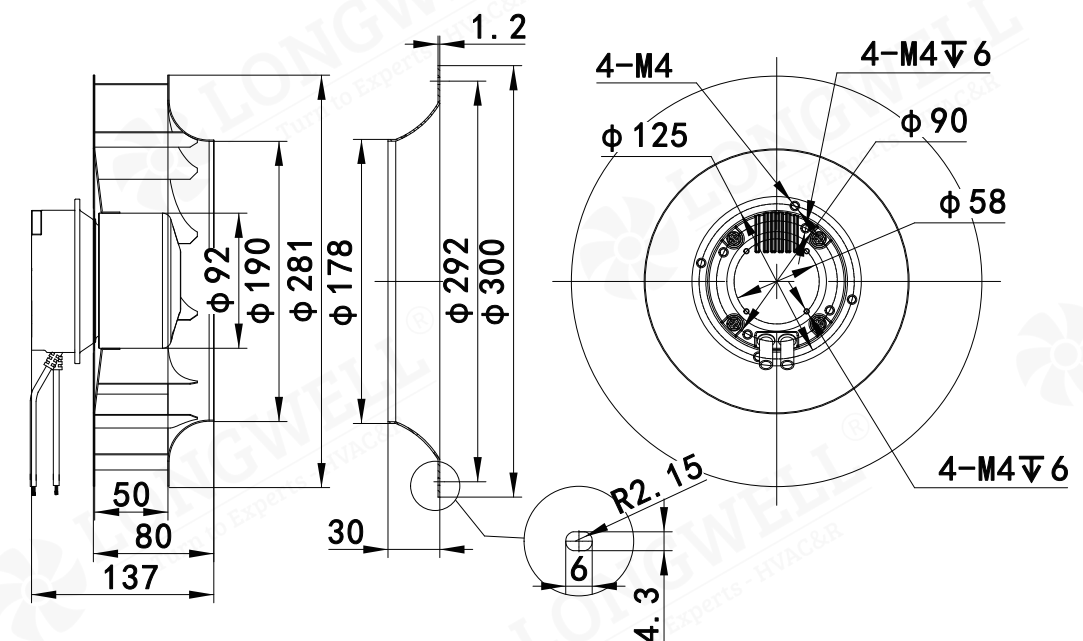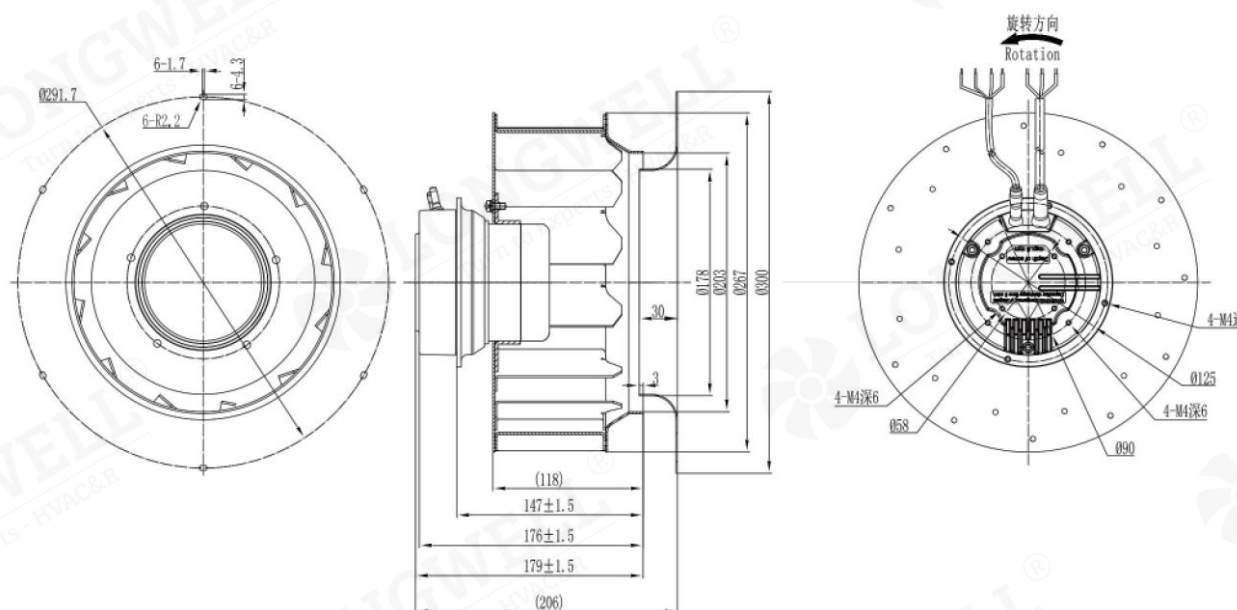

LWBE-280 Serise

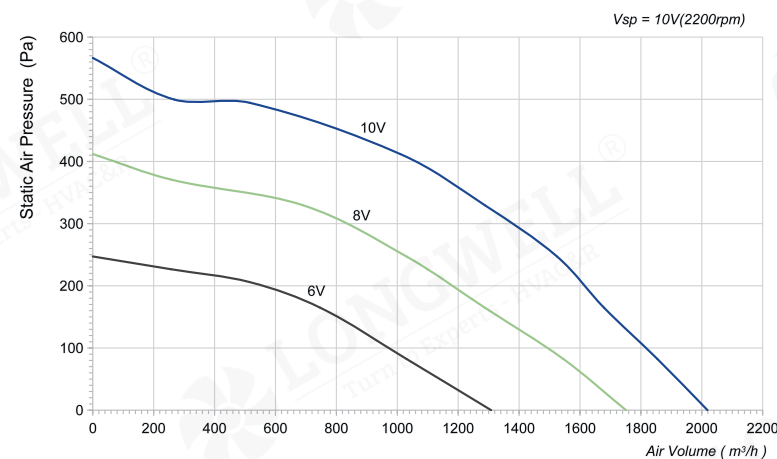


Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-092NS-17	230	180	1.35	2019	546	2200	72

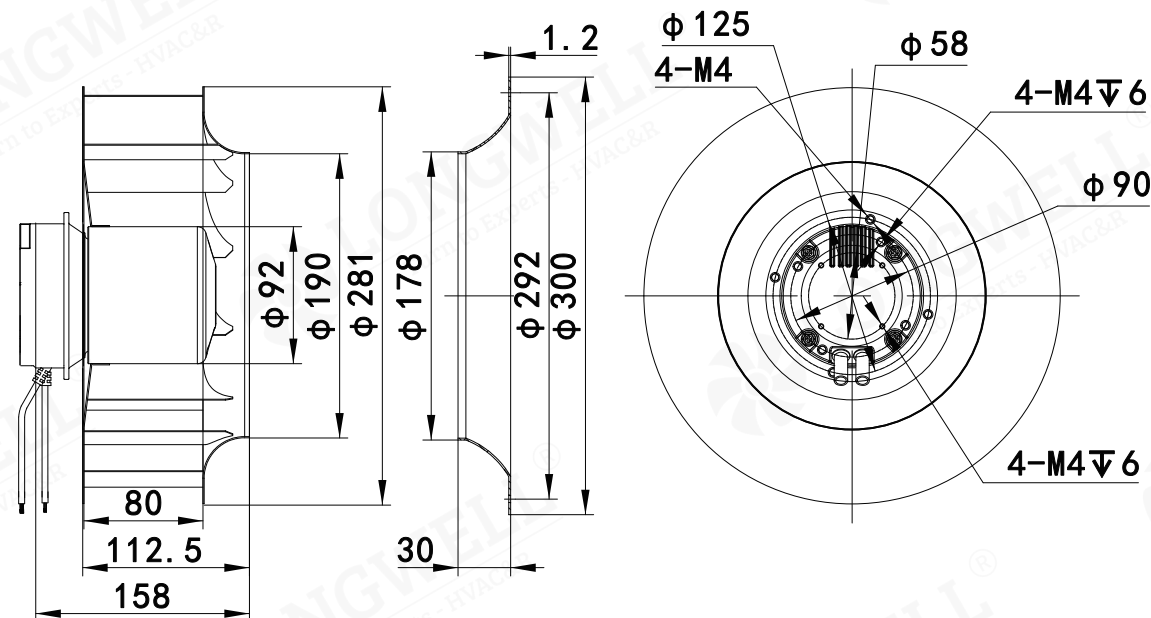

LWBE-280 Serise

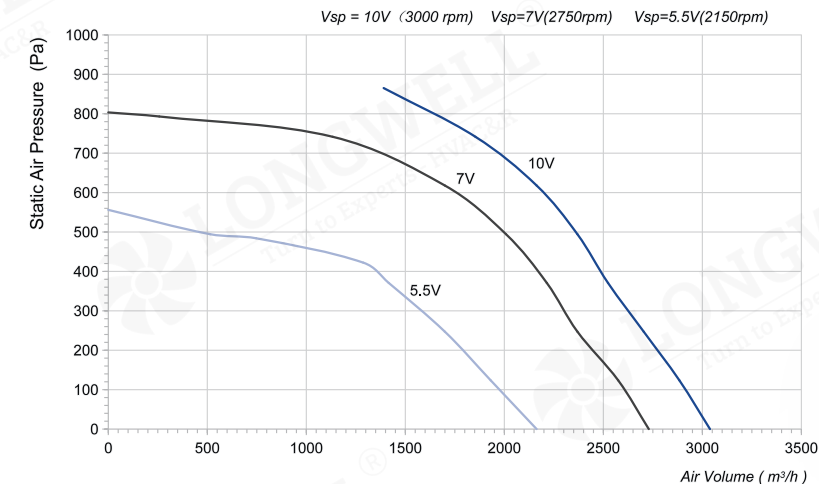


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-138NT-03	400	860	1.22	3028	886	3000	85

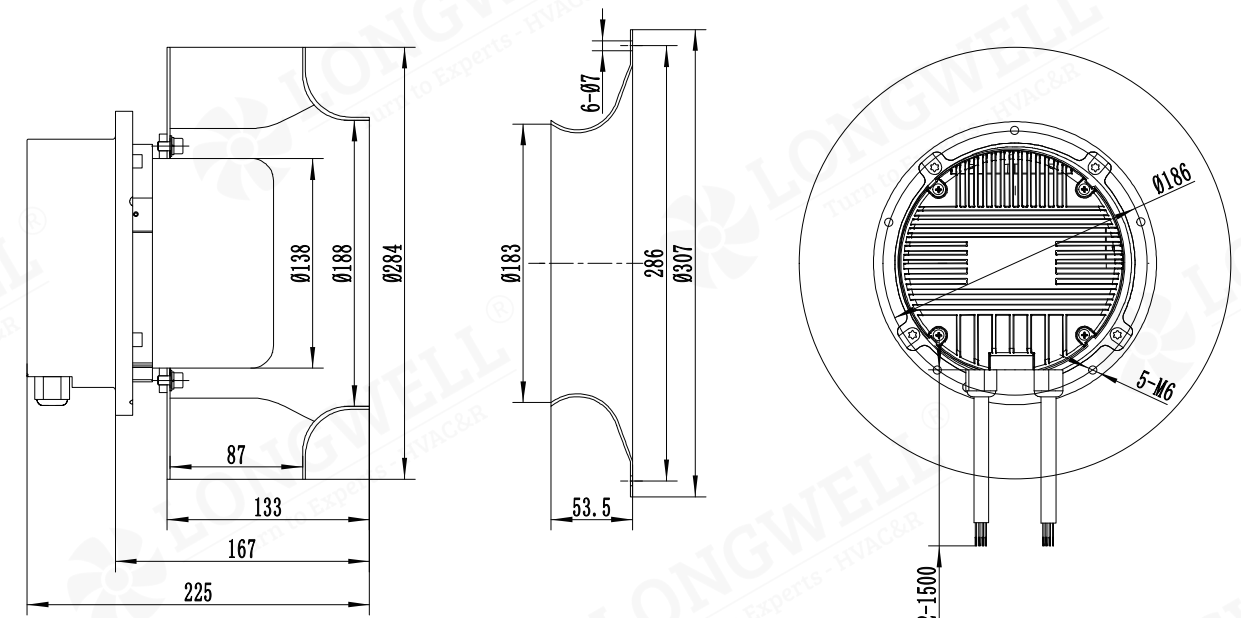

LWBE-280 Serise

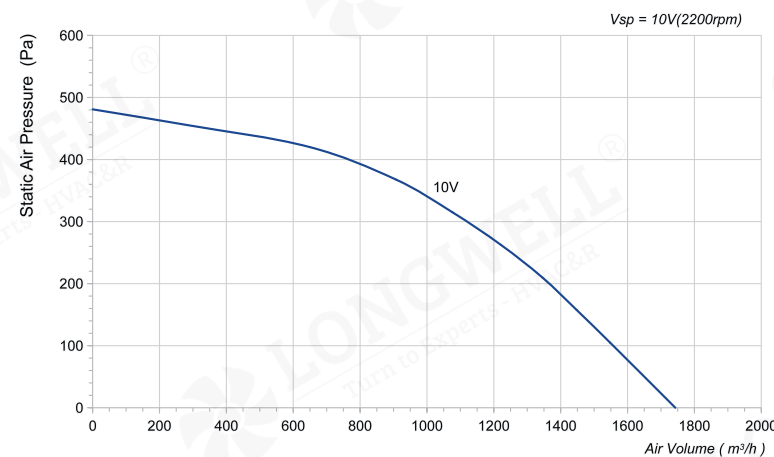


Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-092NS-13	230	105	0.86	1743	481	2200	/

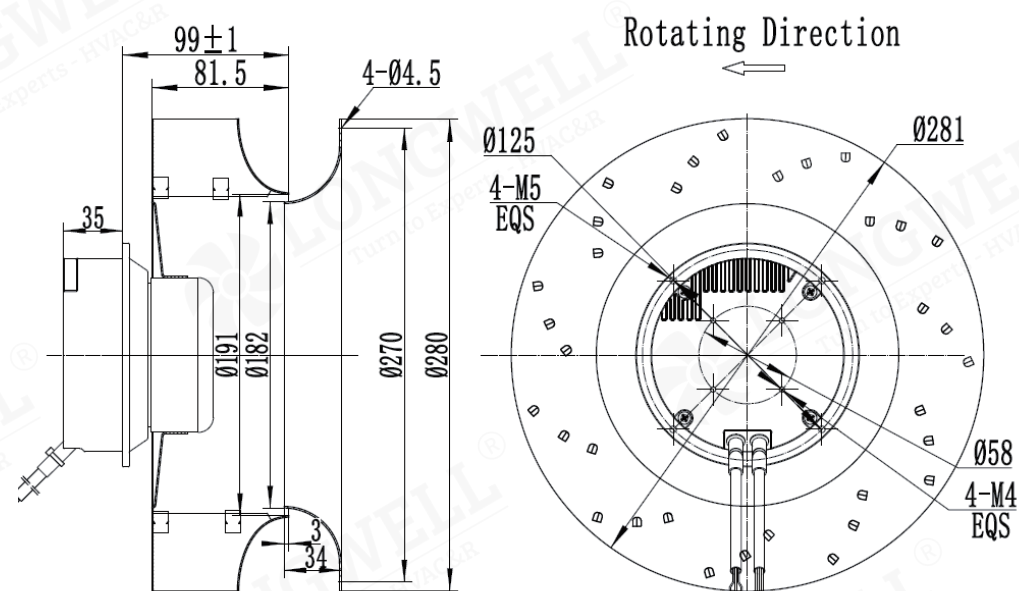

LWBE-280 Serise

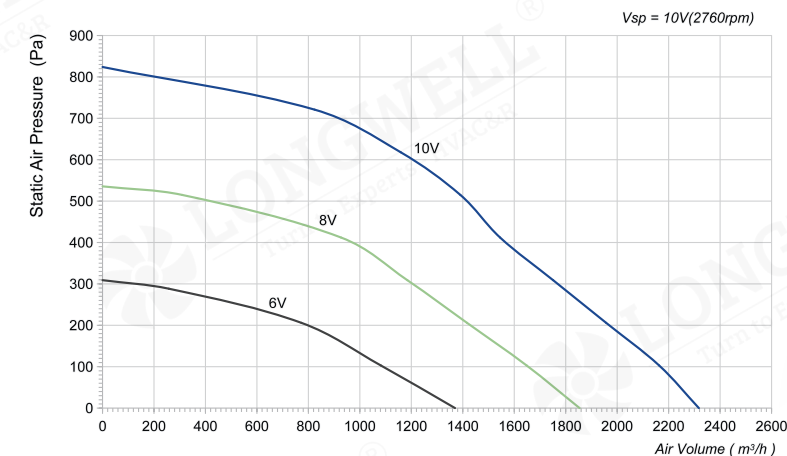


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-14	230	340	2.3	2318	824	2760	78

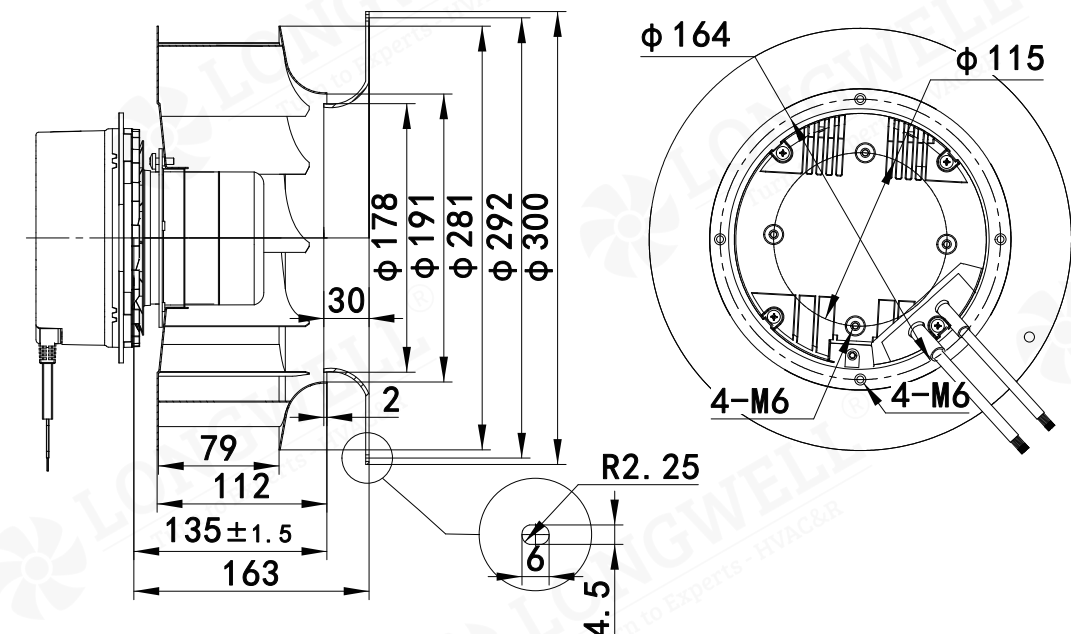

LWBE-280 Serise

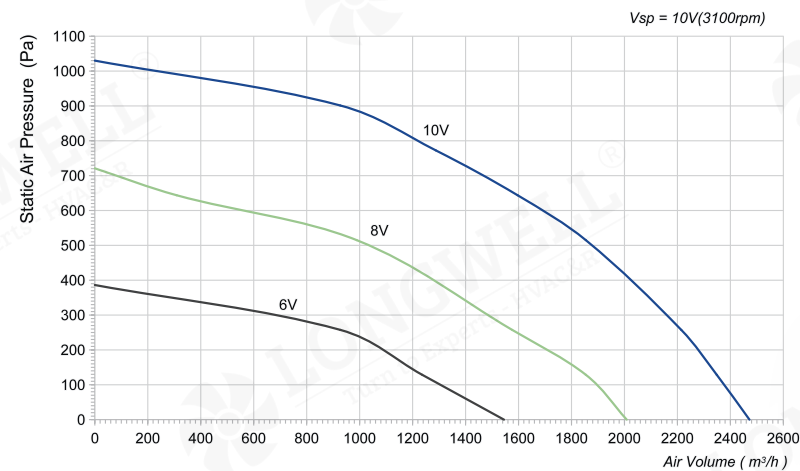


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-15	230	475	3.1	2472	1051	3100	82

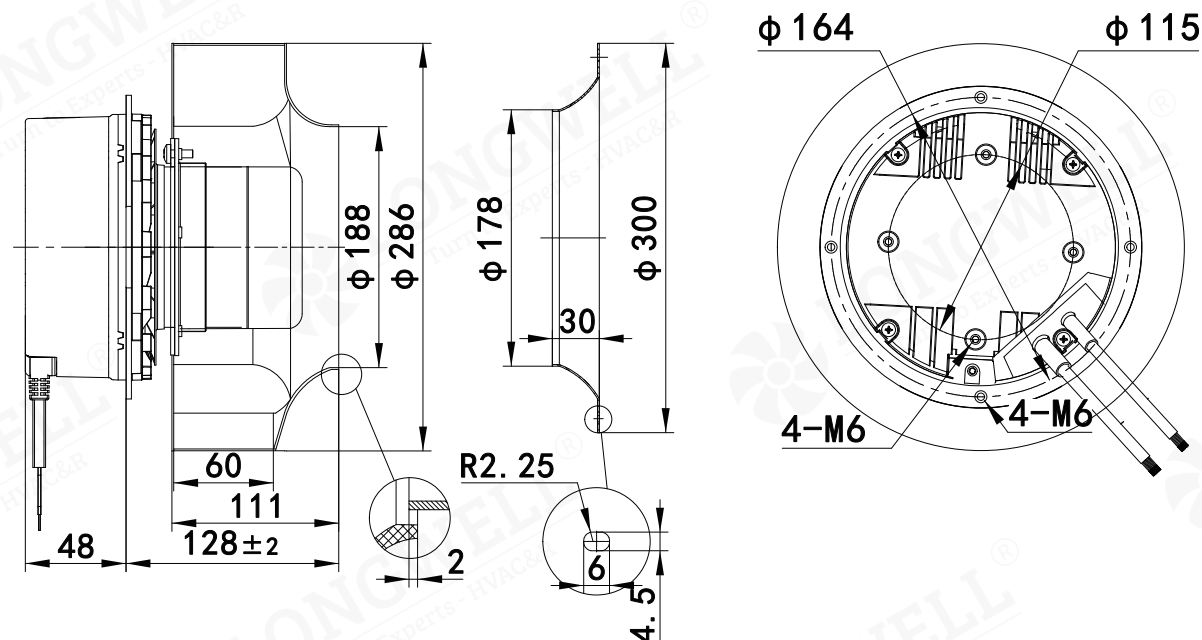

LWBE-280 Serise

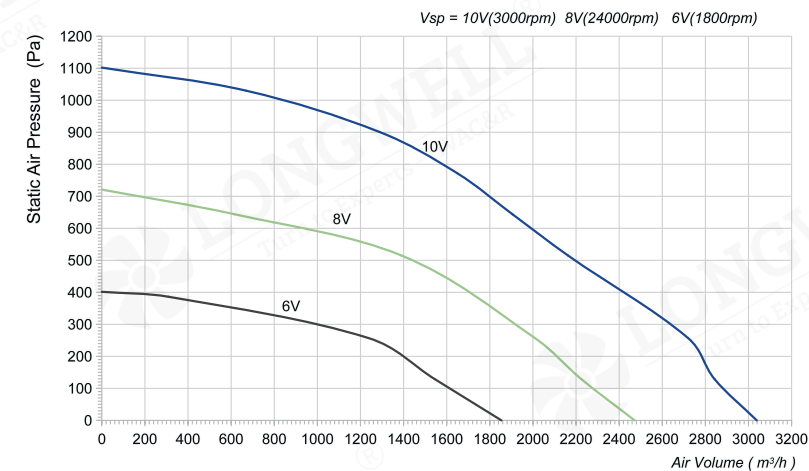

Product Characteristic

- Impeller Material: Galvanised sheet steel
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP44
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 230V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G280-102NS-19	230	625	4	3039	1102	3000	82

