


LWBE-560 Serise




Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM

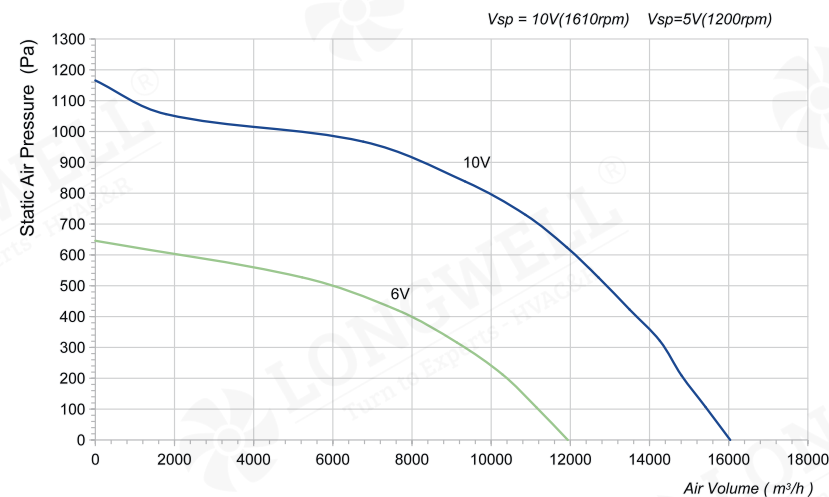


Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188NT-01	400	3300	8	16039	1166	1610	/

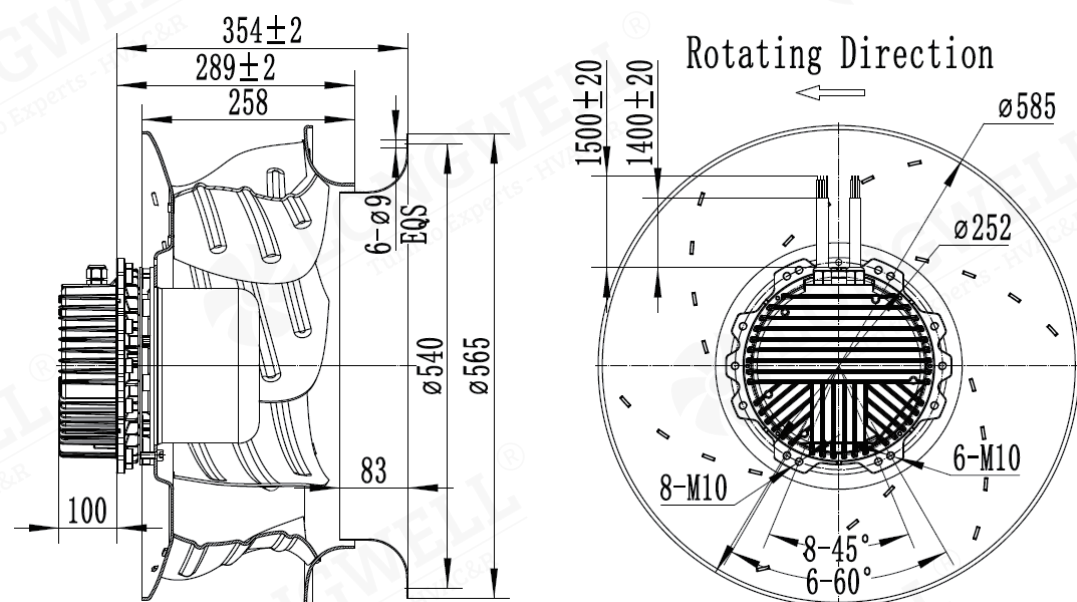

LWBE-560 Serise

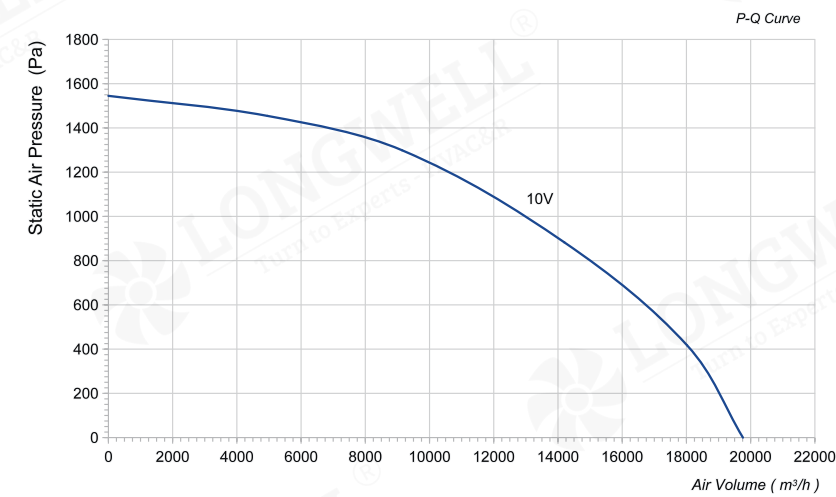


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 380V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-188NT-14	380	4700	7.9	19760	1545	1850	91

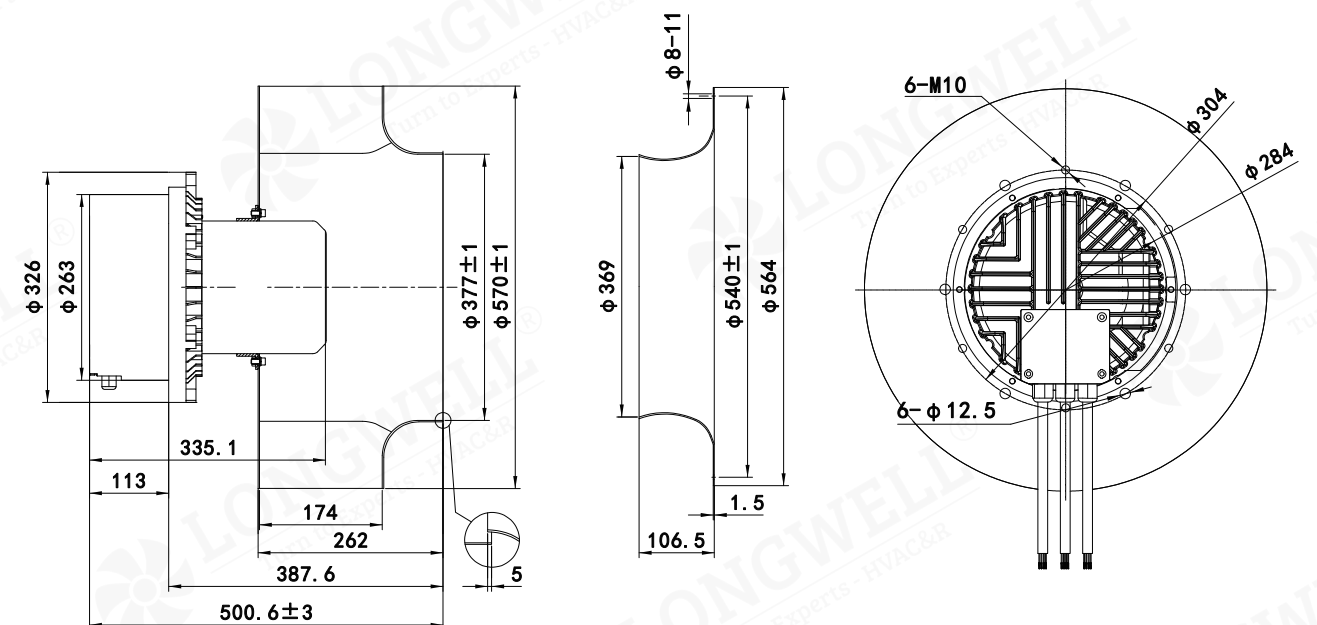

LWBE-560 Serise

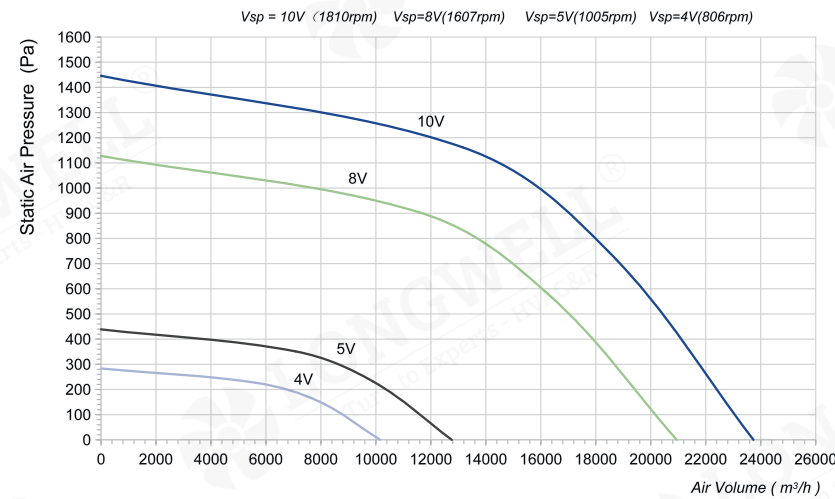


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G560-218NT-13	400	5600	9.5	23896	1442	1800	/

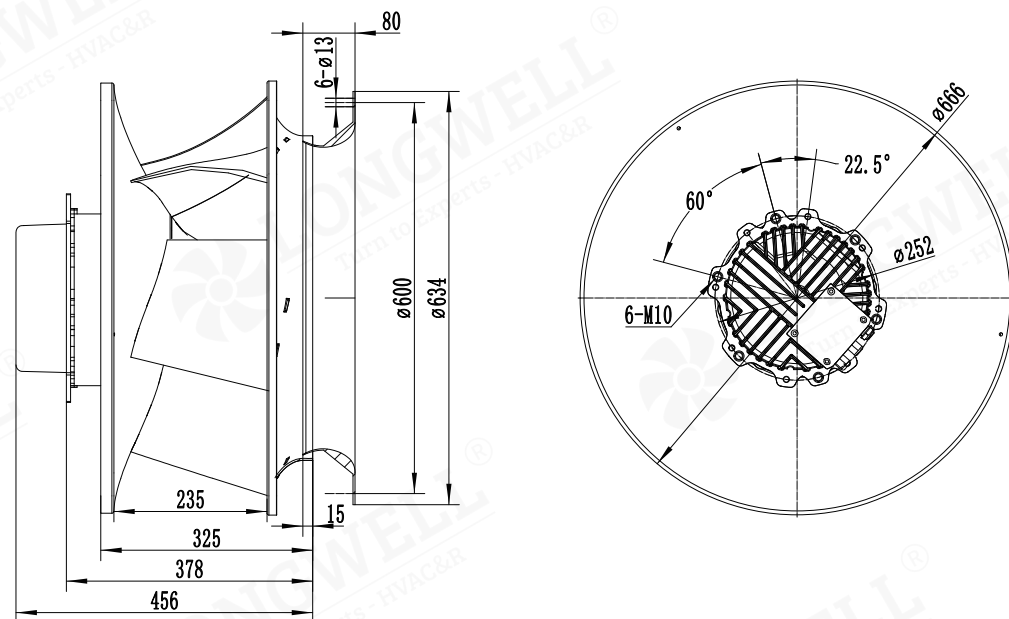

LWBE-630 Serise

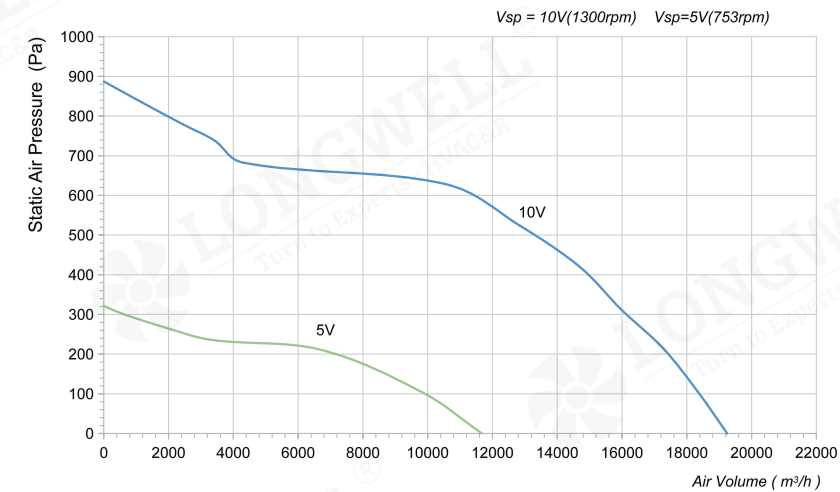


Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G630-188NT-06	400	2195	4.8	19247	887	1300	/

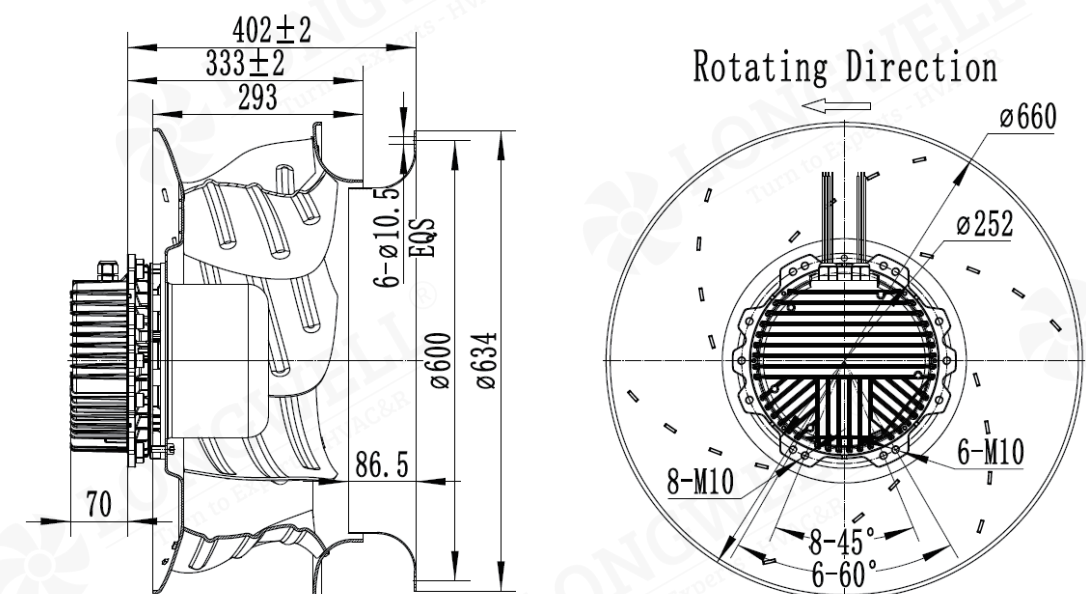

LWBE-630 Serise

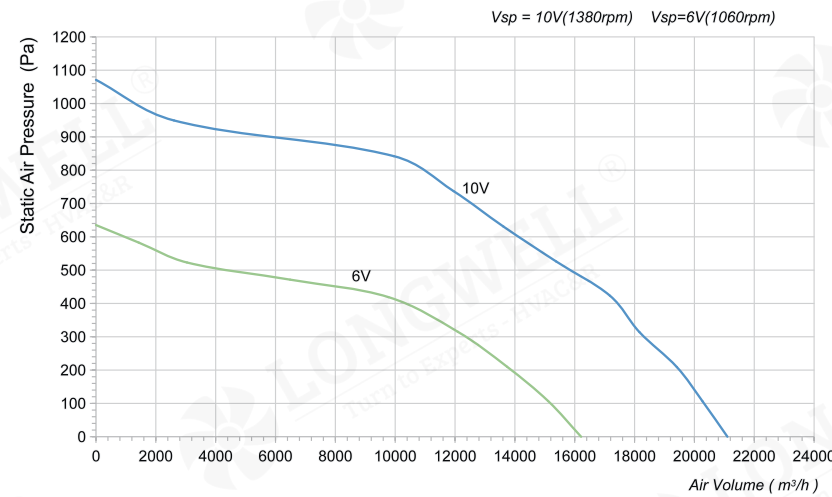



Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM




Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G630-188NT-07	400	2955	6.5	21100	1071	1380	/

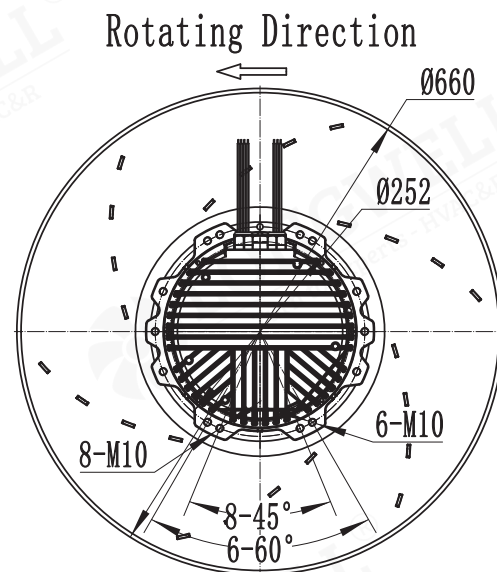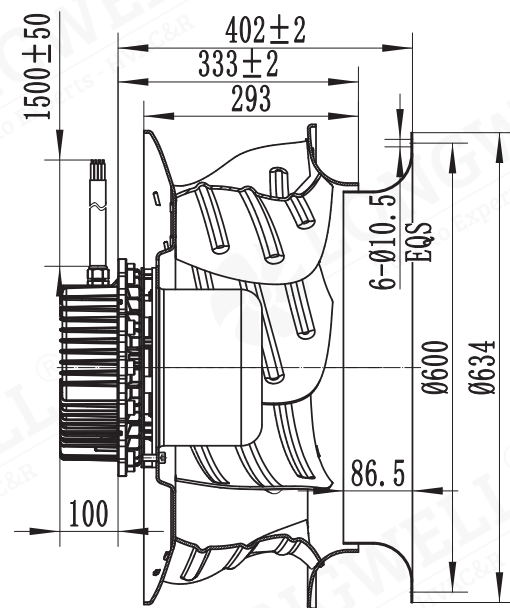

LWBE-630 Serise

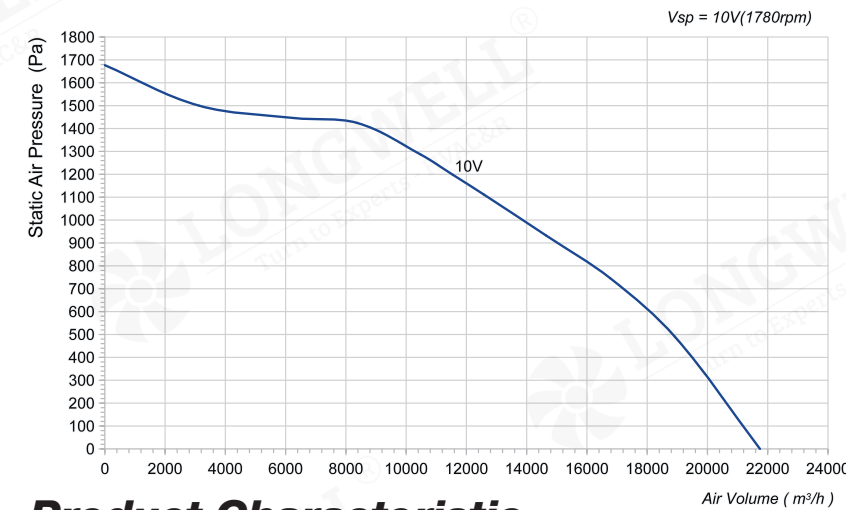

Product Characteristic

- Impeller Material: Aluminum Alloy
- Direction of Rotation: Clockwise, seen on rotor
- Protection Class: IP54
- Mounting Position: Horizontal or Vertical
- Bearing: Maintenance-free ball bearings
- Protection: Tach output, Locked-Rotor protection Reverse Polarity, Over-voltage protection, Soft Start
- Supply Voltage: 400V, 50/60Hz
- Mode of Operation: S1
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Input Power (W)	Current (A)	Air Volume (m³/h)	Static Pressure (Pa)	Speed (RPM)	Noise [dB(A)]
LWBE3G630-188NT-09	400	5600	8.1	21742	1677	1780	/

