


Impellers

Vulturnus · AeroPlus · Aeolus



SMT49C2410E-33

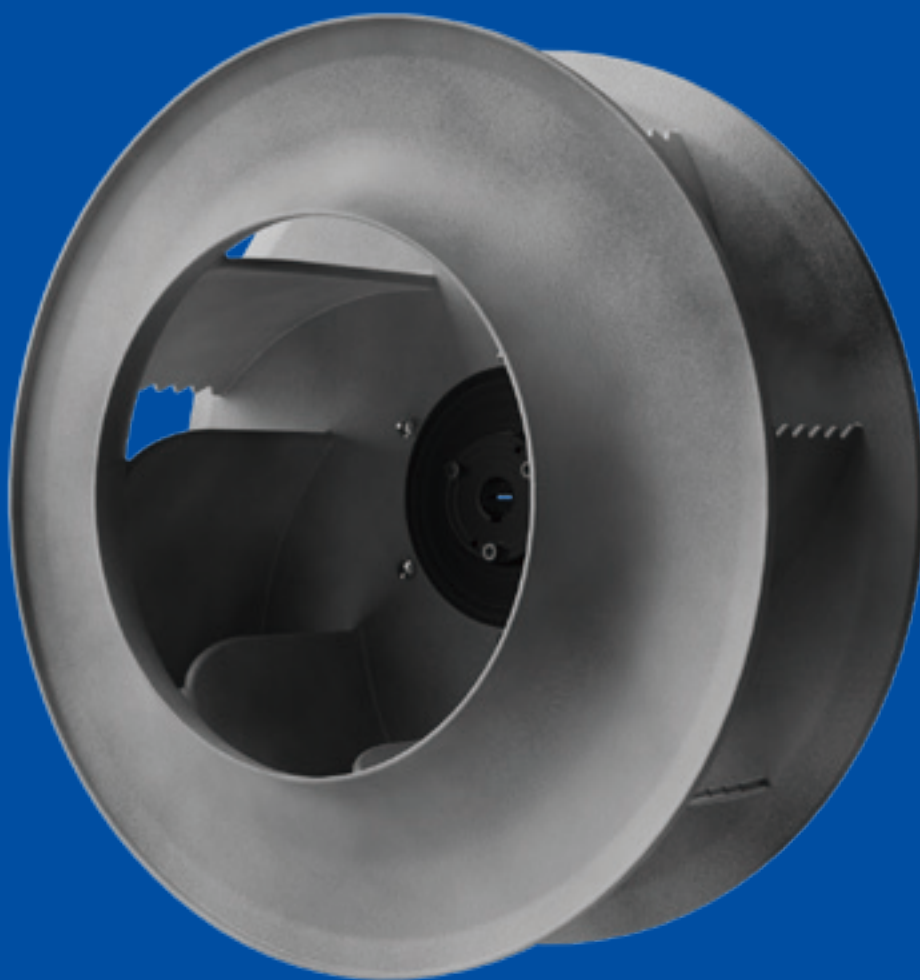

**Professional Fan
Solutions Provided**

Introduction of SEEMTEK

Mission

Committed to providing the most tailored fan solutions and products.

Vision

To be the leading brand in external rotor fan technology.

Value

Reliability, Value, Innovation.



Impeller of Backward Centrifugal Fan

Seemtek

Seemtek is derived from 'seem' and 'tech,' suggesting the company's philosophy of making high-tech solutions appear simple and intuitive. Just as the name implies, Seemtek designs fans and motors that blend seamlessly into various environments while delivering advanced performance.

These products, like the EC fans, embody the balance of simplicity and technology, providing energy-efficient solutions that adapt effortlessly to different applications, from HVAC systems to industrial use.

Our Slogan

We don't just provide products, our goal is to achieve our customers' objectives by offering comprehensive services, from Fan system design to Product delivery and Service. By helping customer engineers solve problems and enhance product performance, Seemtek creates value for its clients. This approach aligns perfectly with our mission: Tailoring Solutions for Fan Industry.

PAGES

01-16

PAGES

17-22

PAGES

23-40

PAGES

41-48

PART

1

Vulturnus

Steel Plate Welded Wing Impeller

High Efficiency
Low Noise
Rich in Size Options

PART

2

AeroPlus

One Piece Injection Molded Wing Impeller

Extremely Stable
Extremely Light
Extremely Durable

Extremely Efficient
Extremely Quiet

PART

3

Aeolus

Aluminum Welded Impeller

Stability
Durability
Wide Range of Sizes, Flexible Customization

PART

4

Product Capacity

R&D Capability
Reliability Testing
Factory Workforce


Part 1

Vulturnus

■ Steel Airfoil Impeller

Product Features

• High Efficiency

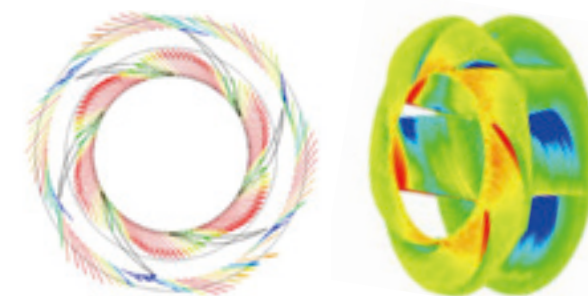

The airfoil blade design reduces airflow separation and turbulence, allowing smoother airflow along the blade and decreasing aerodynamic losses.

The airfoil blade design also promotes even pressure distribution, reducing vortex formation and pressure fluctuations between blade surfaces.


The surface design of the airfoil blade minimizes friction losses, reducing air resistance on the wind-facing surface compared to traditional designs and further enhancing efficiency.

• Rich in Size Options

Available in sizes ranging from 280 to 1100, covering airflow capacities from 1,500 to 40,000 m³/h.

• Easy Installation

Low Noise

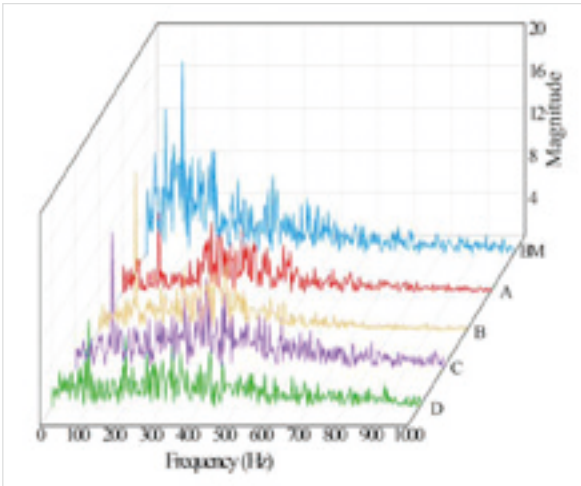


Reduced Airflow Separation and Turbulence: The streamlined airfoil blade design allows air to flow smoothly along the blade surface, reducing common separation and turbulence that create aerodynamic noise.

Minimized Vortex and Pressure Fluctuation: Airfoil blades optimize airflow paths, providing a more even pressure distribution, reducing vortex formation, and lowering noise.


Reduced Tip Vortex Noise: The thin airfoil blade tips decrease vortex formation at the blade edges, which reduces high-frequency noise.

Reduced Turbulent Boundary Layer Noise: Airfoil blades maintain a low turbulent boundary layer, further reducing noise compared to traditional designs.

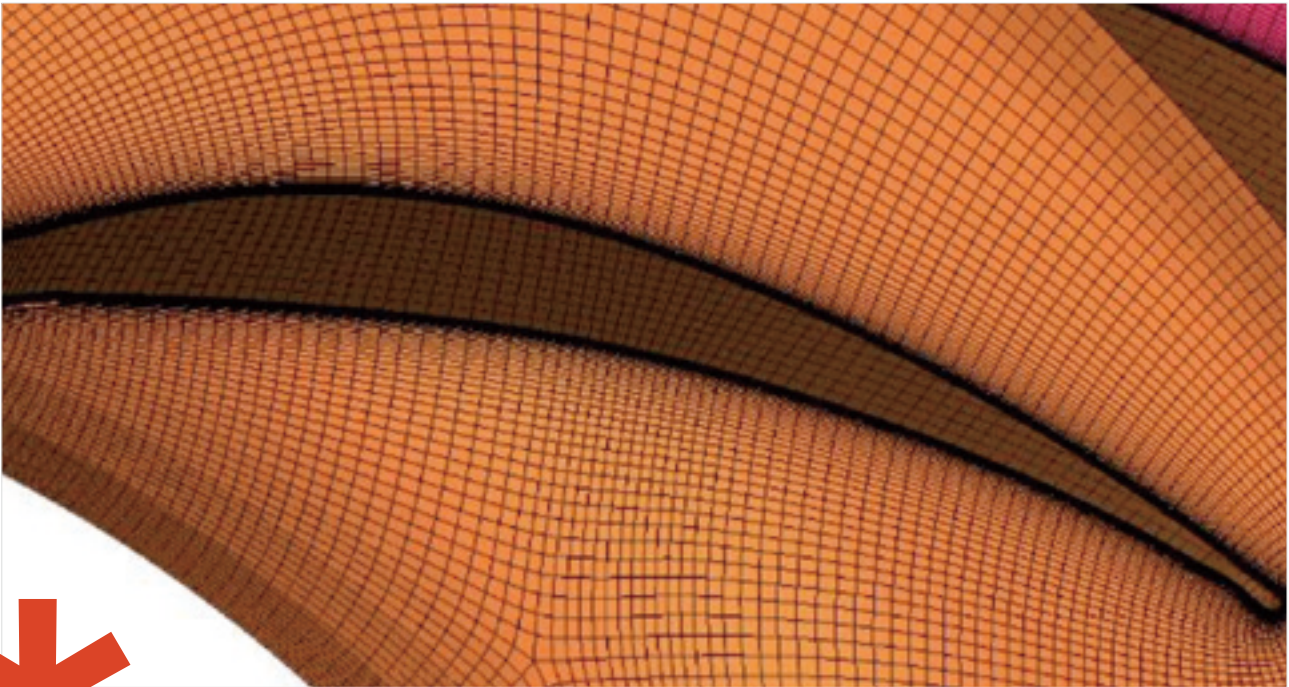


Product Details


Product Appearance

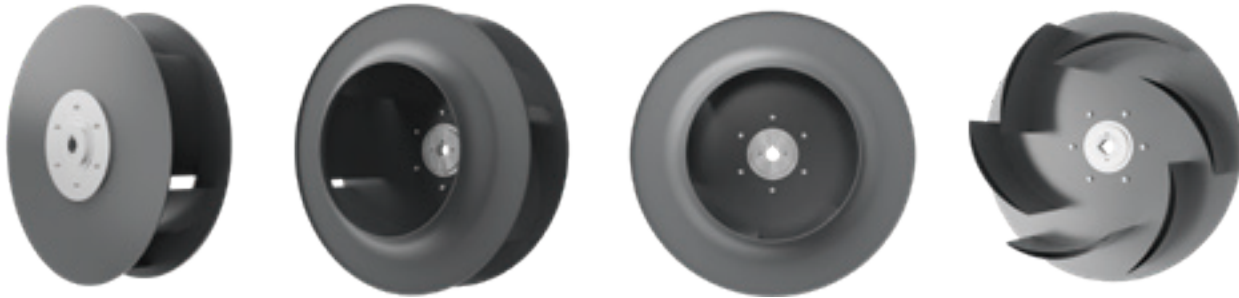

Product Dimensions

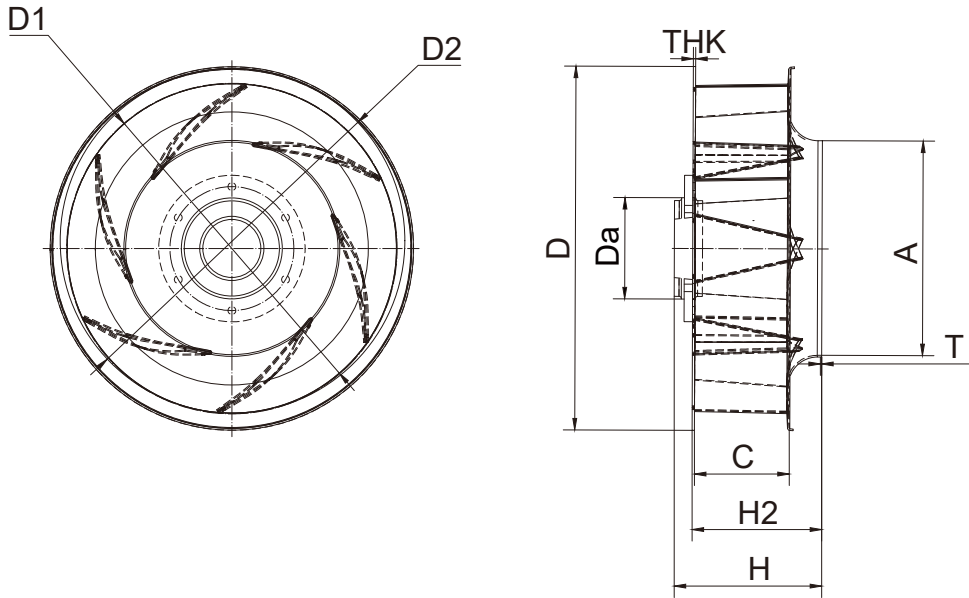

Inlet Ring of Vulturnus

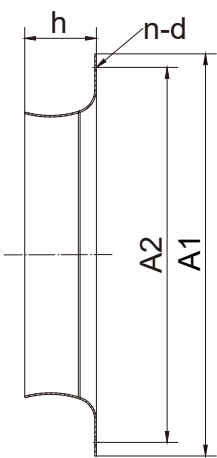

Type	A1 mm	A2 mm	h mm	n Individual	d mm
IN-300-56	300	280	56	6	7
IN-355-57	355	325	57	6	7
IN-383-58	383	344	58	6	7
IN-423-67	423	386	67	6	7
IN-466-71	466	432	71	6	7
IN-515-85	515	485	85	8	9
IN-570-93	570	544	93	8	9
IN-635-109	635	605	109	8	9
IN-700-121	700	670	121	8	9
IN-778-139	778	750	139	12	12
IN-875-160	875	844	160	12	12
IN-980-177	980	945	177	12	12


BAF-S315-131TL-01

Inlet Ring: IN-117-56

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
323	293	131	114.8	82	90	1.5	2	189	4840

Performance Curve

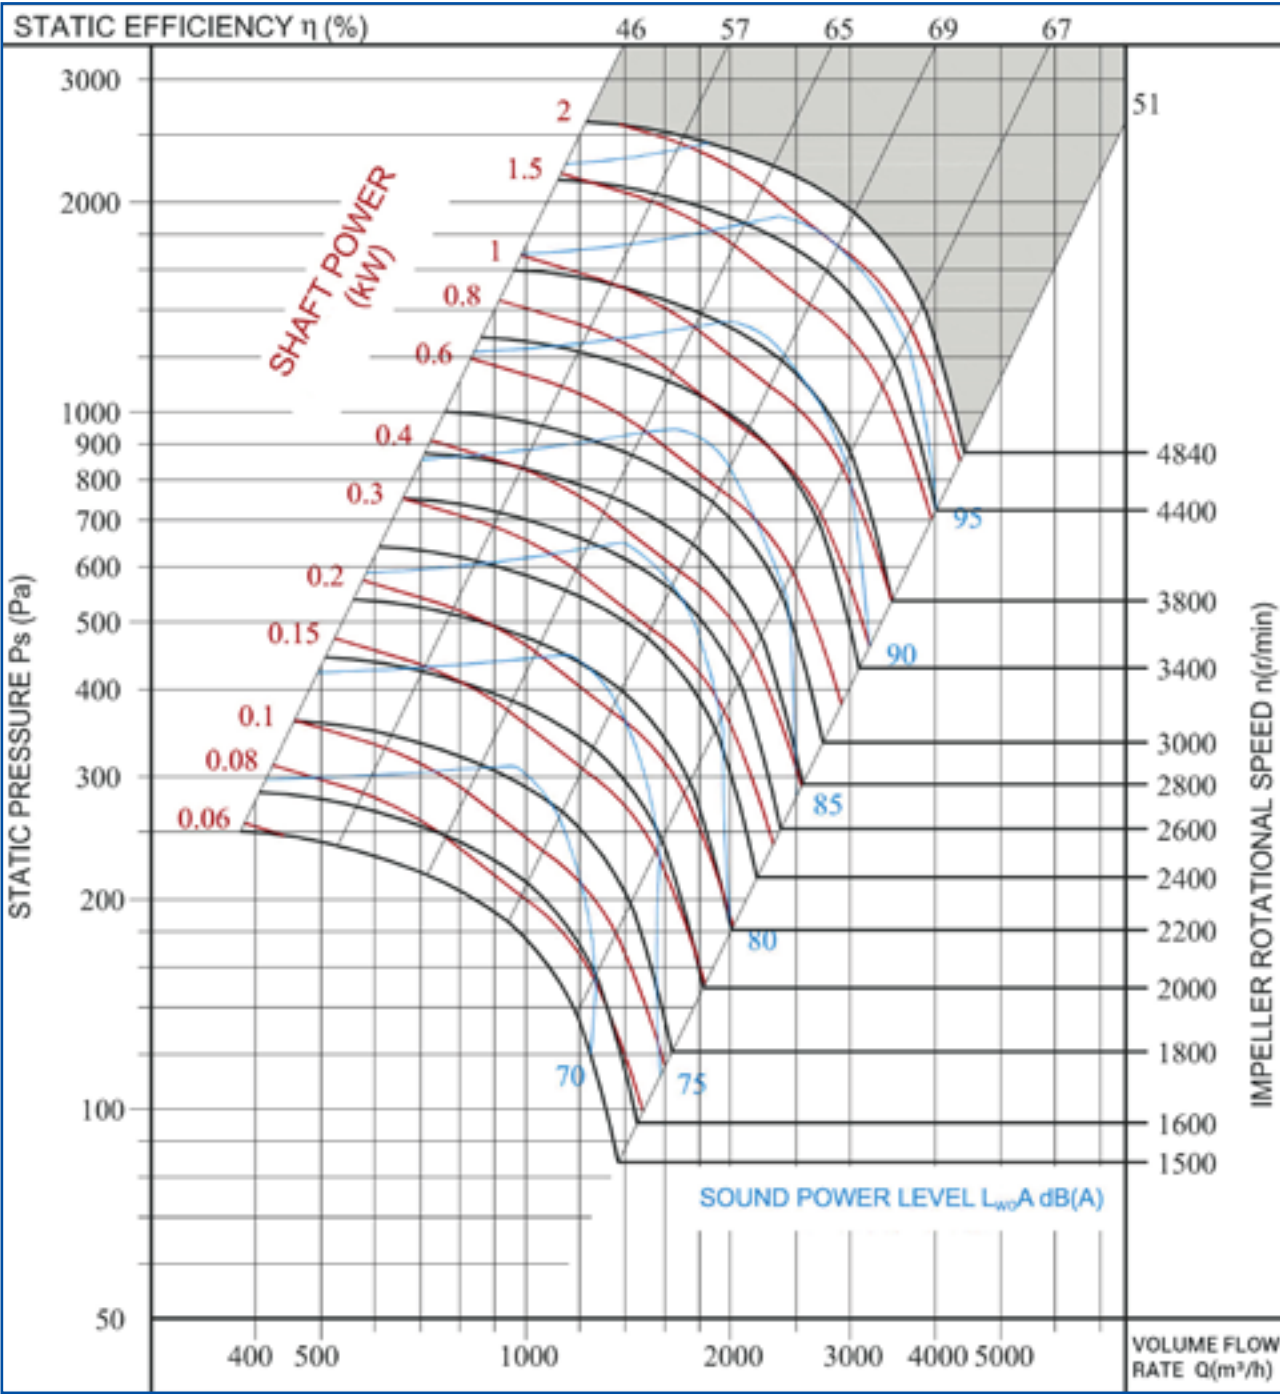


BAF-S355-143TL-01

Inlet Ring: IN-126-57

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
360	330	143	126.65	90	90	2	2	215.5	4140

Performance Curve

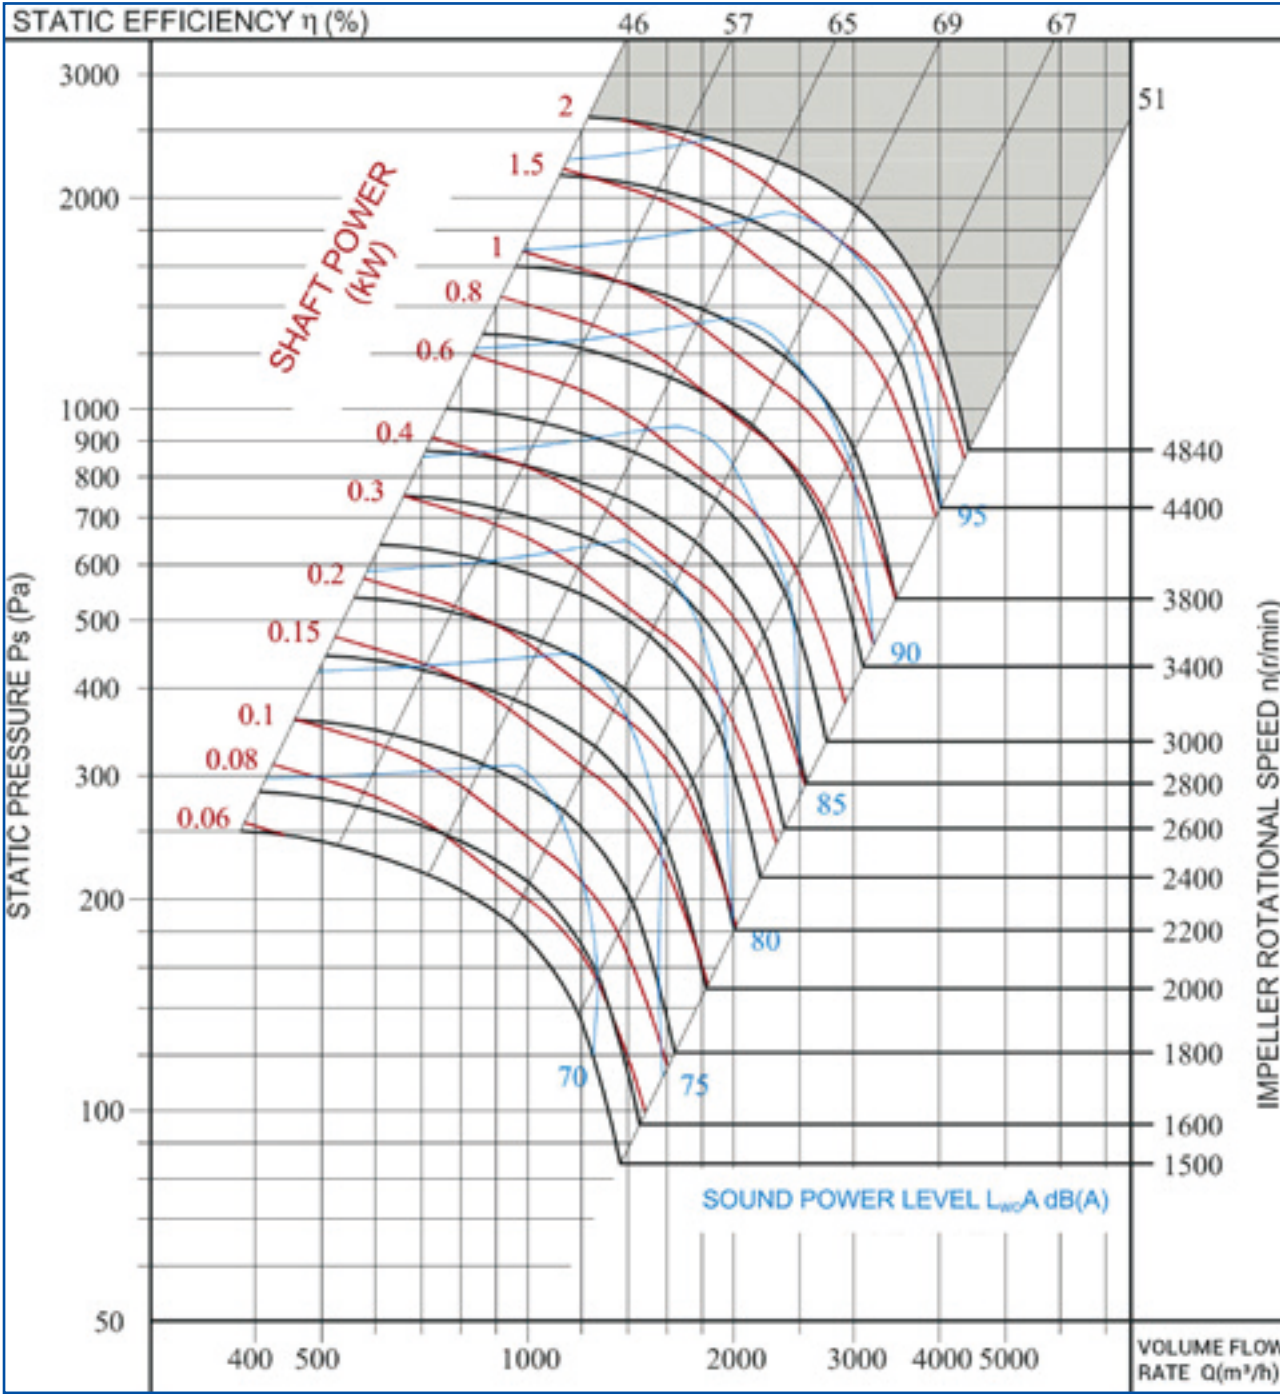


BAF-S400-158TL-01

Inlet Ring: IN-144-58

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
406	372	158	142.05	100.5	90	2.5	2	241.5	3720

Performance Curve

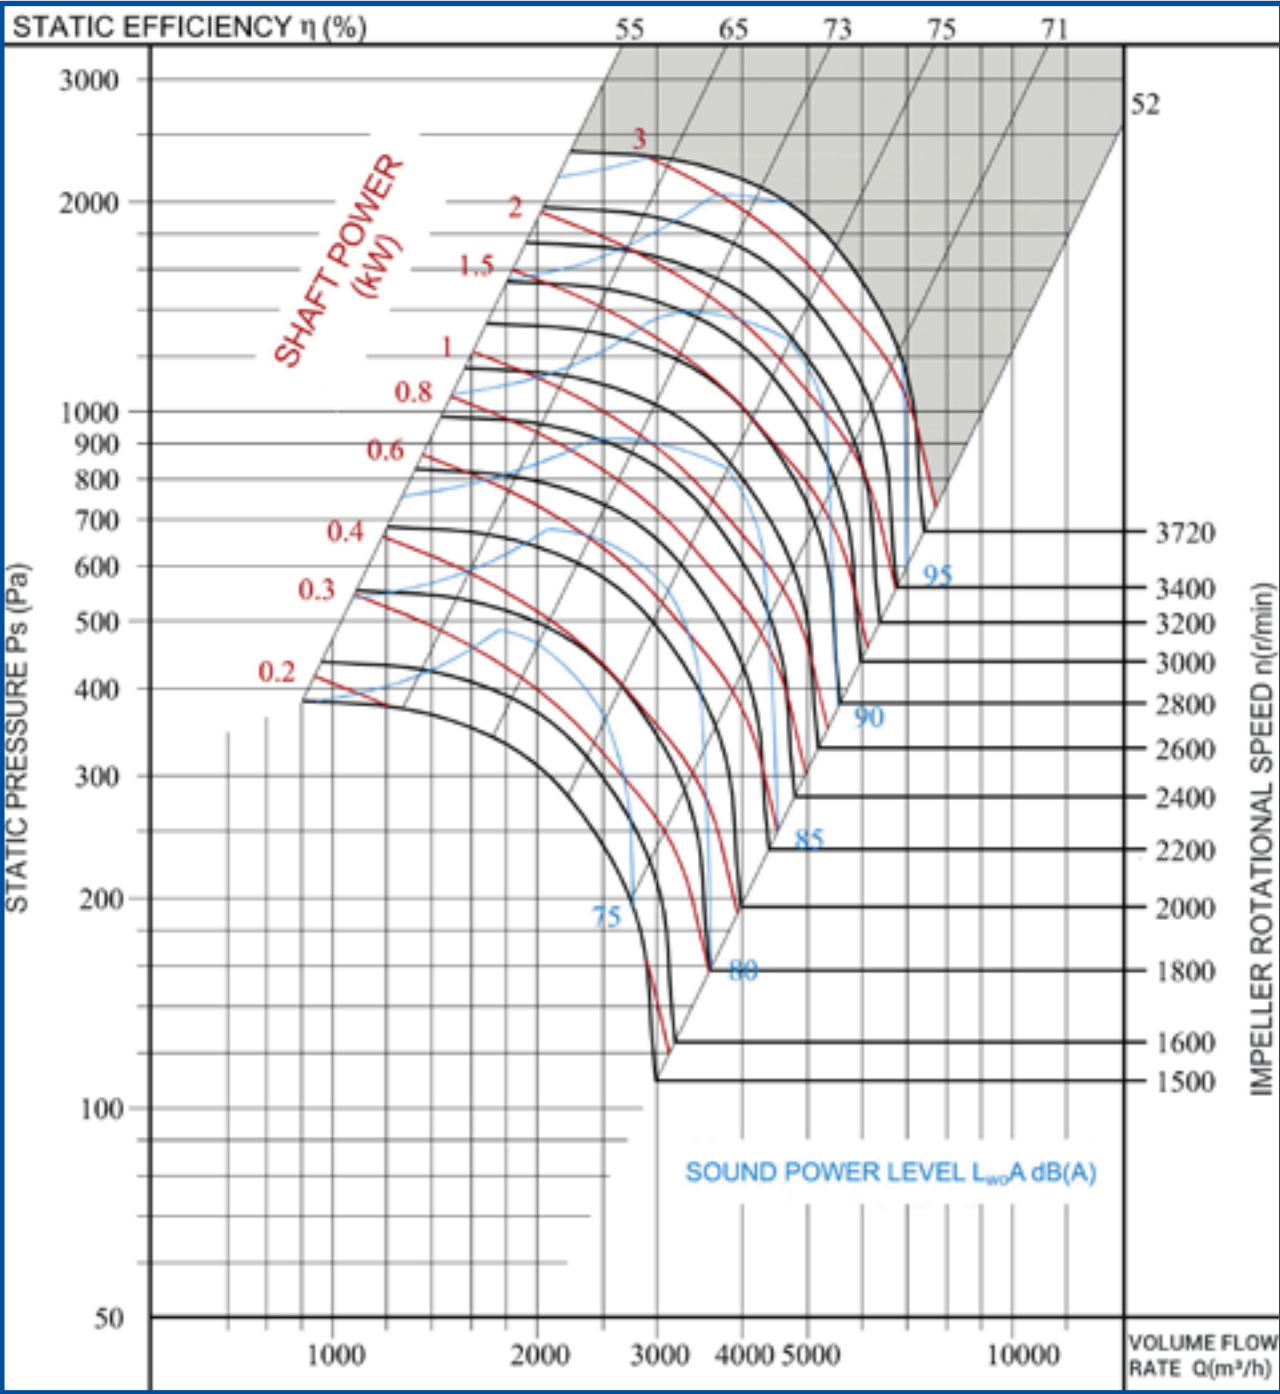


BAF-S450-183TL-01

Inlet Ring: IN-160-67

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
456	419	183	160	113.5	110	2.5	2	271	3300

Performance Curve

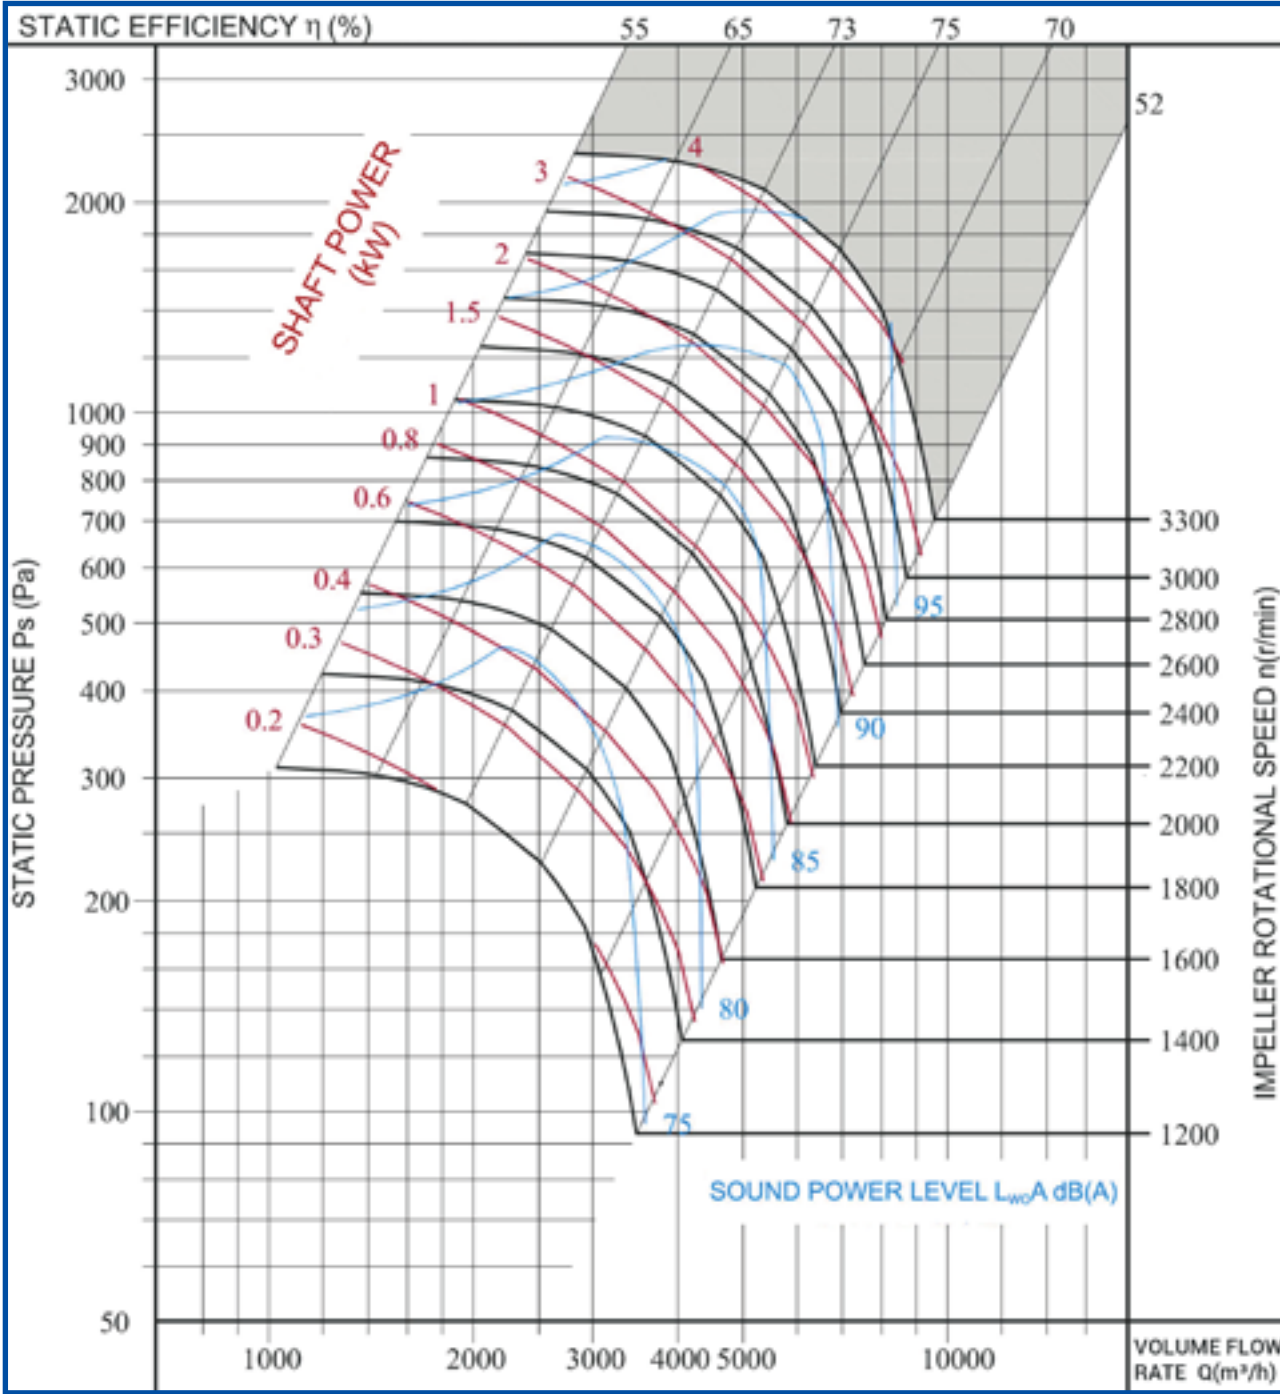


BAF-S500-203TL-01

Inlet Ring: IN-179-71

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
512	471	203	180.5	127.8	110	3	2.5	304	3000

Performance Curve

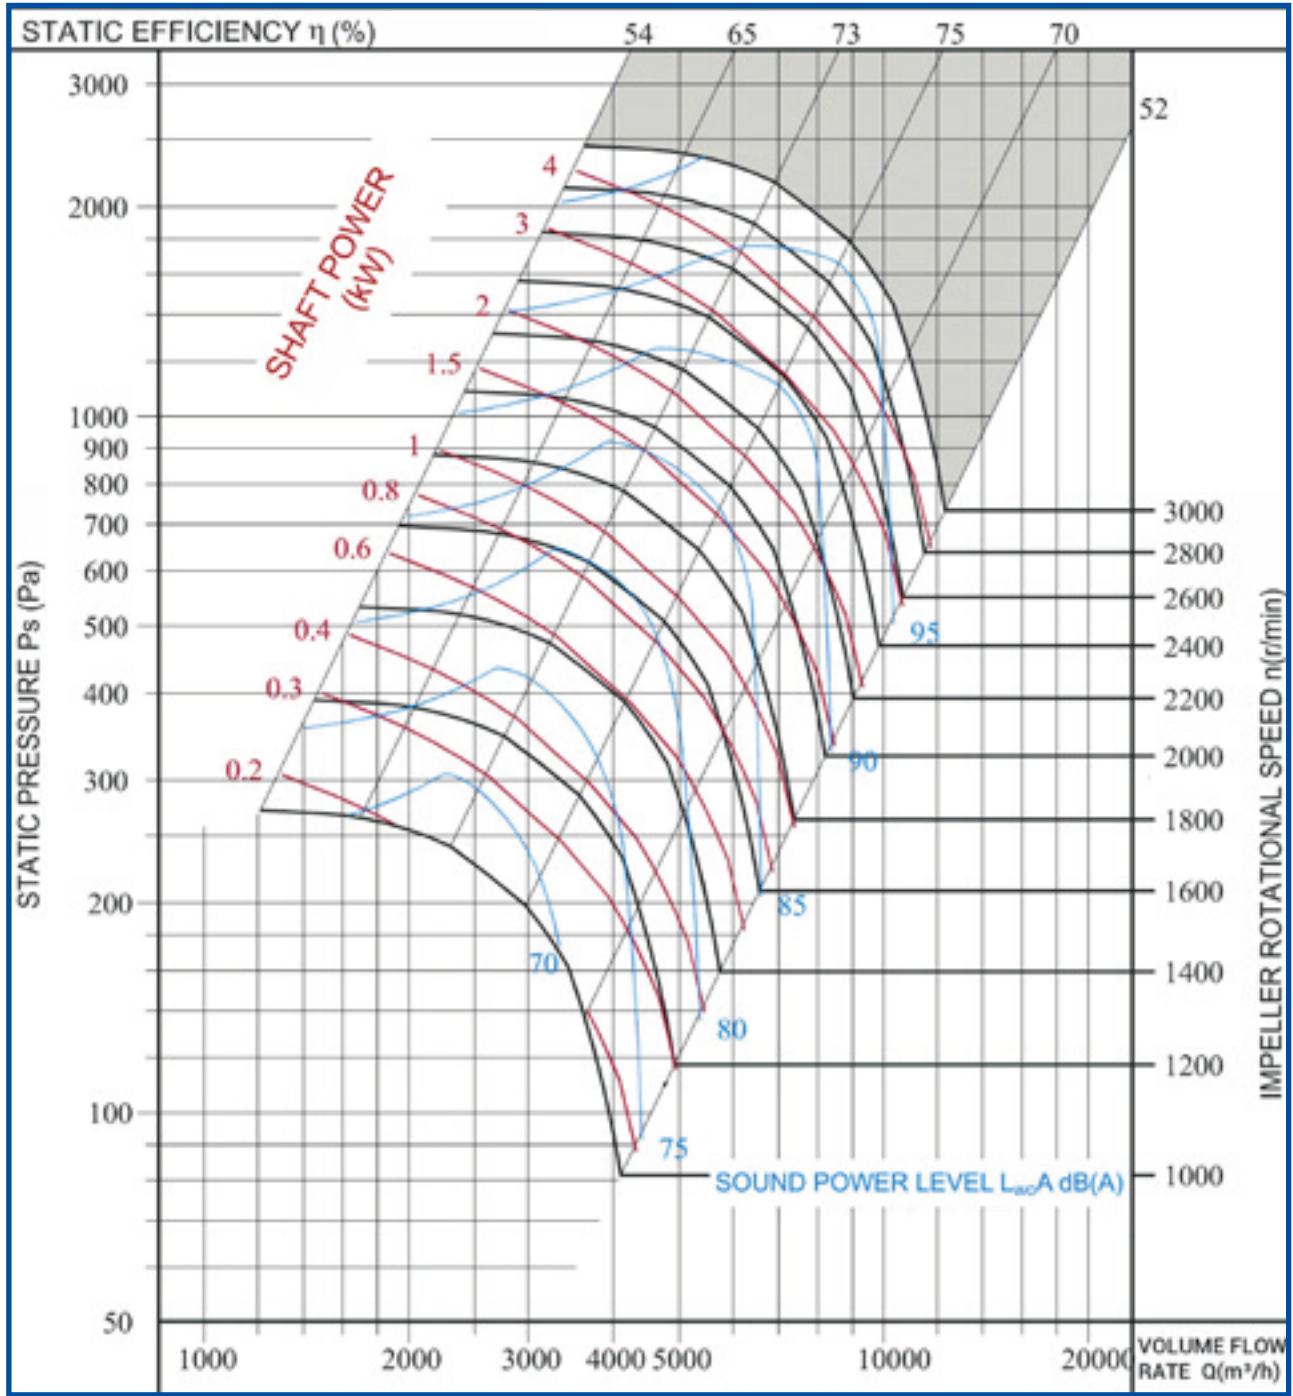


BAF-S560-223TL-01

Inlet Ring: IN-200-85

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
570	513	223	200	142	110	3	2.5	337	1600

Performance Curve

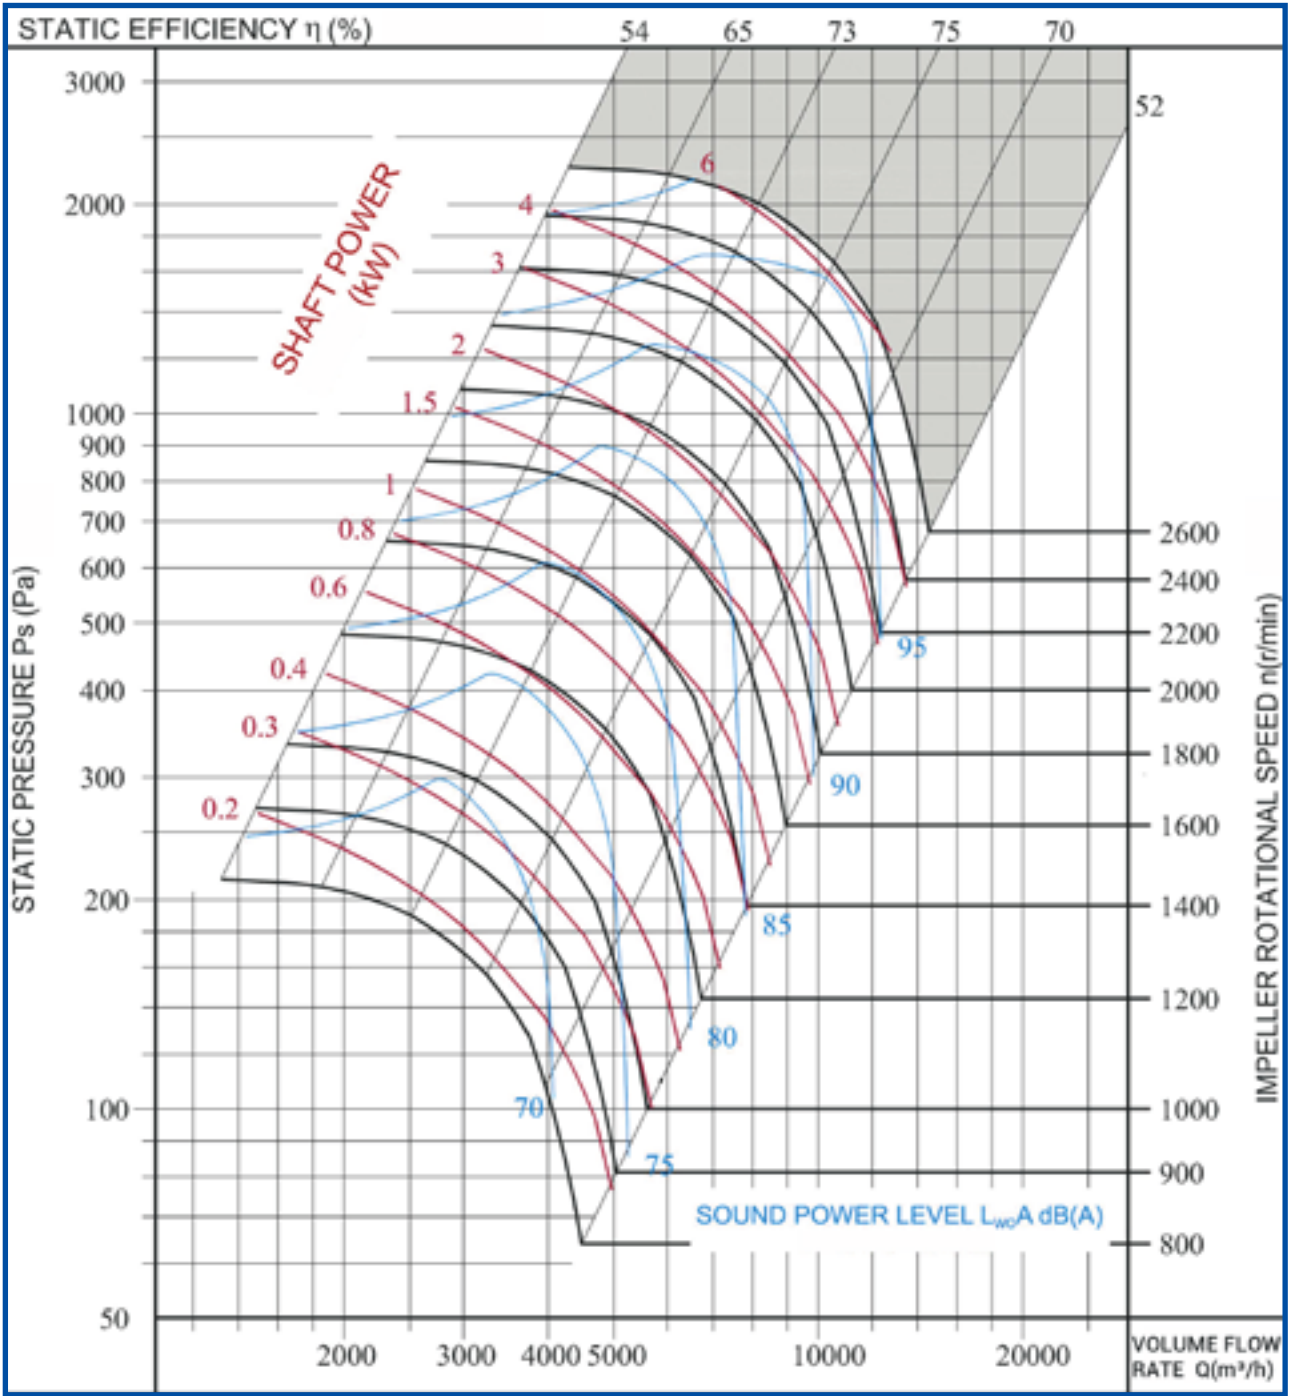


BAF-S630-246TL-01

Inlet Ring: IN-229-93

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
640	587	246	225.6	160	140	4	2.5	377.4	2340

Performance Curve

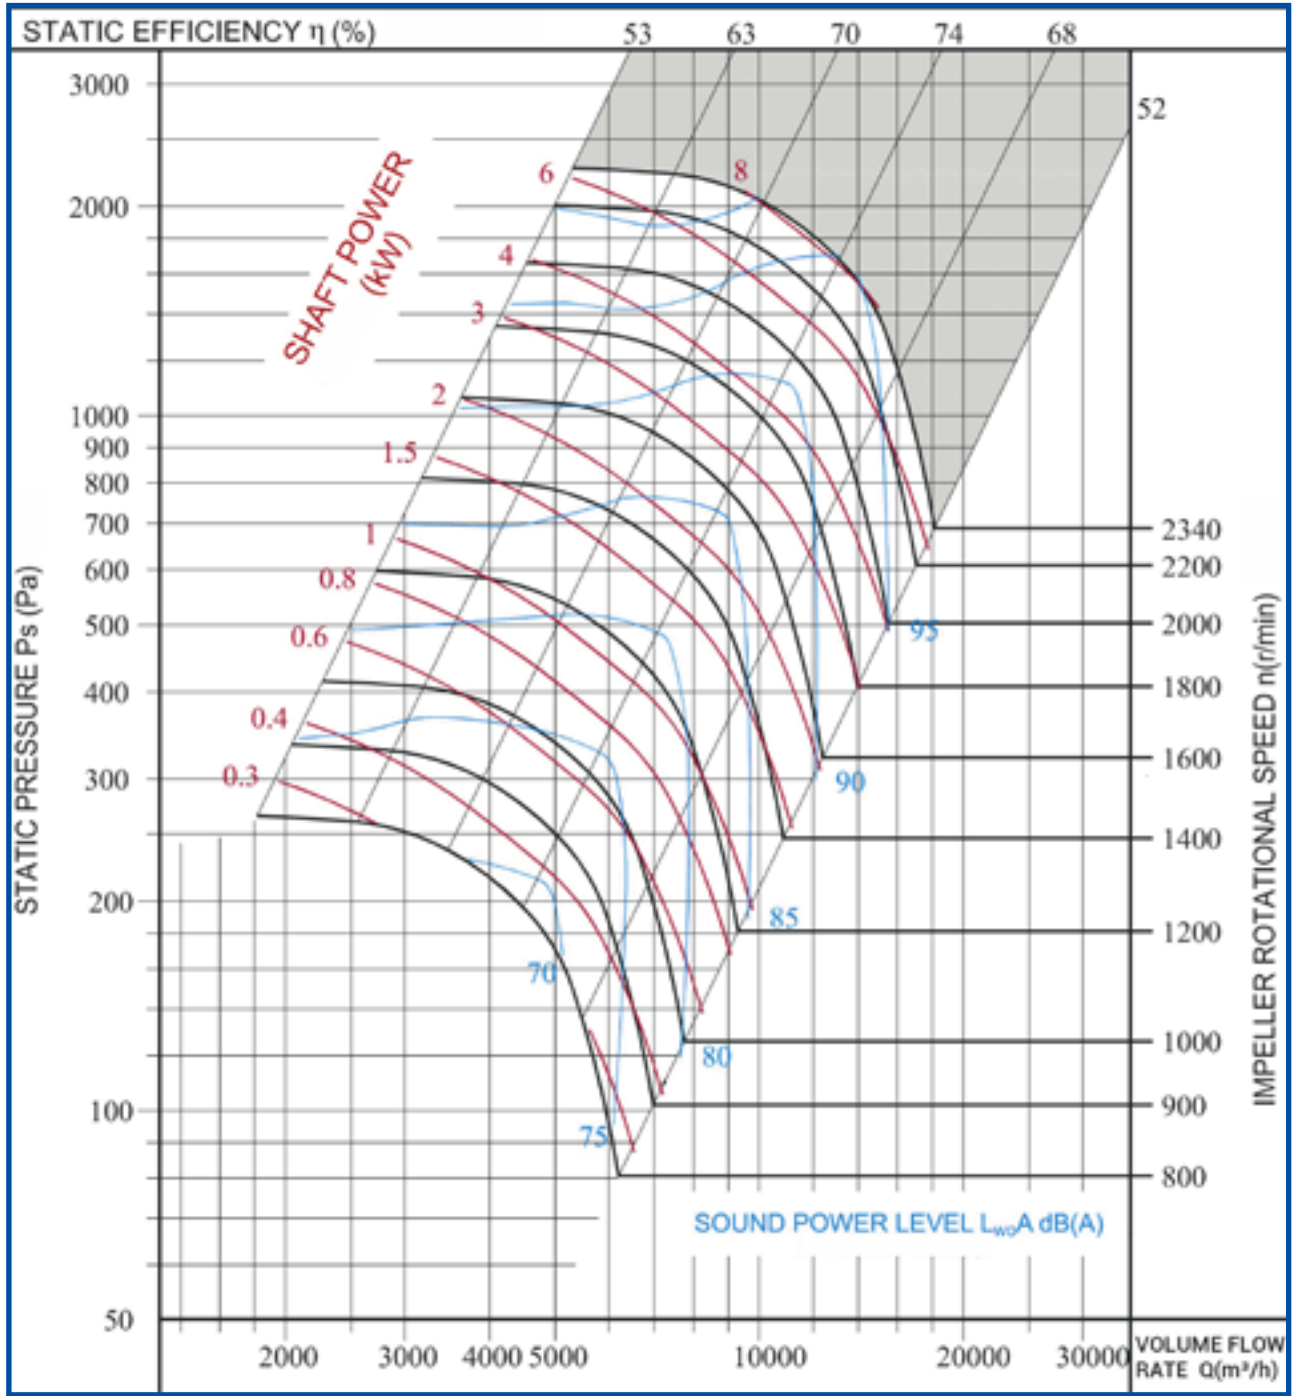


BAF-S720-274TL-01

Inlet Ring: IN-253-109

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
720	660	274	253	180	140	4	3	424.6	2120

Performance Curve

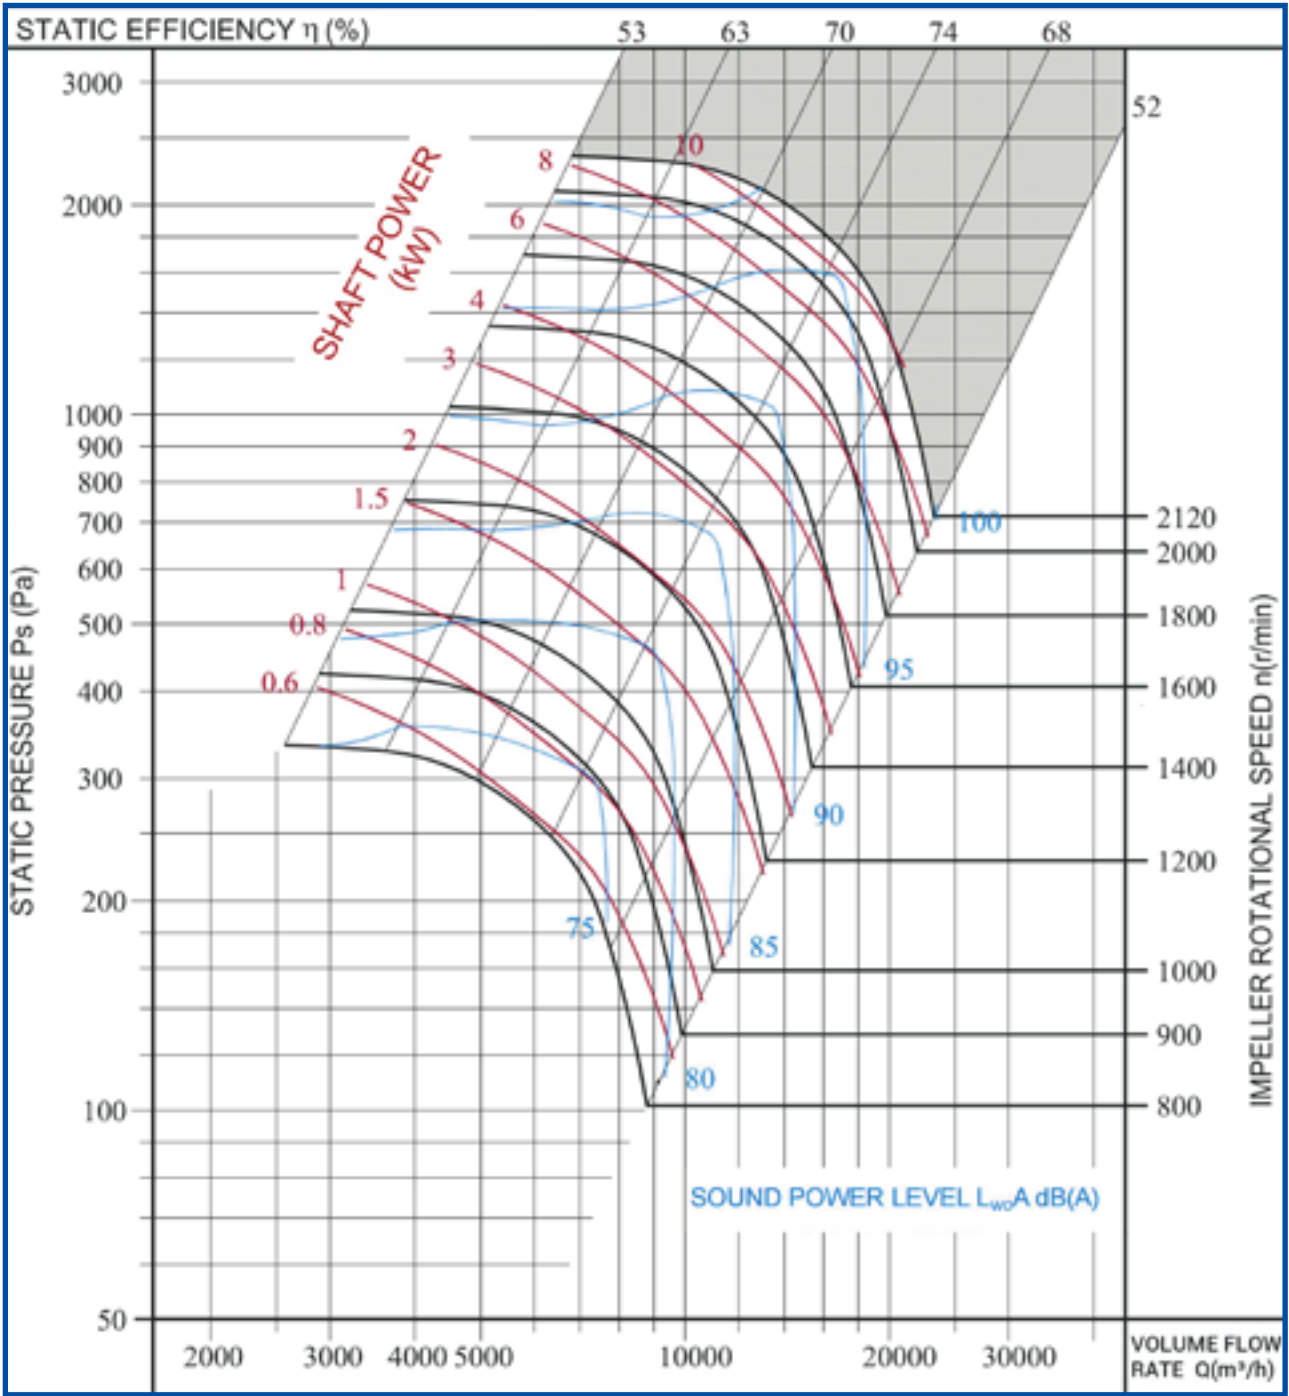


BAF-S810-311TL-01

Inlet Ring: IN-283-121

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
810	743	311	284.1	202	170	4	3	478	1830

Performance Curve

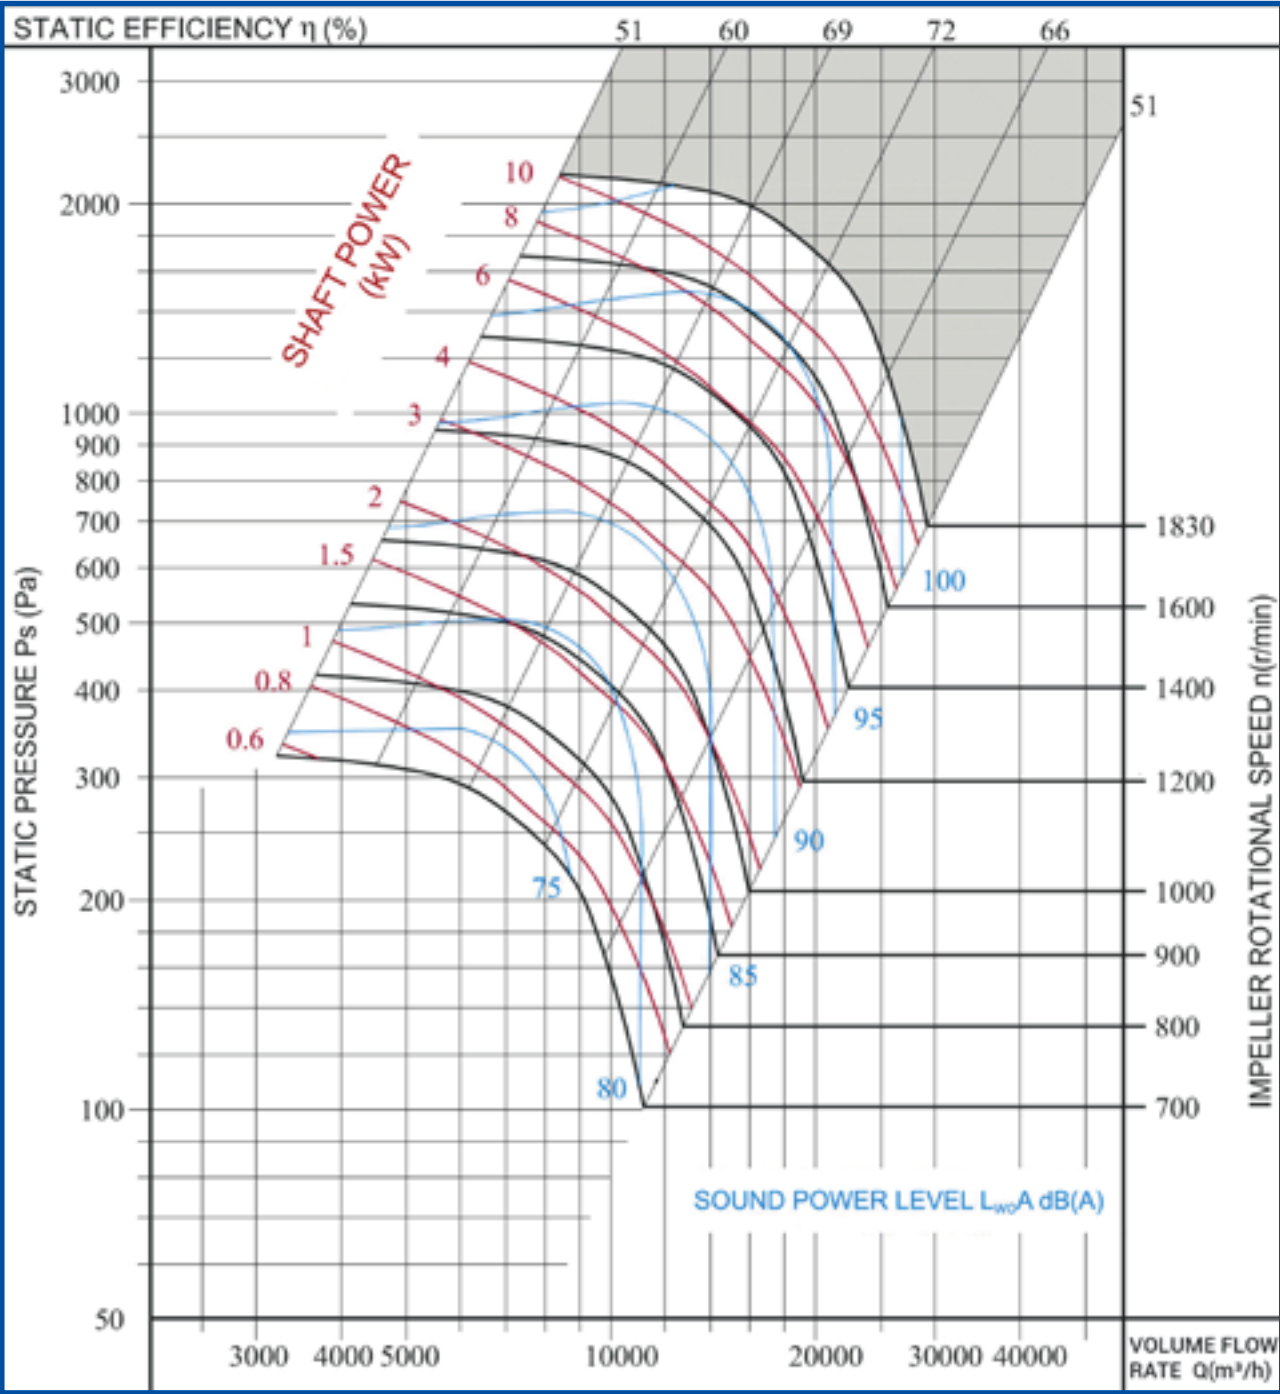


BAF-S910-348TL-01

Inlet Ring: IN-320-139

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
912	837	348	321	229	170	4	3	539.2	1630

Performance Curve

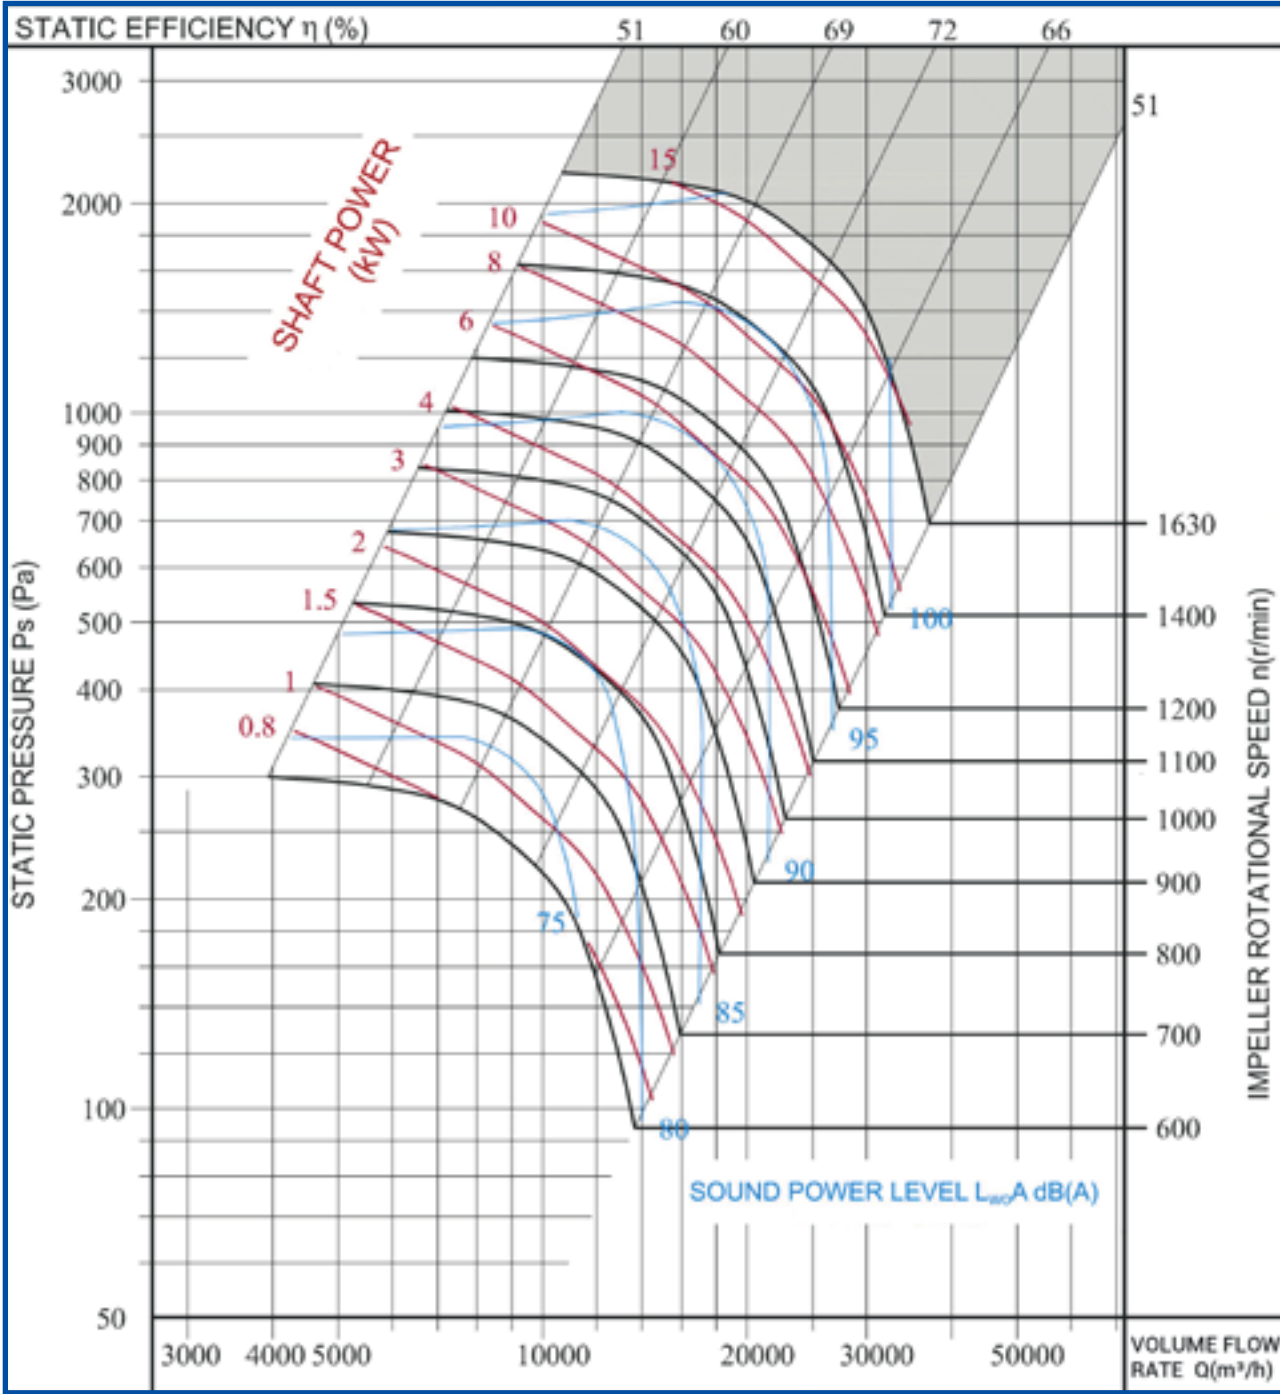


BAF-S1000-391TL-01

Inlet Ring: IN-357-160

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
1023	941	391	359	255	190	5	4	606	1490

Performance Curve

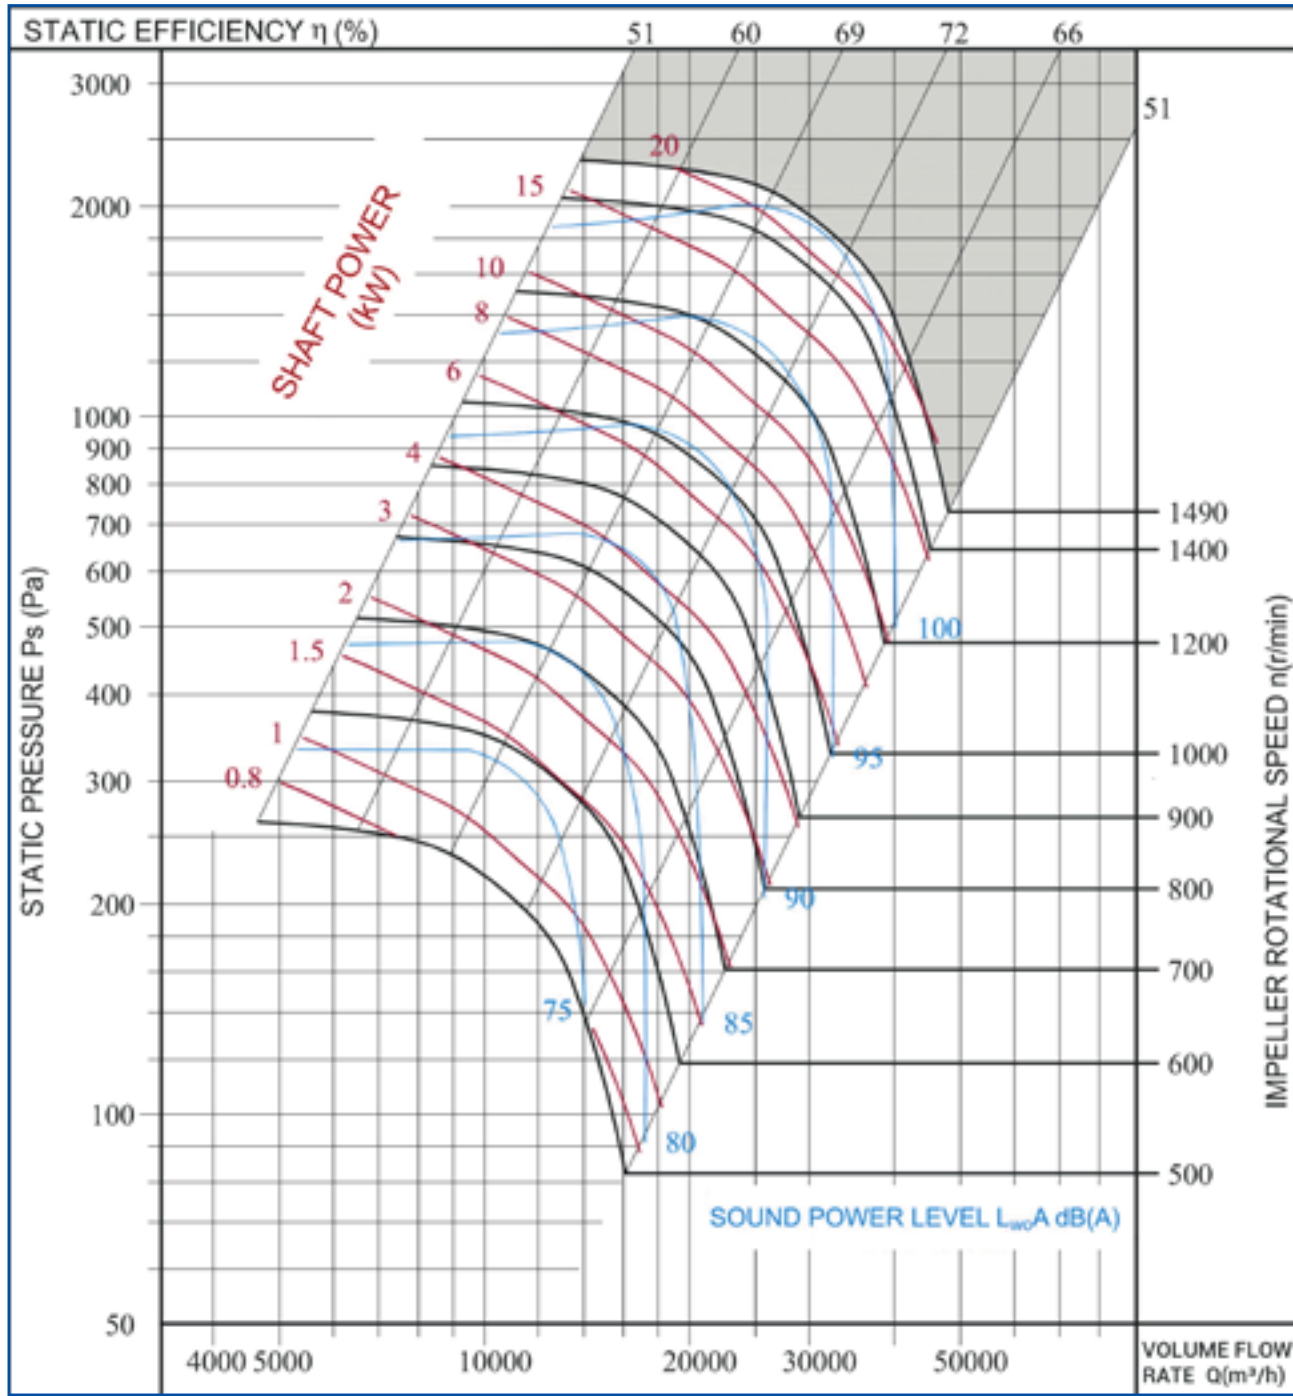


BAF-S1100-433TL-01

Inlet Ring: IN-400-177

Technical Parameters

D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm	Max Speed RPM
1120	1047	433	401	286	220	5	4	674	1320

Performance Curve

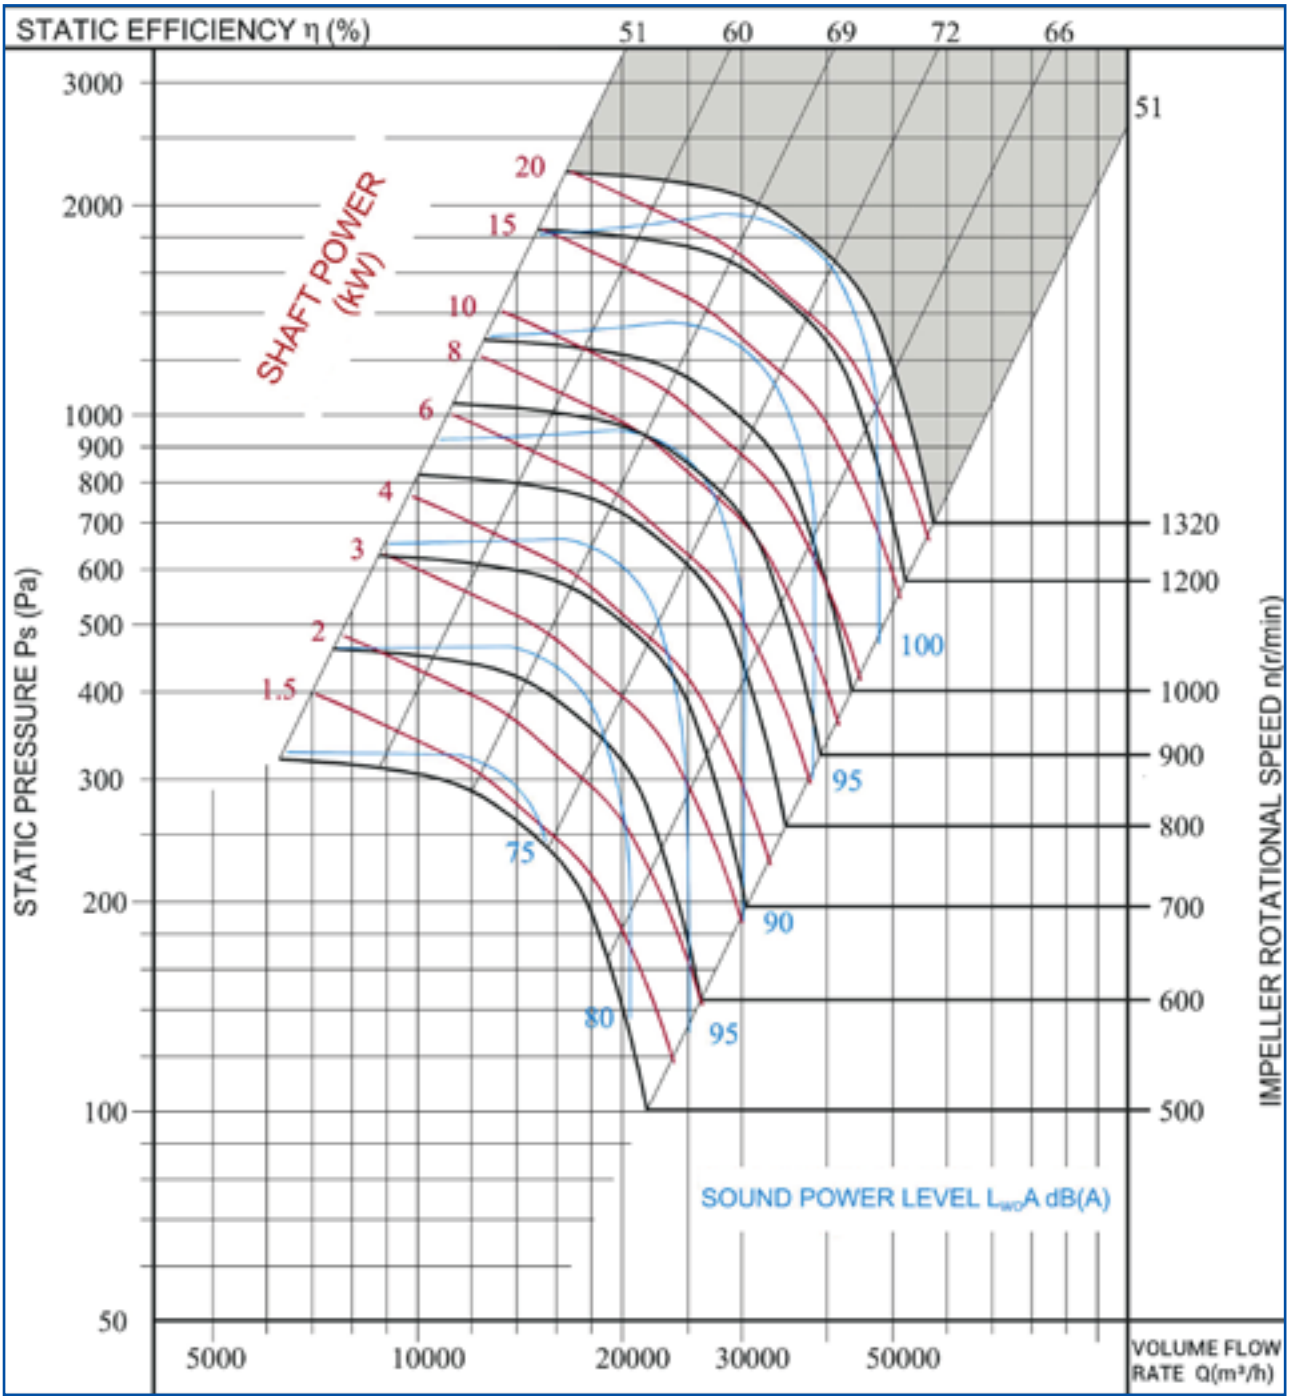

Part 2

AeroPlus


■ Plastic Airfoil Impeller

Product Features

01

Extremely Stable


Uses integrated injection molding and thermal shaping processes to ensure consistent dimensions for each blade.

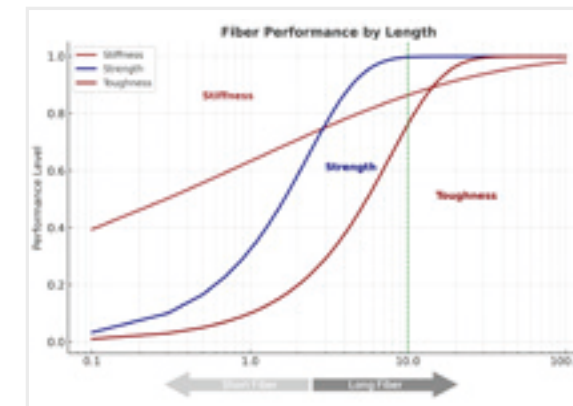

02

Extremely Light


Compared to metal impellers, it is half as light, effectively reducing motor bearing wear and extending fan lifespan. Additionally, customizable material options are available to meet specific needs for color, aging resistance, flame retardancy, UV resistance, and enhanced toughness.

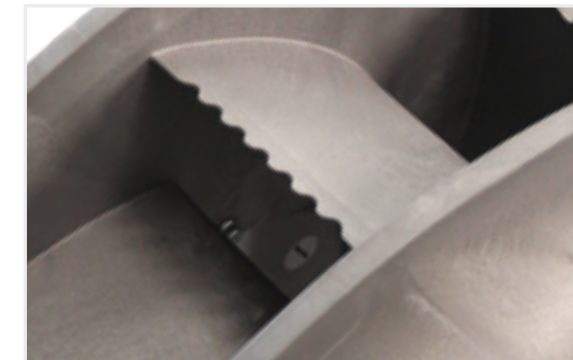


03

Extremely Durable

Made with 100% raw materials and PA66 + 40% LGF to ensure impeller toughness and durability.

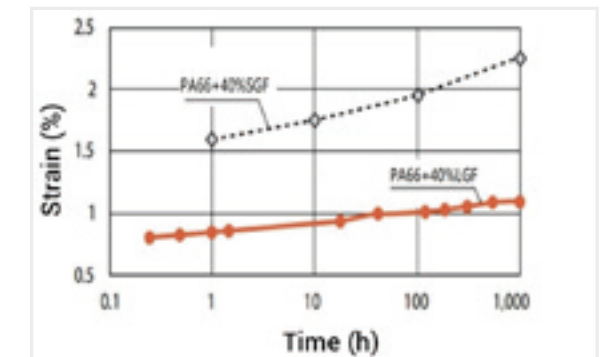


The Using of Long Fiber Reinforced Thermoplastics Ensures:

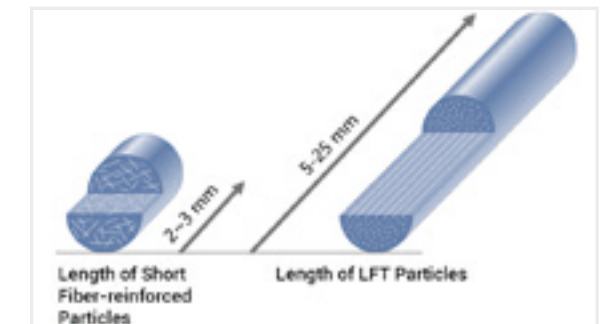

- * Wear Resistance
- * Low Warpage
- * High Impact Strength
- * Increased Rigidity and Toughness
- * Superior Creep Resistance
- * Improved Fatigue Resistance
- * Better Dimensional Stability

04

Extremely Efficient

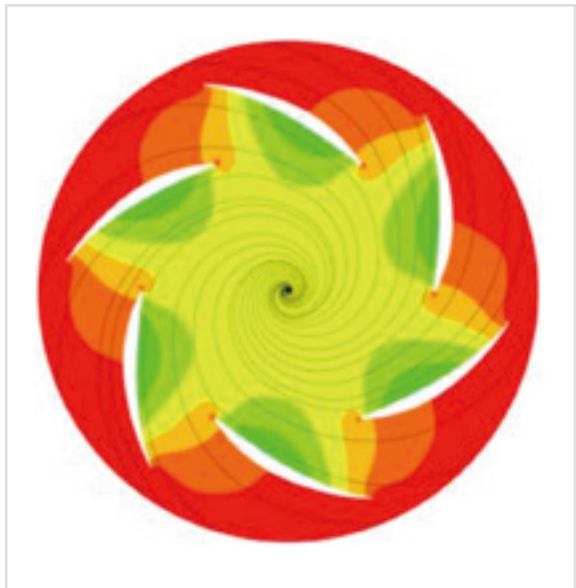

The airfoil blade design reduces airflow separation and turbulence during impeller operation, allowing smoother airflow along the blade and reducing aerodynamic losses.

Another advantage of the airfoil blade design is the even pressure distribution, which prevents excessive vortices within the impeller and reduces pressure fluctuation between blade surfaces.

The airfoil blade surface design also minimizes friction loss, effectively reducing air resistance on the wind-facing surface compared to traditional designs, thereby further enhancing efficiency.

05

Extremely Quiet




Airfoil design effectively reduces velocity separation, significantly lowering blast noise from airflow. The serrated design of the air outlet also reduces noise caused by velocity separation.

Product Details

Product Appearance



Product Dimensions

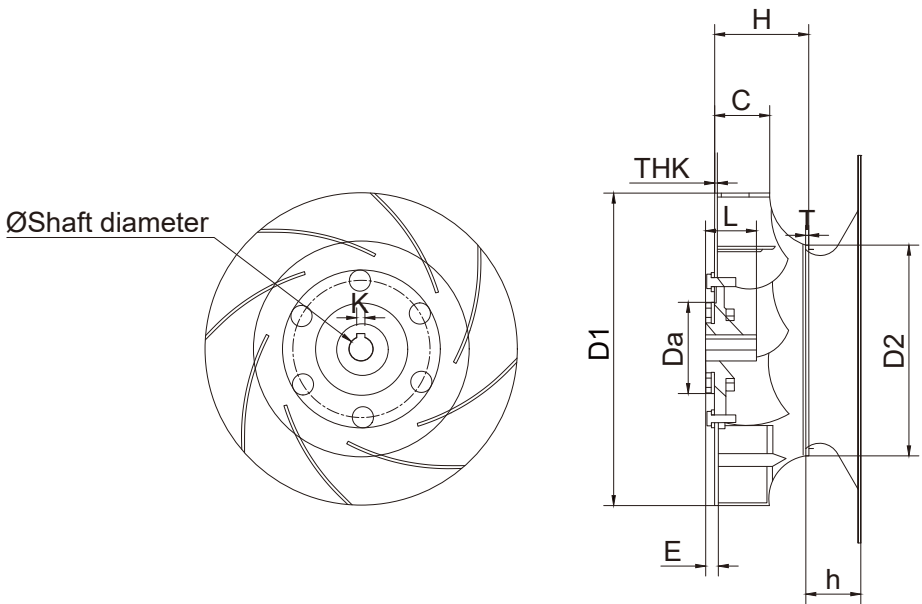

Inlet Ring of AeroPlus




IN-564-116	A1/mm	564
	A2/mm	538
	h/mm	116
	n/mm	8
	d/mm	4.5
IN-634-135	A1/mm	634
	A2/mm	600
	h/mm	135
	n/mm	8
	d/mm	4.5

BHP-P630-265AR-01

Inlet Ring: IN-564-116

Technical Parameters								
D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm
644	363	265	167	13	6	20.25	70	10

Performance Curve

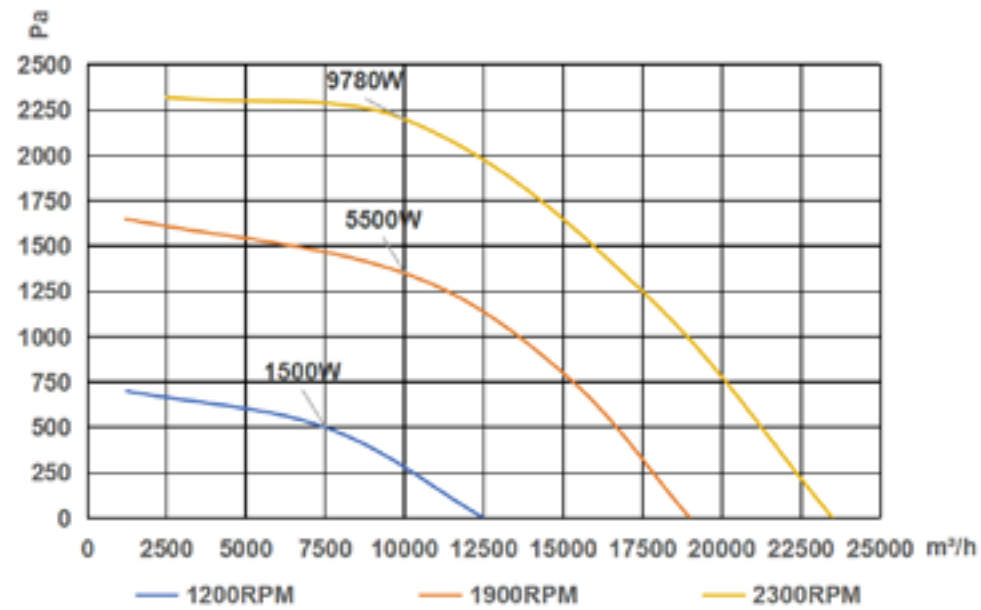


BHP-P710-300AR-01

Inlet Ring: IN-634-135

Technical Parameters								
D mm	D1 mm	H mm	H2 mm	C mm	Da mm	THK mm	T mm	A mm
721	407	300	187	17	6.5	20.25	70	10

Performance Curve

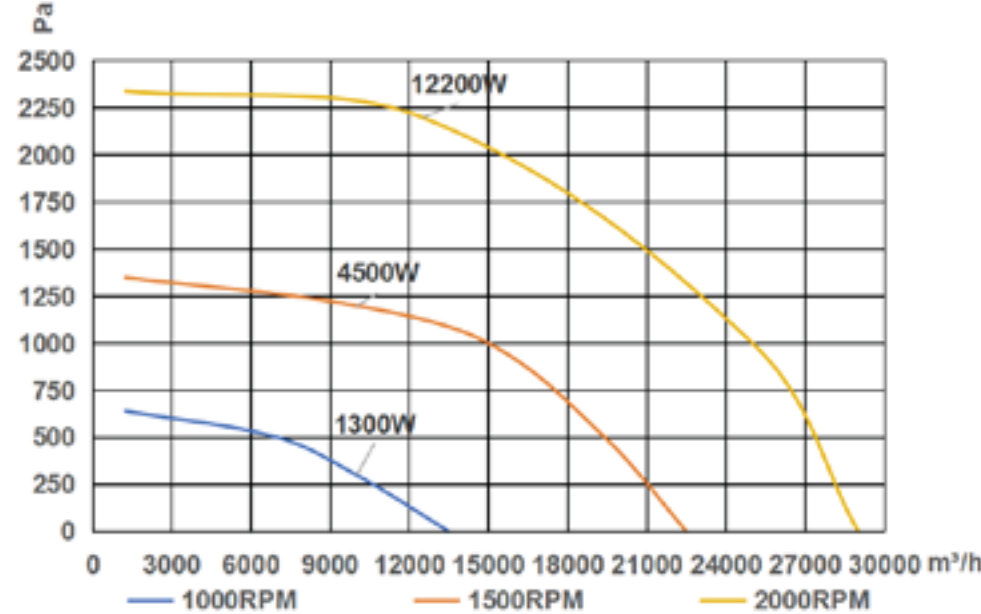


Part 3

Aeolus

Aluminum Welded Impeller

Product Features

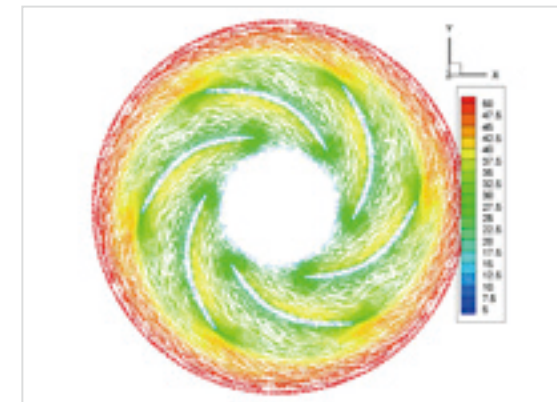


Stability

Standardized dimension design with fully automated robotic welding ensures dimensional consistency and performance stability.



Durability

Made from aluminum-magnesium alloy for product durability.

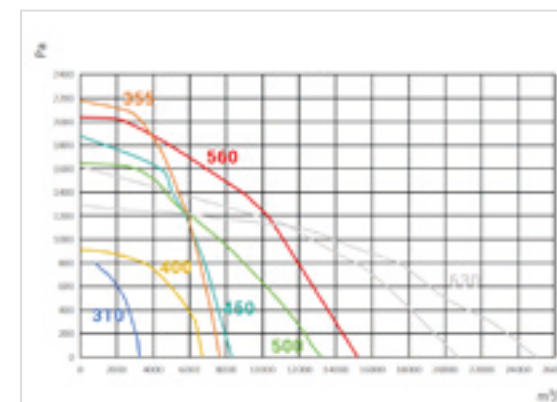

Wide Range of Sizes, Flexible Customization


Available in sizes from 280mm to 630mm, covering airflow capacities from 1,500 to 25,000 m³/h.

Product Details

Product Appearance



Product Dimensions

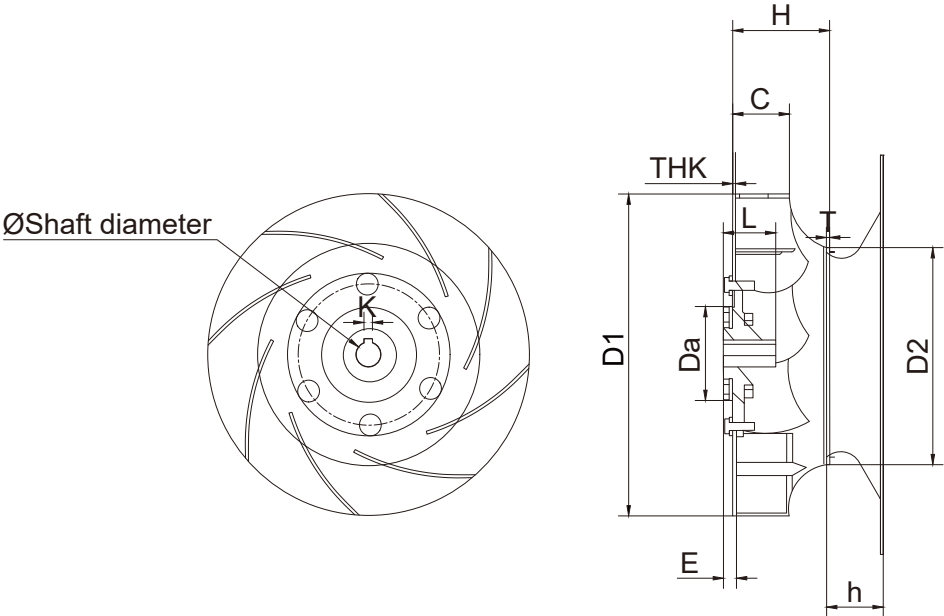

Inlet Ring of AeroPlus

Type	A1 mm	A2 mm	h mm	n Individual	d mm
IN-280-46	280	259	46	6	4.5
IN-307-52	307	286	52	6	7
IN-348-59	348	320	59	8	9
IN-382-65	382	356	65	8	9
IN-422-76	422	395	76	8	11
IN-464-81	464	438	81.5	8	11
IN-450-73	450	425	73	6	9
IN-519-97	519	490	97.5	8	11
IN-445-75	470	445	75	6	9
IN-564-105	564	540	105	8	11
IN-515-82	515	490	82	6	9
IN-640-114	640	610	114	8	14


BMP-A250-080AR-01

Inlet Ring: IN-280-46

Technical Parameters

D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
252	168	80	80	48	2	2	3	32.5	5

Performance Curve

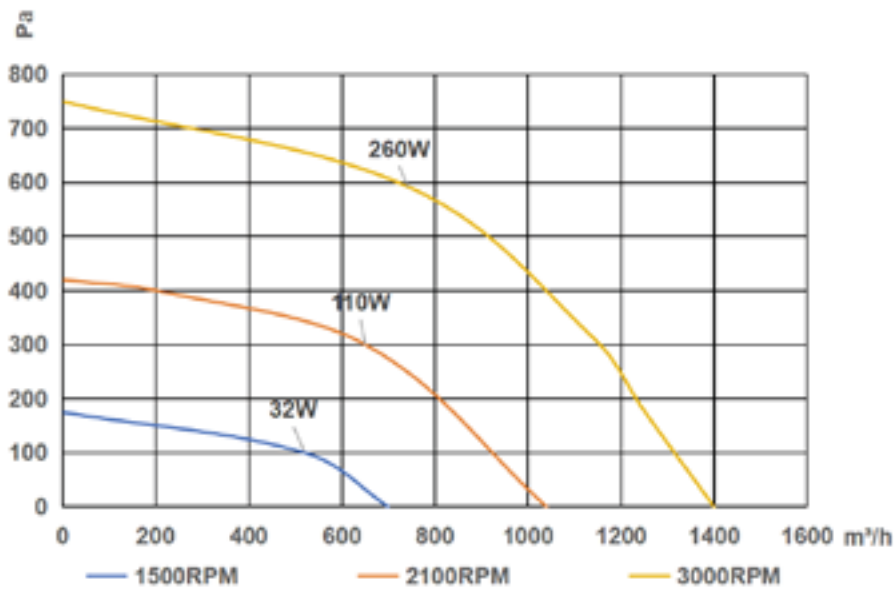


BMP-A250-090AR-02

Inlet Ring: IN-280-46

Technical Parameters

D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
252	168	90	50	48	2	2	3	32.5	5


Performance Curve

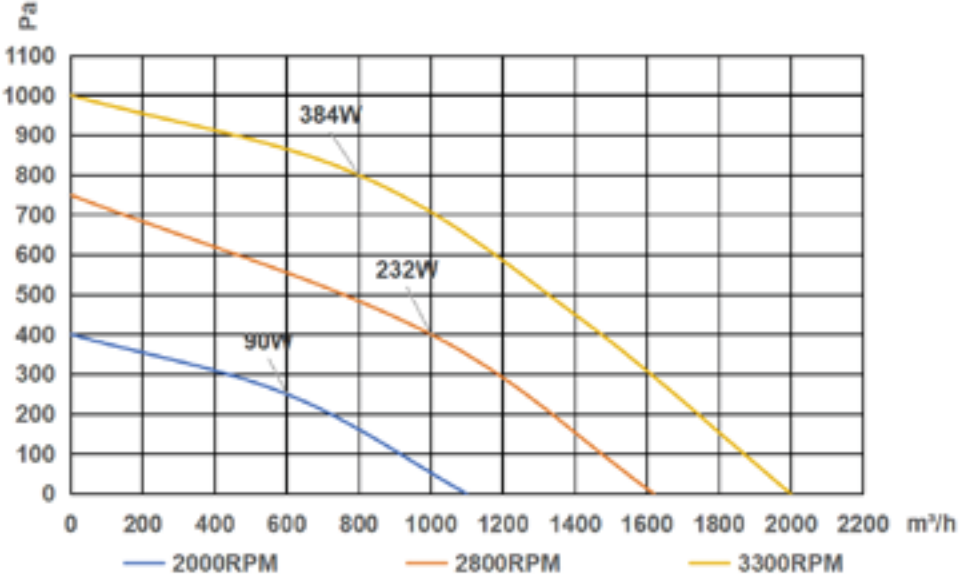

BMP-A250-100AR-03

Inlet Ring: IN-564-116


Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
252	168	100	60	48	2	2	3	32.5	5

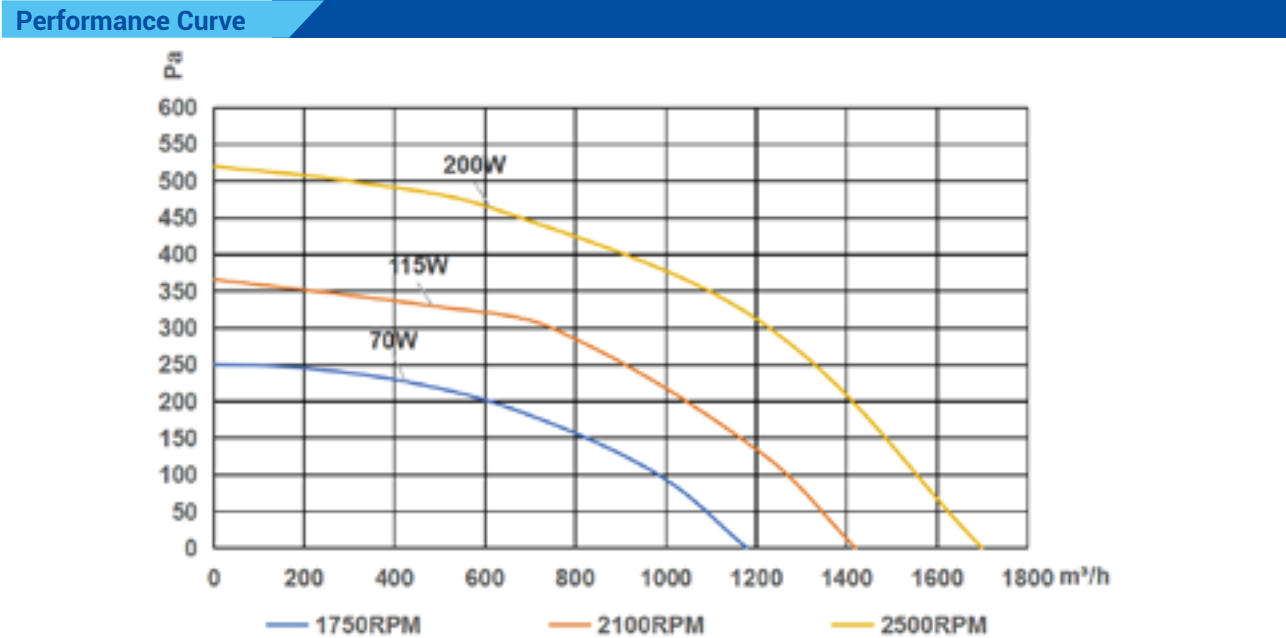

BMP-A280-096AR-01

Inlet Ring: IN-307-52


Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
284	188	96	50	48	2	2	3	32.5	5

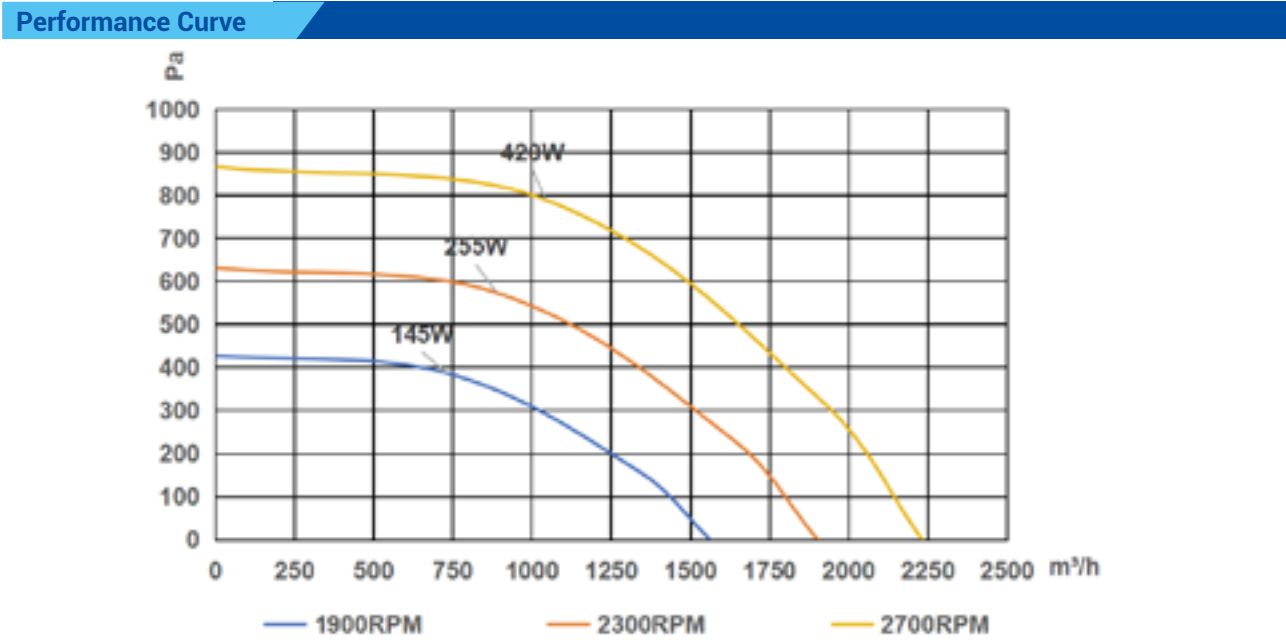

BMP-A280-106AR-02

Inlet Ring: IN-307-52


Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
284	188	106	60	48	2	2	3	32.5	5

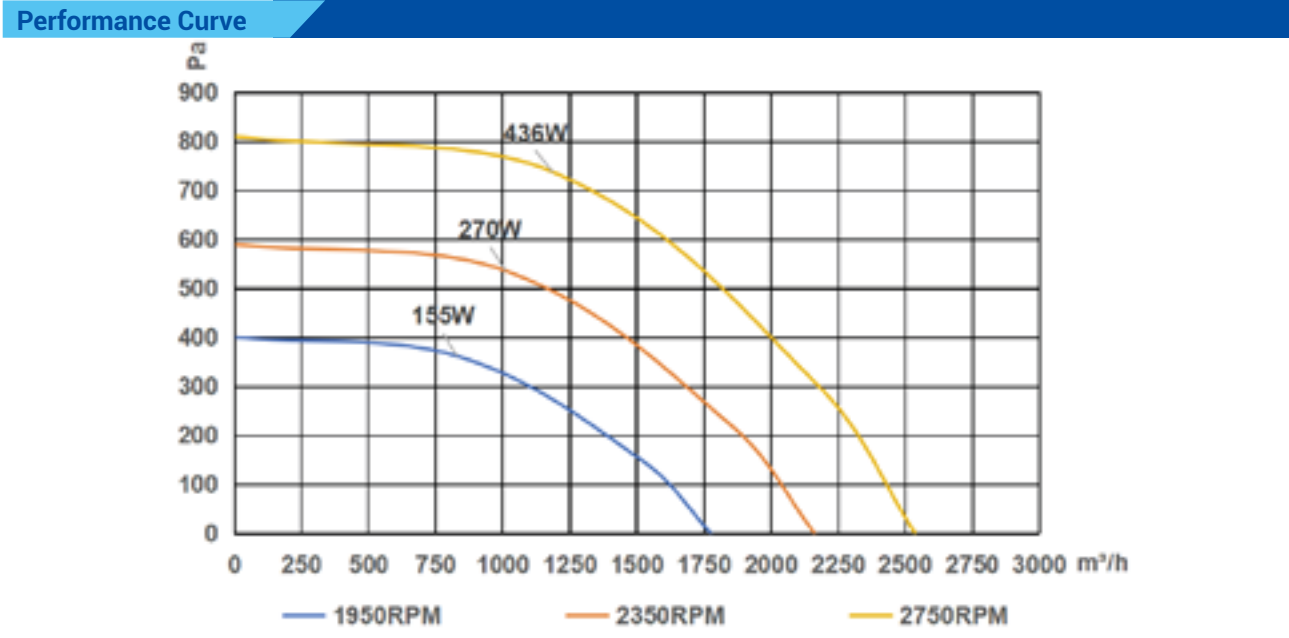

BMP-A280-133AR-03

Inlet Ring: IN-307-52

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
284	188	133	87	48	2	2	3	32.5	5

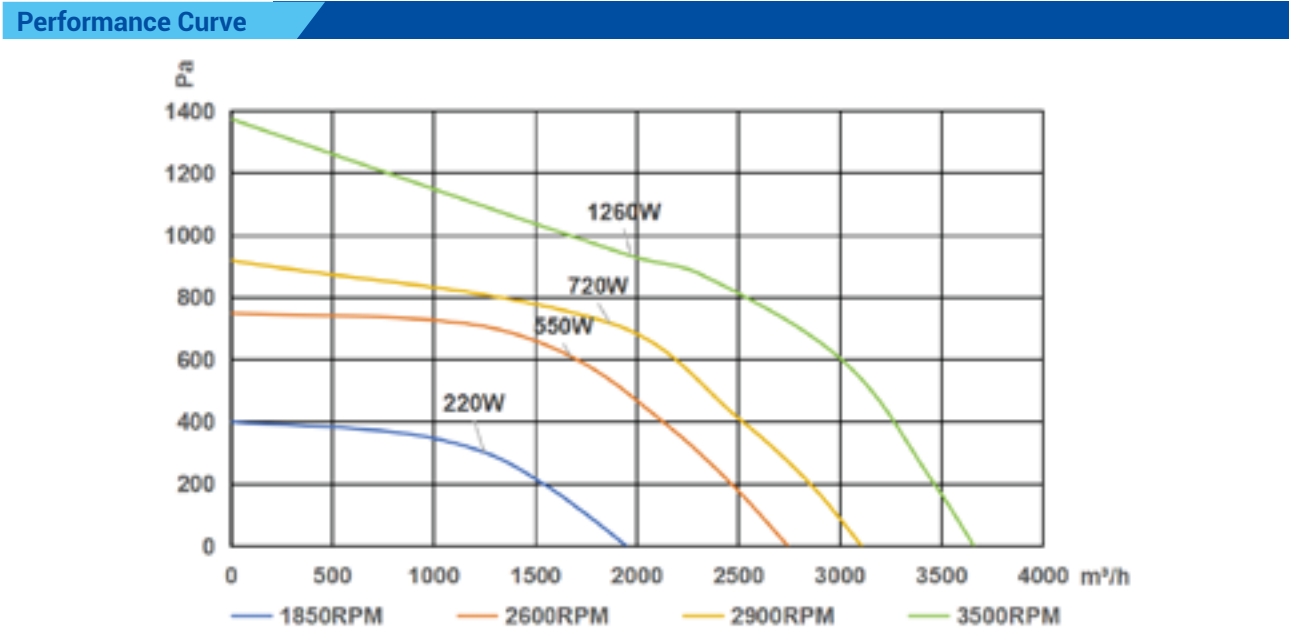


BMP-A280-135AR-04

Inlet Ring: IN-307-52

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
284	190	135	102	48	2	1.5	3	32.5	5

Performance Curve

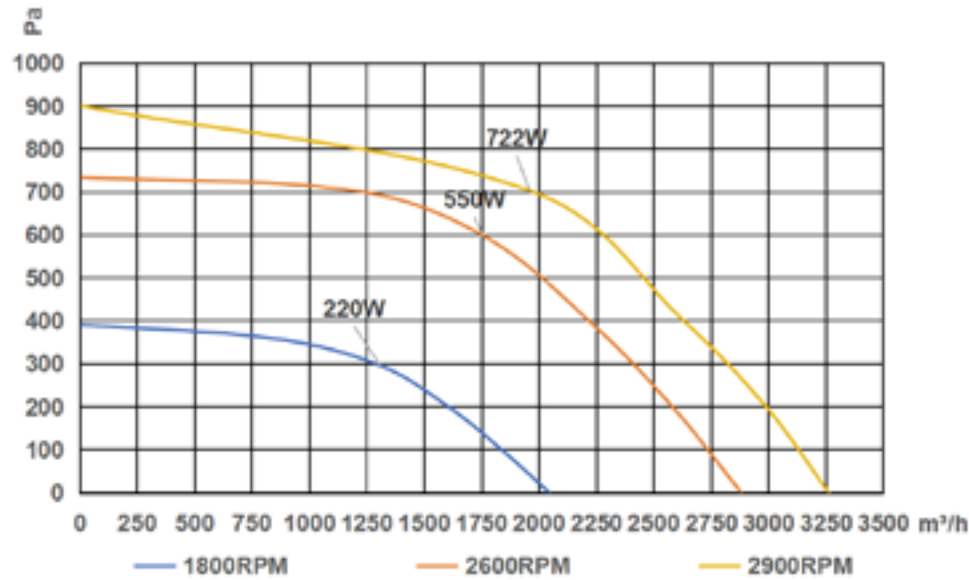


BMP-A315-105AR-01

Inlet Ring: IN-348-59

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
319	212	105	57	75	2	2	7	42	6

Performance Curve

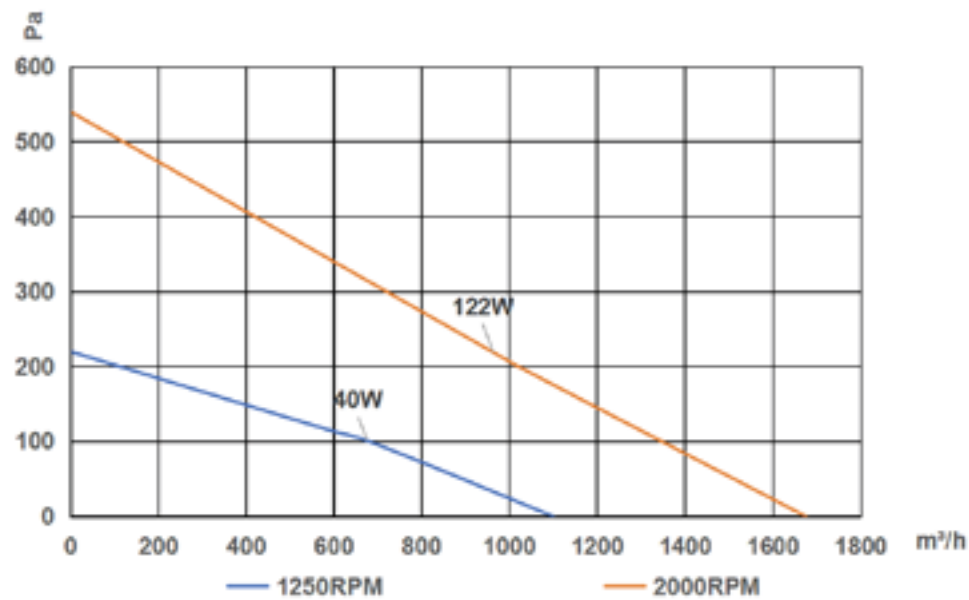


BMP-A315-120AR-02

Inlet Ring: IN-348-59

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
319	212	120	72	75	2	2	7	42	6

Performance Curve

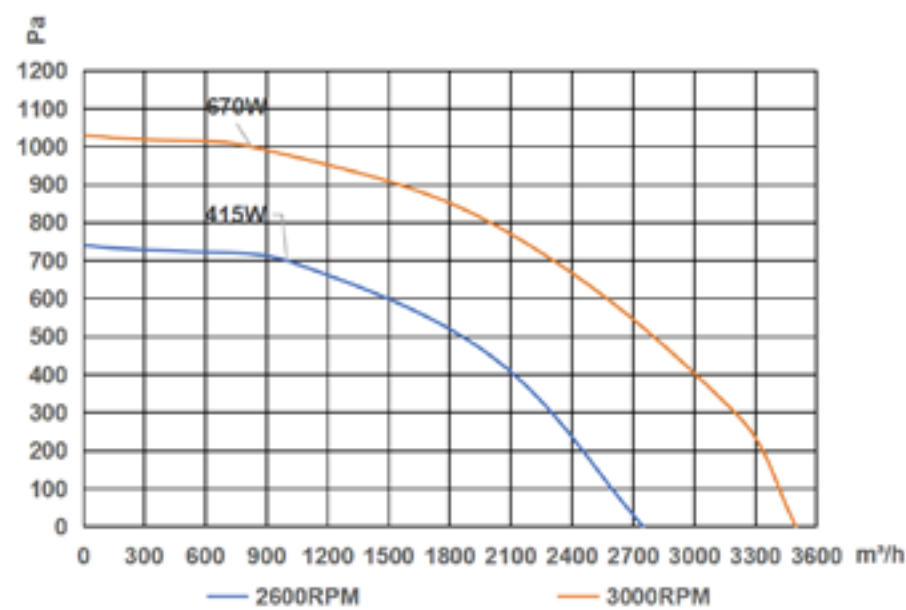


BMP-A315-128AR-03

Inlet Ring: IN-348-59

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
319	212	128	80	75	2	2	7	42	6


Performance Curve

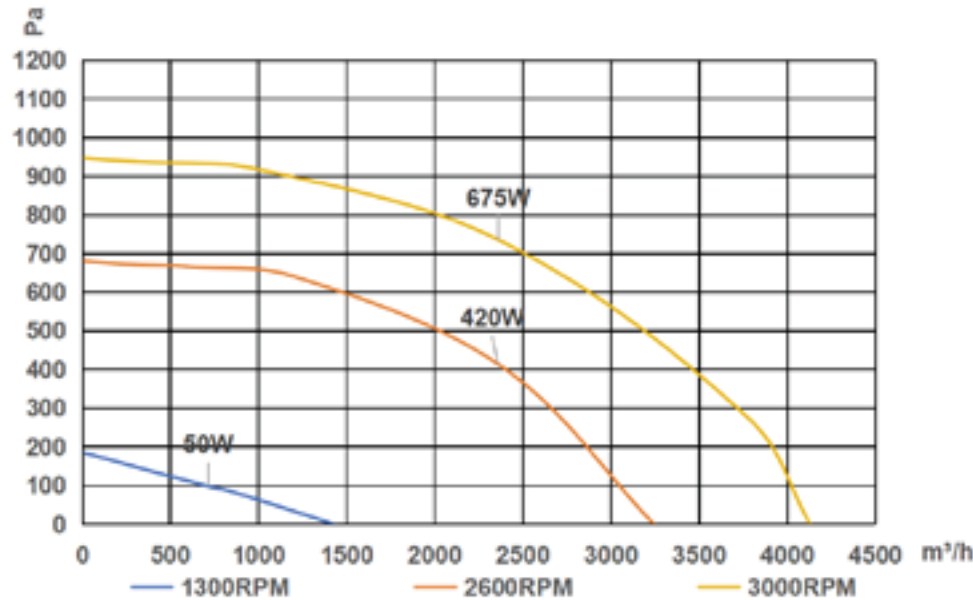

BMP-A315-135AR-04

Inlet Ring: IN-348-59


Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
319	212	135	87	75	2	2	7	42	6

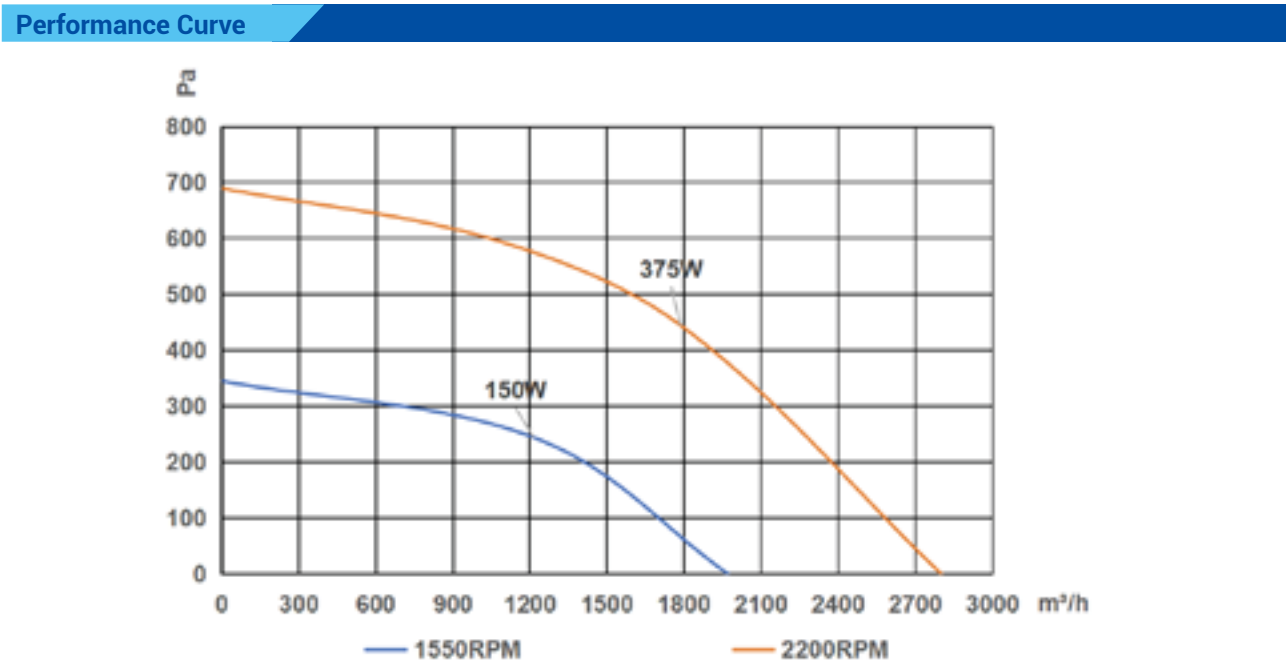

BMP-A315-146AR-05

Inlet Ring: IN-348-59


Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
319	212	146	98	75	2	2	7	42	6

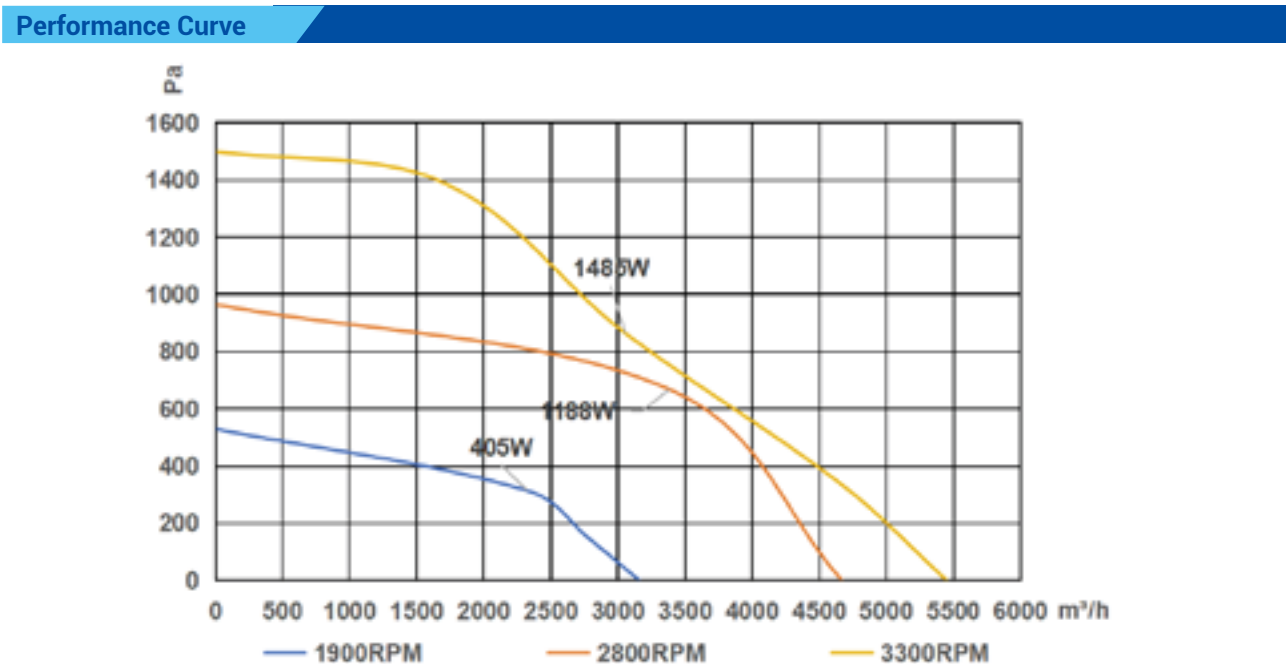

BHP-A355-132AR-01

Inlet Ring: IN-382-65


Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
359	238	132	78	80	2	2	6	25	8

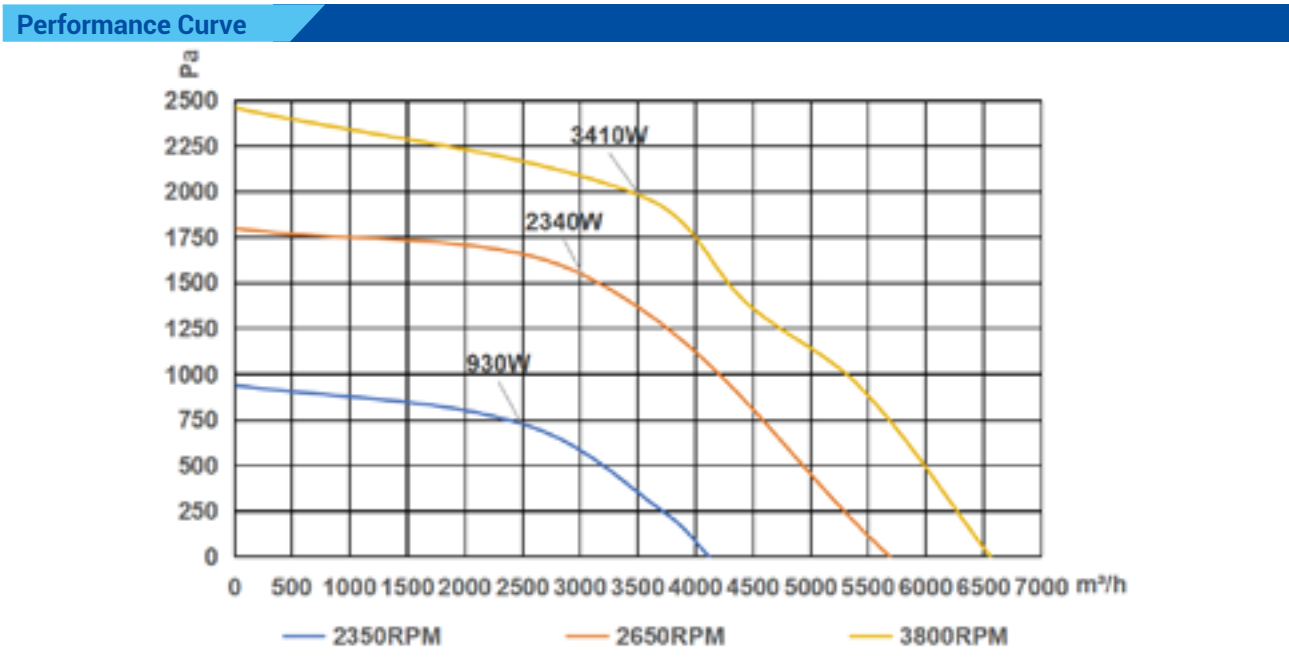

BHP-A355-164AR-02

Inlet Ring: IN-382-65

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
359	238	164	110	80	2	2	6	25	8

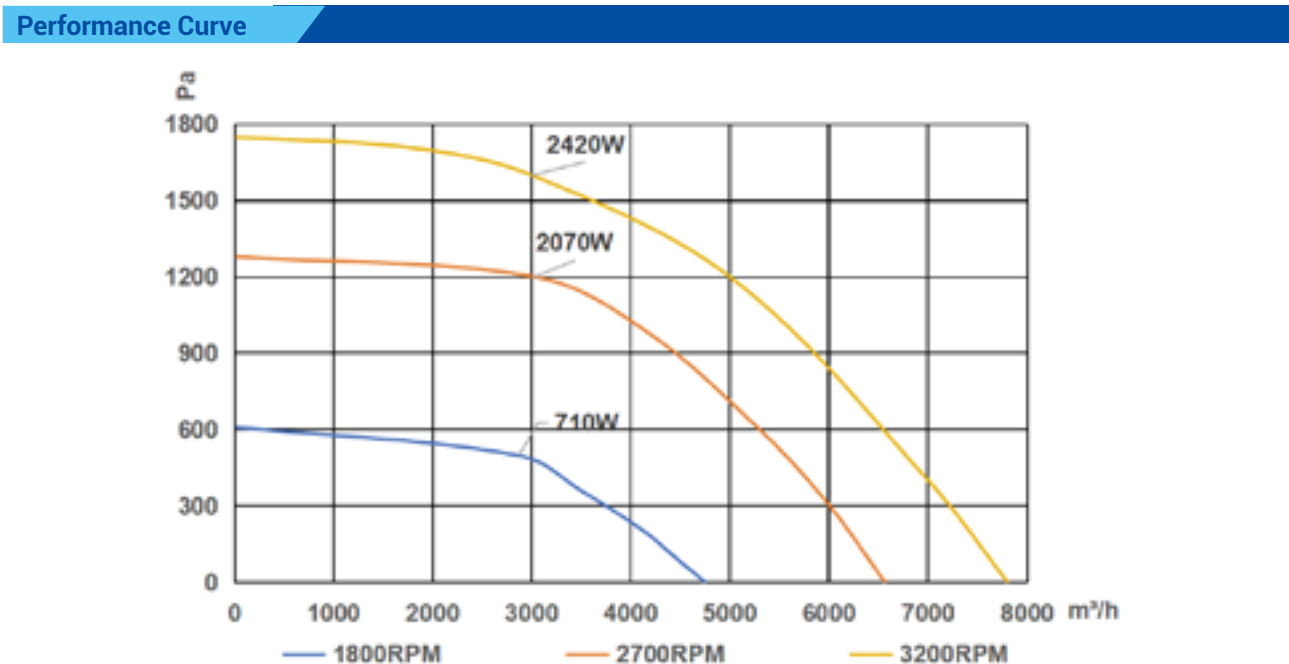


BHP-A400-170AR-01

Inlet Ring: IN-422-76

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
404	267	170	108	80	3	2	6	25	8

Performance Curve

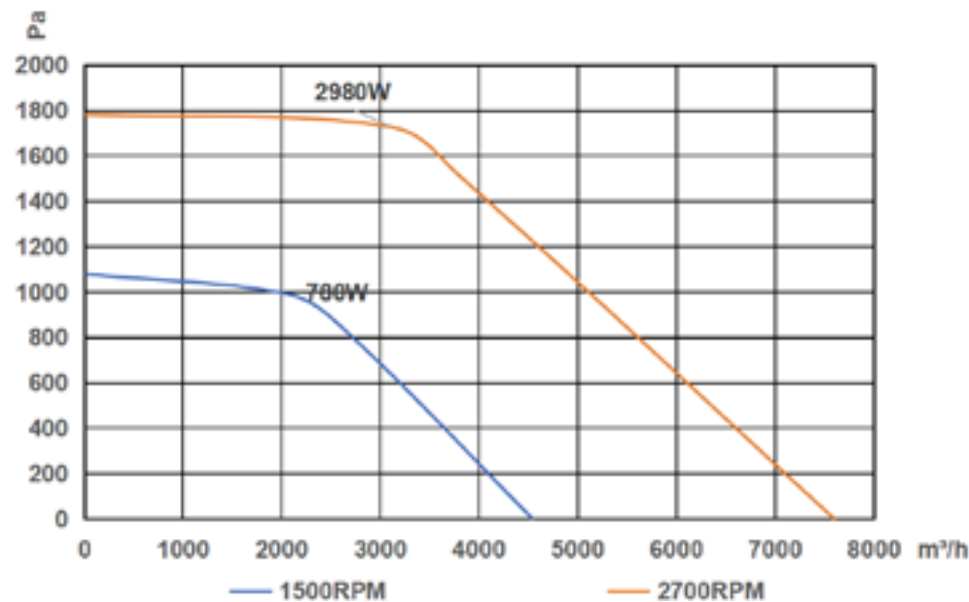


BHP-A400-185AR-02

Inlet Ring: IN-422-76

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
404	267	185	123	80	3	2	6	25	8

Performance Curve

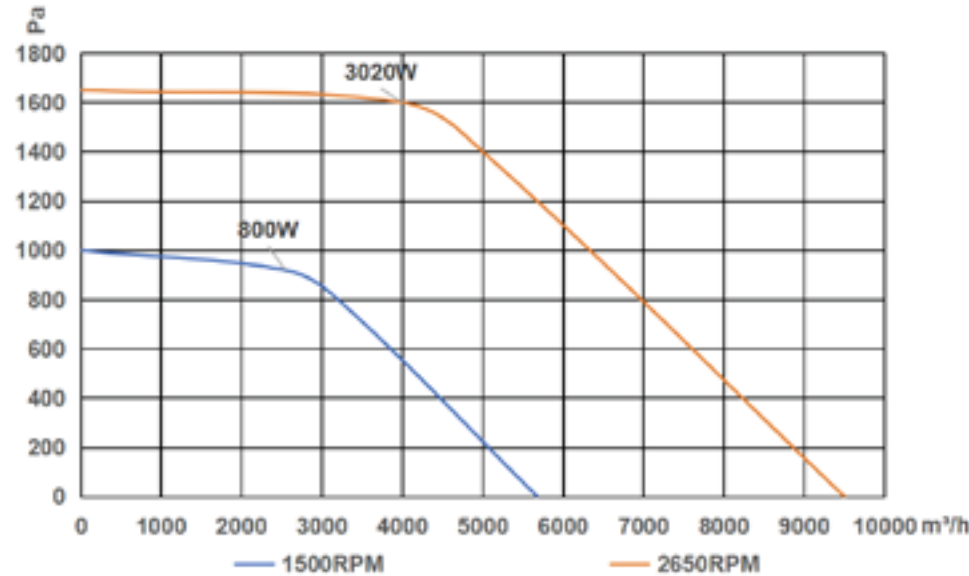


BHP-A400-190AR-03

Inlet Ring: IN-422-76

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
404	267	190	128	80	3	2	6	25	8

Performance Curve

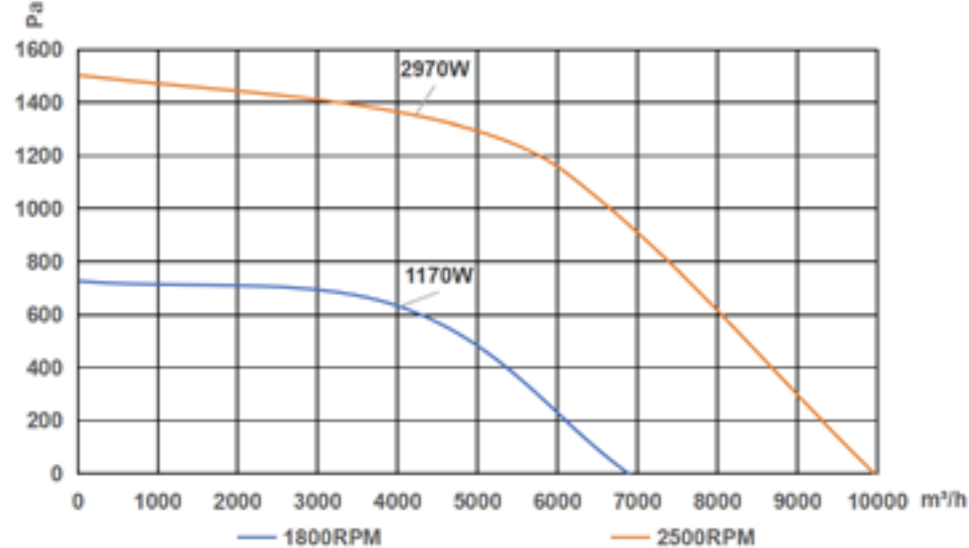


BHP-A450-151AR-01

Inlet Ring: IN-464-81/IN-450-73

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
454	300	151	80	130	3	2.5	13	44	8

Performance Curve

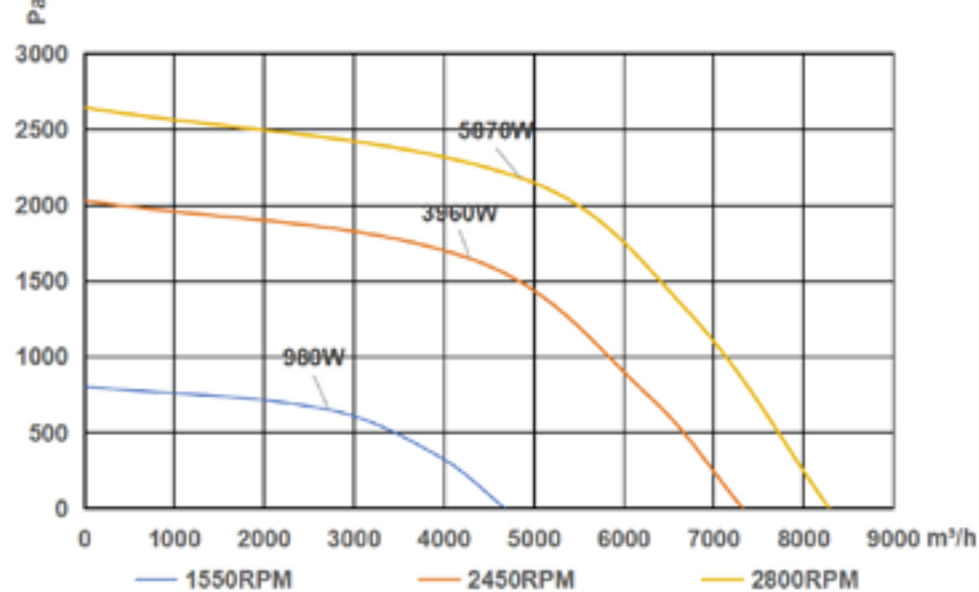


BHP-A450-177AR-02

Inlet Ring: IN-464-81/IN-450-73

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
454	300	177	106	130	3	2.5	13	44	8

Performance Curve

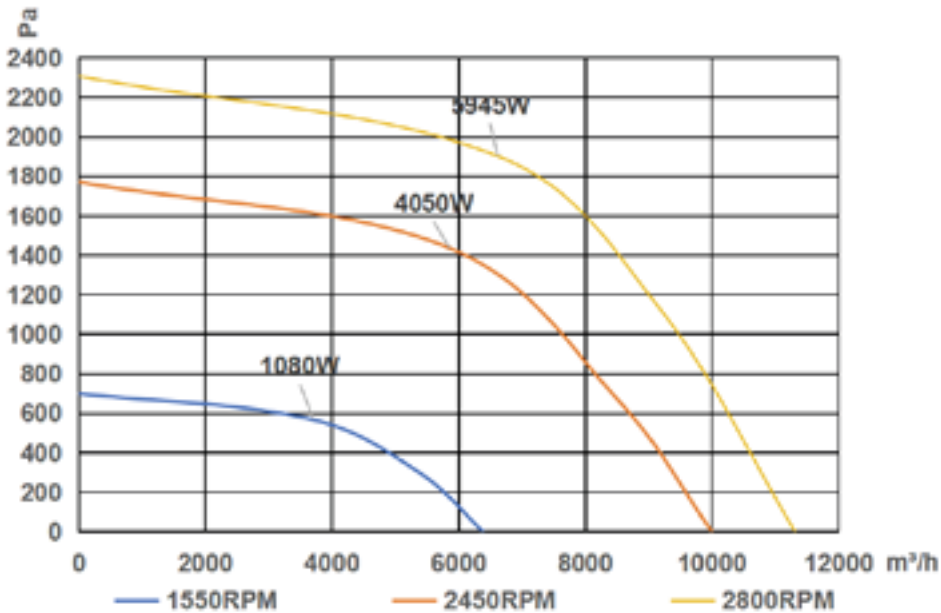


BHP-A450-181AR-03

Inlet Ring: IN-464-81/IN-450-73

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
454	300	181	110	130	3	2.5	13	44	8

Performance Curve

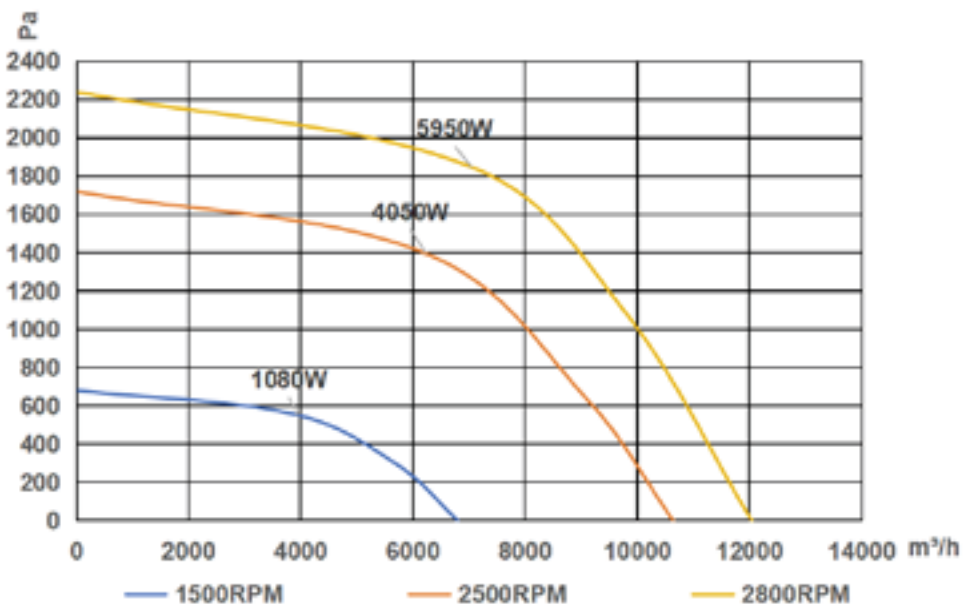


BHP-A450-194AR-04

Inlet Ring: IN-464-81/IN-450-73

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
454	300	194	123	130	3	2.5	13	44	8

Performance Curve

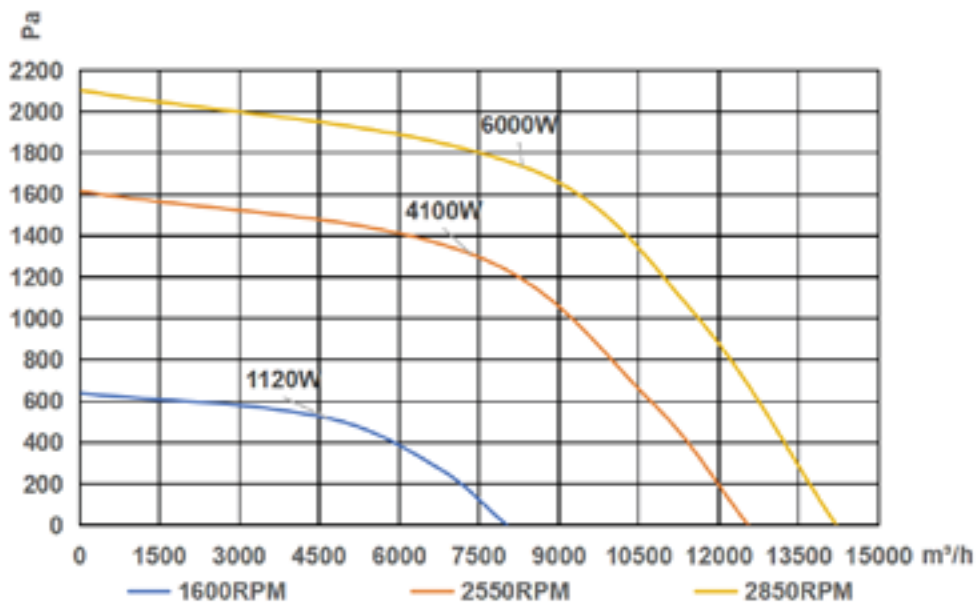


BHP-A450-209AR-05

Inlet Ring: IN-464-81/IN-450-73

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
454	300	209	138	130	3	2.5	13	44	8

Performance Curve

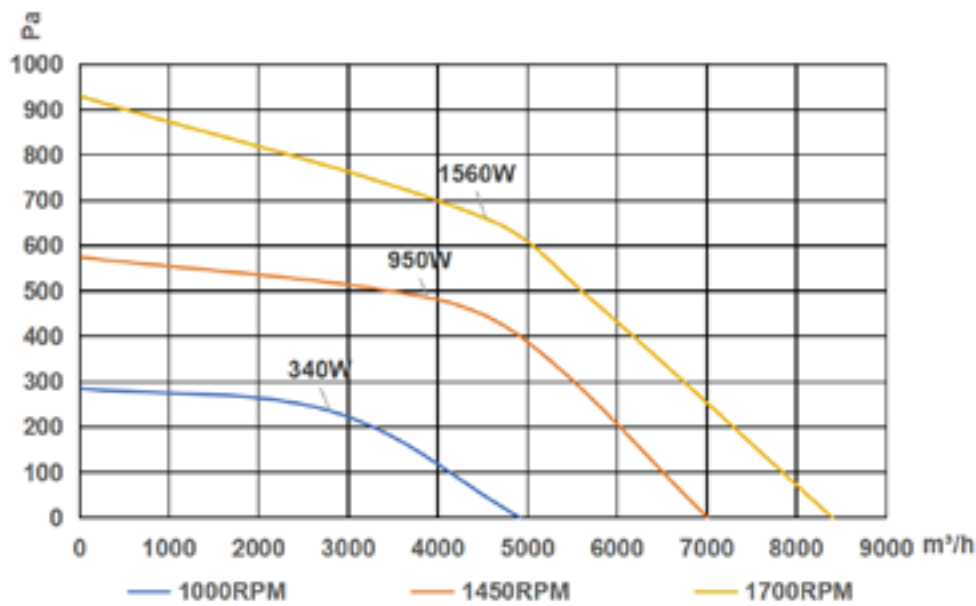


BHP-A500-202AR-01

Inlet Ring: IN-519-97/IN-445-75

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
510	337	202	123	130	3	2.5	13	44	8

Performance Curve

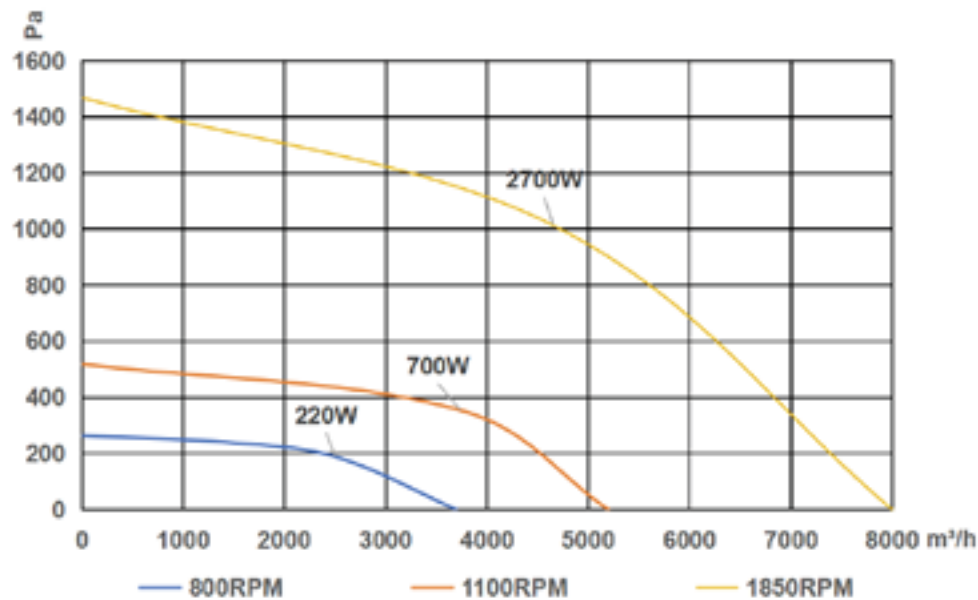


BHP-A500-234AR-02

Inlet Ring: IN-519-97/IN-445-75

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
510	337	234	155	130	3	2.5	13	44	8

Performance Curve

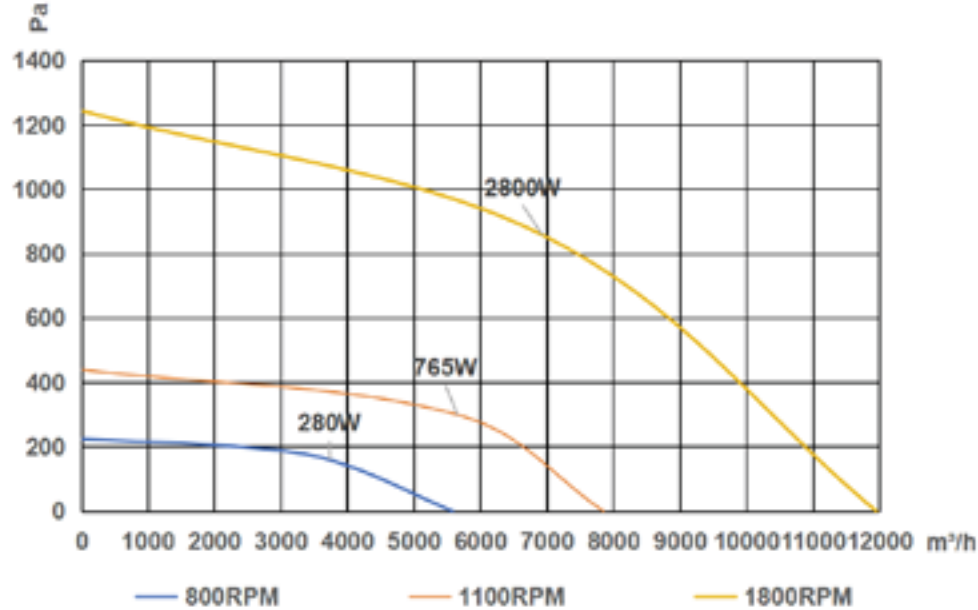


BHP-A500-249AR-03

Inlet Ring: IN-519-97/IN-445-75

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
510	337	249	170	130	3	2.5	13	44	8

Performance Curve

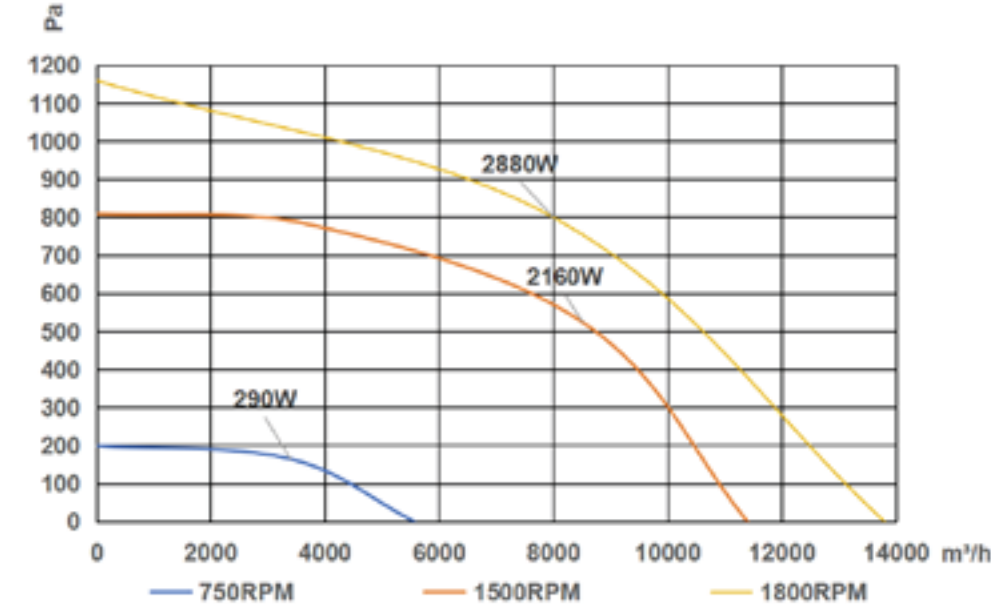


BHP-A560-220AR-01

Inlet Ring: IN-564-105/IN-515-82

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
570	377	220	132	165	3	2.5	16	50	8

Performance Curve

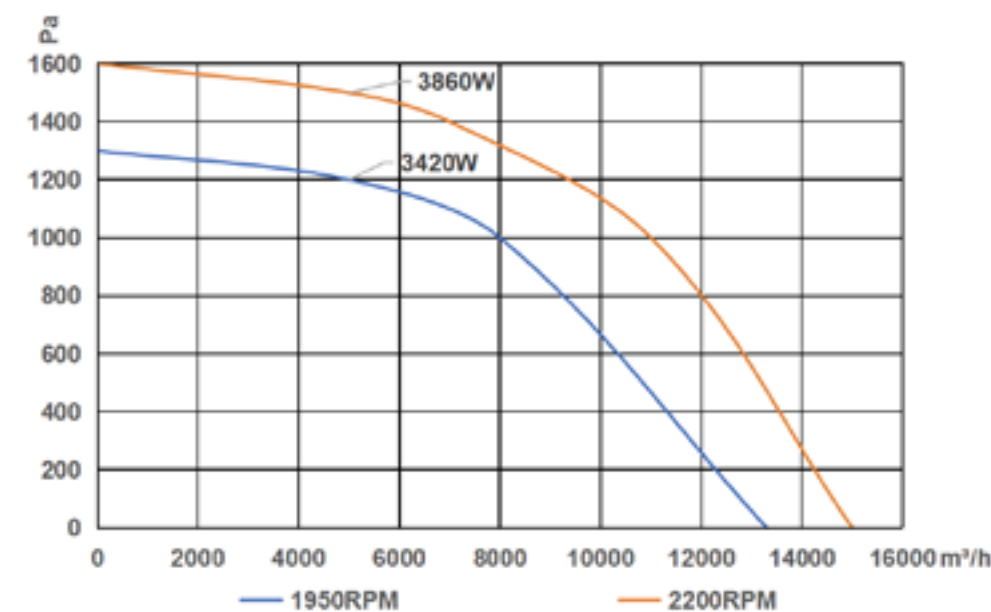


BHP-A560-238AR-02

Inlet Ring: IN-564-105/IN-515-82

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
570	377	238	150	165	3	2.5	16	50	8

Performance Curve

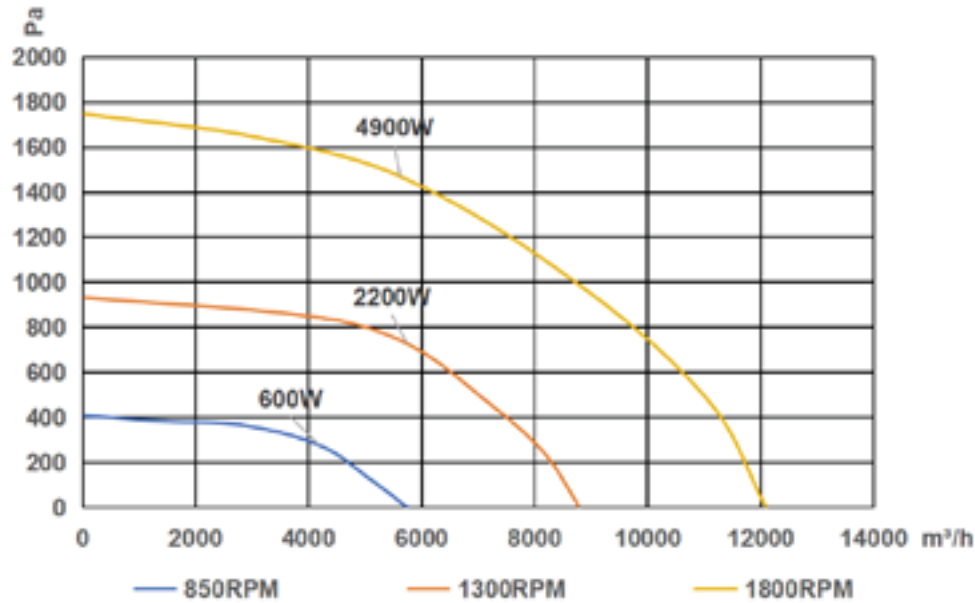


BHP-A560-243AR-03

Inlet Ring: IN-564-105/IN-515-82

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
570	377	243	155	165	3	2.5	16	50	8

Performance Curve

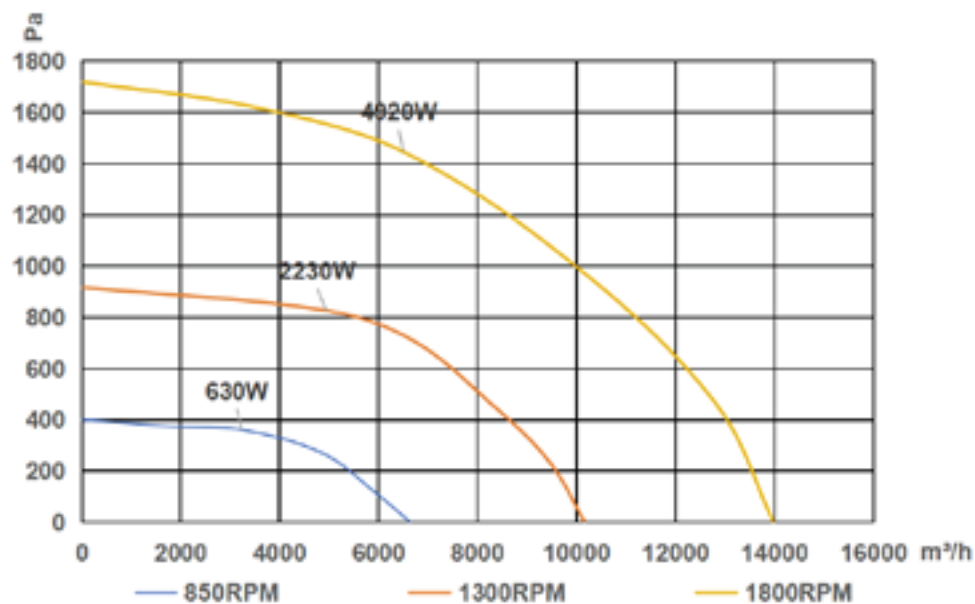


BHP-A560-262AR-04

Inlet Ring: IN-564-105/IN-515-82

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
570	377	262	174	165	3	2.5	16	50	8

Performance Curve

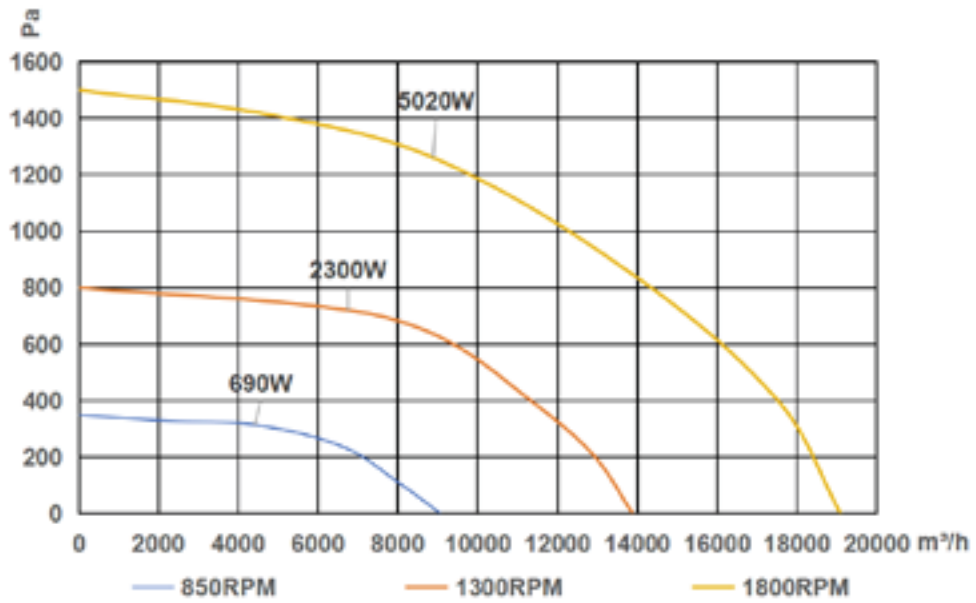


BHP-A630-292AR-01

Inlet Ring: IN-640-114

Technical Parameters									
D1 mm	D2 mm	H mm	C mm	Da mm	THK mm	T mm	E mm	L mm	K mm
640	424	292	195	165	3	2.5	16	50	8

Performance Curve

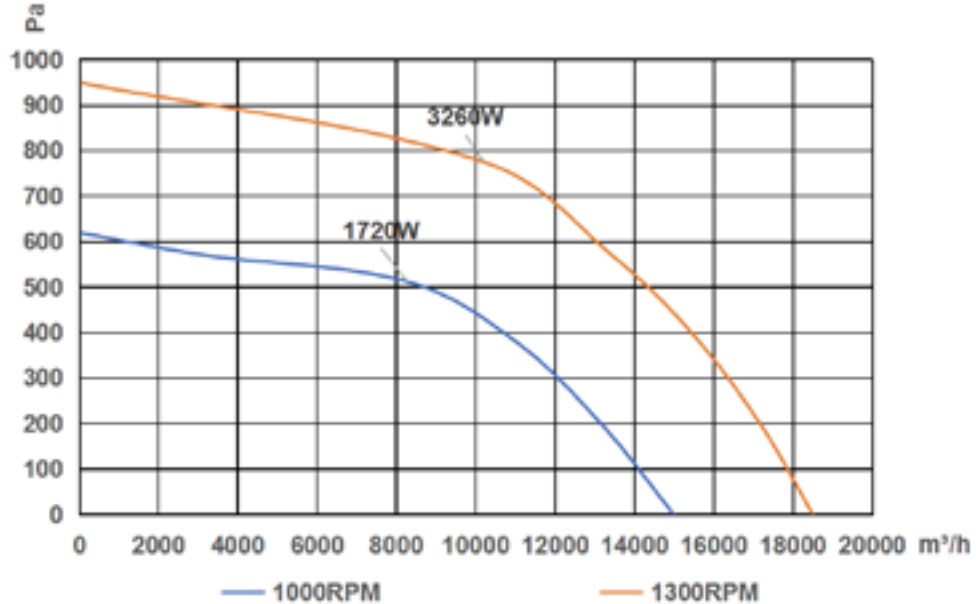

Part 3 Production Capacity

Our Persistence

Serving the market with green products through innovative design and continual improvement in manufacturing processes and customer service has always been of prime importance and a key factor in maintaining Seemtek's position at the forefront of the EC motor and fan market. Whether it's one of the standard products or a custom design, Seemtek is ready to working with you for the optimal solutions.




20+
Years
Experience
Verified by 3000+ Clients in 150+ Countries

30+
R&D
Engineers
Driving Cutting-edge Innovation with Expertise

11
Test
Producers
Comprehensive Quality Assurance Through
Rigorous Testing

R&D Capability

Through 20 years focused on electromagnetic technology and fluid design, Seemtek has always firmly believed that research and innovation are crucial to its competitiveness, which is why it focuses on constantly building and enhancing its R&D division.

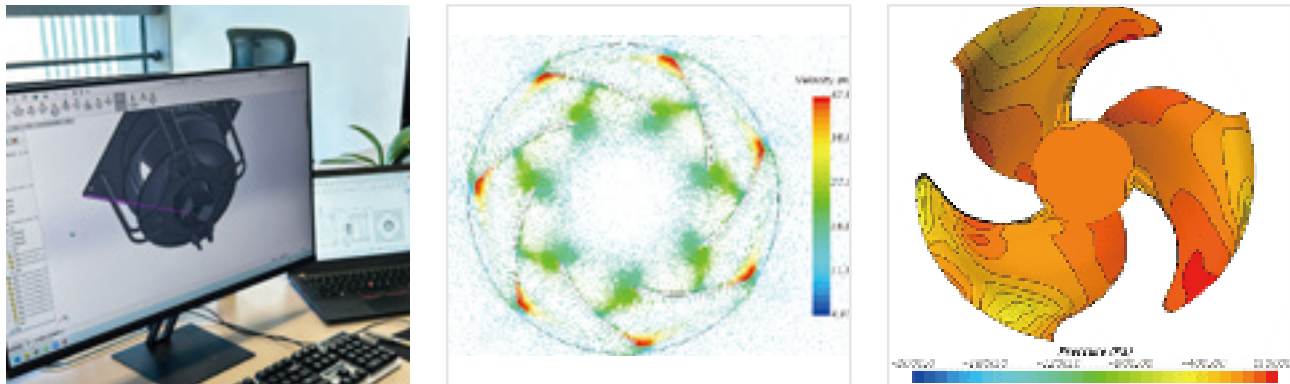

We now have an R&D team of over 30 members. From initial demands to final results, our R&D team always remain by our customers' side, helping them find the most effective solutions to elevate the value of their equipment.

Based on two decades of experience in the fan industry, we have found that appropriate fan selection brings tremendous value to the entire machinery or electromechanical system, and can offer our clients optimal fan selection advice to maximize the effectiveness of their equipment.

Reliability Testing




Noise Test

This test verifies the low noise performance of the fan at high speeds and high static pressure, analyzing noise through FFT noise spectrum analysis. The optimized flow path and blade design effectively reduce noise levels, improving the overall comfort of the operating environment. It minimizes the transmission of low-frequency noise over long distances in ventilation ducts.

Airflow Test

This test measures the airflow output and fan efficiency under different speeds and static pressure resistance. The optimized impeller design and three-dimensional blade structure of the Achelous fan ensure efficient airflow output and adaptability to various working conditions.

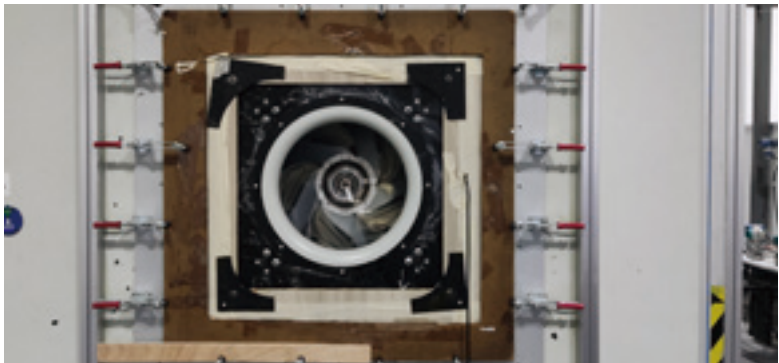

Constant Temperature & Humidity Test

This test validates the fan's performance stability in environments with varying temperature and humidity, particularly in corrosion and moisture-resistant conditions. A 21-day continuous operation at 75°C and 95% humidity is used to verify the fan's long-term stability.



Salt Mist Test

Salt mist test assesses the corrosion resistance of the Achelous fan, especially under C5-grade corrosion conditions. It ensures long-term performance in salty environments, providing protective measures for aluminum-magnesium alloy impellers against corrosion.



Temperature Shock Test

This test evaluates the operational stability of the fan under rapid temperature changes. The high-temperature materials and precise control system of the Achelous fan ensure that performance is not affected by thermal expansion and contraction under extreme temperature variations.



High-Speed Lifespan Test

This test focuses on verifying the strength and stability of the Achelous fan's impeller under long-term high-speed operation and ensures that the impeller remains free from deformation or damage under high-speed conditions, ensuring the fan's safety and reliability, especially in applications requiring high-efficiency airflow output.



Outdoor Lifespan Test

This test validates the fan's durability in harsh outdoor environments. The Achelous fan's IP55/IP56 protection rating, along with its high-temperature and corrosion-resistant design, ensures reliable long-term operation outdoors.



Indoor Lifespan Test


This test evaluates the long-term lifespan of the fan in standard indoor environments, ensuring that the Achelous fan has a long life with low maintenance requirements. The test is particularly focused on its performance in common applications such as AHU and FFU systems.




High Temperature Test

This test validates the reliable operation of the Achelous fan in high-temperature environments, especially under high static pressure and efficient electromagnetic design conditions. It ensures the stability of the impeller material at extreme temperatures, extending the fan's lifespan.

Factory Workshop

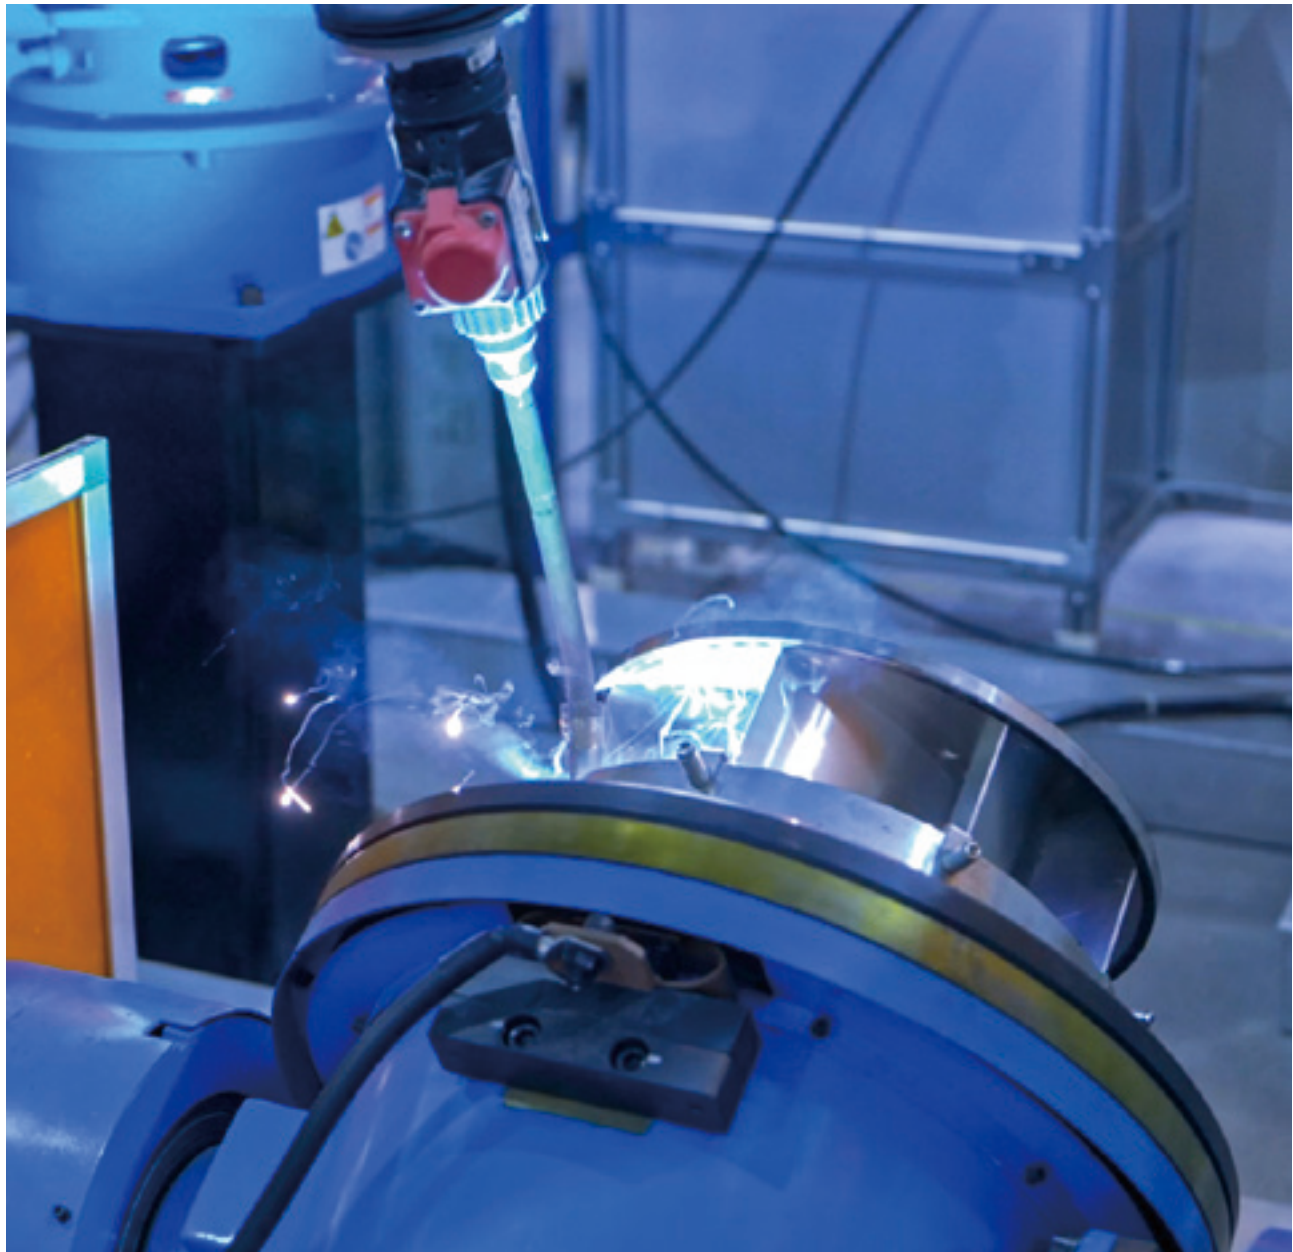

Seemtek currently has various fully automated production lines in use, producing millions of high-performance axial fans and centrifugal fans every year. These production lines ensure the highest quality and efficiency, meeting the rigorous demands of our global customers. With the expertise and dedication of our skilled workforce and advanced manufacturing techniques allows us to deliver superior products that set industry standards for performance and reliability.

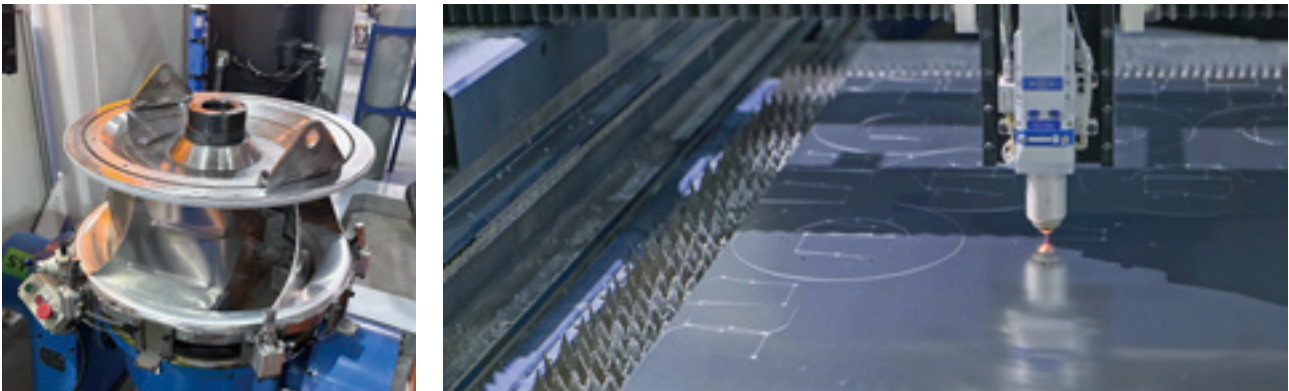

SMT49C2410E-33

 www.seemtek.com

 +86 512 6922 3858

 sales@seemtek.com

 No.888 Chengyang Road,Xiangcheng District, Suzhou, Jiangsu, China 215131