

Axial Fan




Impeller Material: Sheet steel
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A200-A9-0	220	50/60	0.40	55	3000	940	60

Performance Curve

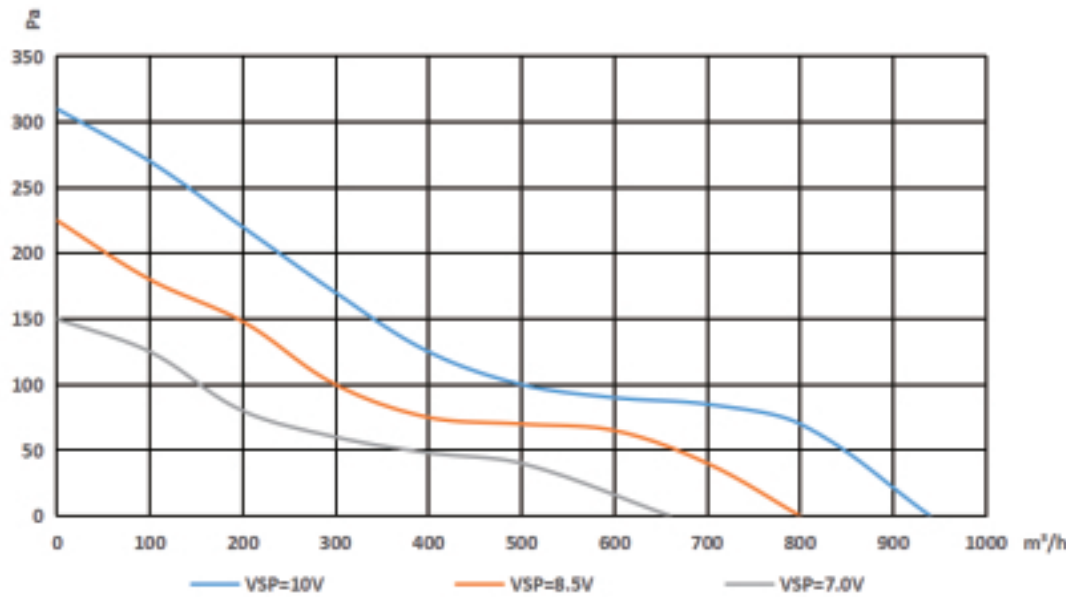

Dimensions

Suction	A3E-2A200-A9-03
Blowing	A3E-2A200-A9-04

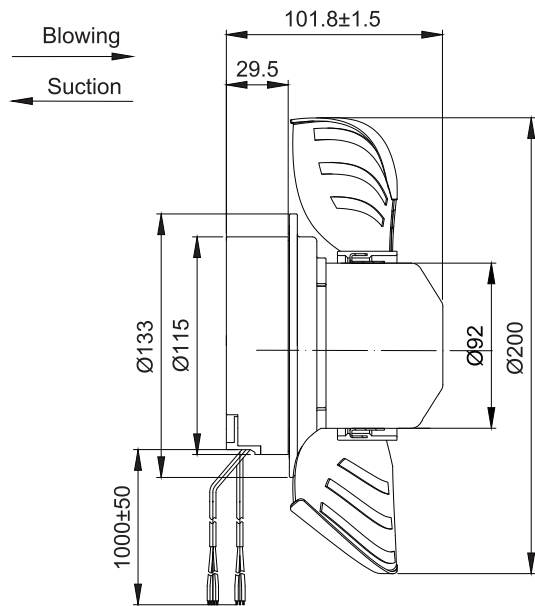
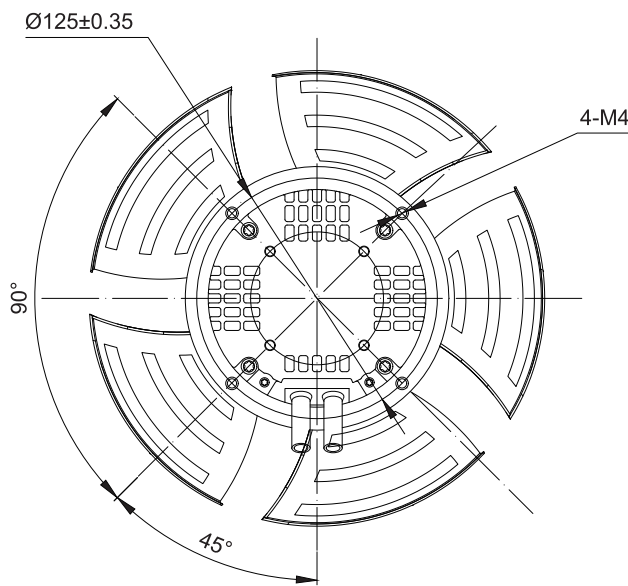


Axial Fan

Dimensions

Suction	G3E-2A200-A9-03
Blowing	G3E-2A200-A9-04



With wall concave net cover grill

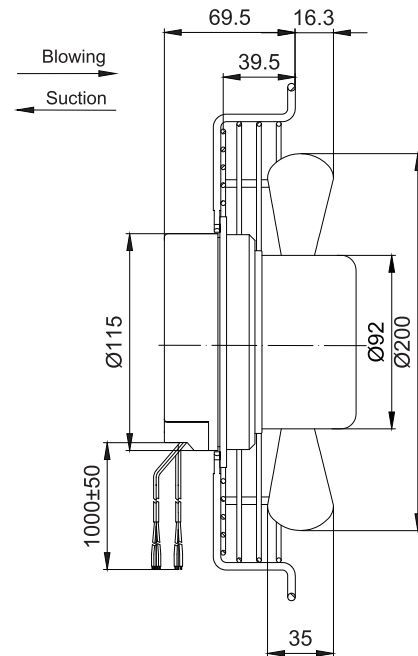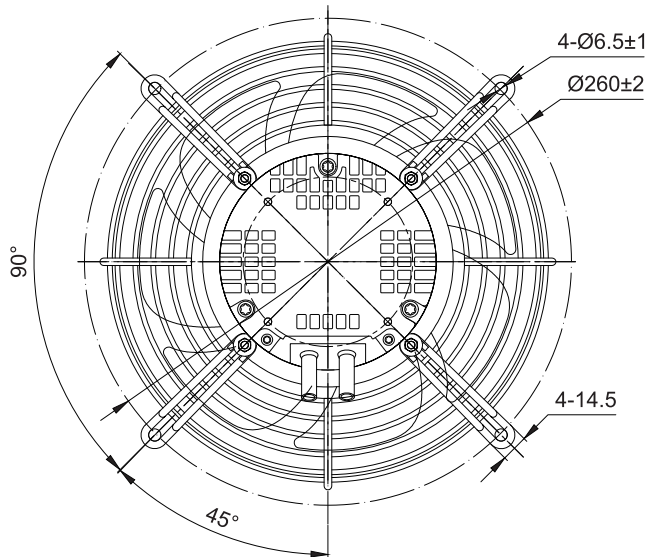

Dimensions

Suction	W3E-2A200-A9-03
Blowing	W3E-2A200-A9-04

With wind guide panel

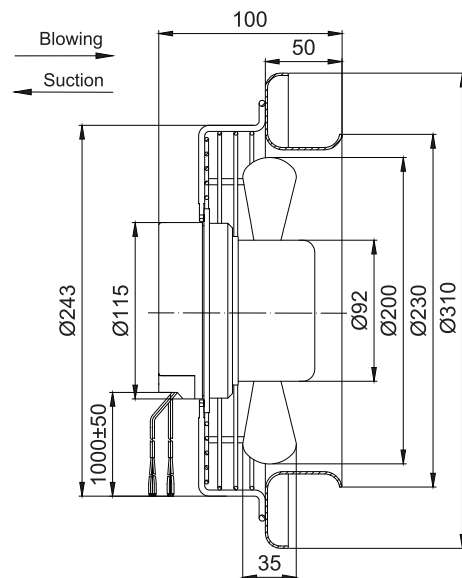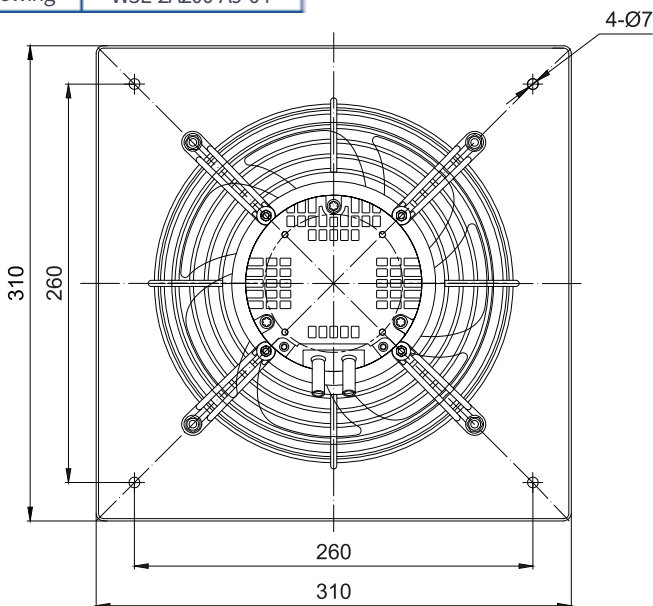

Axial Fan



Impeller Material: Plastic

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 25 °C ~ +60 °C


Insulation class: B



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A250-A9-0	220	50/60	1.40	200	3150	1790	69

Performance Curve

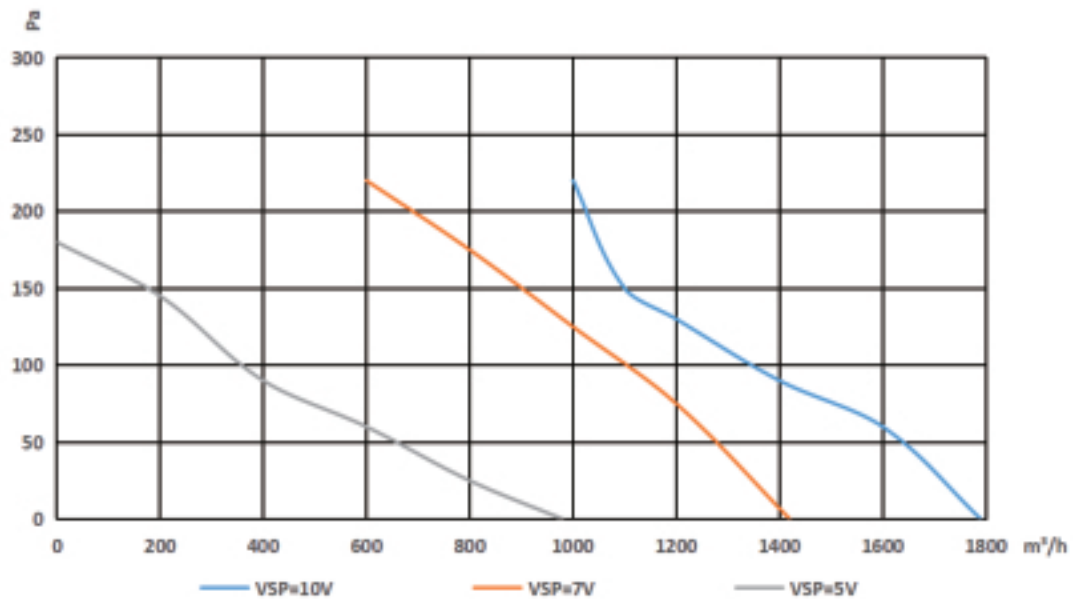

Dimensions

Suction	A3E-2A250-A9-01
Blowing	A3E-2A250-A9-02

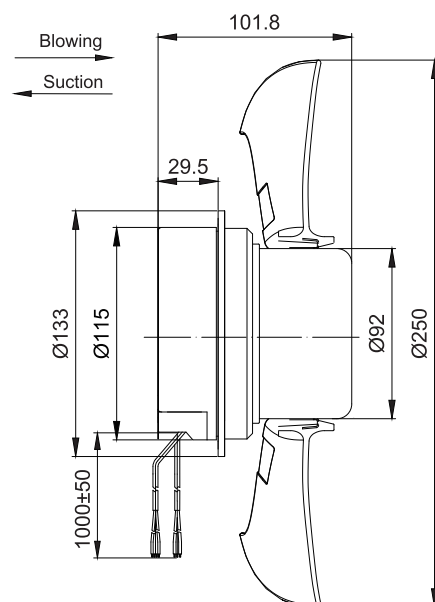
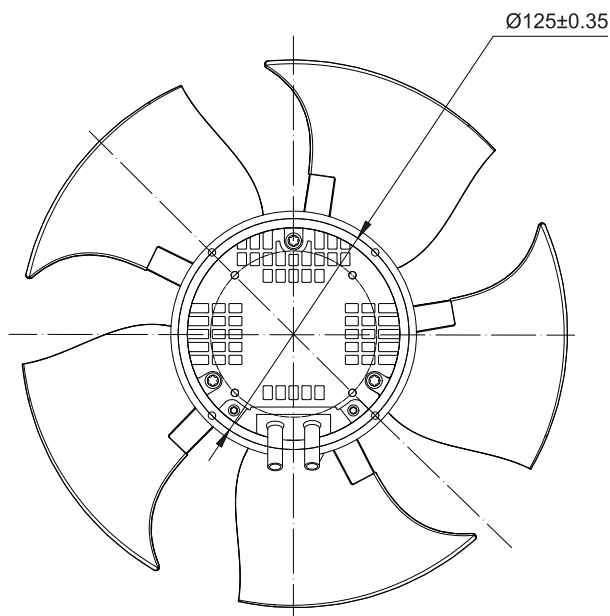


Axial Fan

Dimensions

Suction	G3E-2A250-A9-01
Blowing	G3E-2A250-A9-02



With wall concave net cover grill

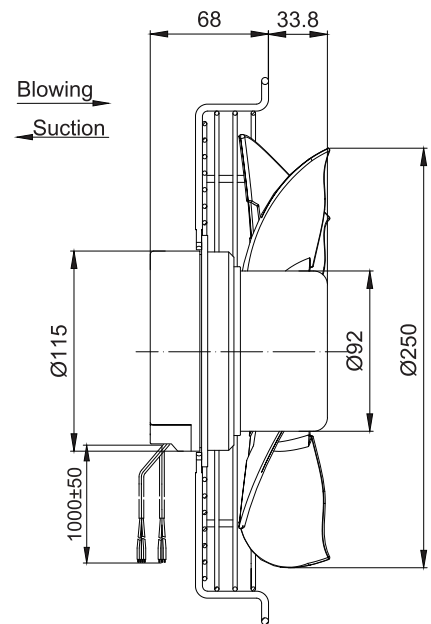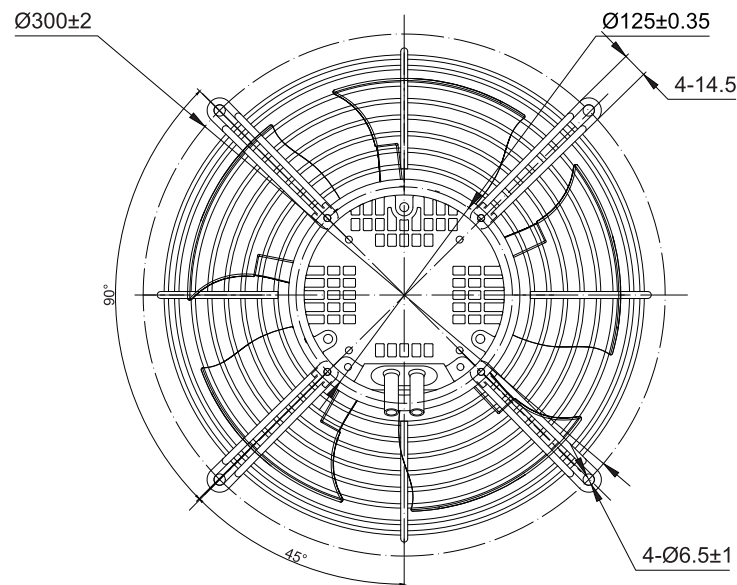

Dimensions

Suction	W3E-2A250-A9-01
Blowing	W3E-2A250-A9-02

With wind guide panel

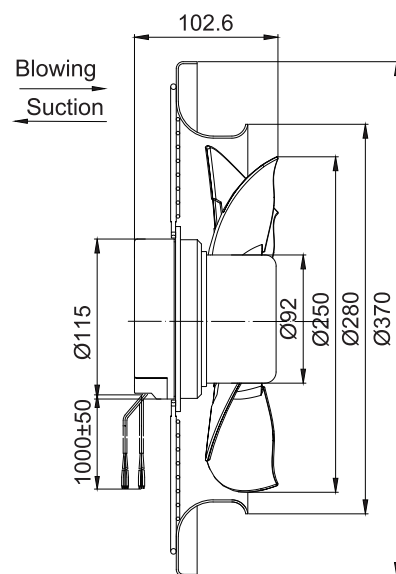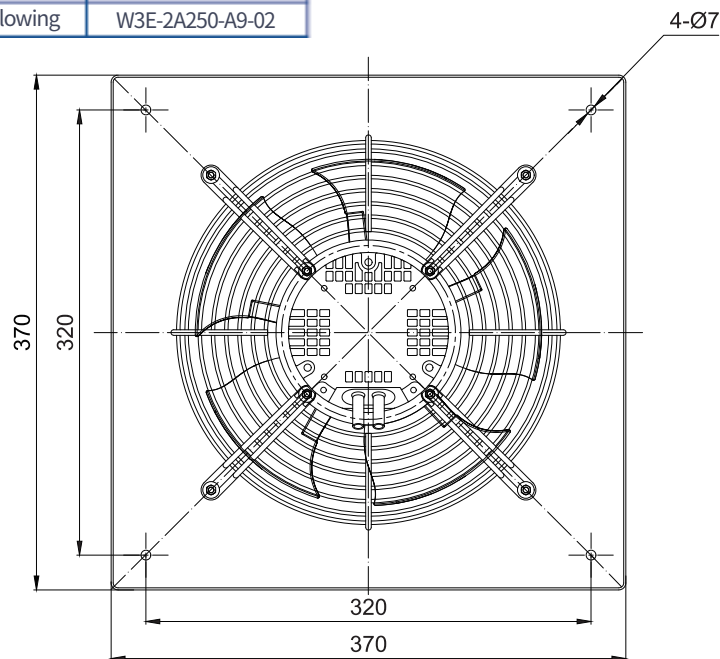

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A300-A7-0	220	50/60	0.57	80	1400	1900	63

Performance Curve

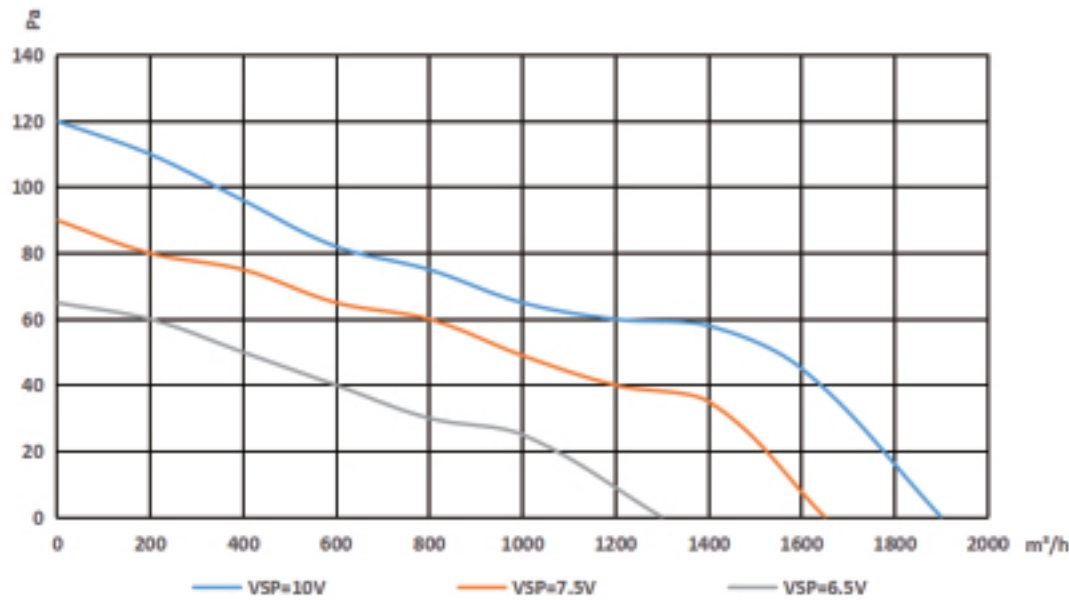

Dimensions

Suction	A3E-2A300-A7-01
Blowing	A3E-2A300-A7-02

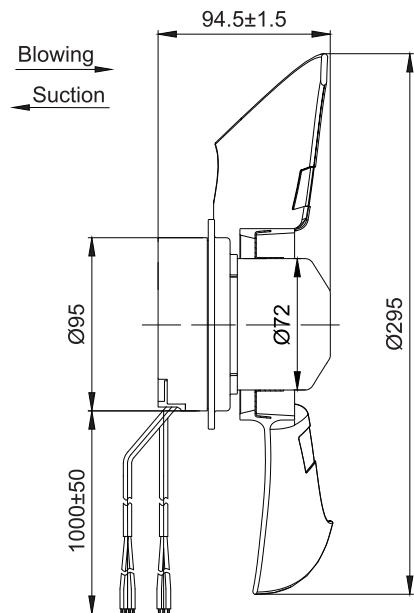
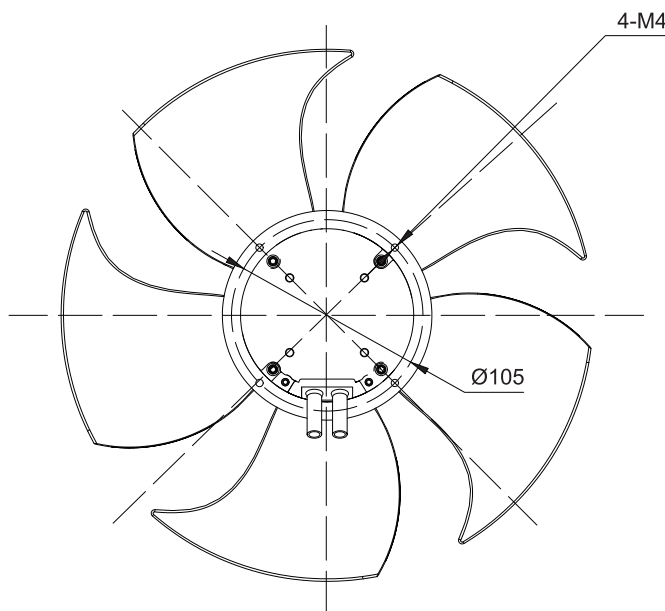


Axial Fan

Dimensions

With wall concave net cover grill



Suction	G3E-2A300-A7-01
Blowing	G3E-2A300-A7-02

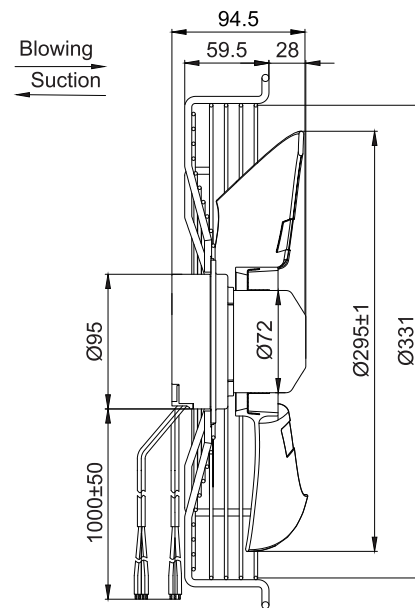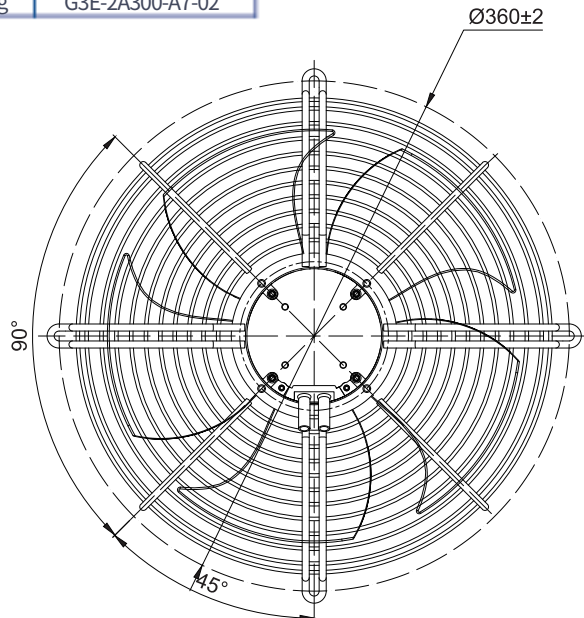

Dimensions

With wind guide panel

Suction	W3E-2A300-A7-01
Blowing	W3E-2A300-A7-02

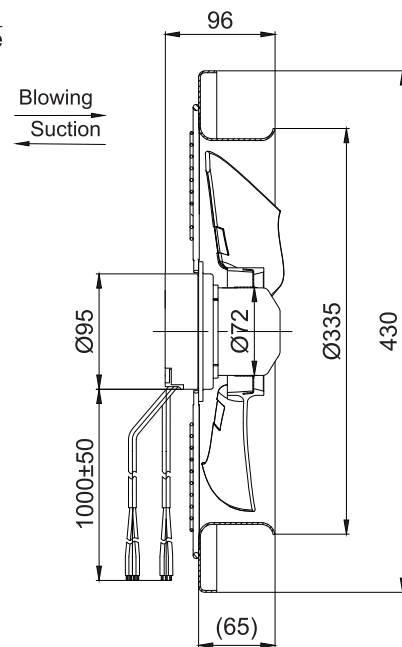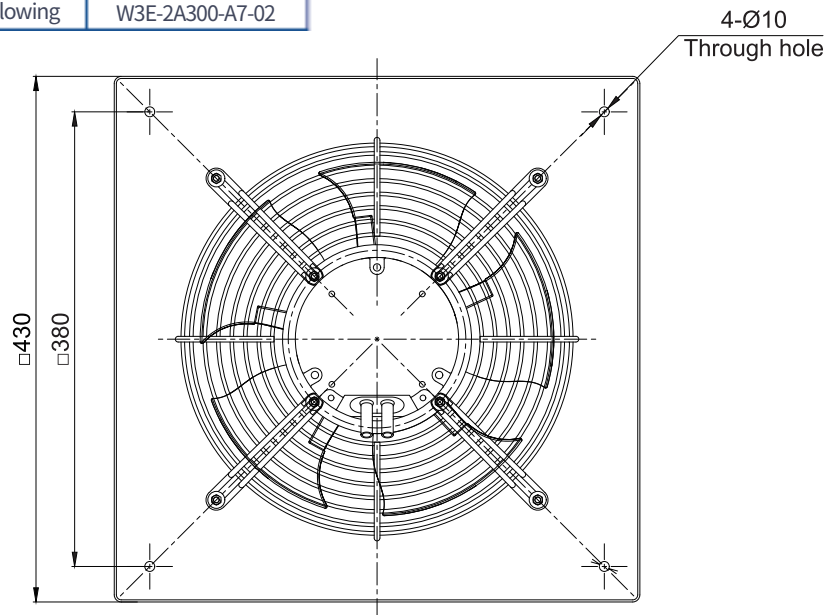

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B





Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A300-A9-0	220	50/60	1.20	165	2100	2380	65

Performance Curve

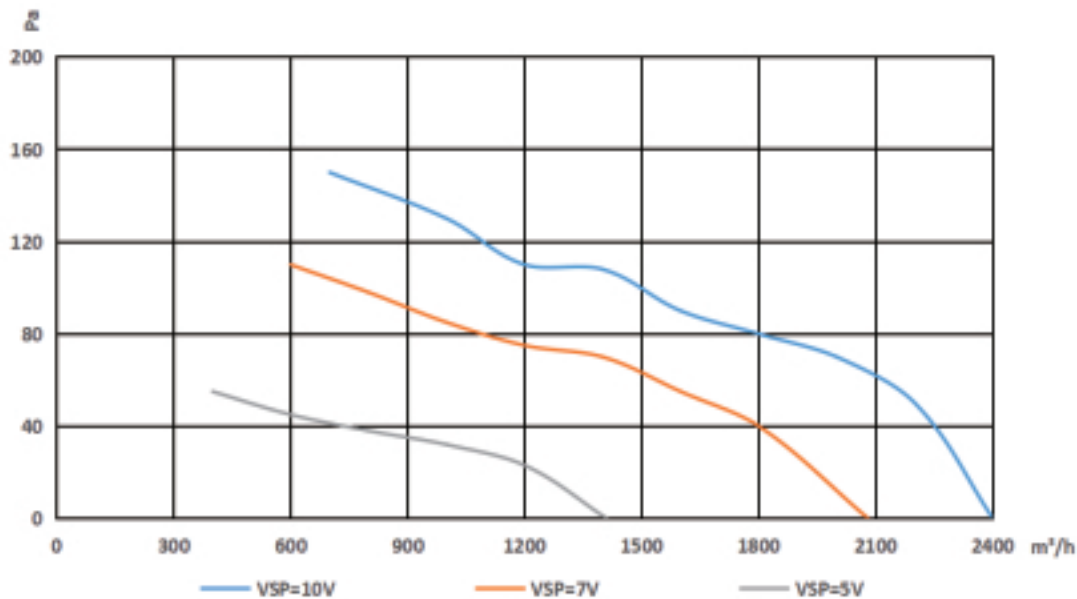

Dimensions

Suction	A3E-2A300-A9-03
Blowing	A3E-2A300-A9-04

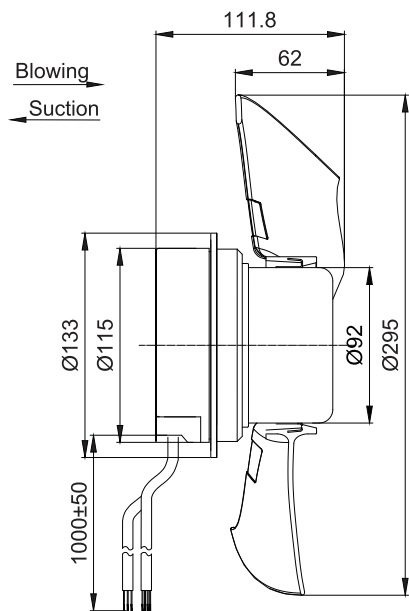
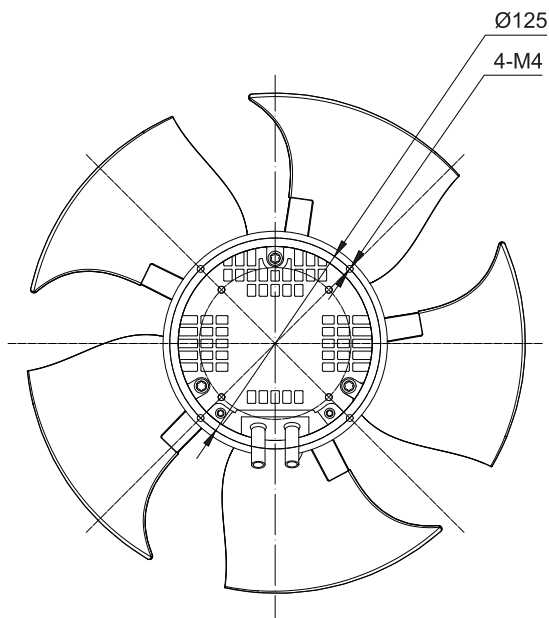


Axial Fan

Dimensions

Suction	G3E-2A300-A9-03
Blowing	G3E-2A300-A9-04



With wall concave net cover grill

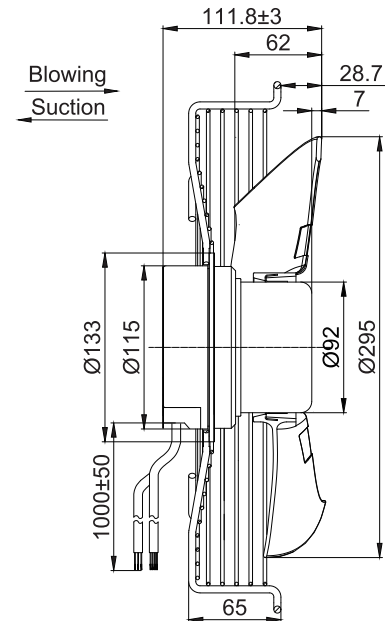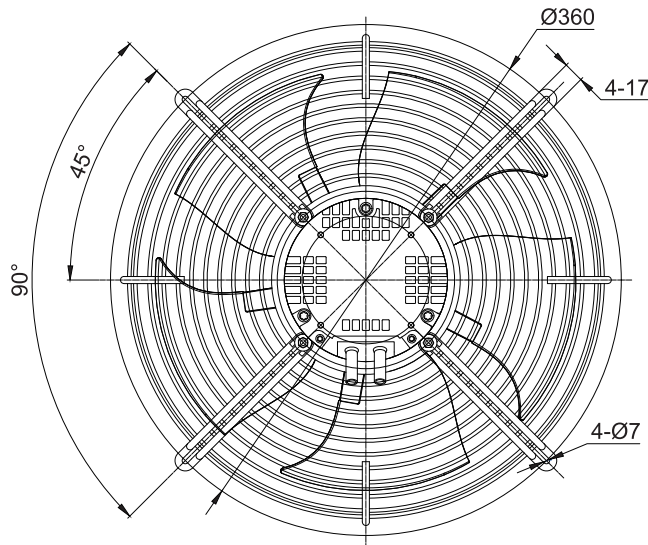

Dimensions

Suction	W3E-2A300-A9-03
Blowing	W3E-2A300-A9-04

With wind guide panel

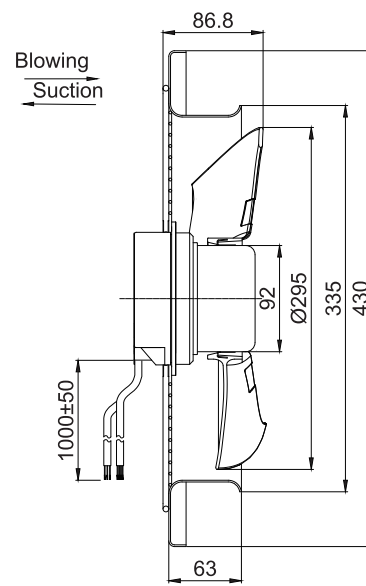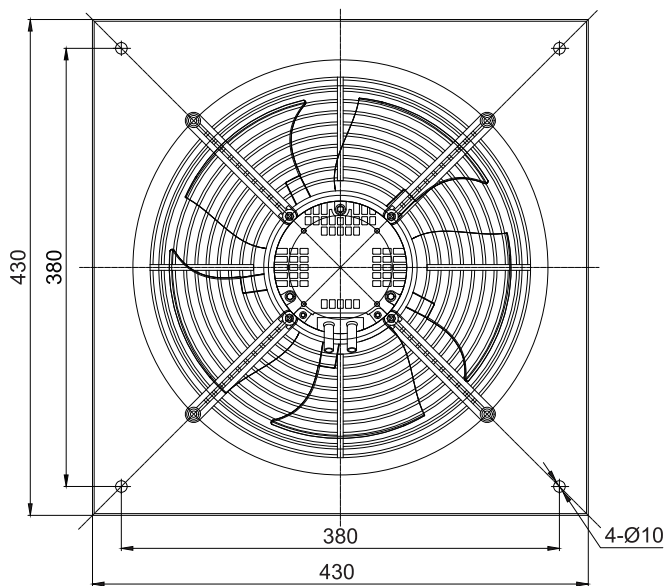

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B





Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A350-A7-0	220	50/60	0.65	90	1380	2830	57

Performance Curve

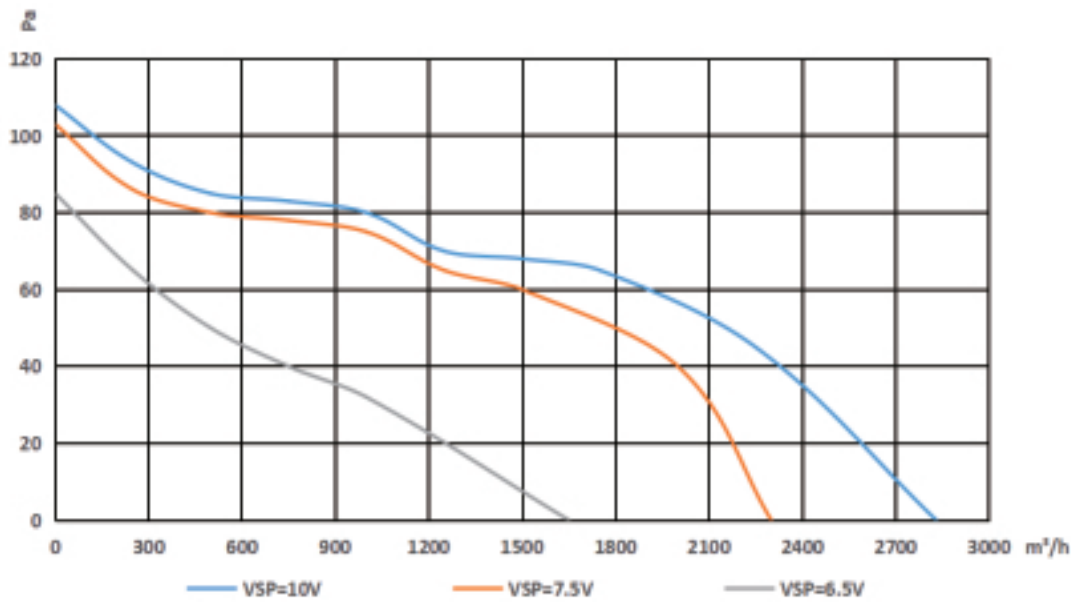

Dimensions		With wall concave net cover grill
Blowing	G3E-2A350-A7-01	

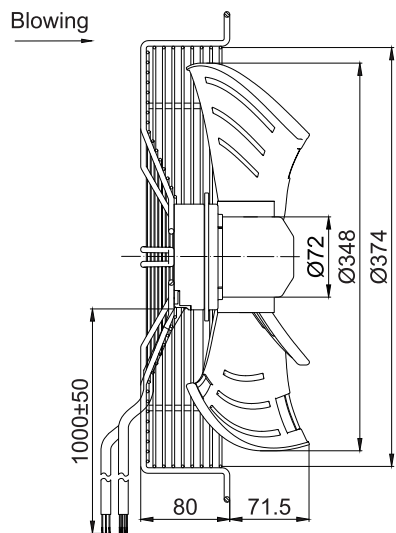
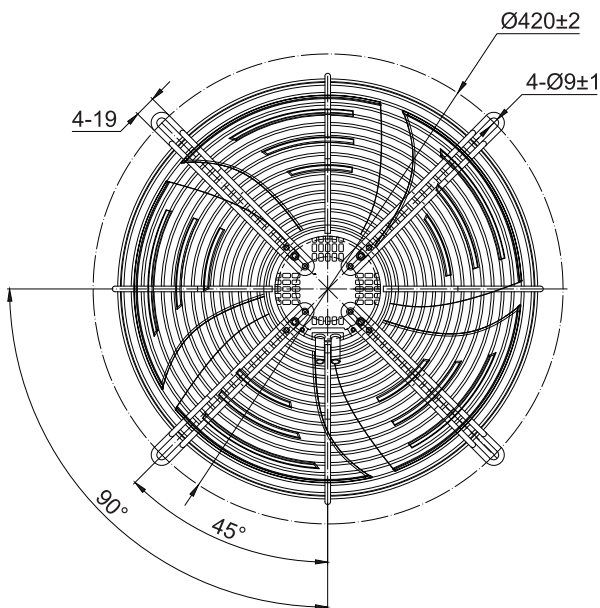


Axial Fan

Dimensions

With wind guide panel

Blowing W3E-2A350-A7-02

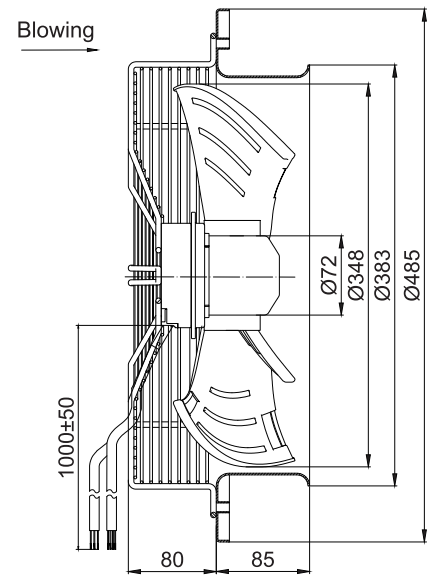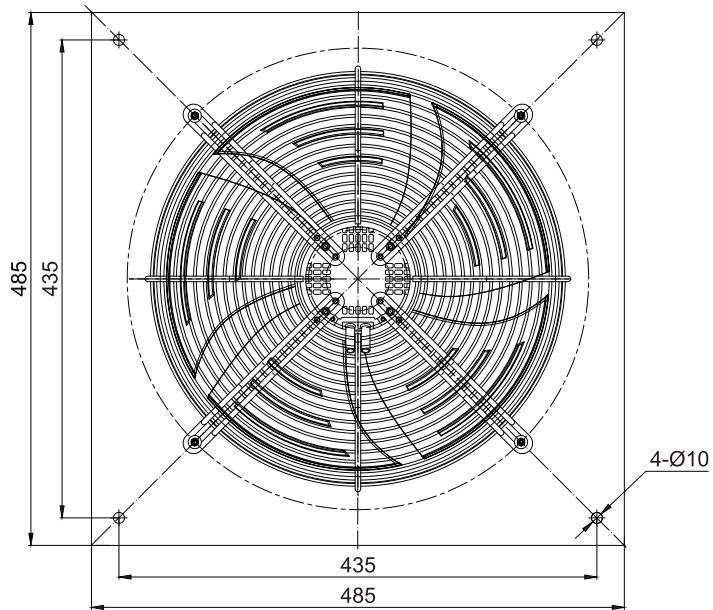

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A350-A9-0	220	50/60	1.10	165	1550	3300	67

Performance Curve

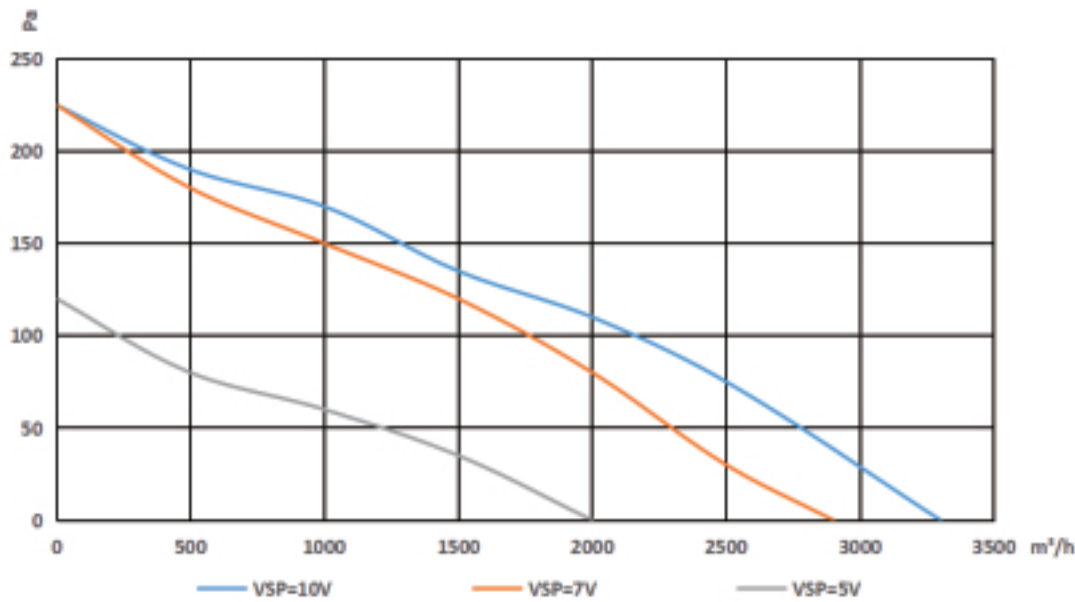

Dimensions


Suction	A3E-2A350-A9-03
Blowing	A3E-2A350-A9-04

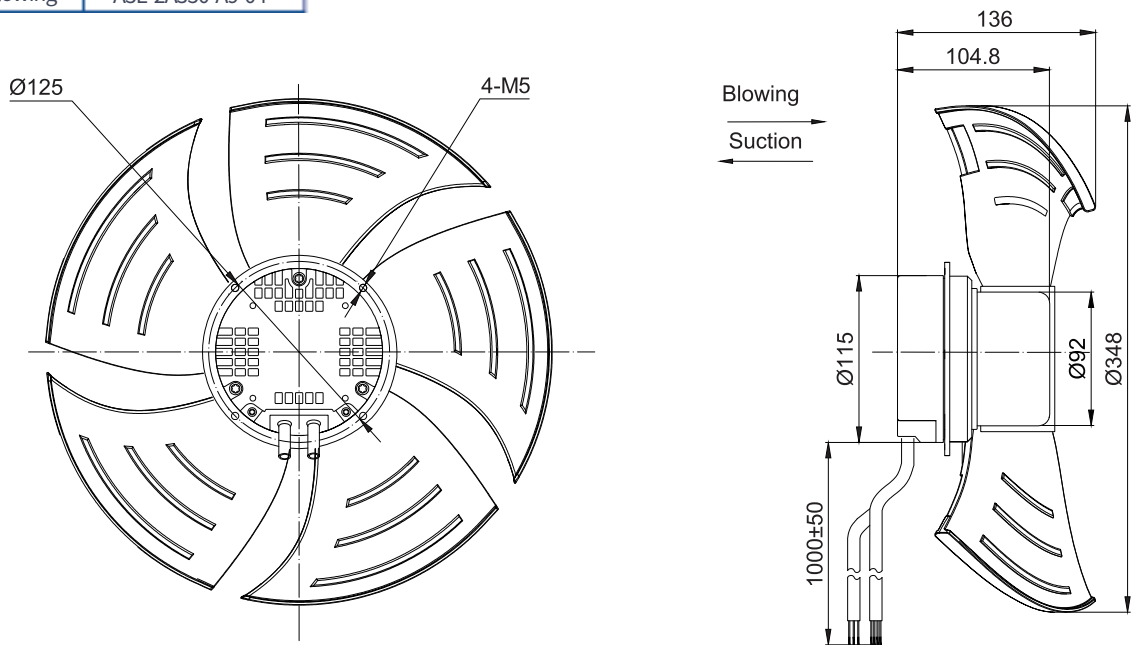


Axial Fan

Dimensions

Suction	G3E-2A350-A9-03
Blowing	G3E-2A350-A9-04

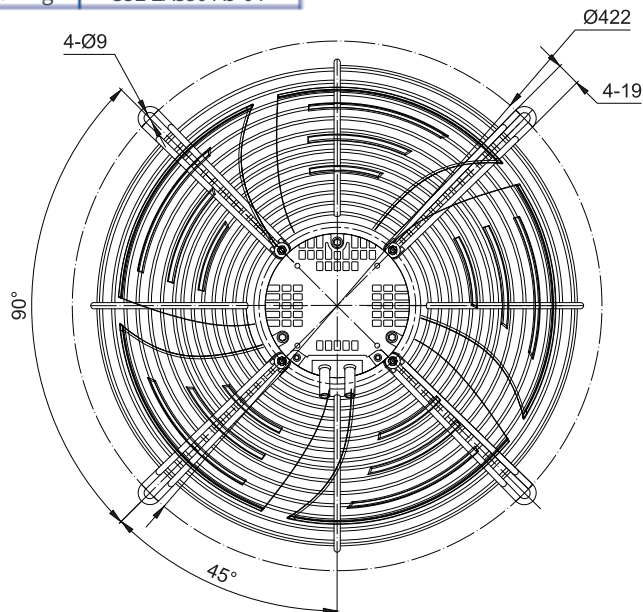


With wall concave net cover grill

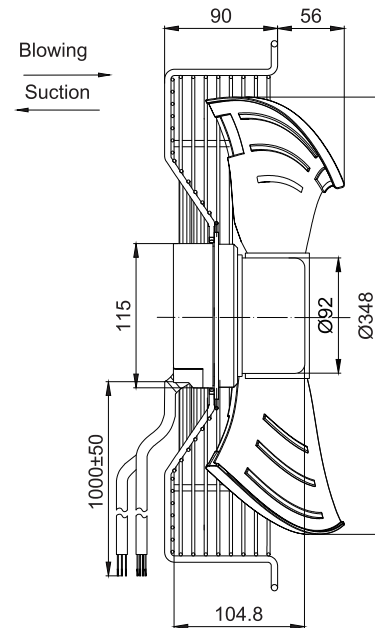


Dimensions

Suction	W3E-2A350-A9-03
Blowing	W3E-2A350-A9-04

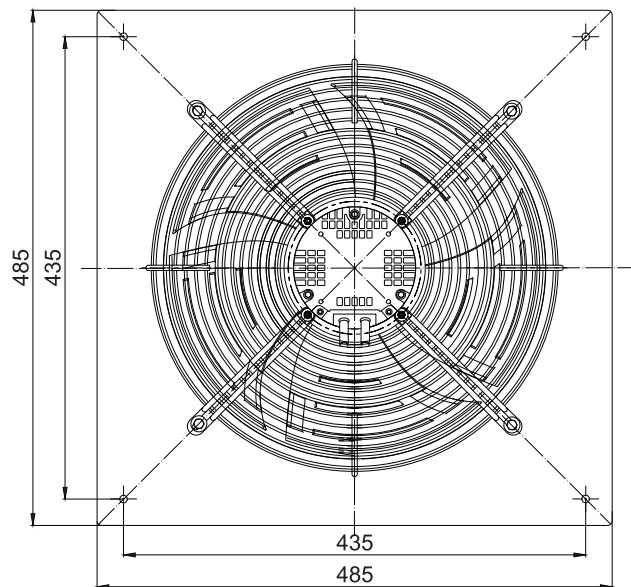

With wind guide panel

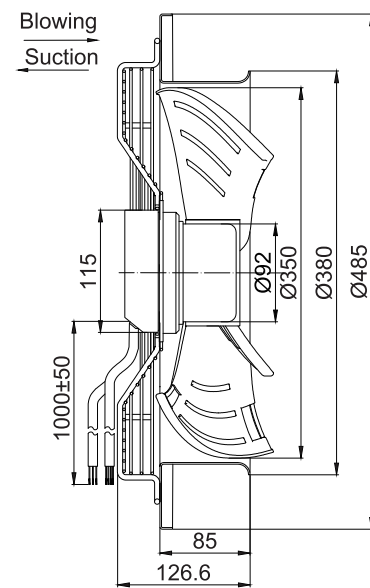

Axial Fan




Impeller Material: Sheet steel
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A400-A2-0	220	50/60	1.90	400	1700	5700	69

Performance Curve

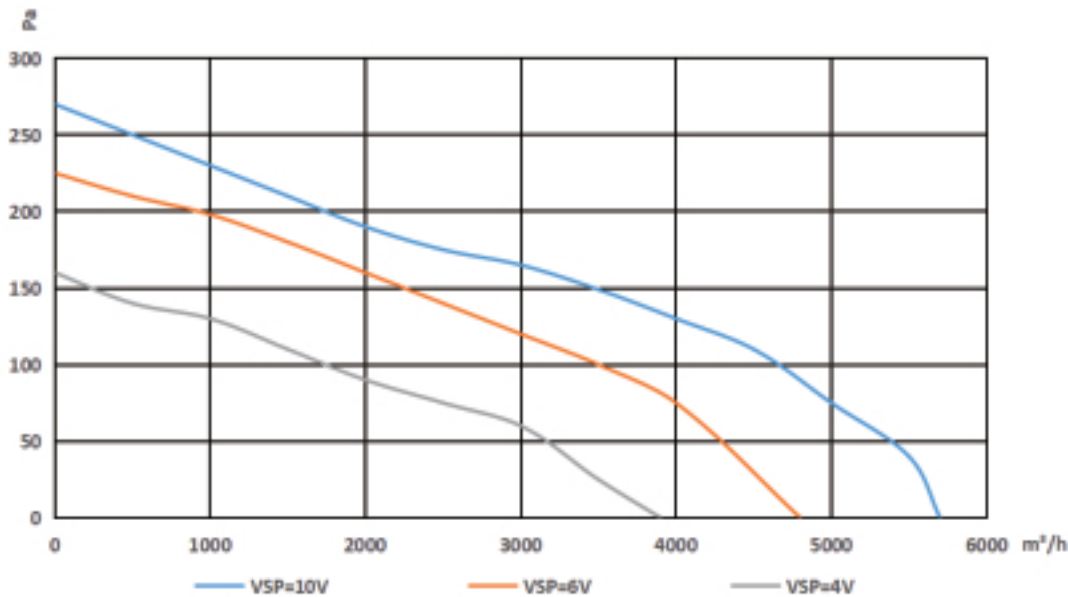

Dimensions

Suction	A3E-2A400-A2-01
Blowing	A3E-2A400-A2-02

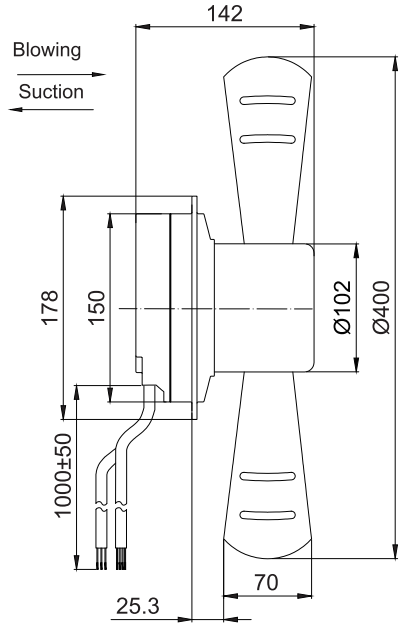
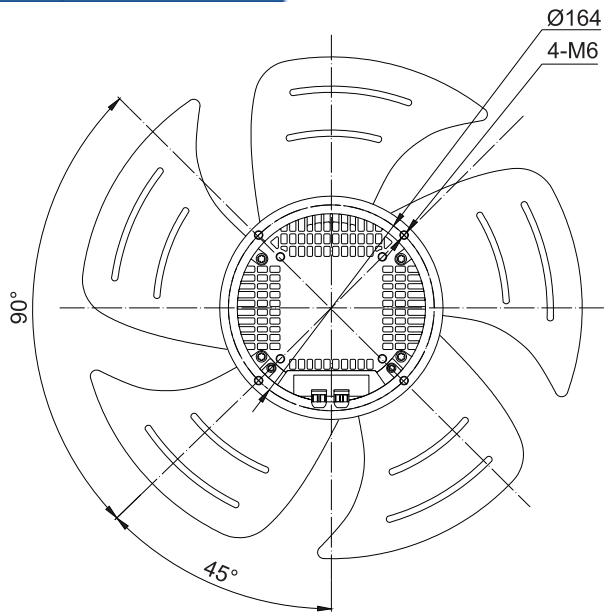


Axial Fan

Dimensions

Suction	G3E-2A400-A2-01
Blowing	G3E-2A400-A2-02



With wall concave net cover grill

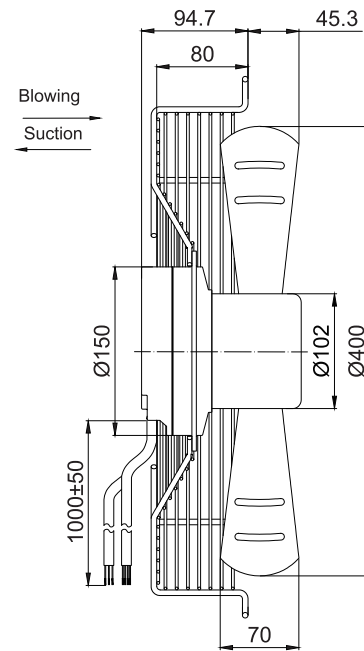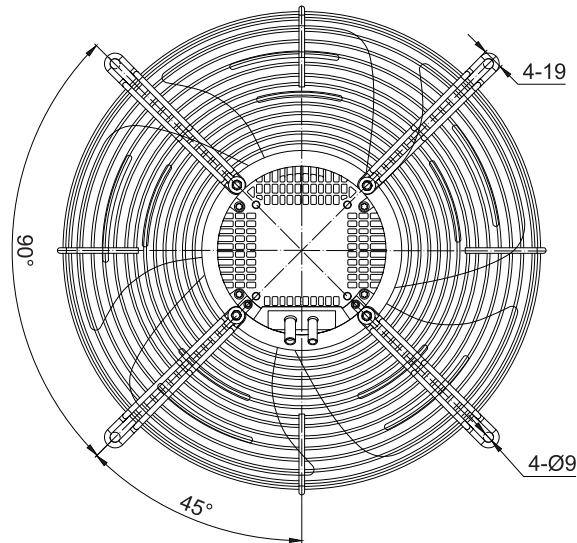

Dimensions

Suction	W3E-2A400-A2-01
Blowing	W3E-2A400-A2-02

With wind guide panel

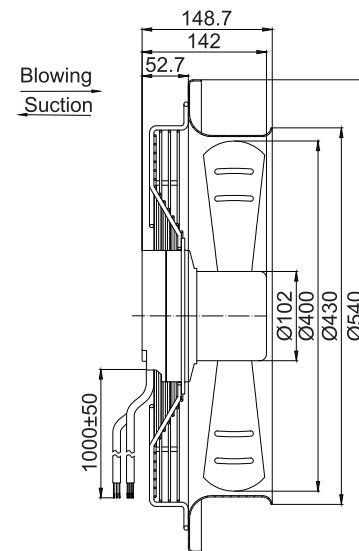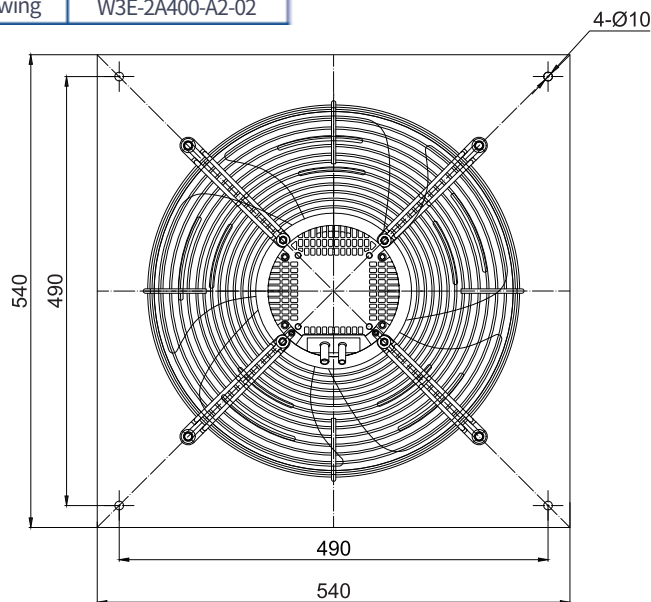

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B





Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
G3E-2A450-A9-0*	220	50/60	0.72	100	1080	4200	66

Performance Curve

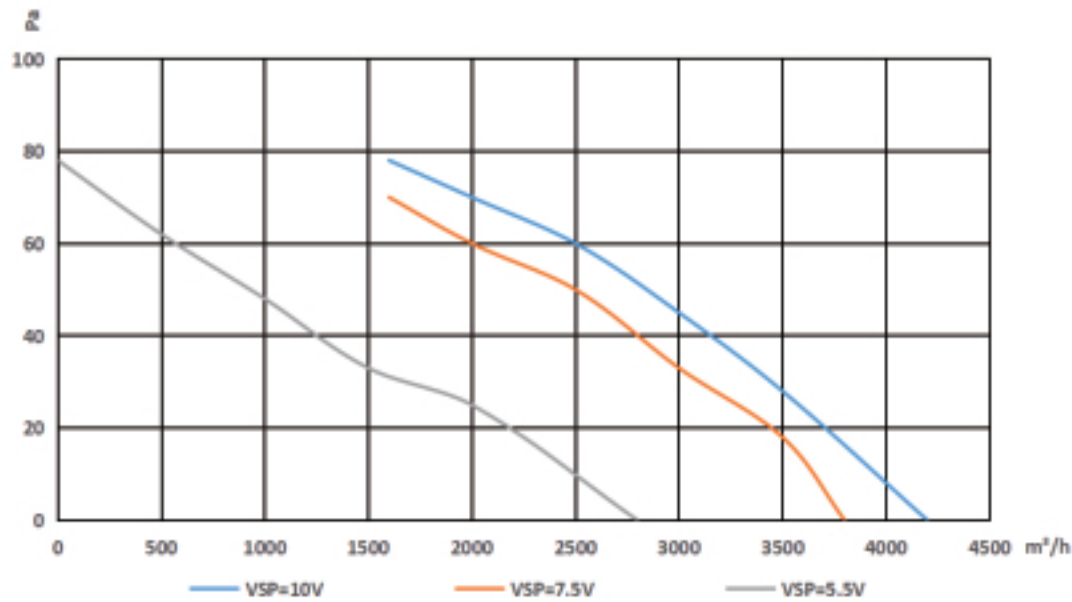

Dimensions		With wall concave net cover grill
Suction	G3E-2A450-A9-01	
Blowing	G3E-2A450-A9-02	

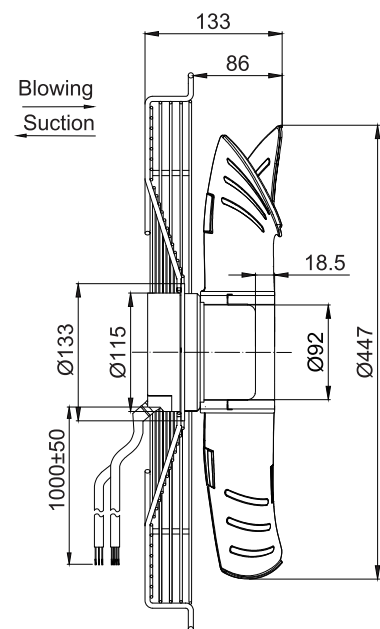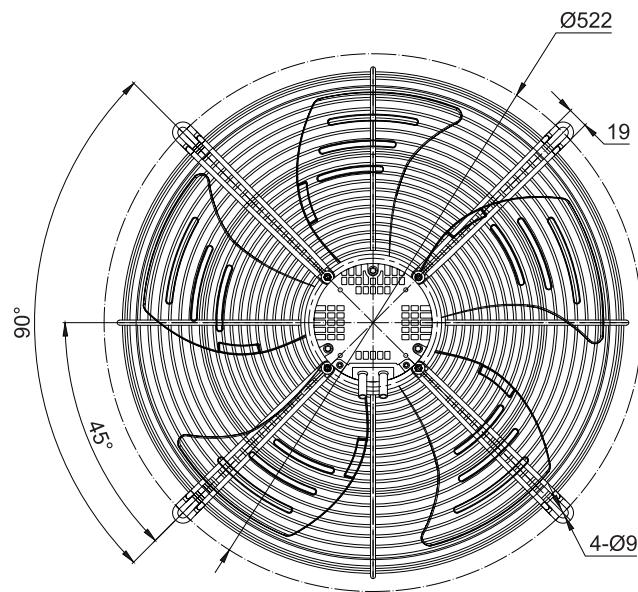

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A450-A2-0	220	50/60	1.80	400	1700	6100	70

Performance Curve

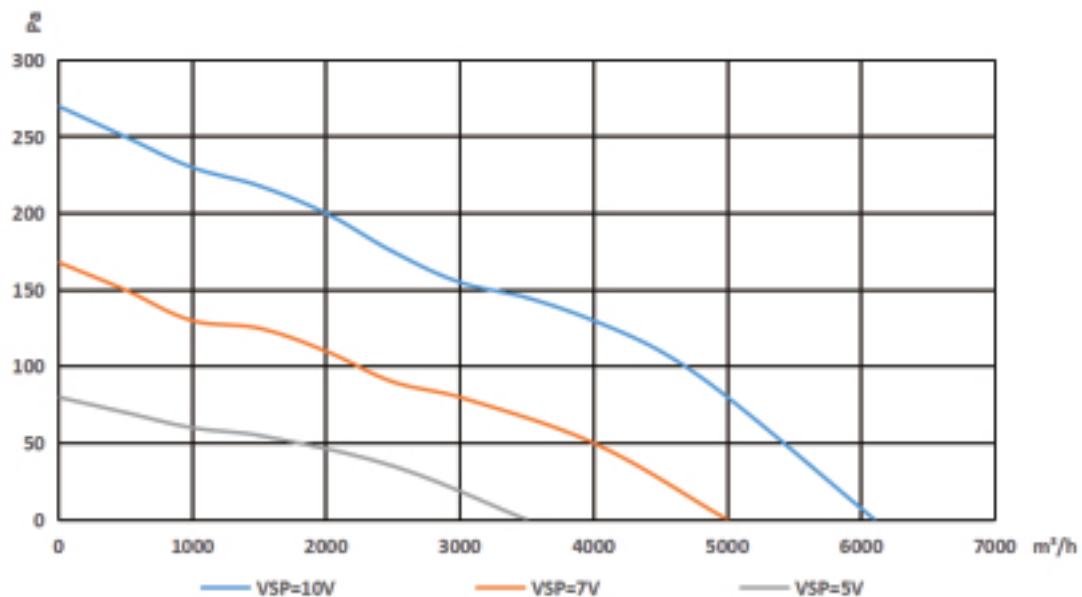

Dimensions



Suction	A3E-2A450-A2-01
Blowing	A3E-2A450-A2-02

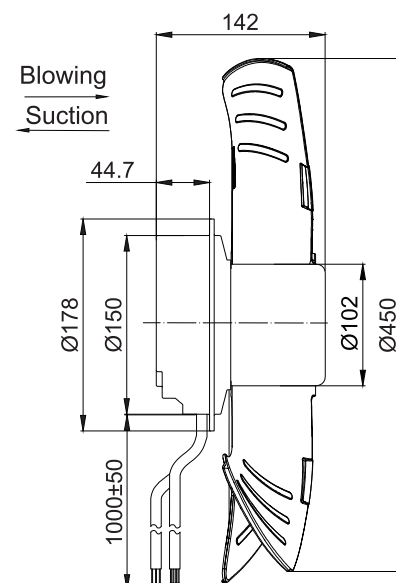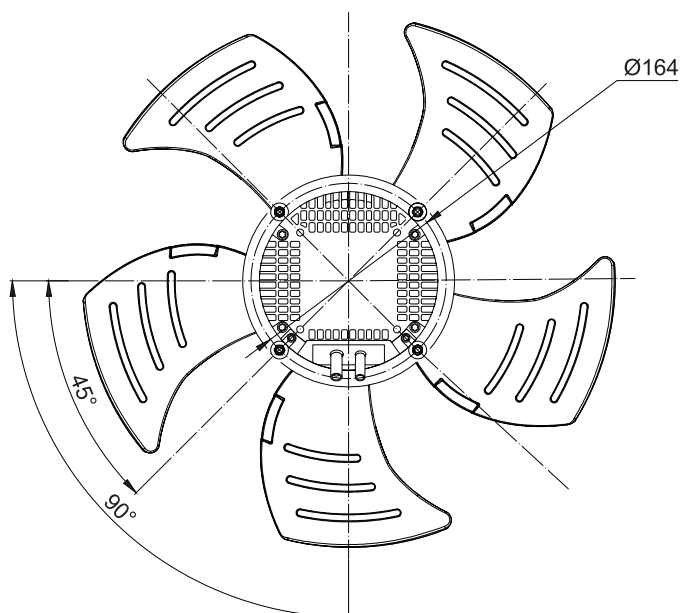

Dimensions

With wall concave net cover grill



Suction	G3E-2A450-A2-01
Blowing	G3E-2A450-A2-02

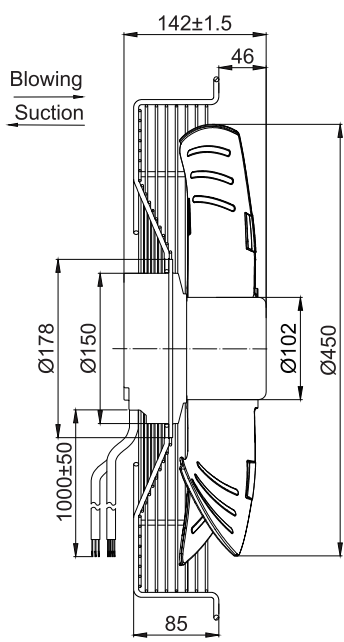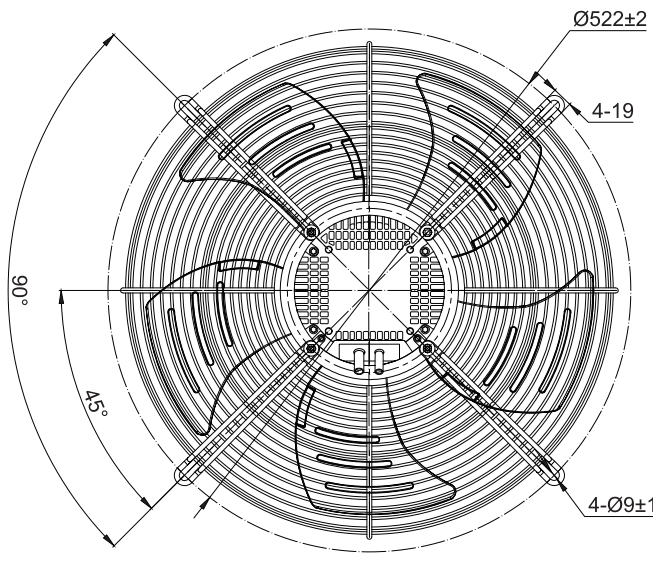

Dimensions

With wind guide panel

Suction	W3E-2A450-A2-01
Blowing	W3E-2A450-A2-02

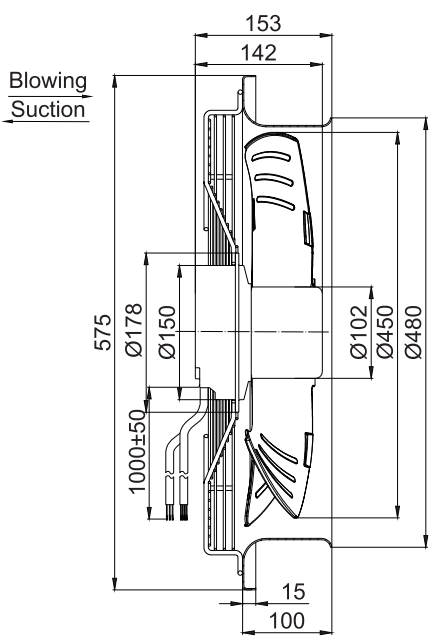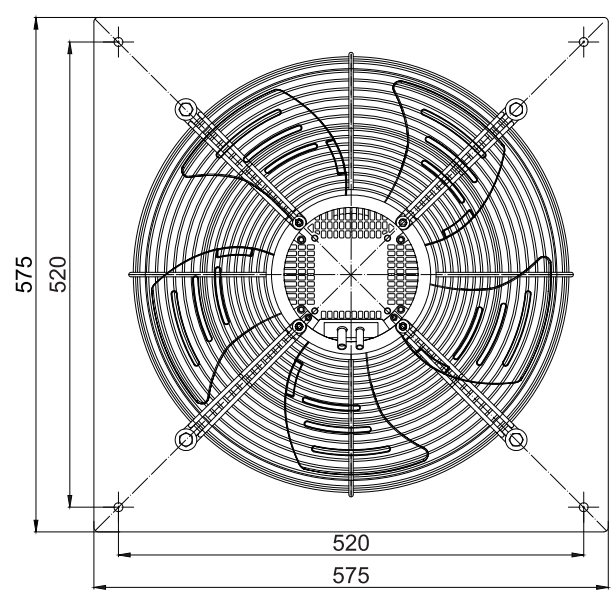

Axial Fan



Impeller Material: Sheet aluminum

Speed Control: 0-10VDC/PWM

Type of Protection: IP54

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 30 °C ~ +60 °C


Insulation class: F



Technical Parameters

Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
G3E-3A450-A3-03	380	50/60	1.30	725	2200	6800	75



Performance Curve

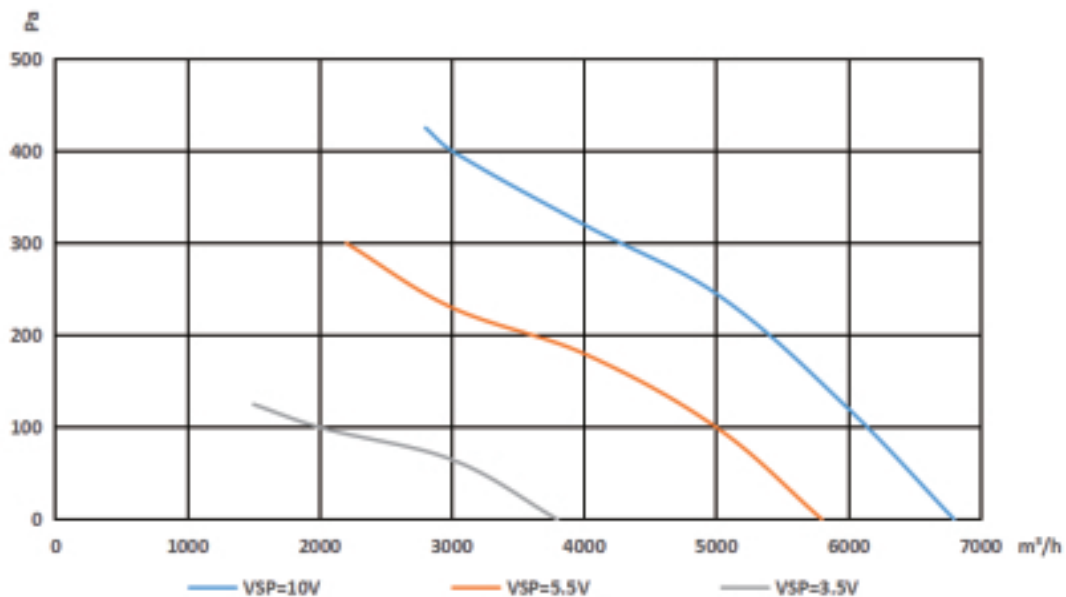

Dimensions

With wall concave net cover grill

Suction G3E-3A450-A3-03

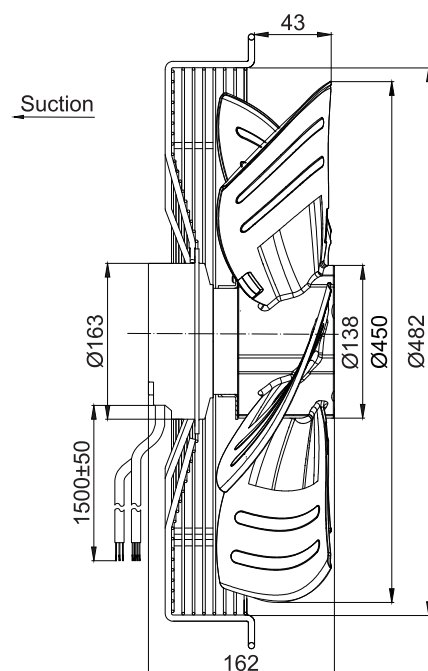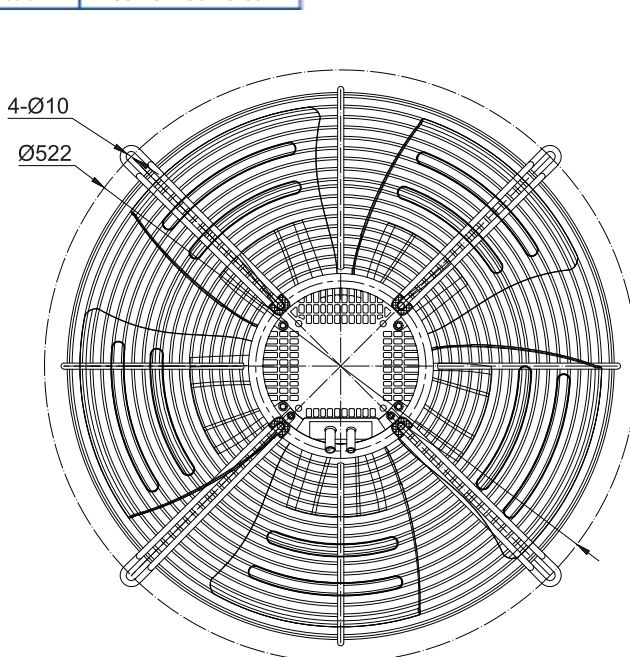

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Insulation class: B




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
G3E-2A500-A2-01	220	50/60	1.40	200	900	5750	56

Performance Curve

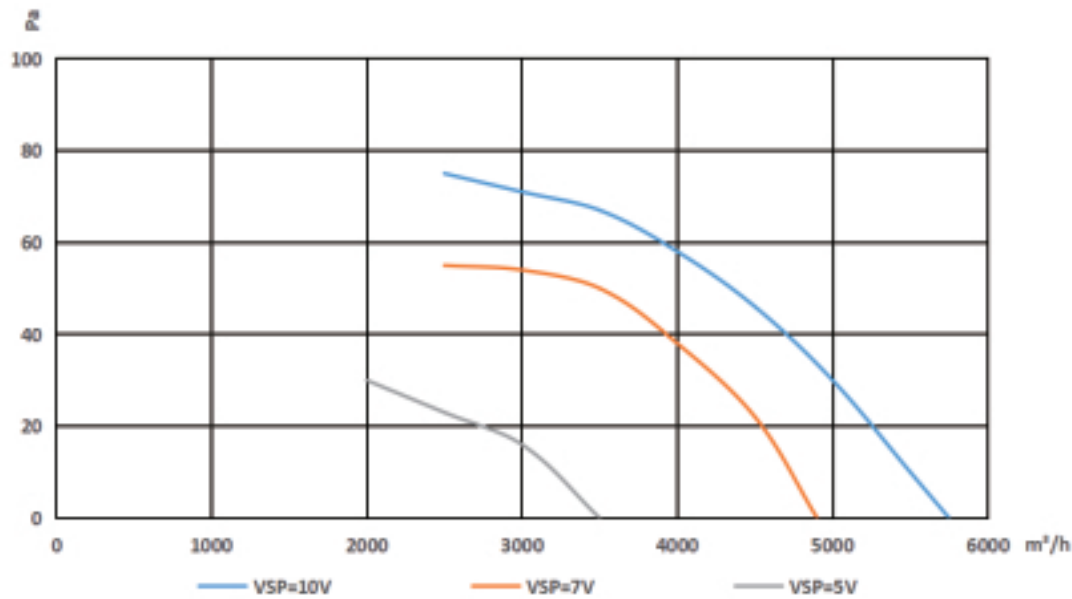

Dimensions With wall concave net cover grill

Suction	G3E-2A500-A2-01
---------	-----------------

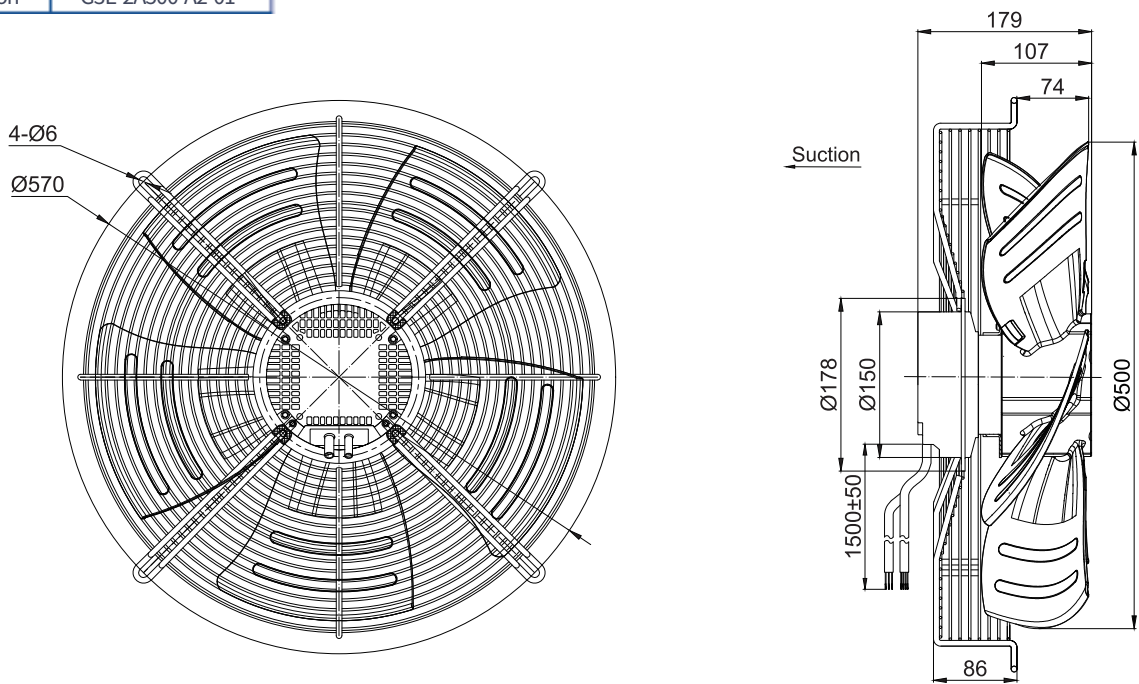

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters

Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
G3E-2A500-A3-02	220	50/60	3.50	770	1600	9100	72

Performance Curve

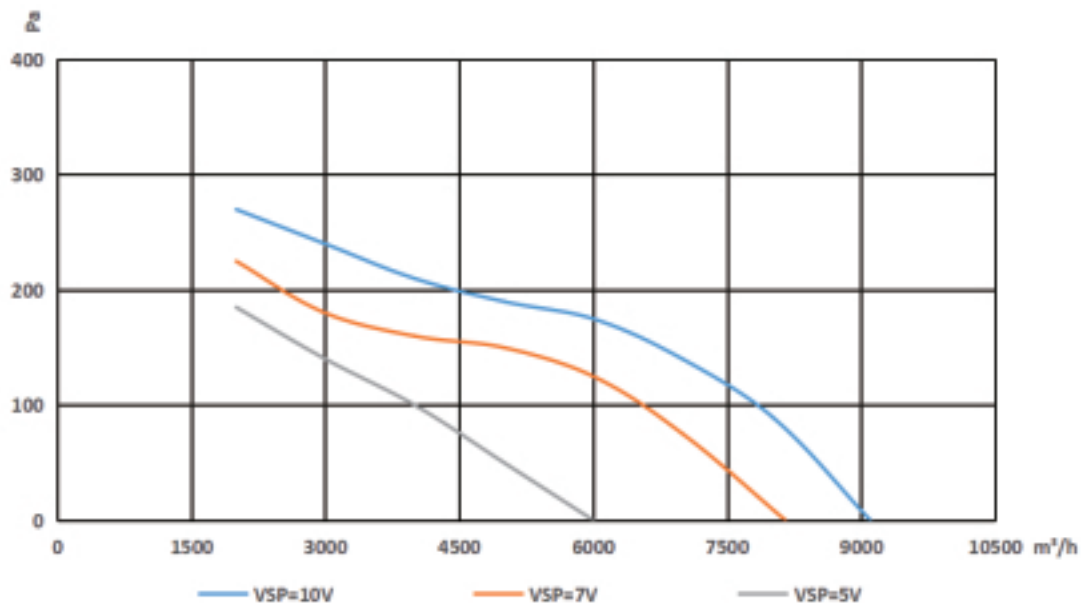

Dimensions

With wall concave net cover grill

Suction G3E-2A500-A3-02

