

Axial Fan




Impeller Material: Sheet steel
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F





Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A500-A3-0	220	50/60	2.90	600	1450	8500	71

Performance Curve

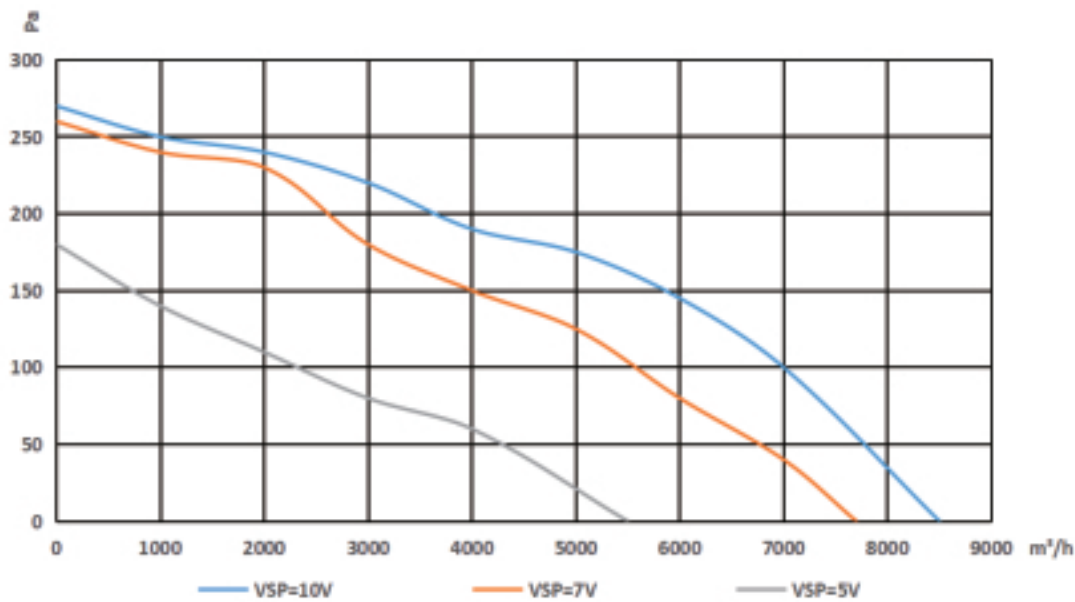

Dimensions

Suction	A3E-2A500-A3-03
Blowing	A3E-2A500-A3-04

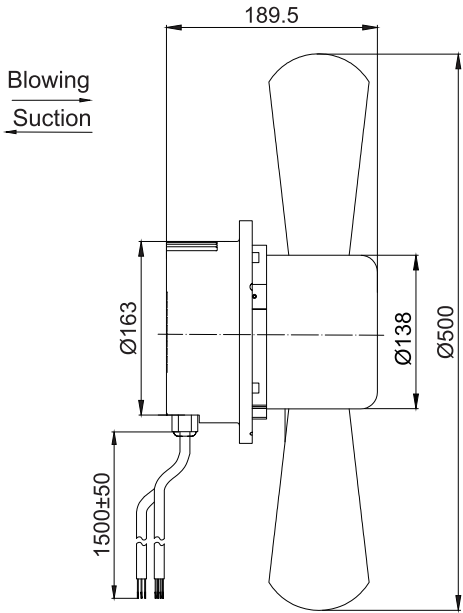
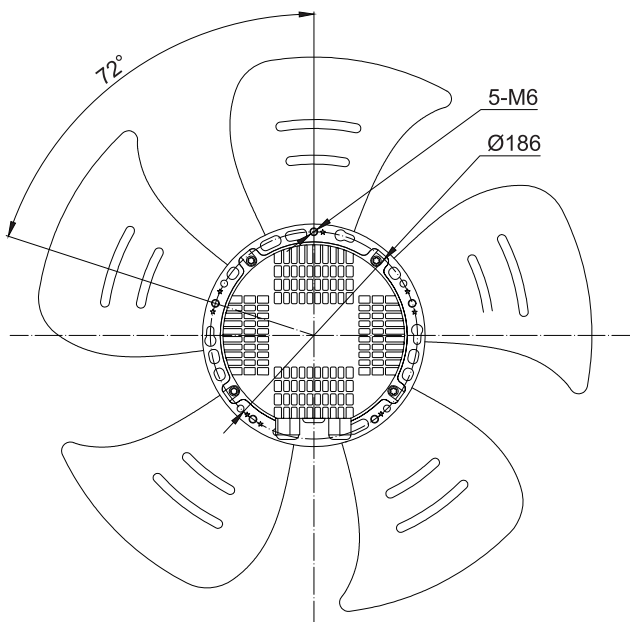


Axial Fan

Dimensions

Suction	G3E-2A500-A3-03
Blowing	G3E-2A500-A3-04



With wall concave net cover grill

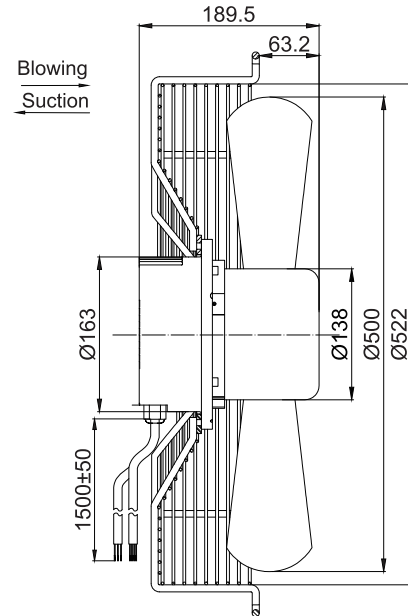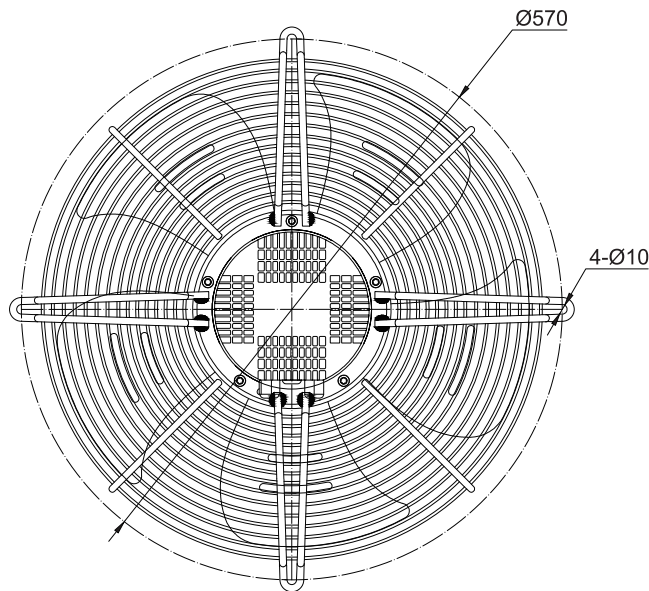

Dimensions

Suction	W3E-2A500-A3-03
Blowing	W3E-2A500-A3-04

With wind guide panel

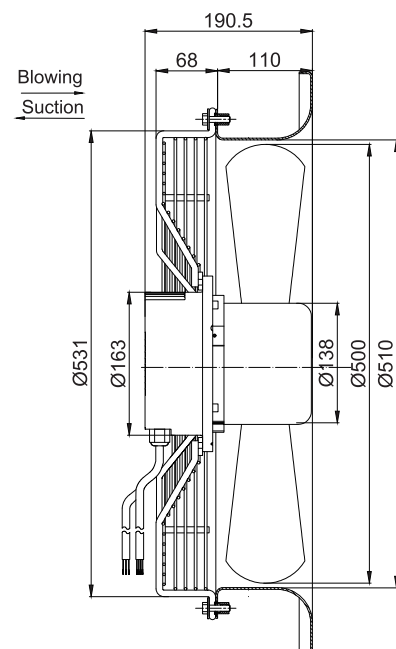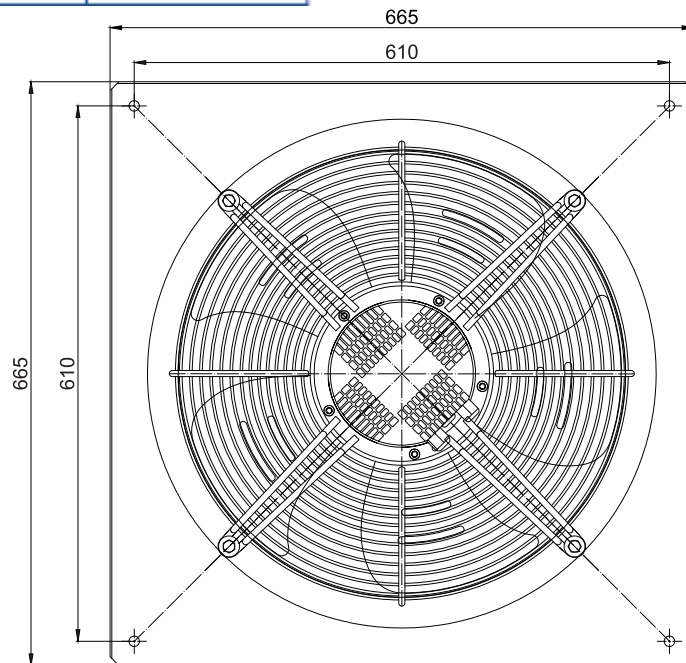

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A500-A3-0	380	50/60	2.30	1250	1900	10000	75

Performance Curve

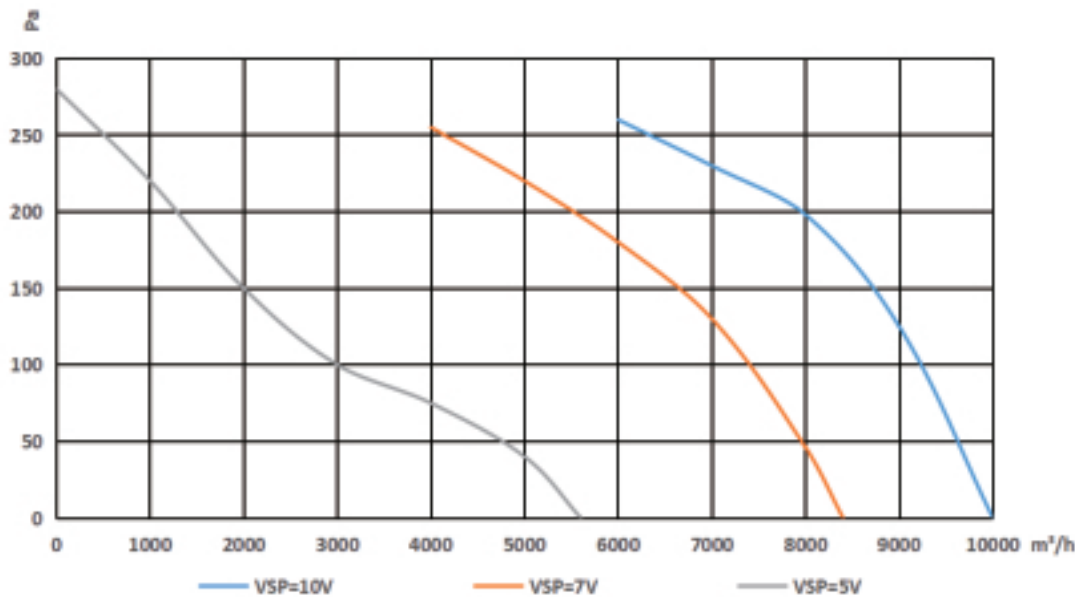

Dimensions

Suction	A3E-3A500-A3-05
Blowing	A3E-3A500-A3-06

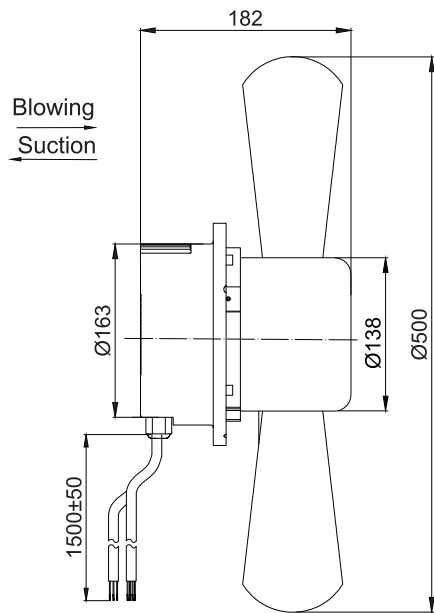
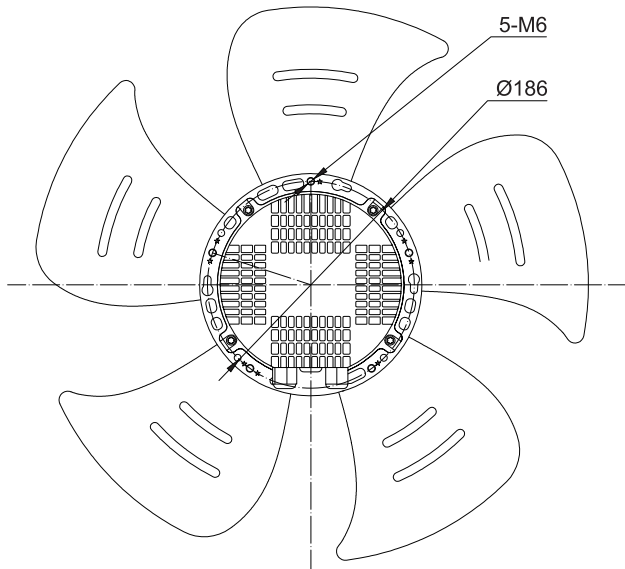


Axial Fan

Dimensions

Suction	G3E-3A500-A3-05
Blowing	G3E-3A500-A3-06



With wall concave net cover grill

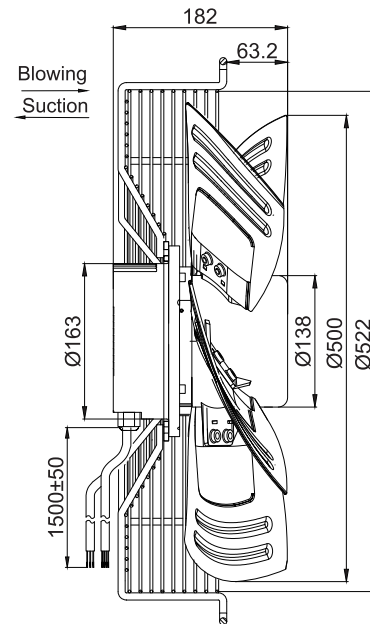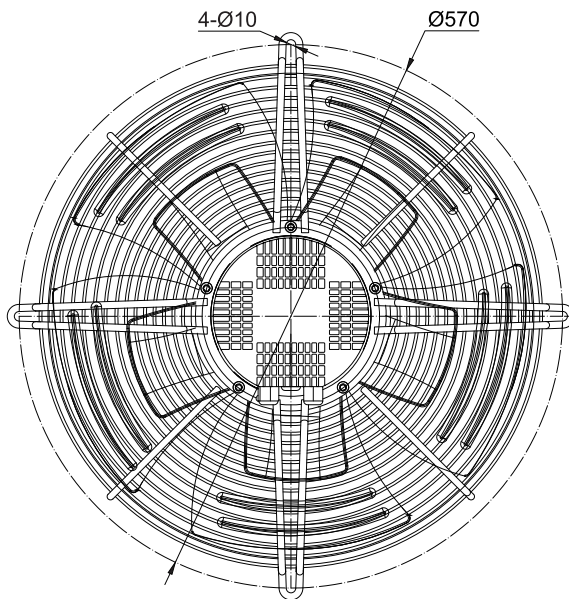

Dimensions

Suction	W3E-3A500-A3-05
Blowing	W3E-3A500-A3-06

With wind guide panel

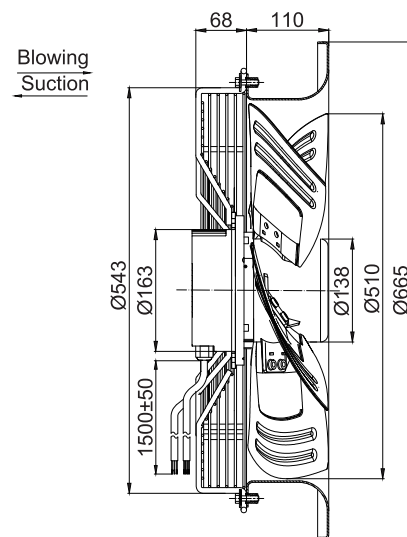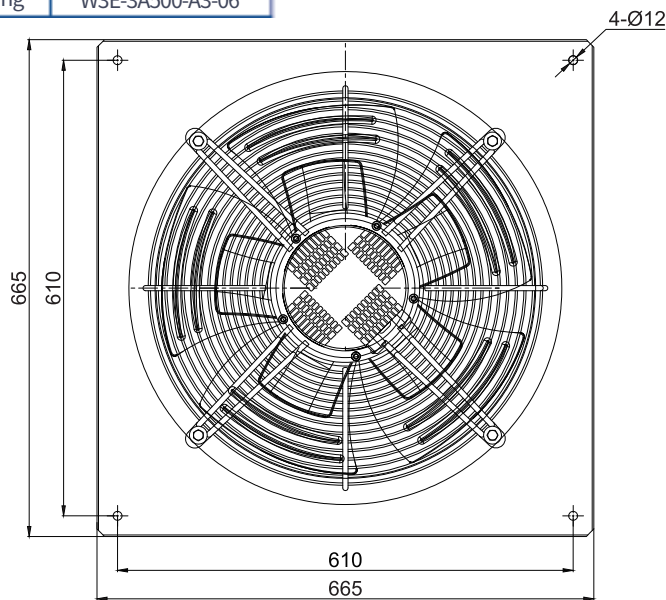

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A500-A3-0	380	50/60	2.80	1650	2050	11100	79

Performance Curve

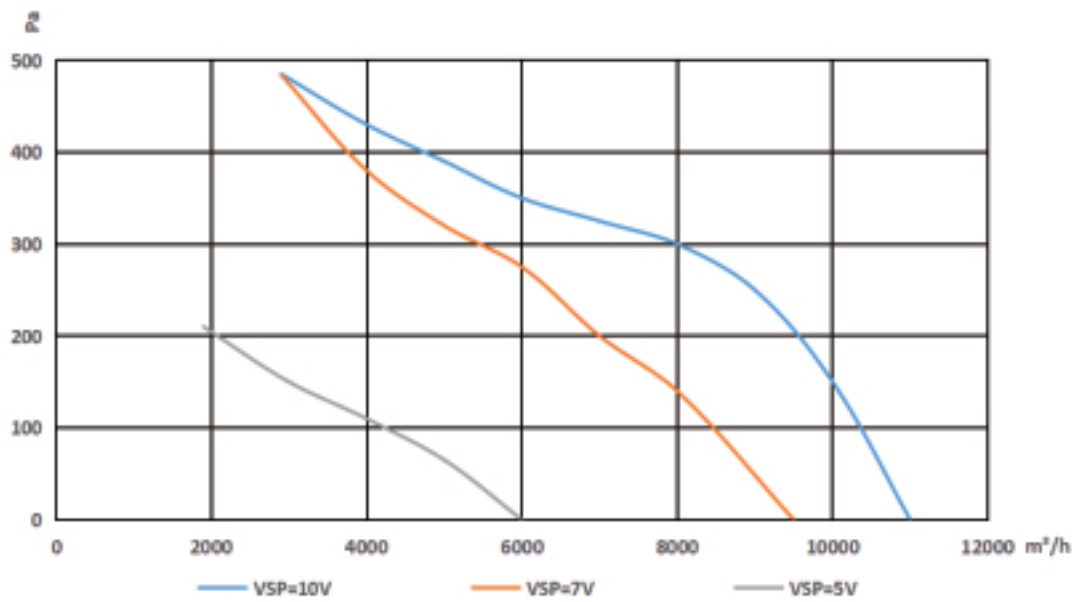

Dimensions

Suction	A3E-3A500-A3-07
Blowing	A3E-3A500-A3-08


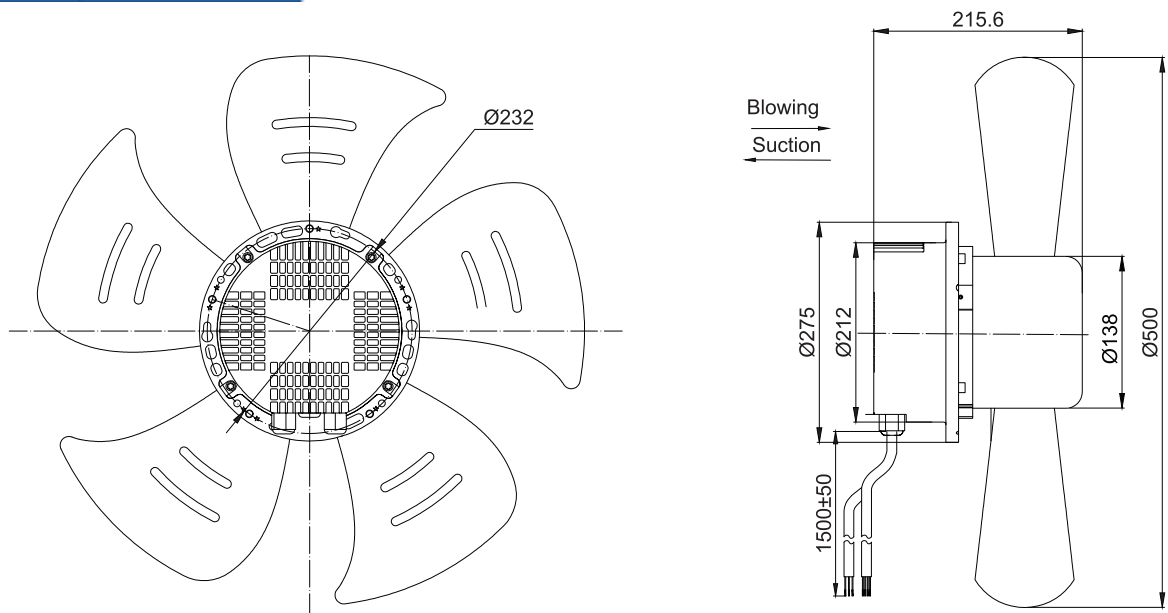


Axial Fan

Dimensions

Suction	G3E-3A500-A3-07
Blowing	G3E-3A500-A3-08



With wall concave net cover grill

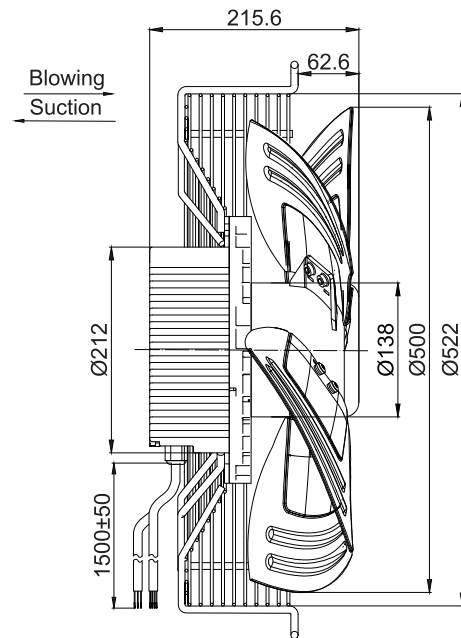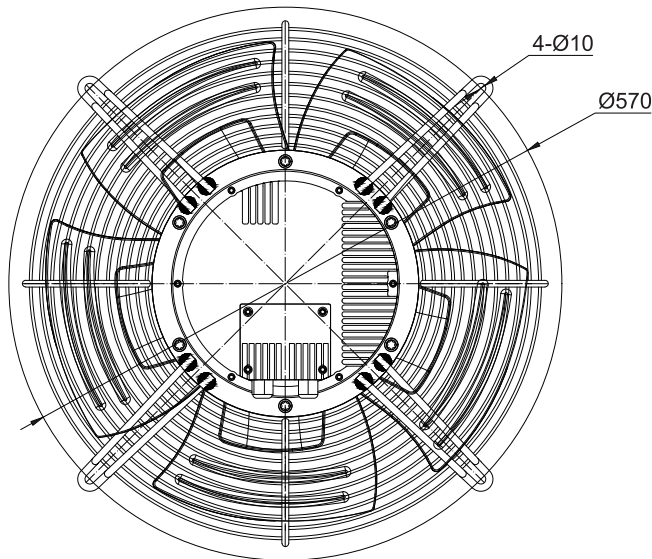

Dimensions

Suction	W3E-3A500-A3-07
Blowing	W3E-3A500-A3-08

With wind guide panel

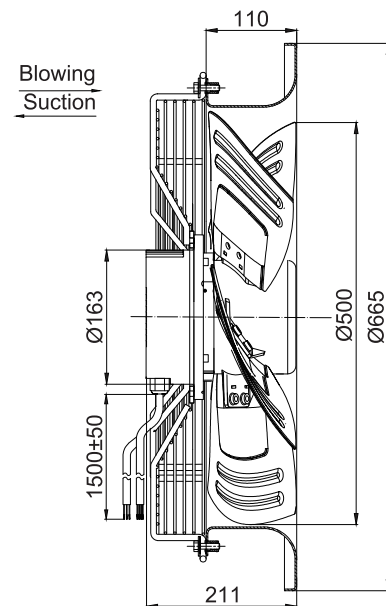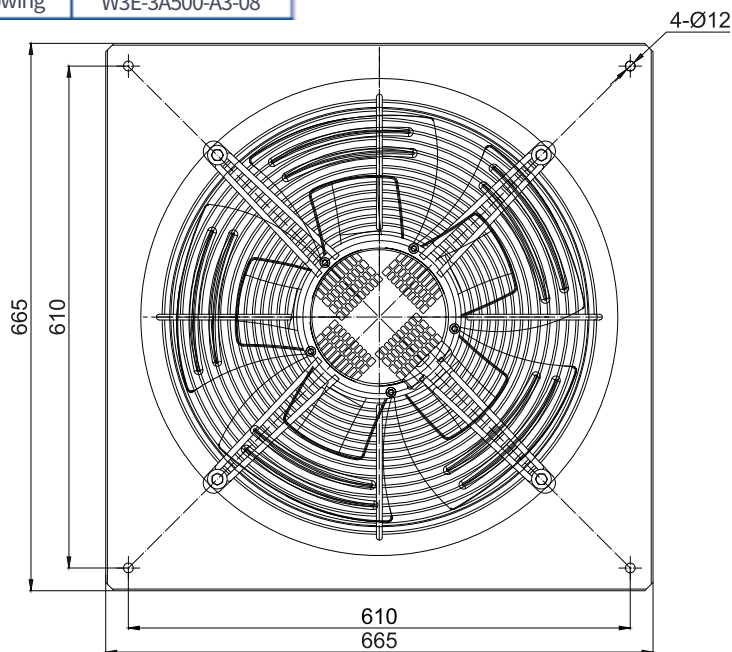

Axial Fan




Impeller Material: Sheet steel
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters


Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A550-A3-0	220	50/60	2.60	550	1250	9000	71

Performance Curve

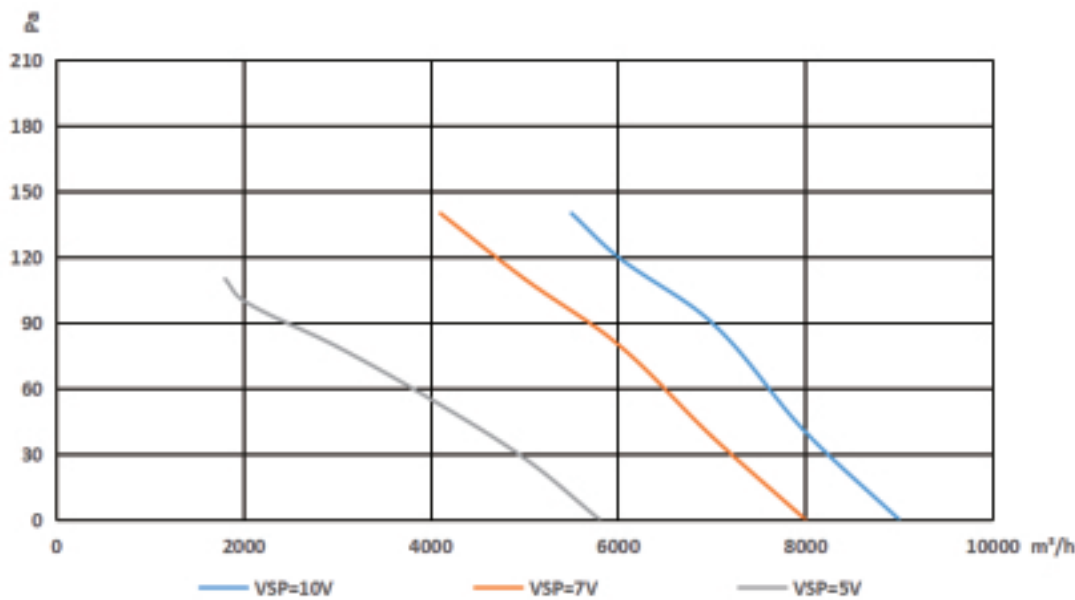

Dimensions

Suction	A3E-2A550-A3-01
Blowing	A3E-2A550-A3-02


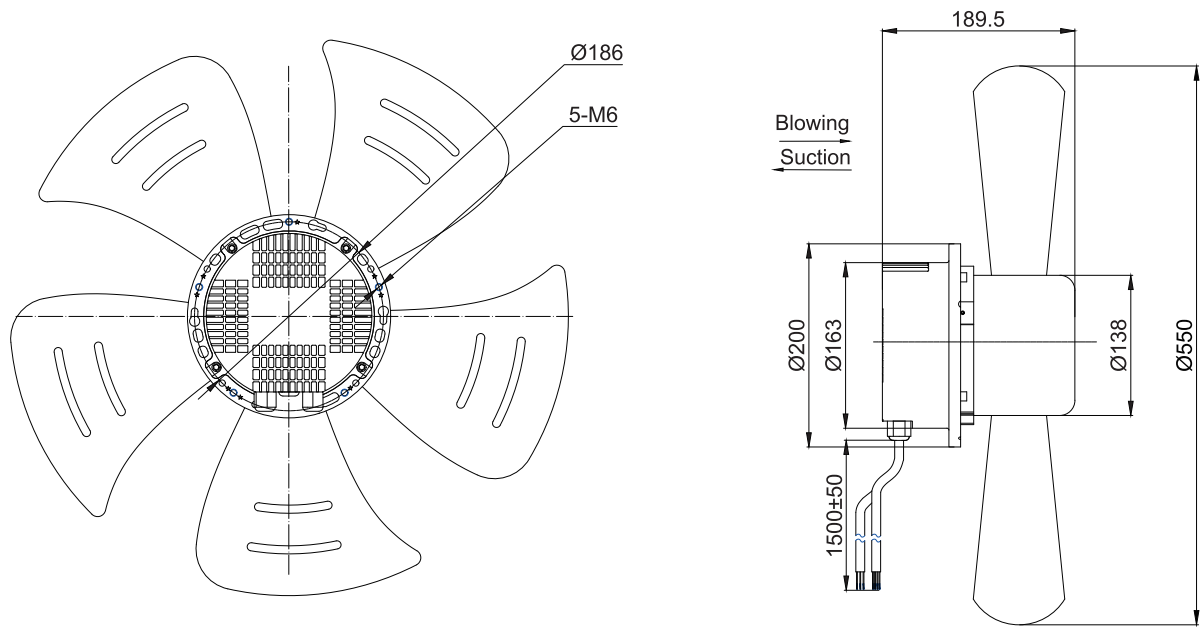


Axial Fan

Dimensions

With wall concave net cover grill



Suction	G3E-2A550-A3-01
Blowing	G3E-2A550-A3-02

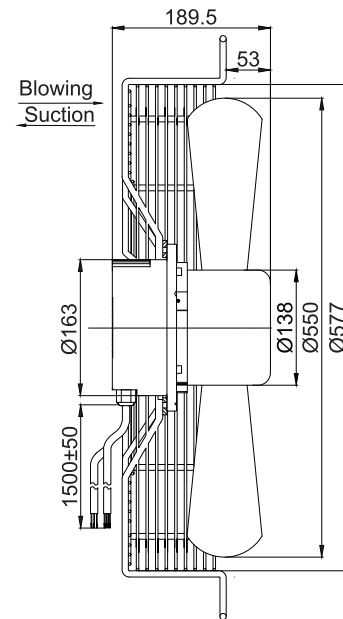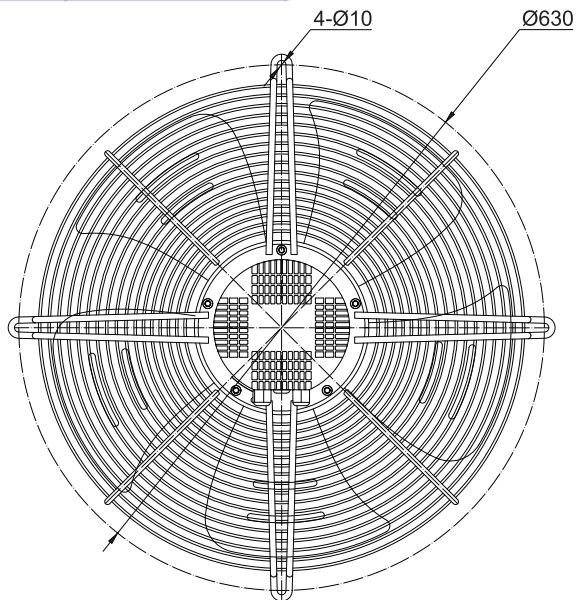

Dimensions

With wind guide panel

Suction	W3E-2A550-A3-01
Blowing	W3E-2A550-A3-02

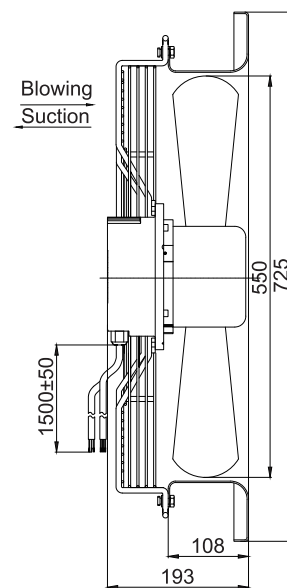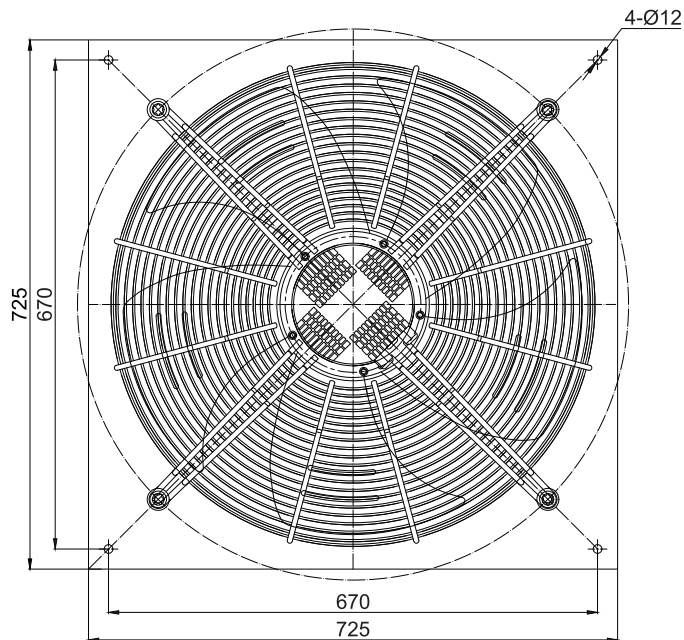

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters


Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A550-A3-0	380	50/60	1.90	1050	1650	11800	73

Performance Curve

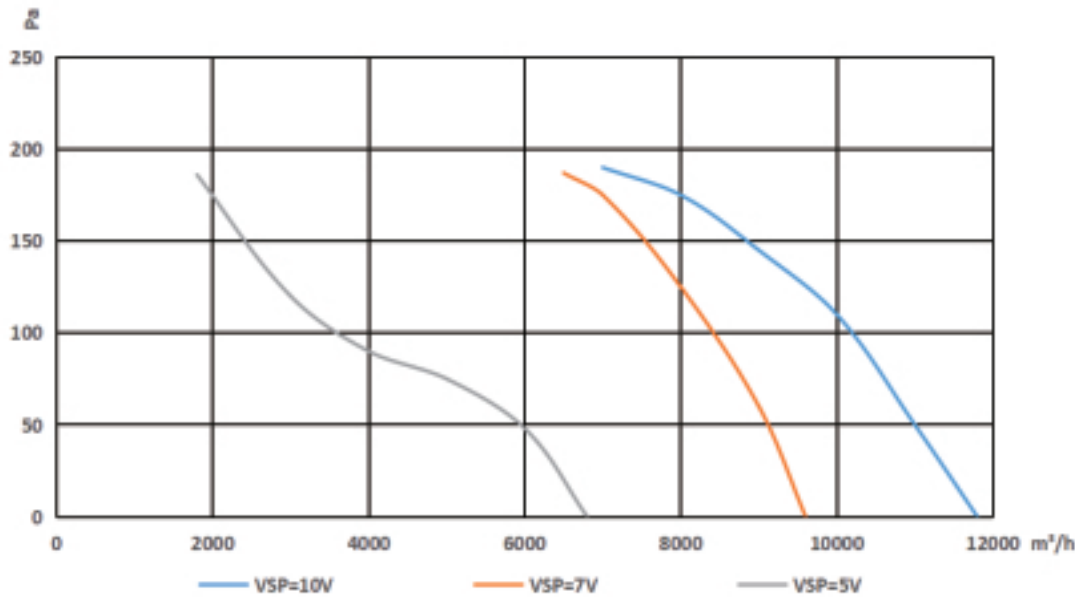

Dimensions

Suction	A3E-3A550-A3-03
Blowing	A3E-3A550-A3-04


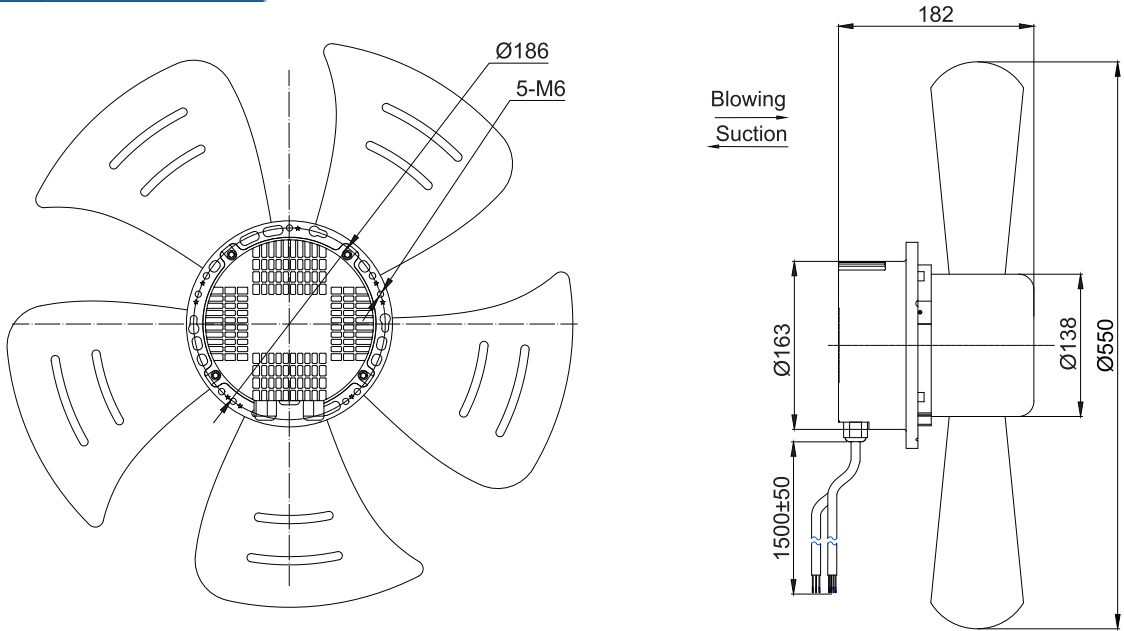


Axial Fan

Dimensions

Suction	G3E-3A550-A3-03
Blowing	G3E-3A550-A3-04



With wall concave net cover grill

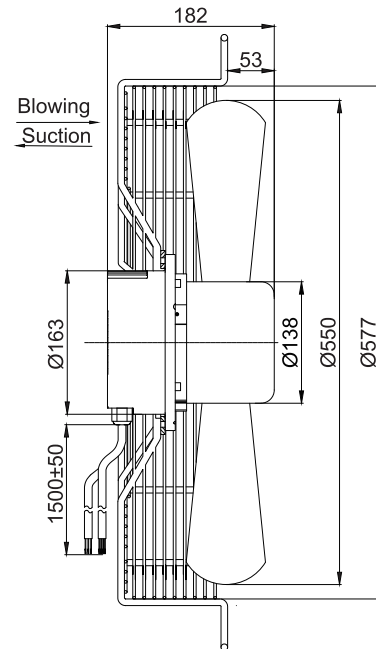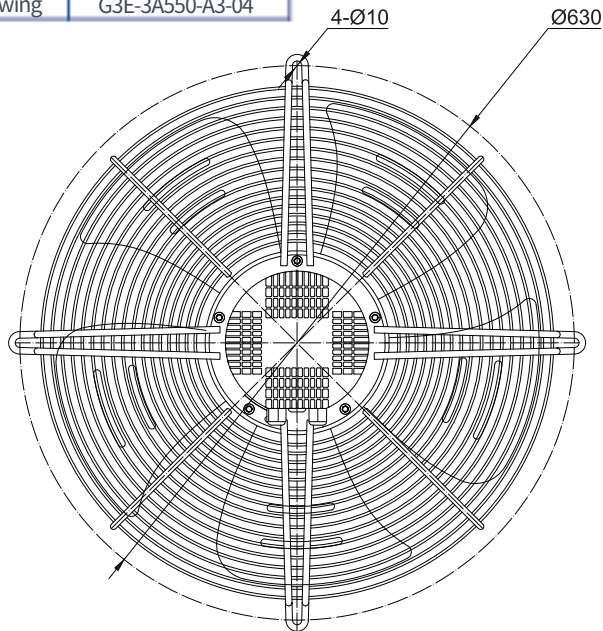

Dimensions

Suction	W3E-3A550-A3-03
Blowing	W3E-3A550-A3-04

With wind guide panel

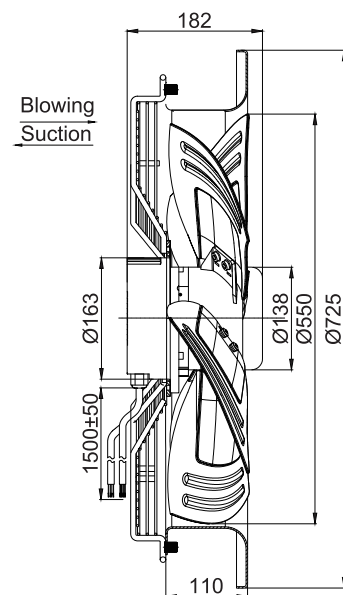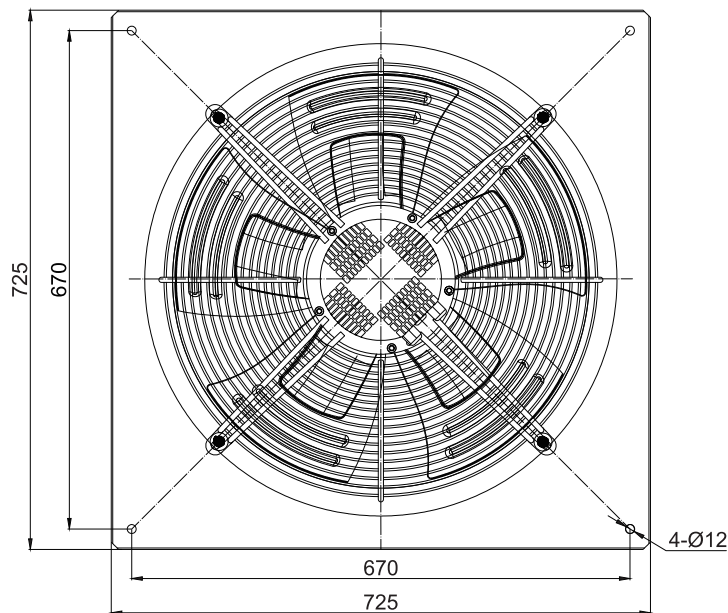

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A550-A3-0	380	50/60	2.74	1600	1800	11900	78

Performance Curve

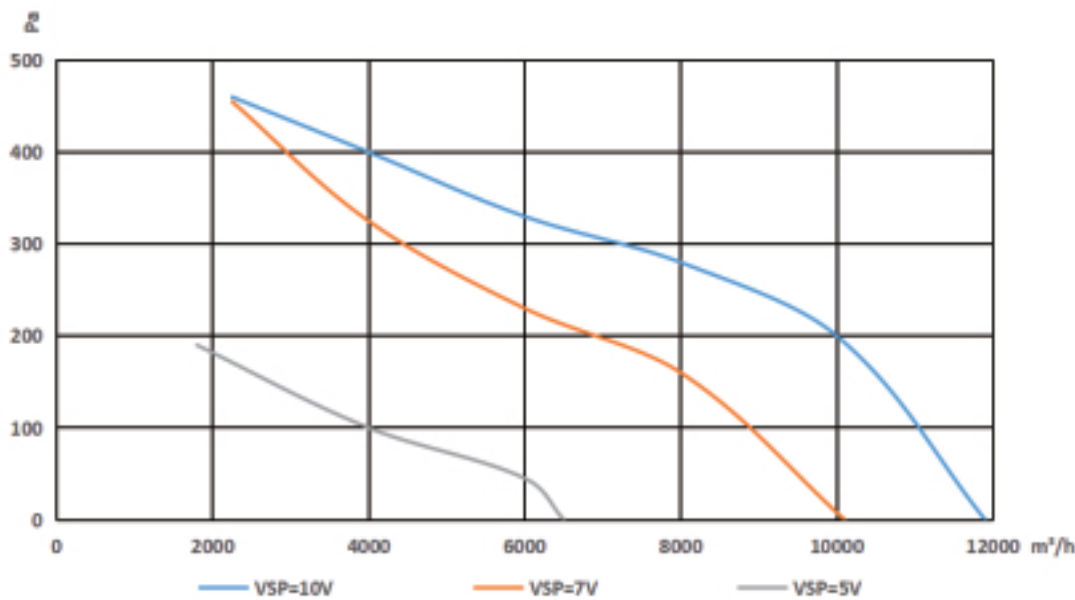

Dimensions

Suction	A3E-3A550-A3-05
Blowing	A3E-3A550-A3-06

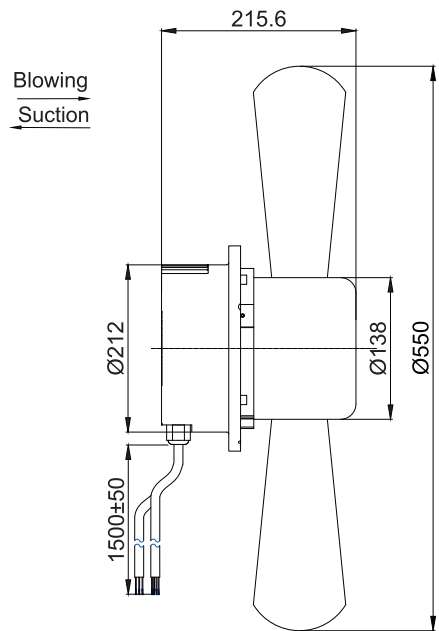
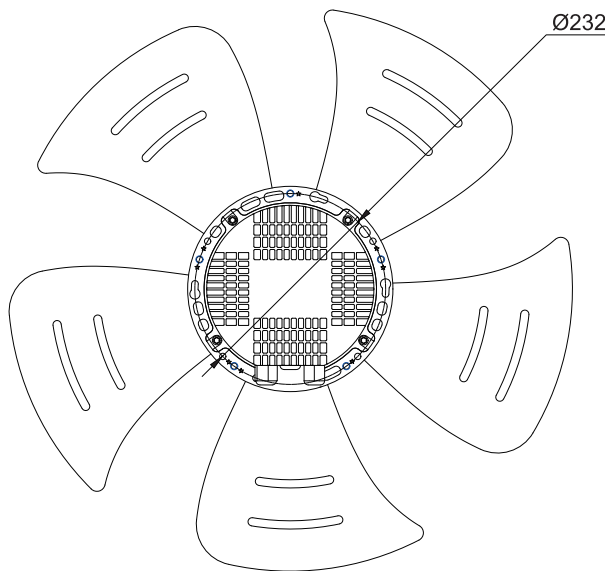


Axial Fan

Dimensions

Suction	G3E-3A550-A3-05
Blowing	G3E-3A550-A3-06



With wall concave net cover grill

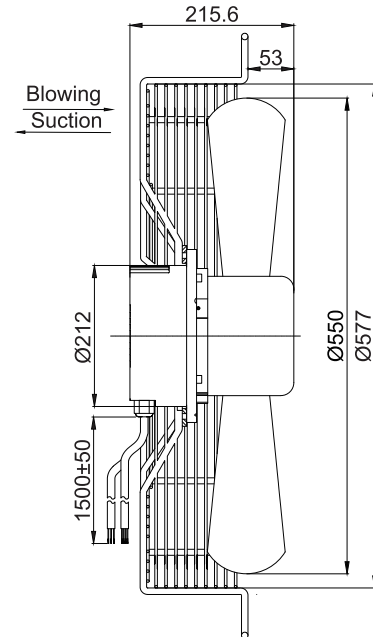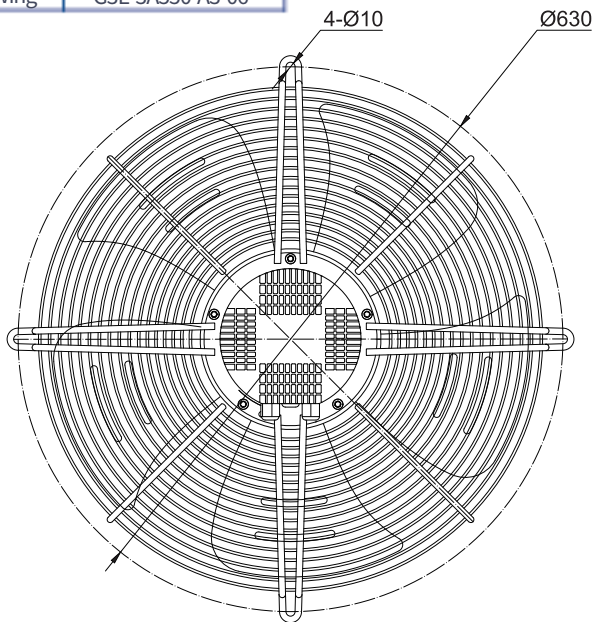

Dimensions

Suction	W3E-3A550-A3-05
Blowing	W3E-3A550-A3-06

With wind guide panel

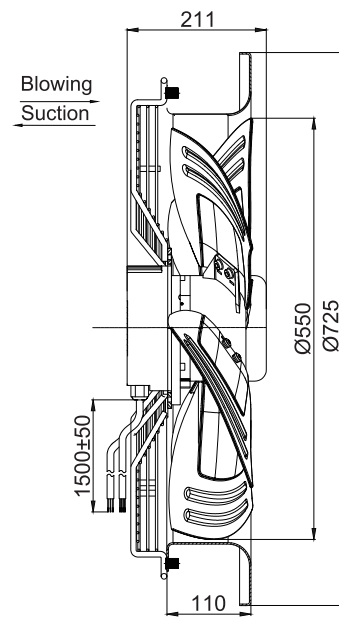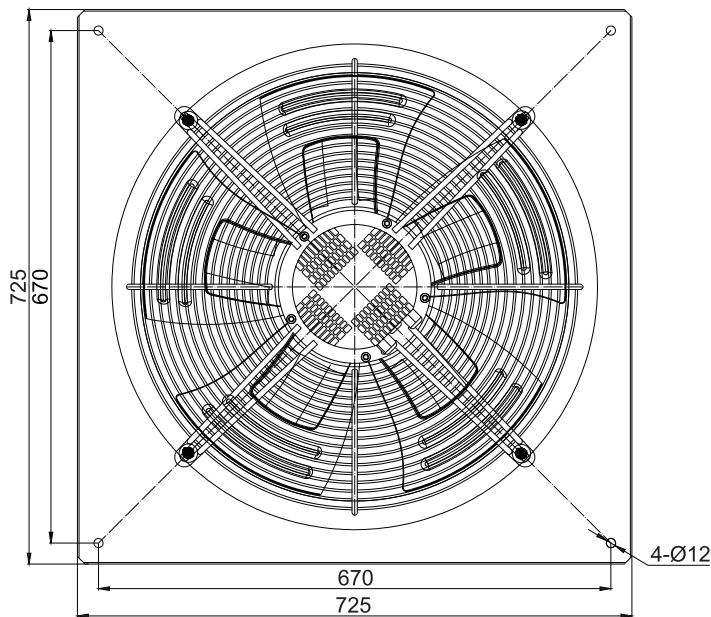

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A630-A3-0	220	50/60	2.75	600	960	11900	65

Performance Curve

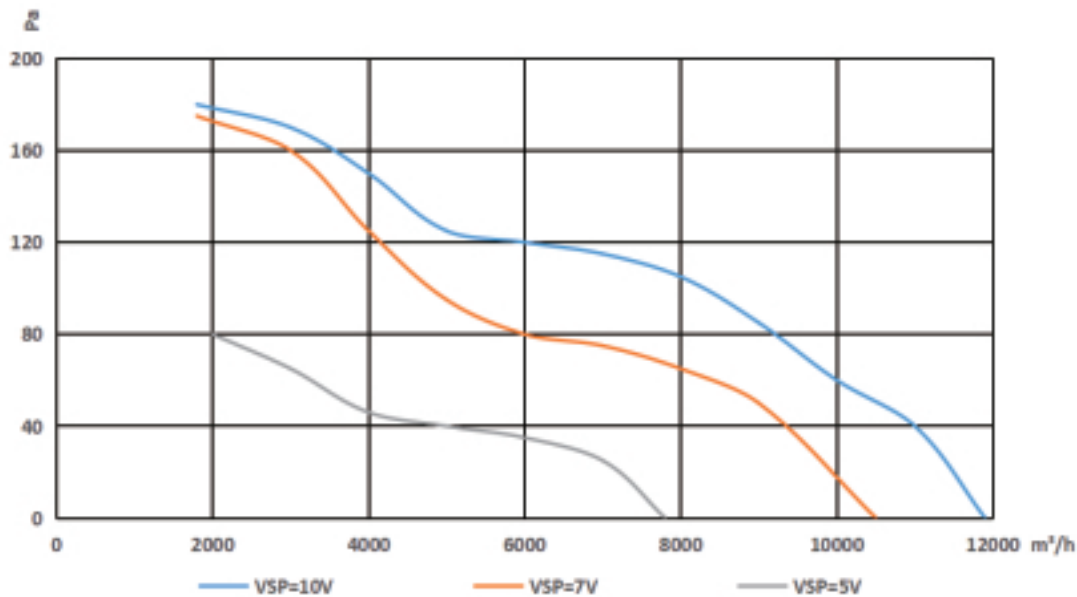

Dimensions

Suction	A3E-2A630-A3-01
Blowing	A3E-2A630-A3-02


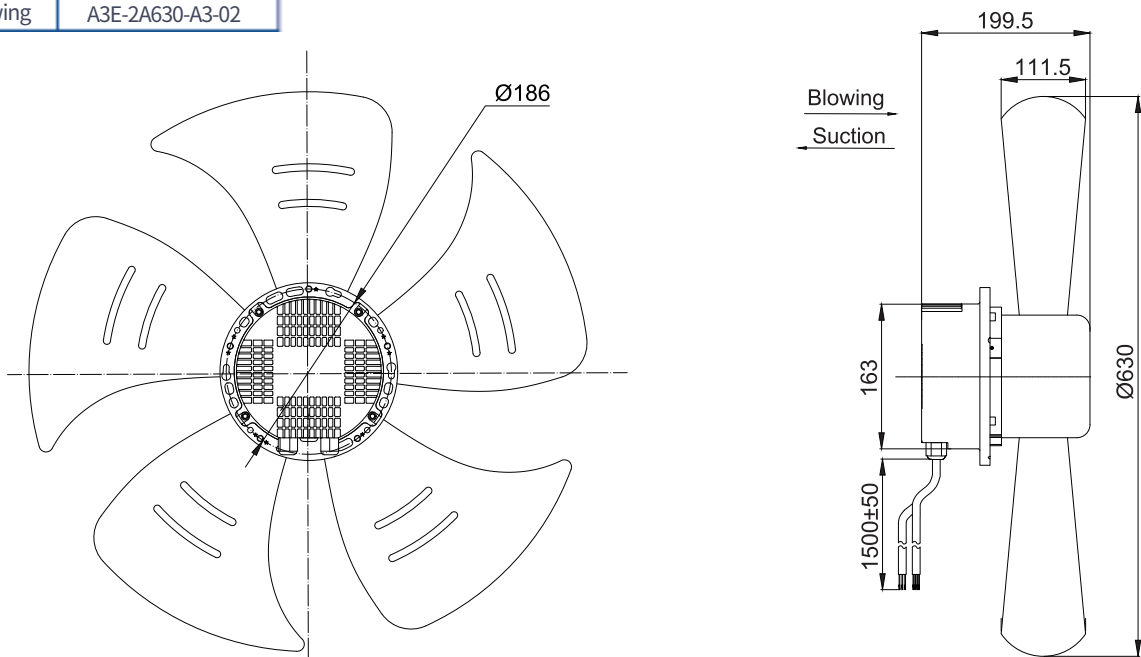


Axial Fan

Dimensions

With wall concave net cover grill

Suction	G3E-2A630-A3-01
---------	-----------------

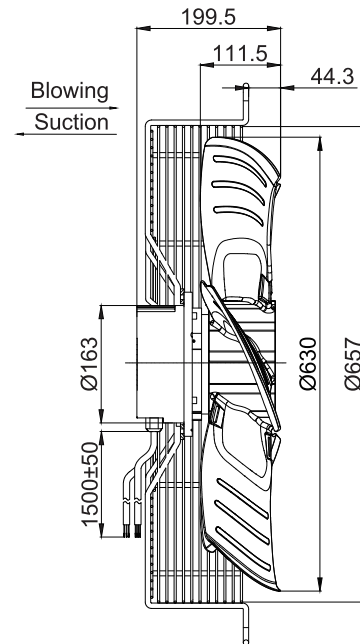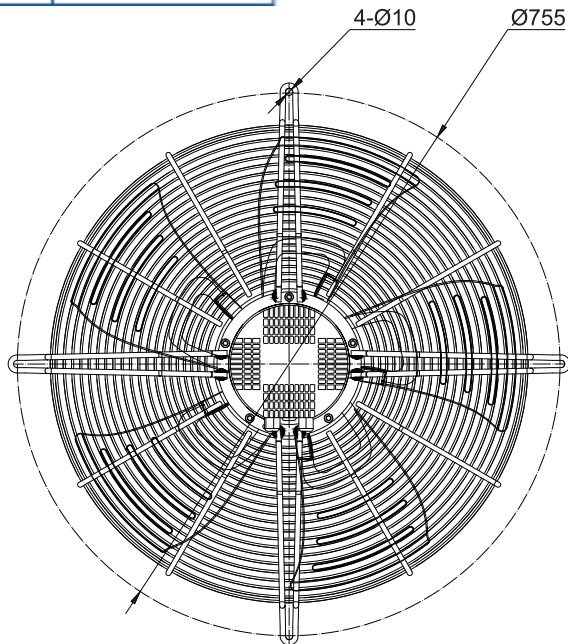

Axial Fan




Impeller Material: Sheet steel
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F





Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-2A630-A3-0	220	50/60	2.80	600	1100	12100	68

Performance Curve

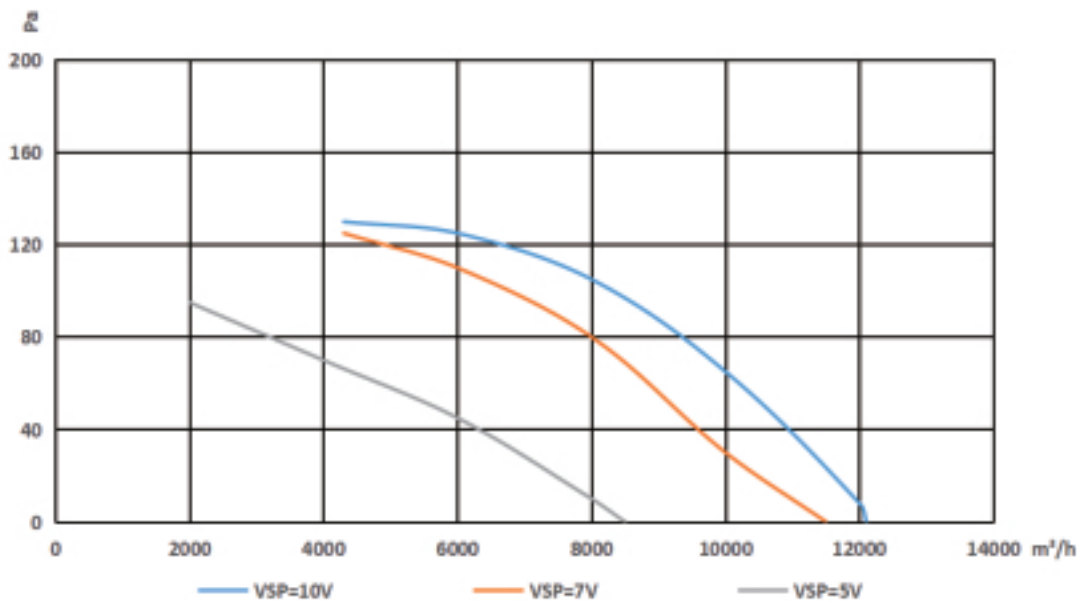

Dimensions

Suction	A3E-2A630-A3-03
Blowing	A3E-2A630-A3-04

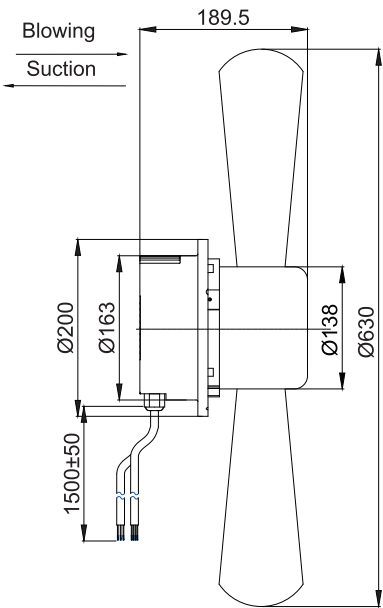
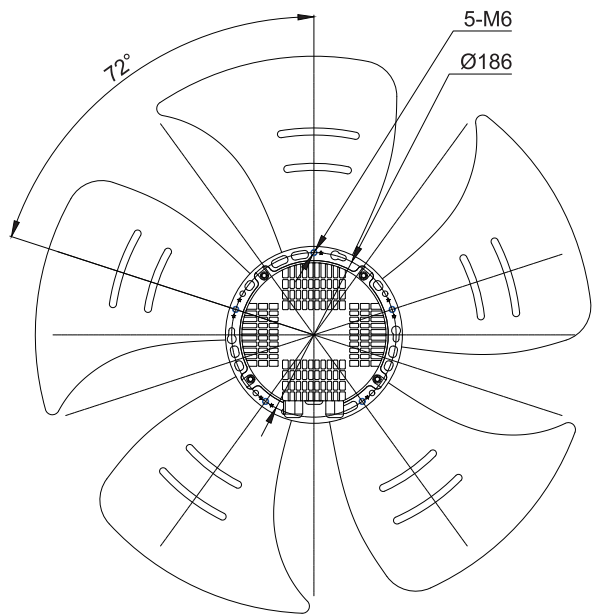


Axial Fan

Dimensions

Suction	G3E-2A630-A3-03
Blowing	G3E-2A630-A3-04



With wall concave net cover grill

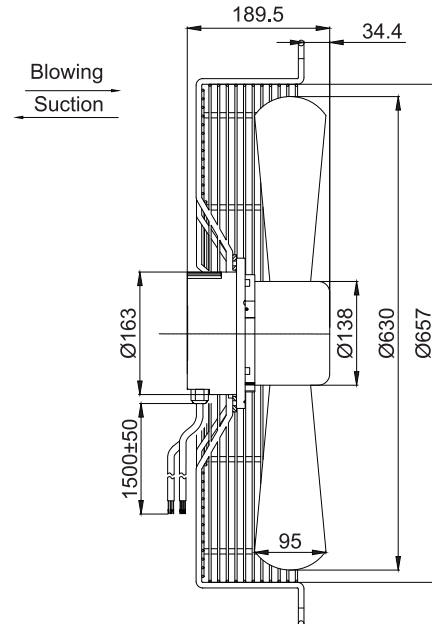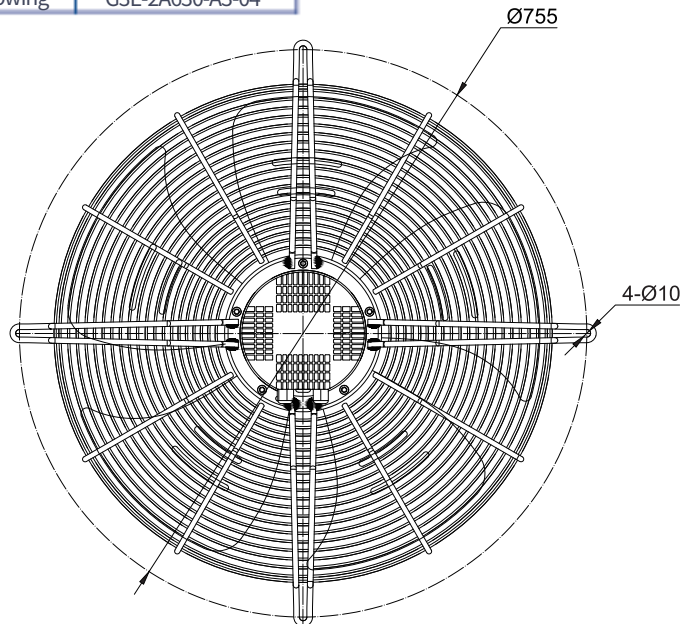

Dimensions

Suction	W3E-2A630-A3-03
Blowing	W3E-2A630-A3-04

With wind guide panel

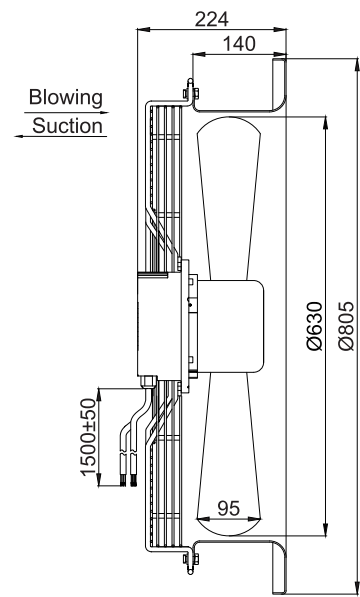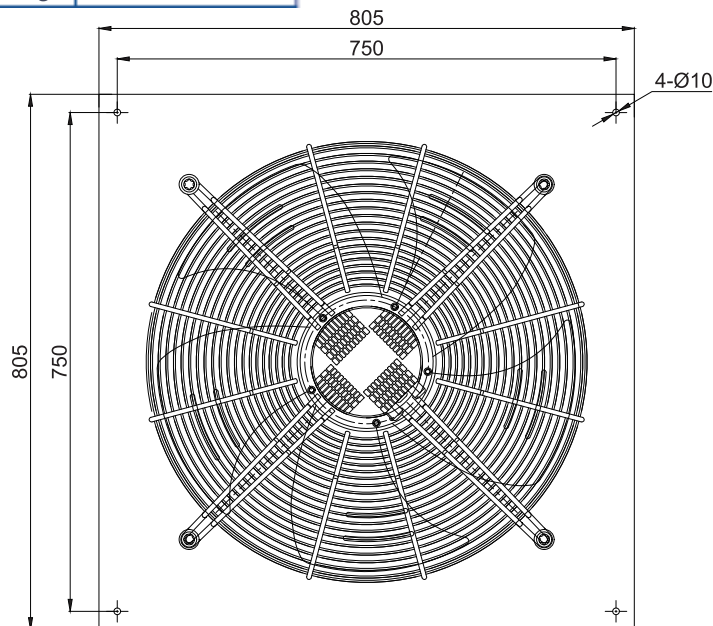

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A630-A3-0	380	50/60	1.80	1050	1400	14000	70

Performance Curve

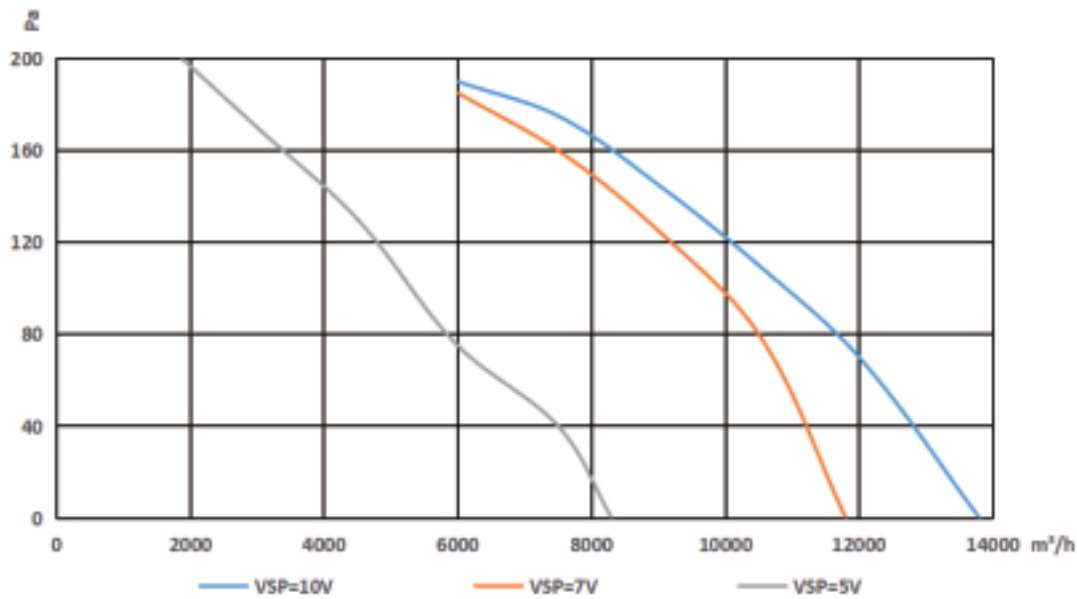

Dimensions

Suction	A3E-3A630-A3-05
Blowing	A3E-3A630-A3-06


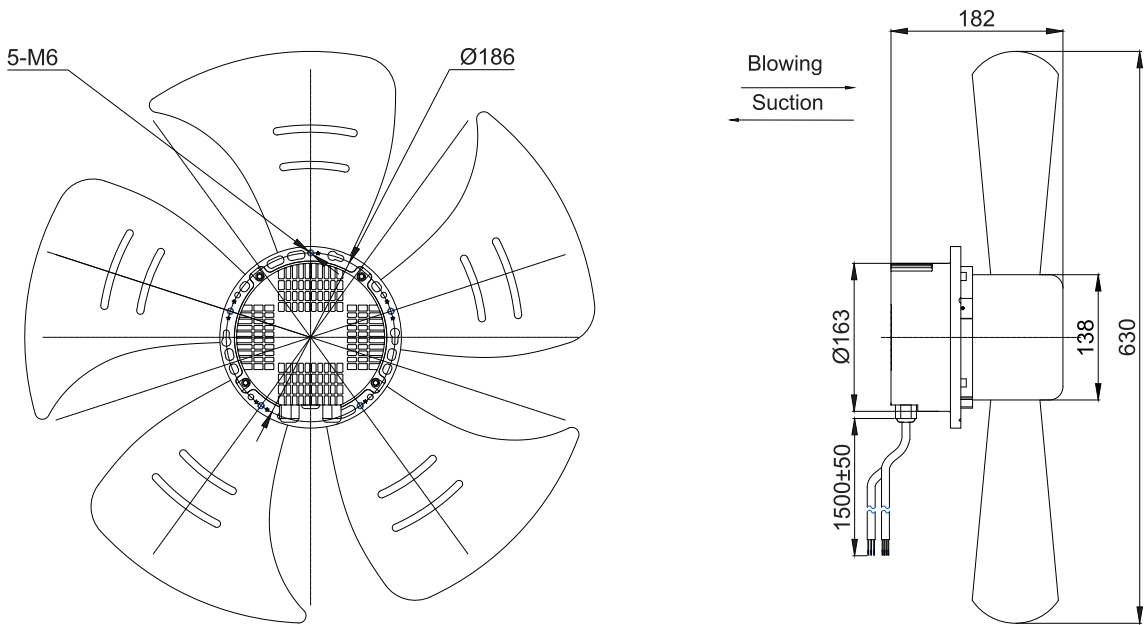


Axial Fan

Dimensions

With wall concave net cover grill



Suction	G3E-3A630-A3-05
Blowing	G3E-3A630-A3-06

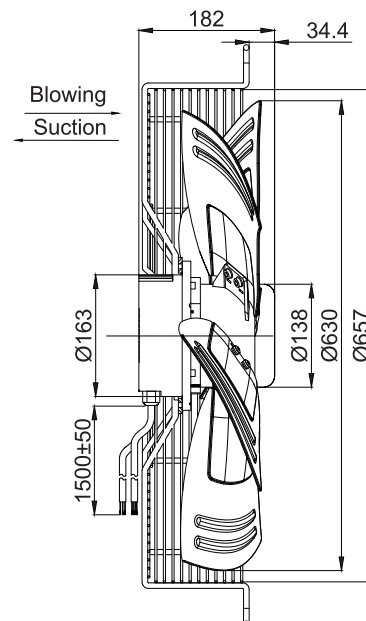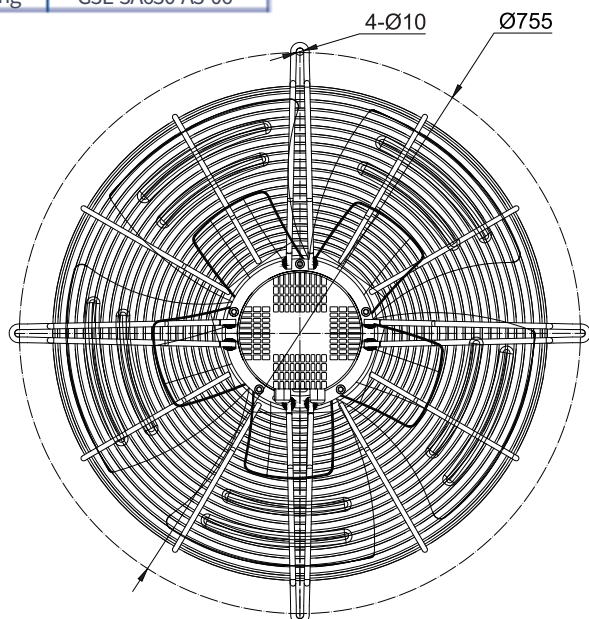

Dimensions

With wind guide panel

Suction	W3E-3A630-A3-05
Blowing	W3E-3A630-A3-06

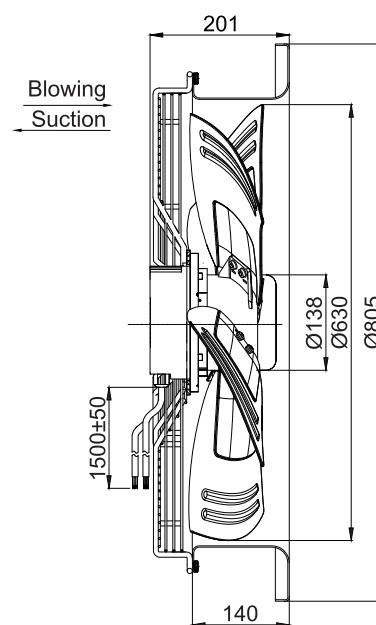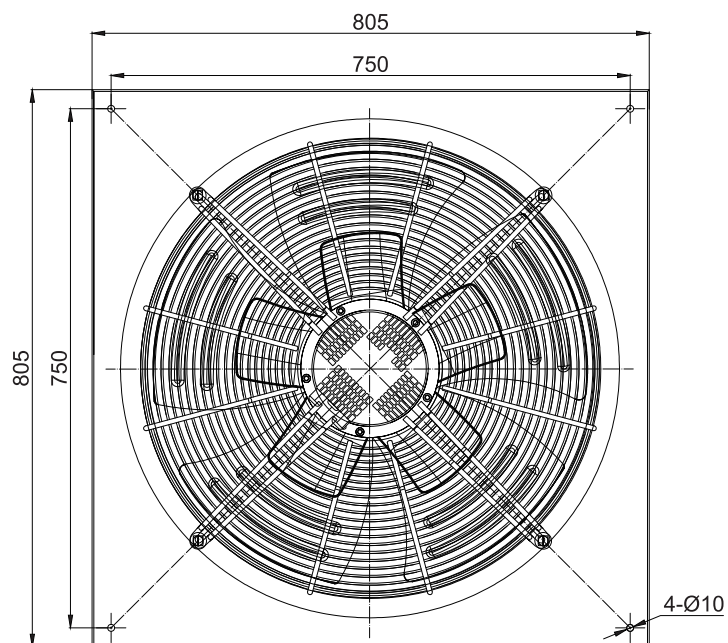

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F





Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A630-A3-0	380	50/60	2.40	1400	1450	14500	74

Performance Curve

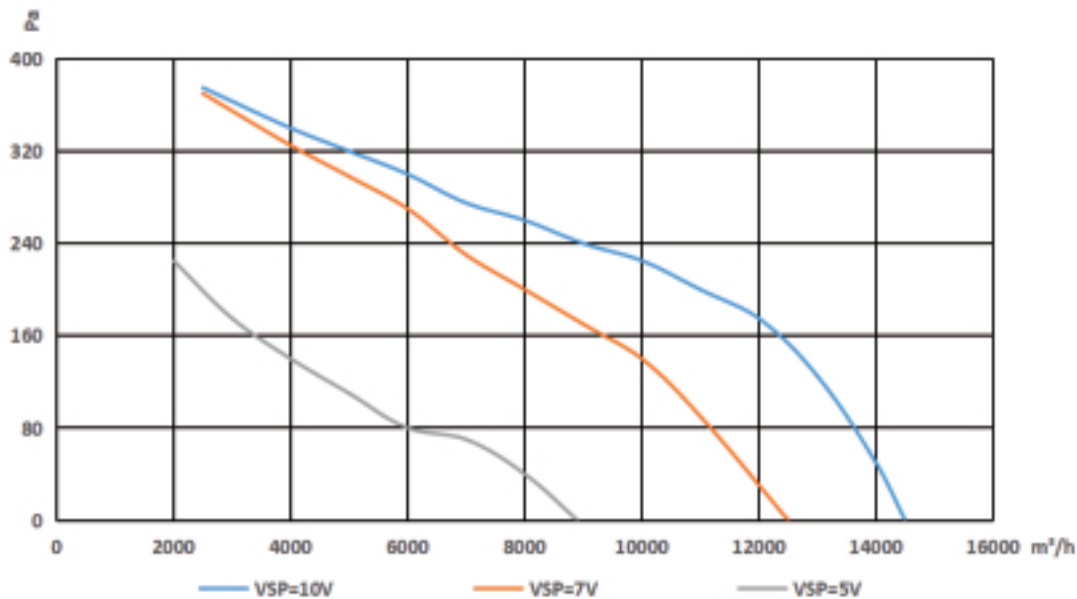

Dimensions

Suction	A3E-3A630-A3-07
Blowing	A3E-3A630-A3-08

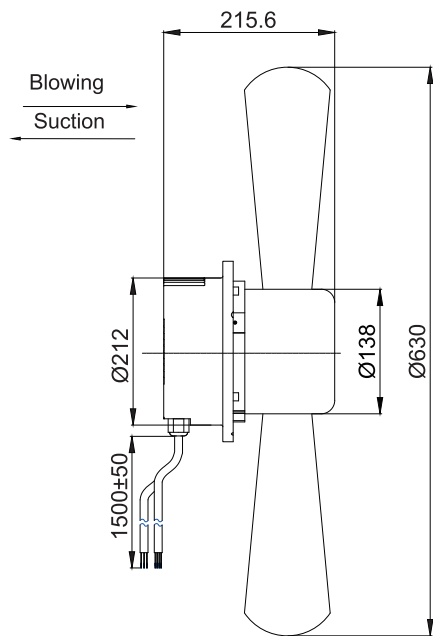
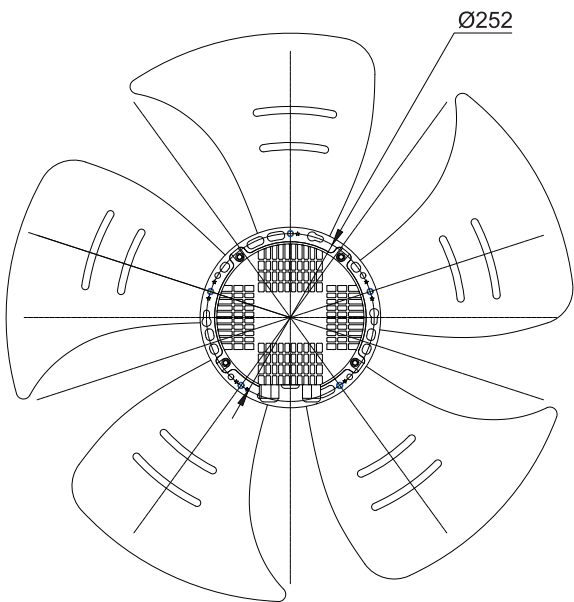


Axial Fan

Dimensions

With wall concave net cover grill

Suction	G3E-3A630-A3-07
Blowing	G3E-3A630-A3-08

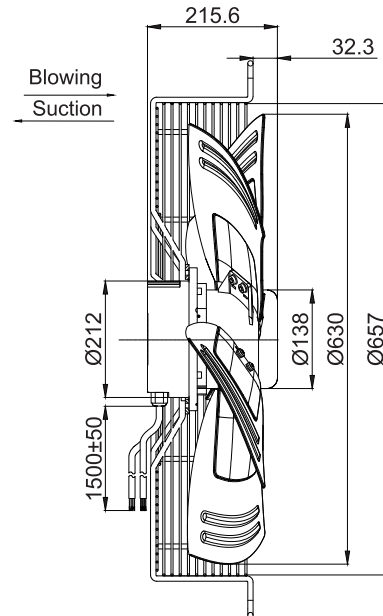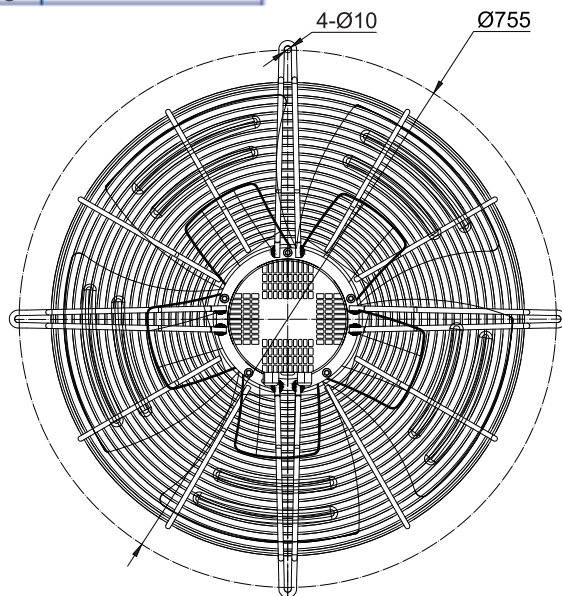

Dimensions

With wind guide panel

Suction	W3E-3A630-A3-07
Blowing	W3E-3A630-A3-08

