

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters



Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A710-A8-0	380	50/60	2.20	1280	1300	17000	77

Performance Curve

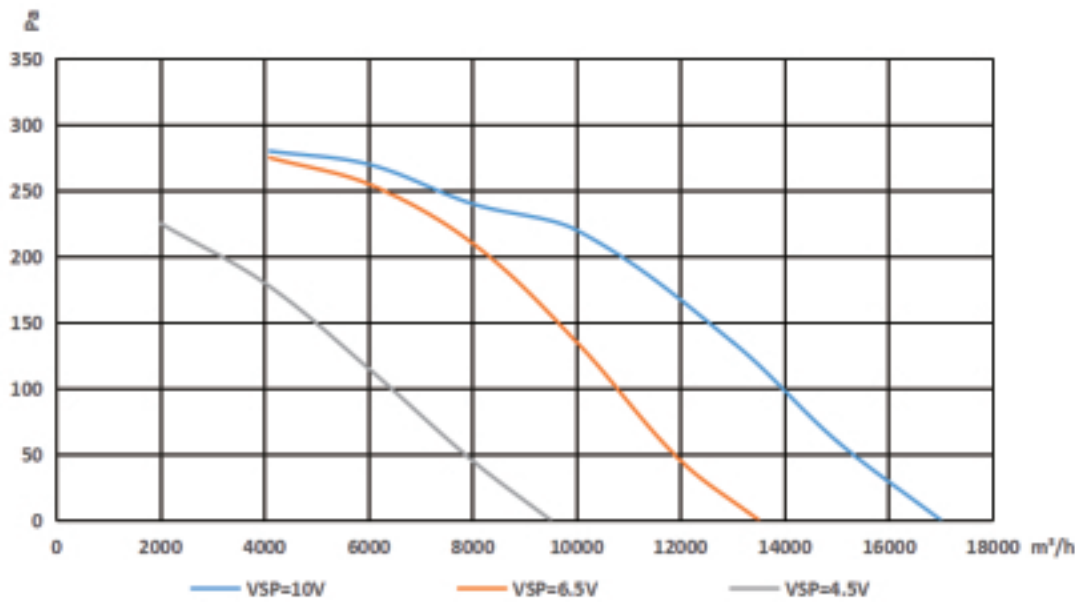

Dimensions

Suction	A3E-3A710-A8-01
Blowing	A3E-3A710-A8-02

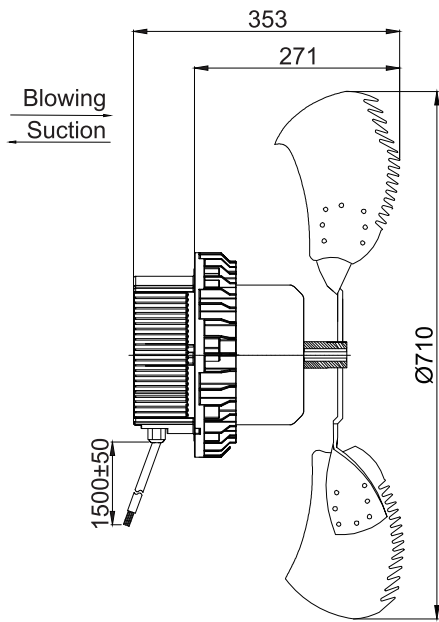
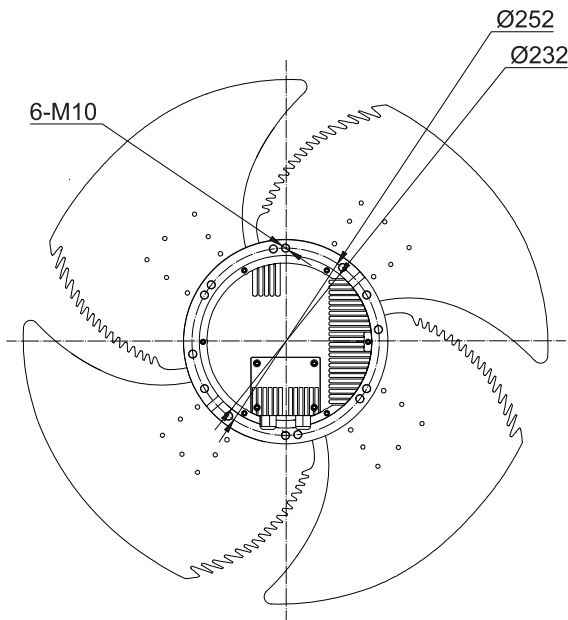


Axial Fan

Dimensions

With wall concave net cover grill



Suction	G3E-3A710-A8-01
Blowing	G3E-3A710-A8-02

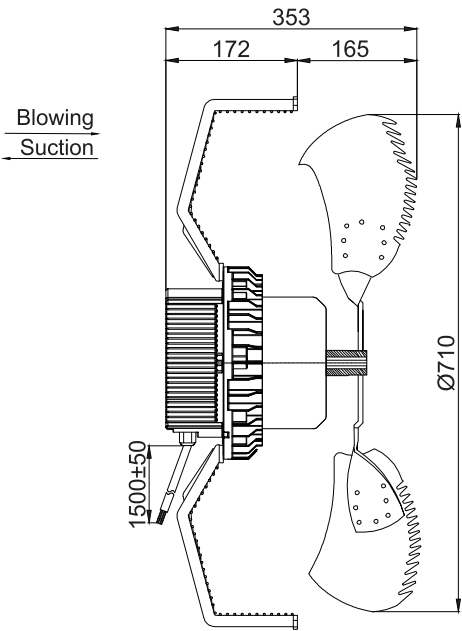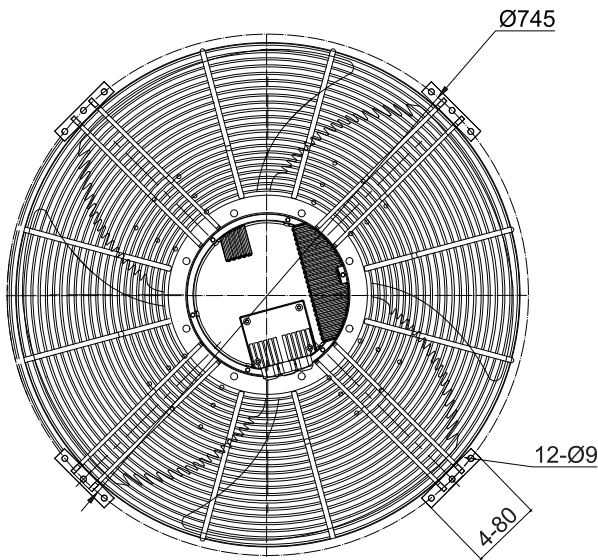

Dimensions

With wind guide panel

Suction	W3E-3A710-A8-01
Blowing	W3E-3A710-A8-02

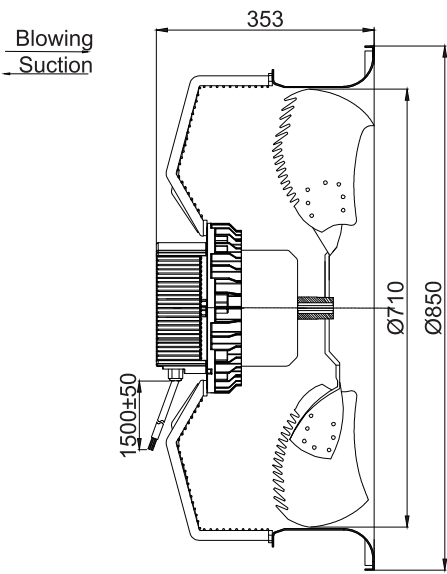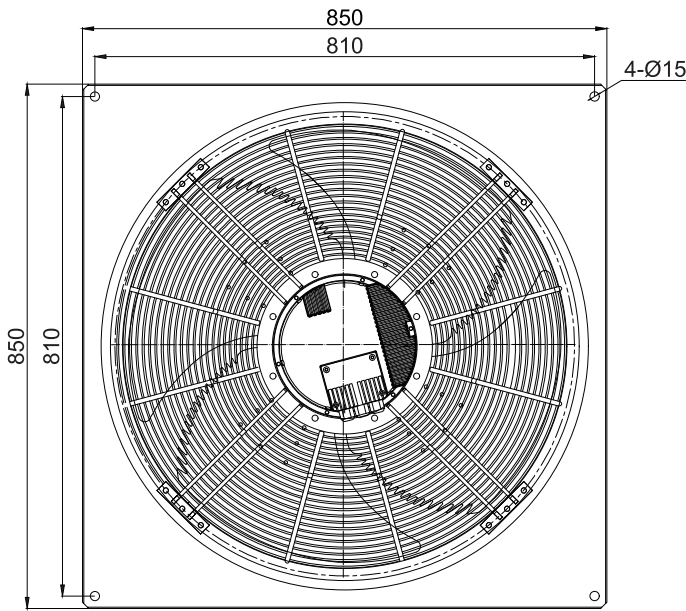

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A800-A8-0	380	50/60	3.00	1900	1100	27000	74

Performance Curve

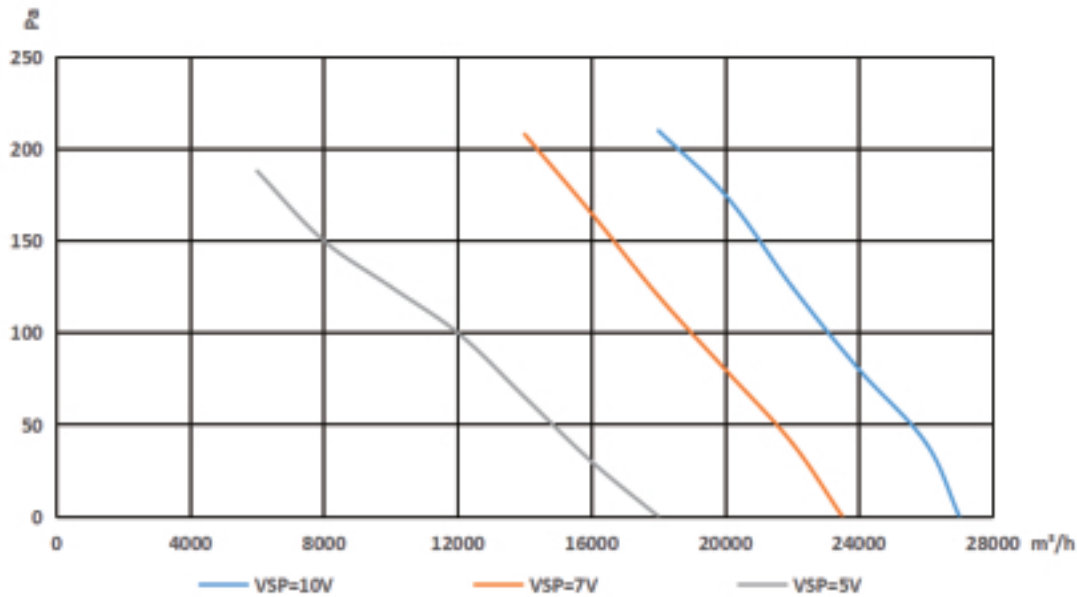

Dimensions

Suction	A3E-3A800-A8-01
Blowing	A3E-3A800-A8-02


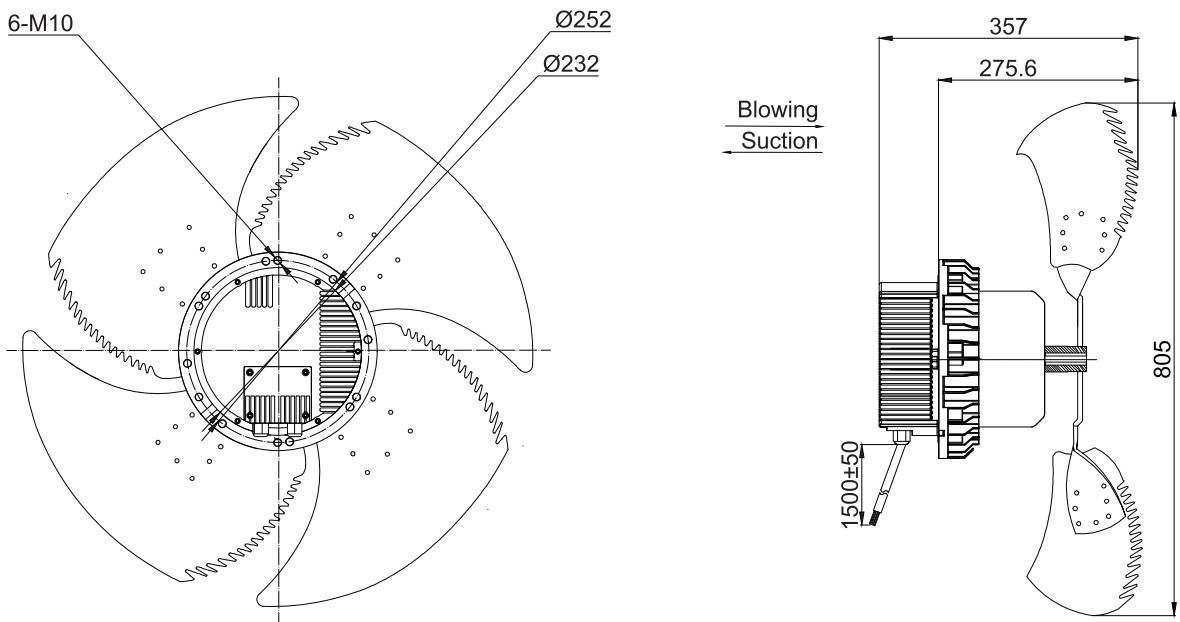


Axial Fan

Dimensions

Suction	G3E-3A800-A8-01
Blowing	G3E-3A800-A8-02



With wall concave net cover grill

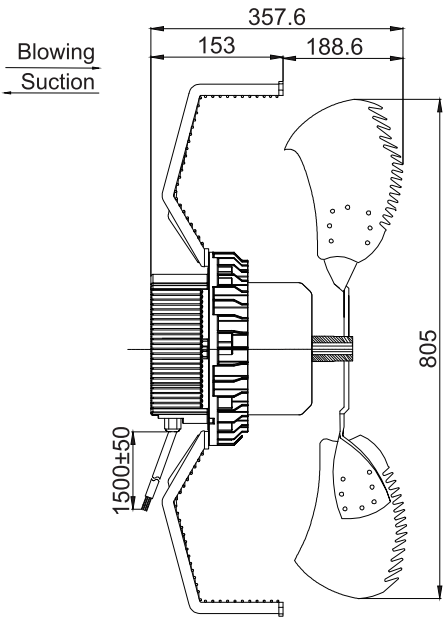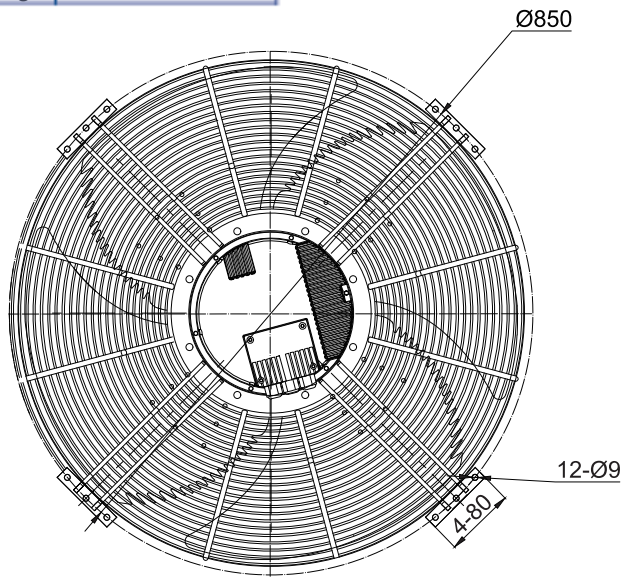

Dimensions

Suction	W3E-3A800-A8-01
Blowing	W3E-3A800-A8-02

With wind guide panel

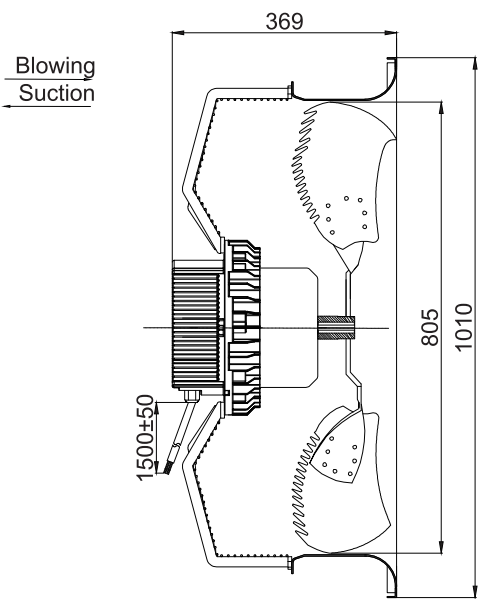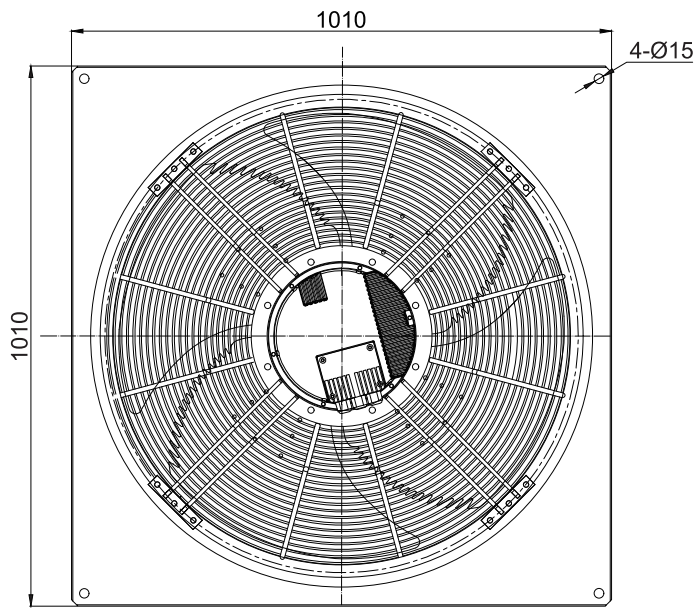

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC
Type of Protection: IP55
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 20 °C ~ +55 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Rated Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
W3E-3A800-Y8-02	380	50/60	4.60	2220	1020	28000	72

Performance Curve

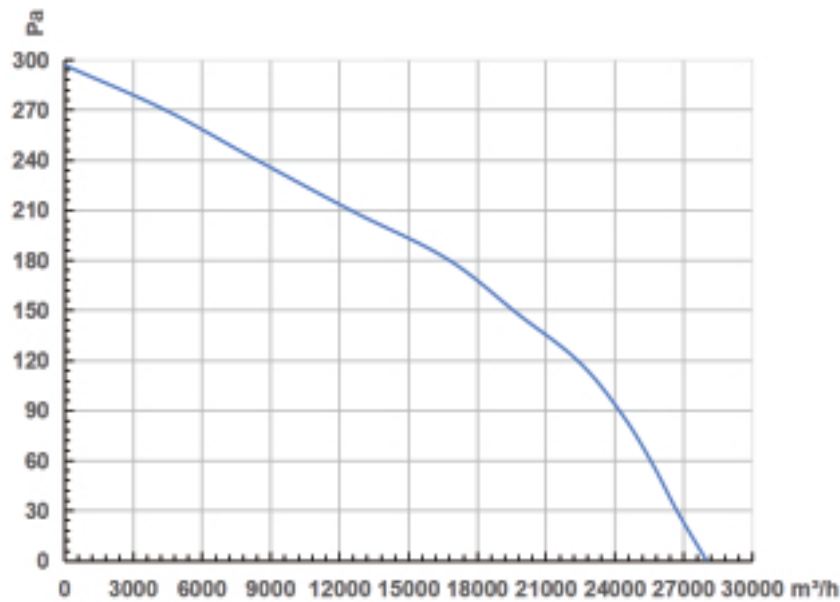

Dimensions

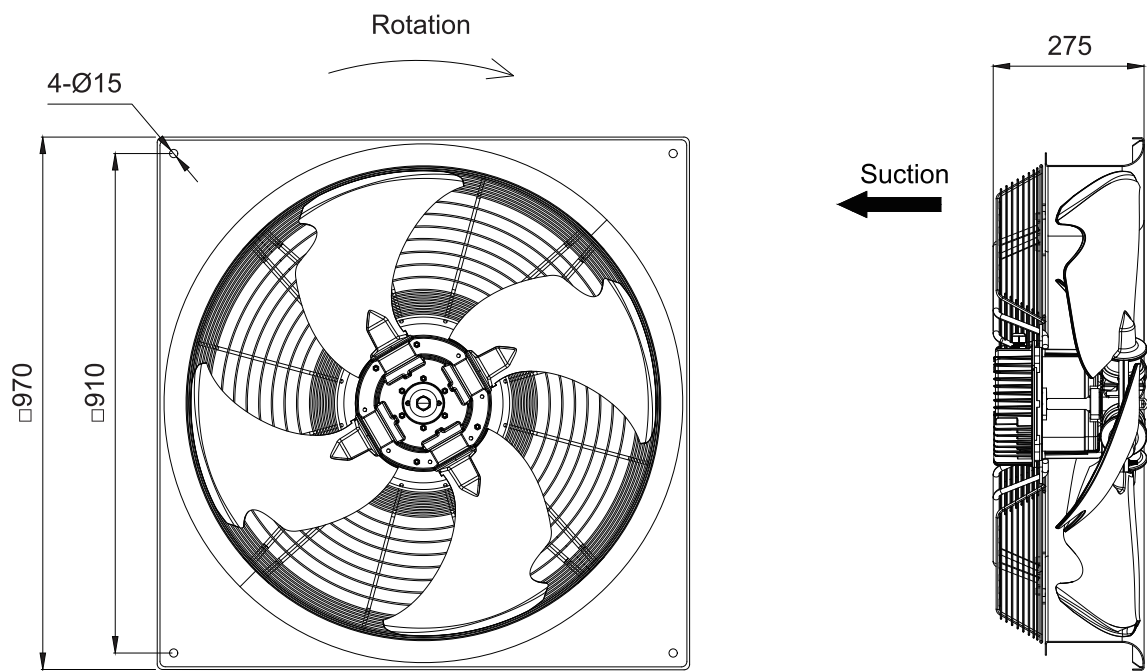

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM/4-20mA
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +65 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Rated Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
W3E-3A800-G8-01	380	50/60	4.50	2870	1150	29220	74

Performance Curve

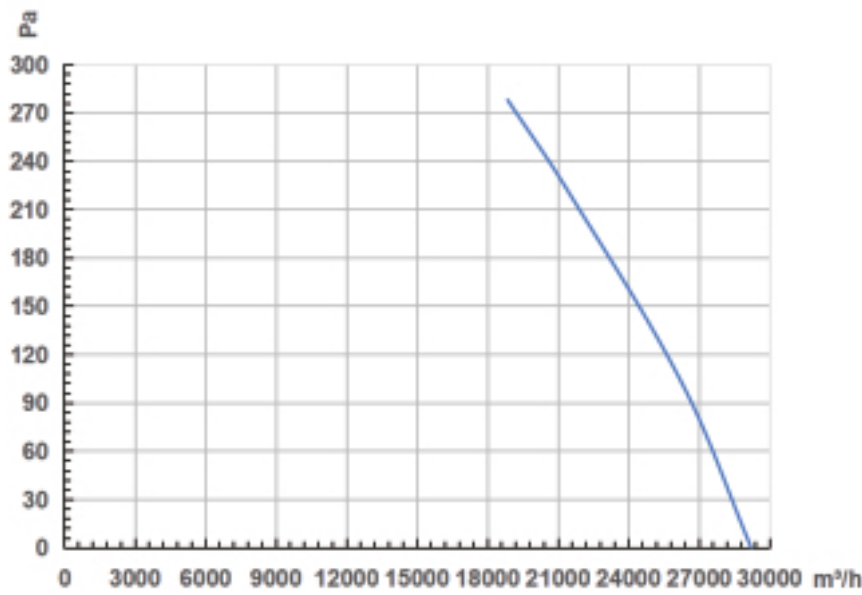

Dimensions

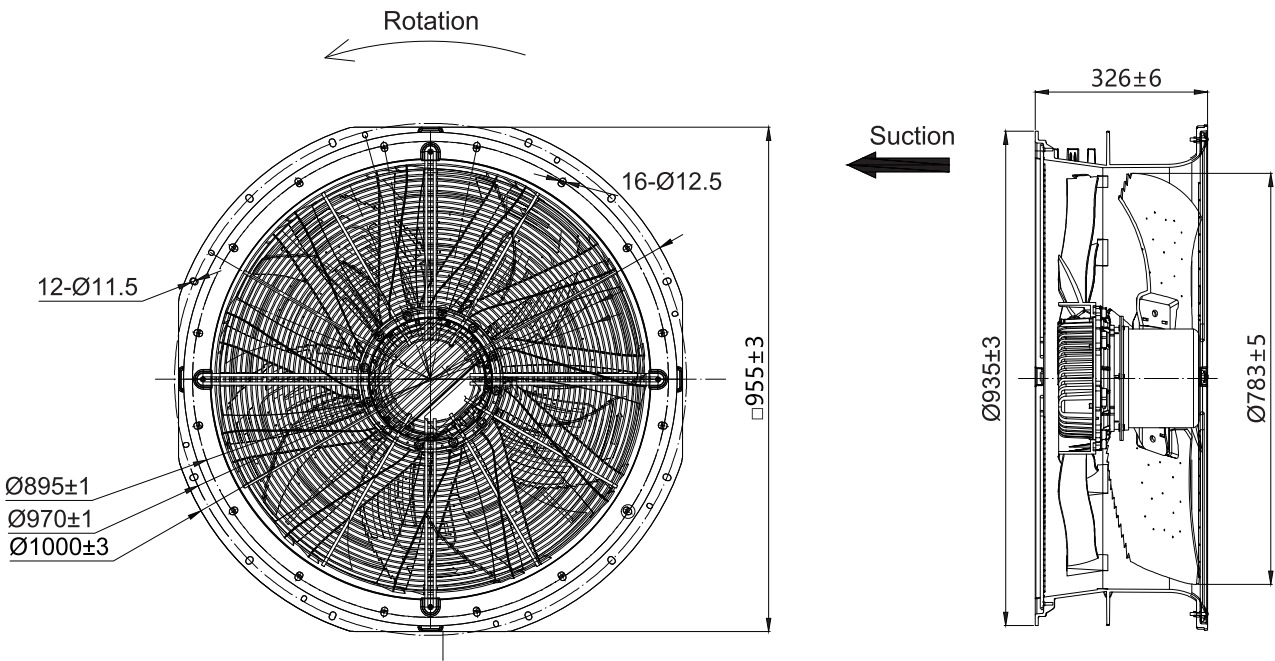

Axial Fan




Impeller Material: Sheet aluminum
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 30 °C ~ +60 °C
Insulation class: F



Technical Parameters


Model No.	Rated Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
3E-3A910-A8-2	380	50/60	3.00	1800	1000	31000	77

Performance Curve

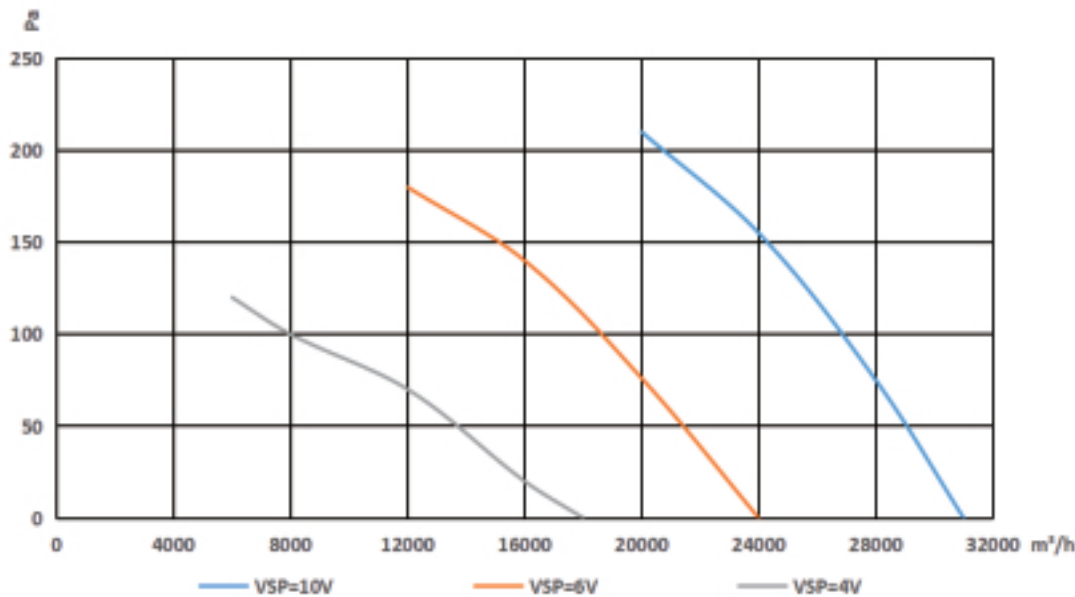

Dimensions

Suction	A3E-3A910-A8-24
Blowing	A3E-3A910-A8-25

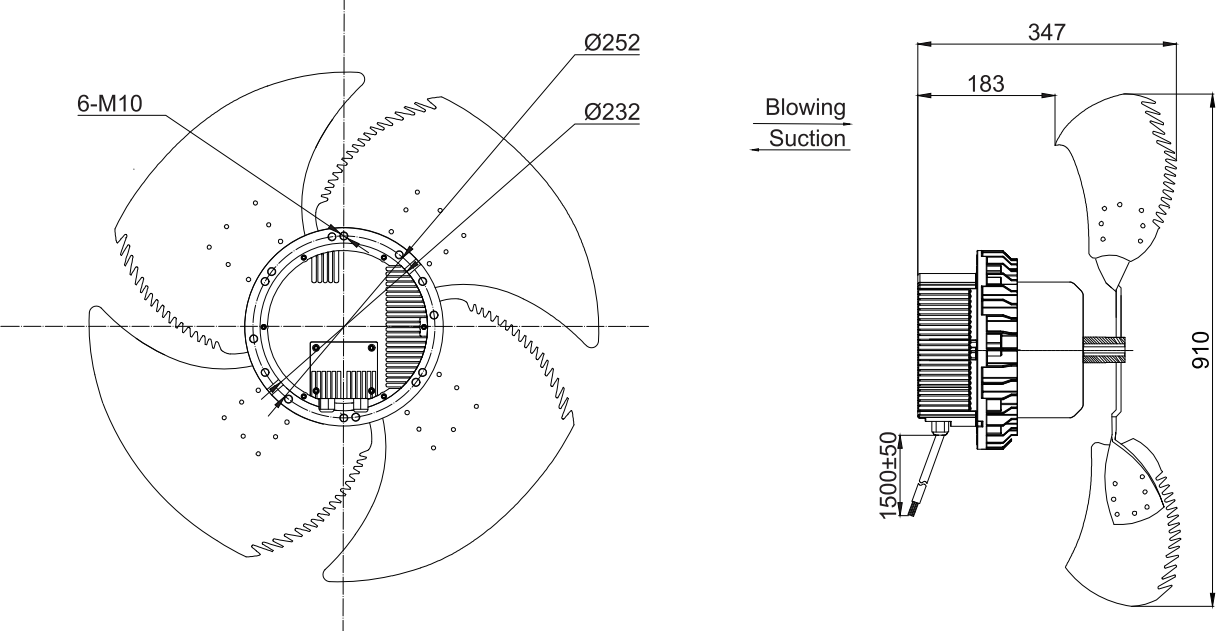


Axial Fan

Dimensions

With wall concave net cover grill


Suction	G3E-3A910-A8-20
Blowing	G3E-3A910-A8-21

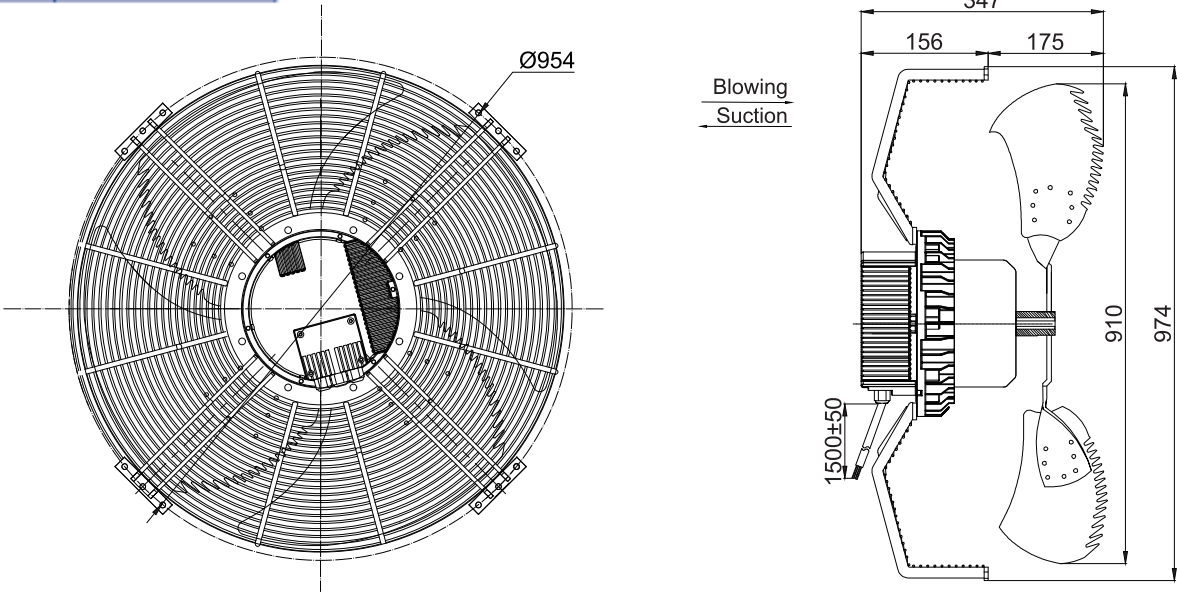

Dimensions

With wind guide panel

Suction	W3E-3A910-A8-22
Blowing	W3E-3A910-A8-23

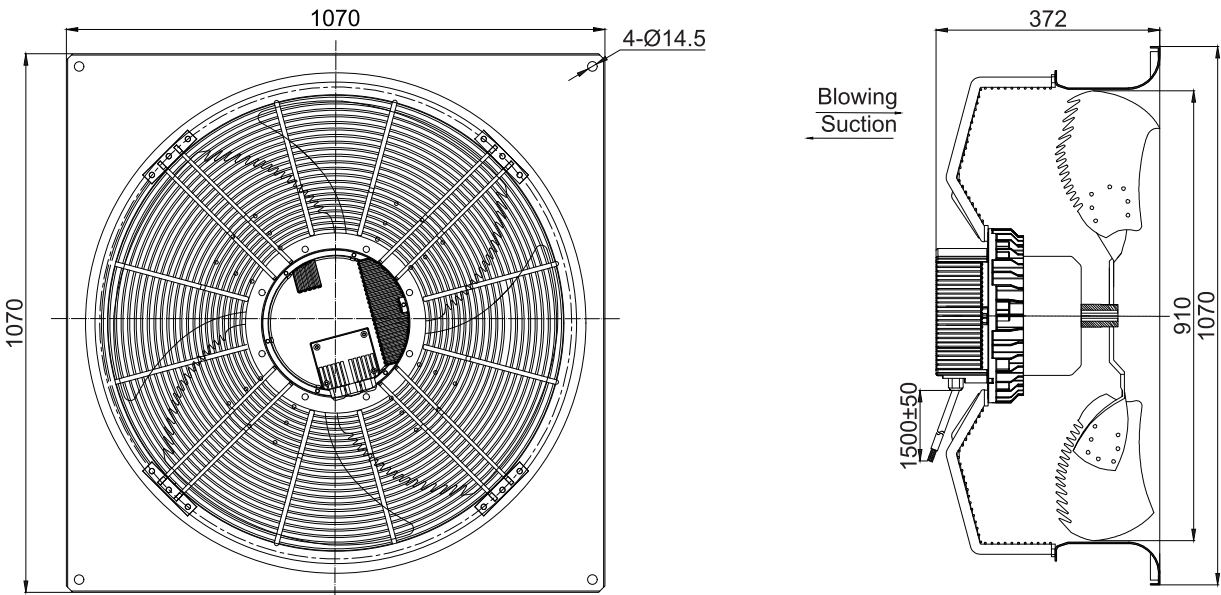

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC
Type of Protection: IP55
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 20 °C ~ +55 °C
Insulation class: F




Technical Parameters							
Model No.	Rated Voltage VAC	Frequency Hz	Current A	Rated Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
W3E-3A910-Y8-01	380	50/60	4.75	2250	1000	30100	73

Performance Curve

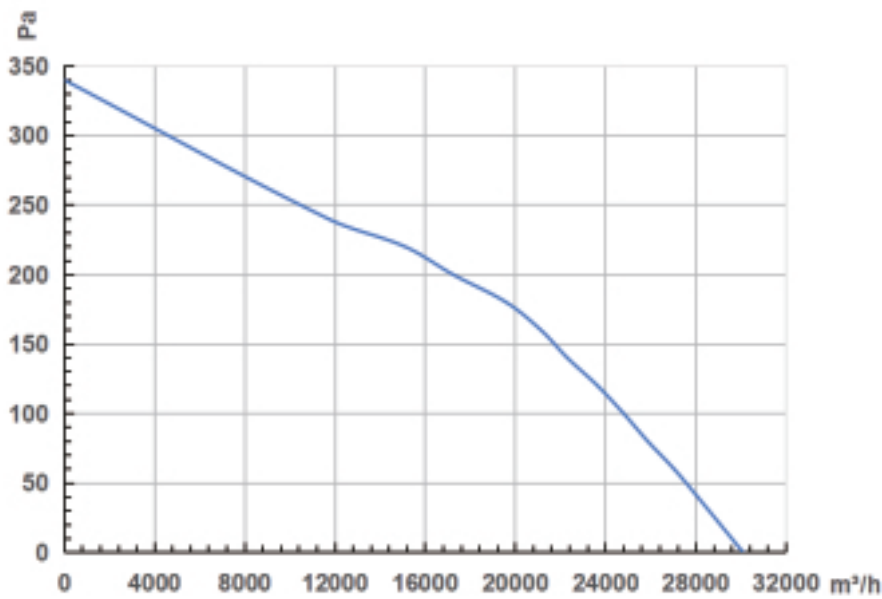

Dimensions

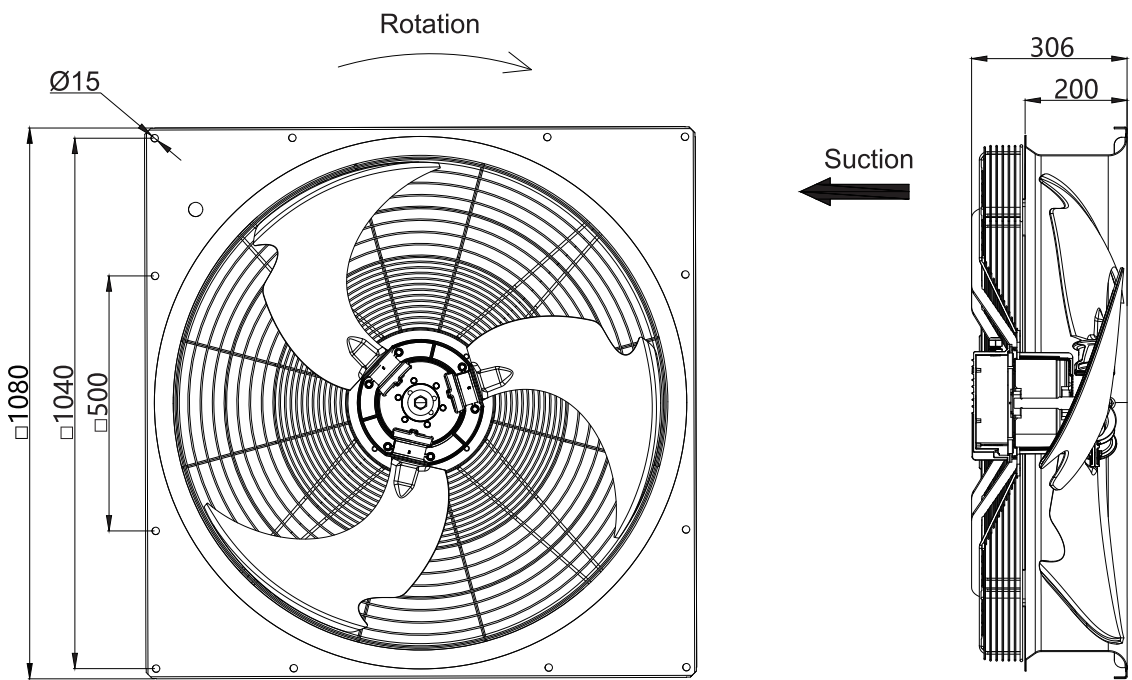

Axial Fan




Impeller Material: Plastic
Speed Control: 0-10VDC/PWM/4-20mA
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +65 °C
Insulation class: F




Technical Parameters

Model No.	Rated Voltage VAC	Frequency Hz	Current A	Rated Power W	Speed RPM	Air Flow m³/h	Noise Level dBA
W3E-3A910-G8-01	380	50/60	5.35	3420	1050	35300	77

Performance Curve

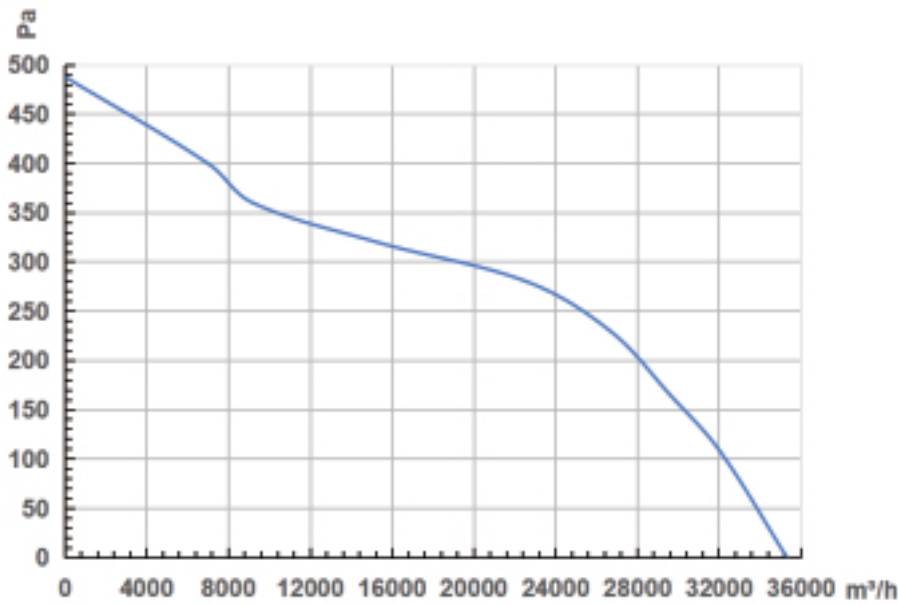

Dimensions

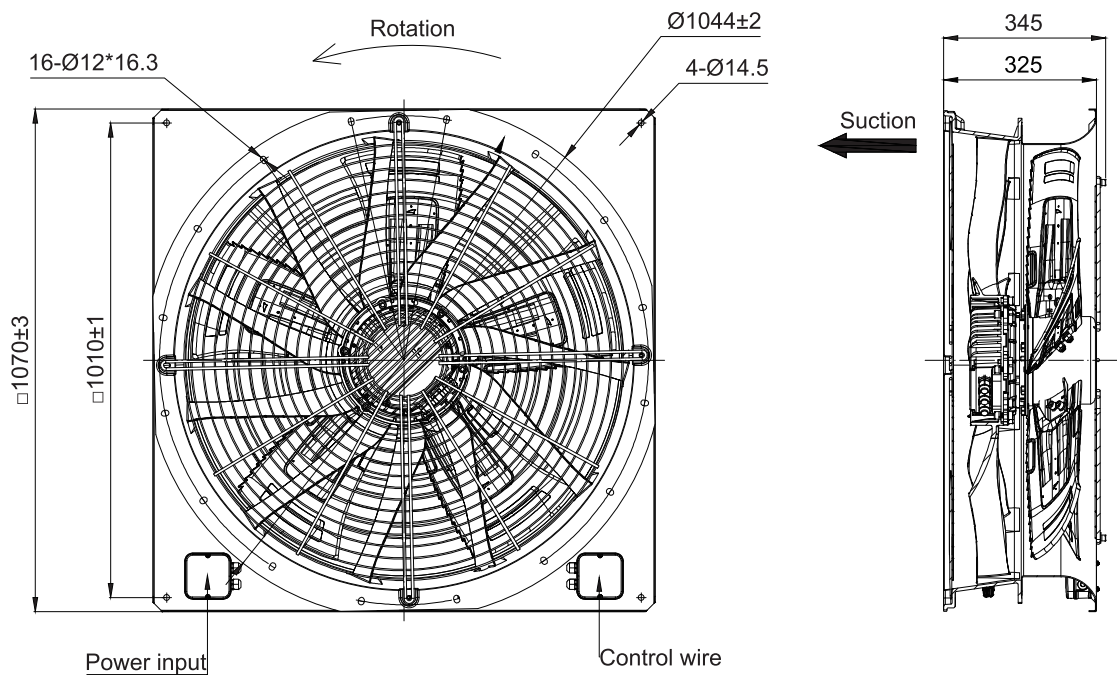



SMT49C2410E-43

 www.seemtek.com

 +86 512 6922 3858

 sales@seemtek.com

 No.88 Litanghe Road, Xiangcheng District, Suzhou, Jiangsu, China 215131