

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A133-A7-01 | 220                  | 0.30               | 45               | 1700               | 268                           | 650                | Class B    | 65                 |

## Performance Curve

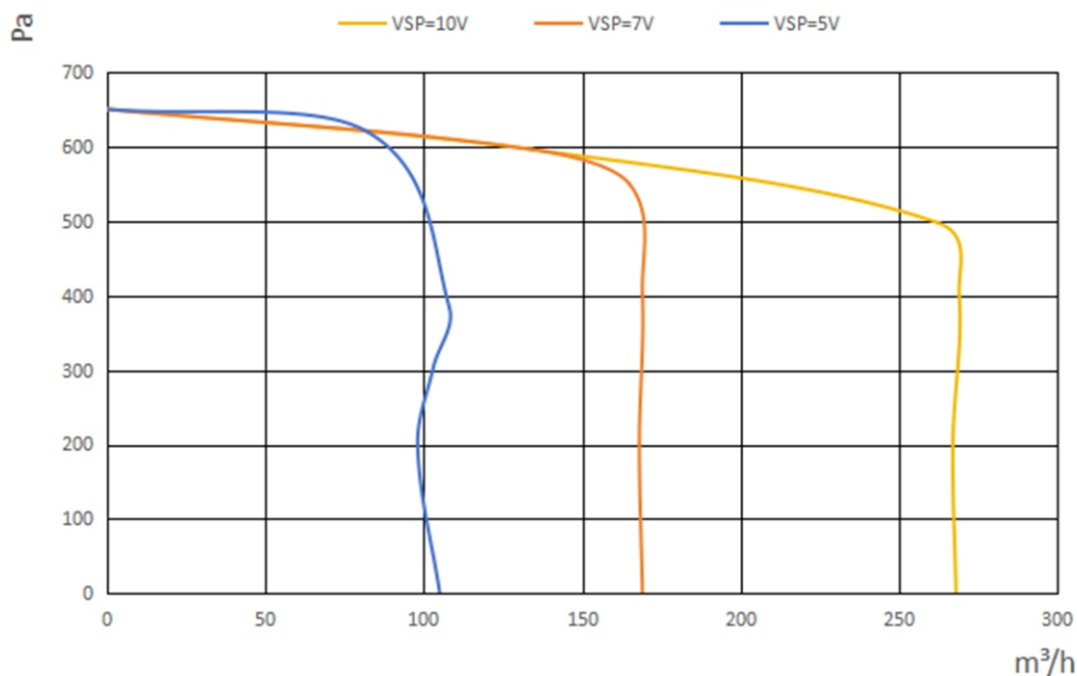

## Outline Drawing

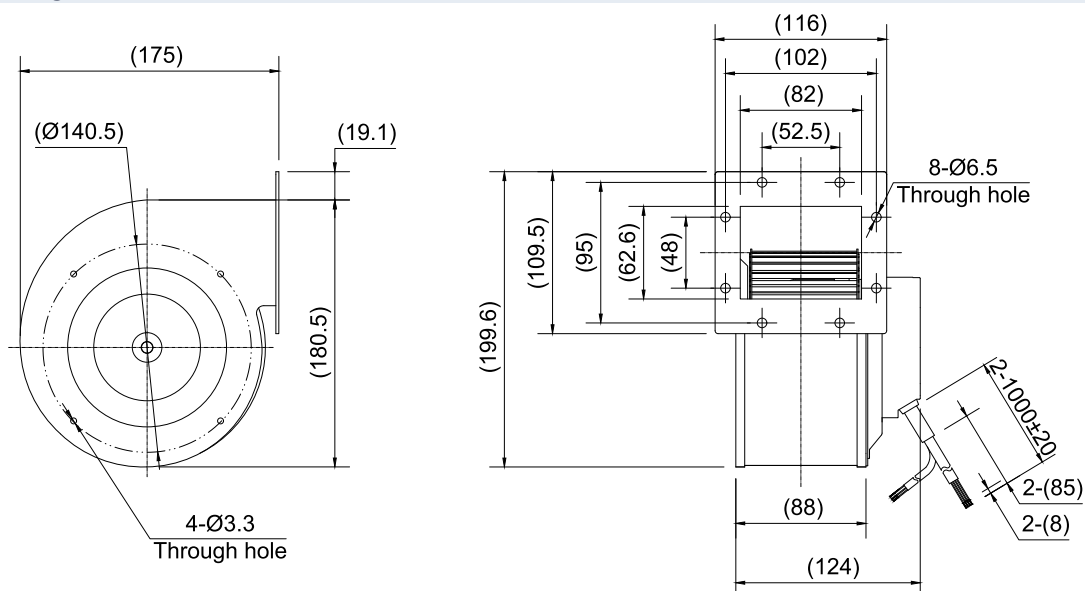

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A133-A7-02 | 220                  | 0.50               | 65               | 2100               | 310                           | 310                | Class B    | 71                 |


## Performance Curve

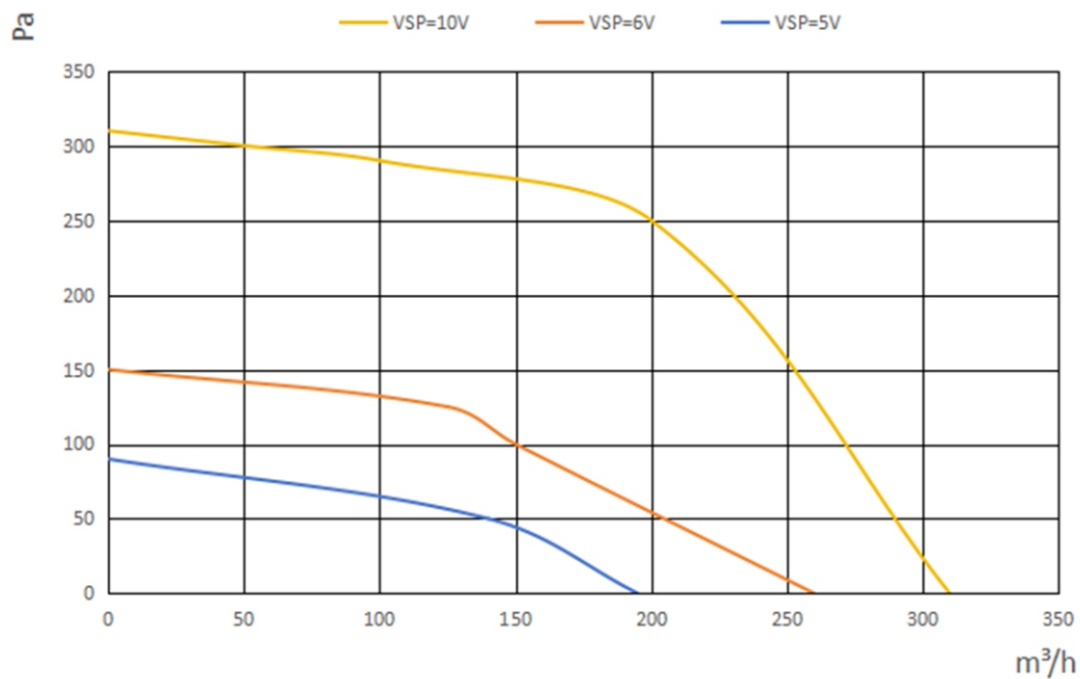

## Outline Drawing

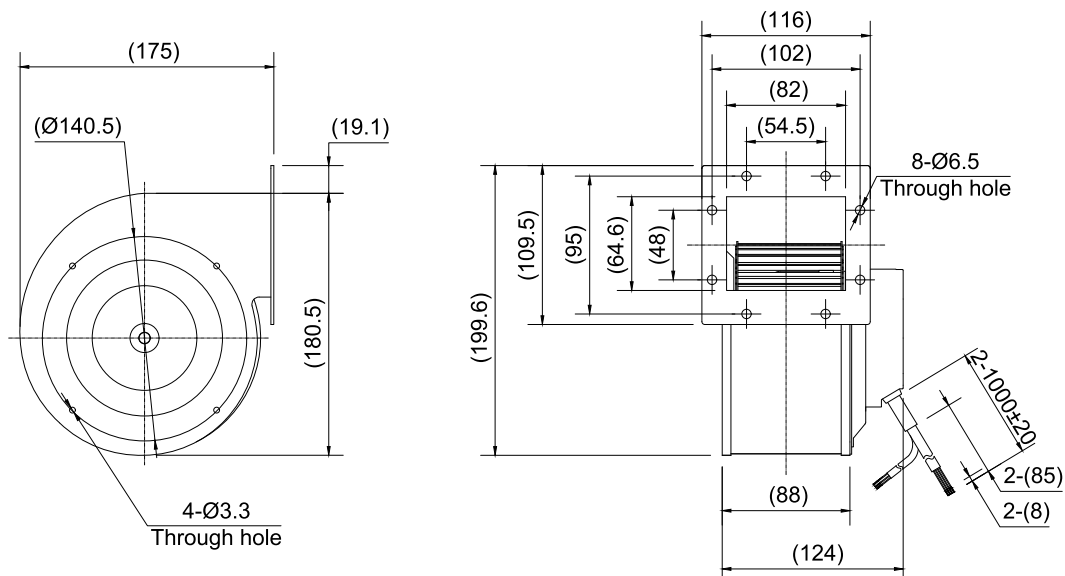

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-2A140-A7-01 | 220                  | 0.22               | 30               | 1250               | 310              | 500                | Class B    | 63                 |


## Performance Curve

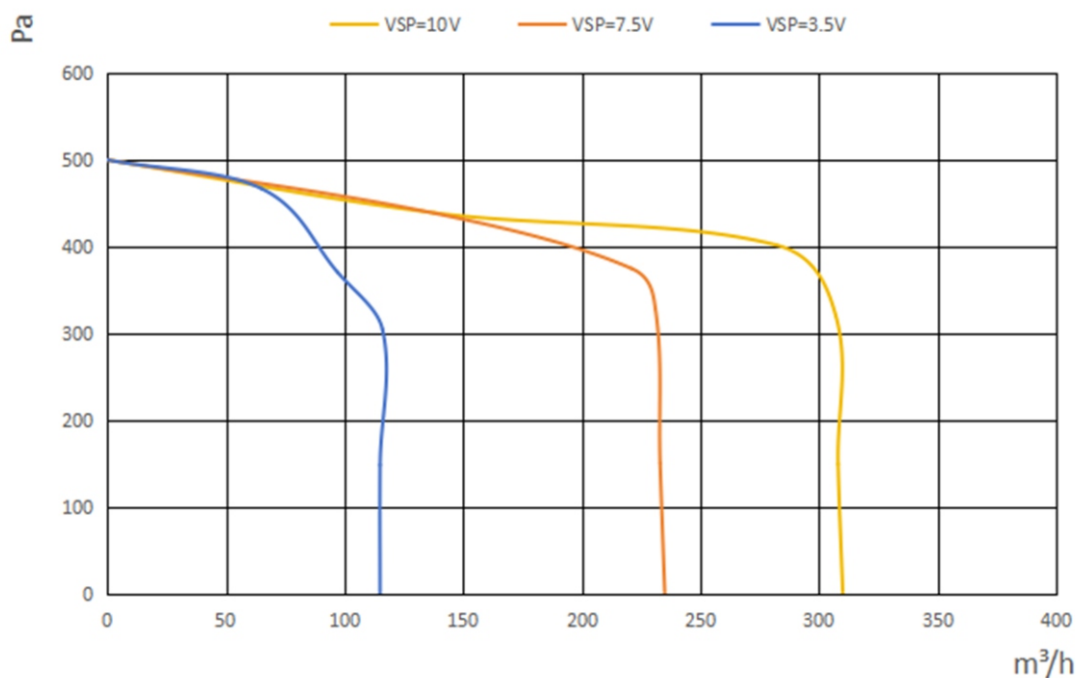

## Outline Drawing

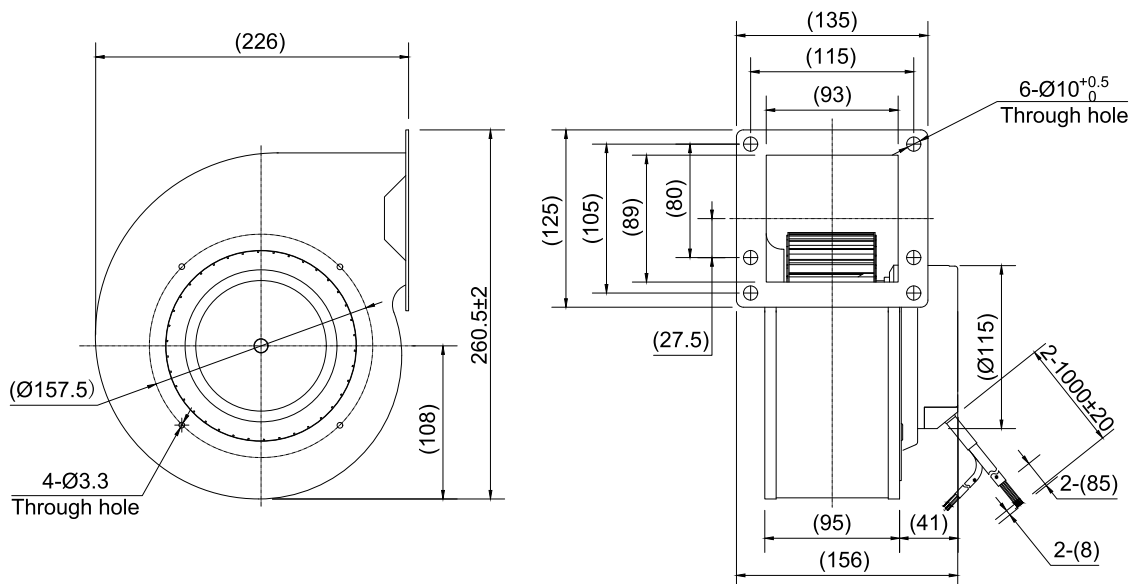

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-2A140-A7-02 | 220                  | 0.60               | 80               | 1800               | 450              | 460                | Class B    | 59                 |


## Performance Curve

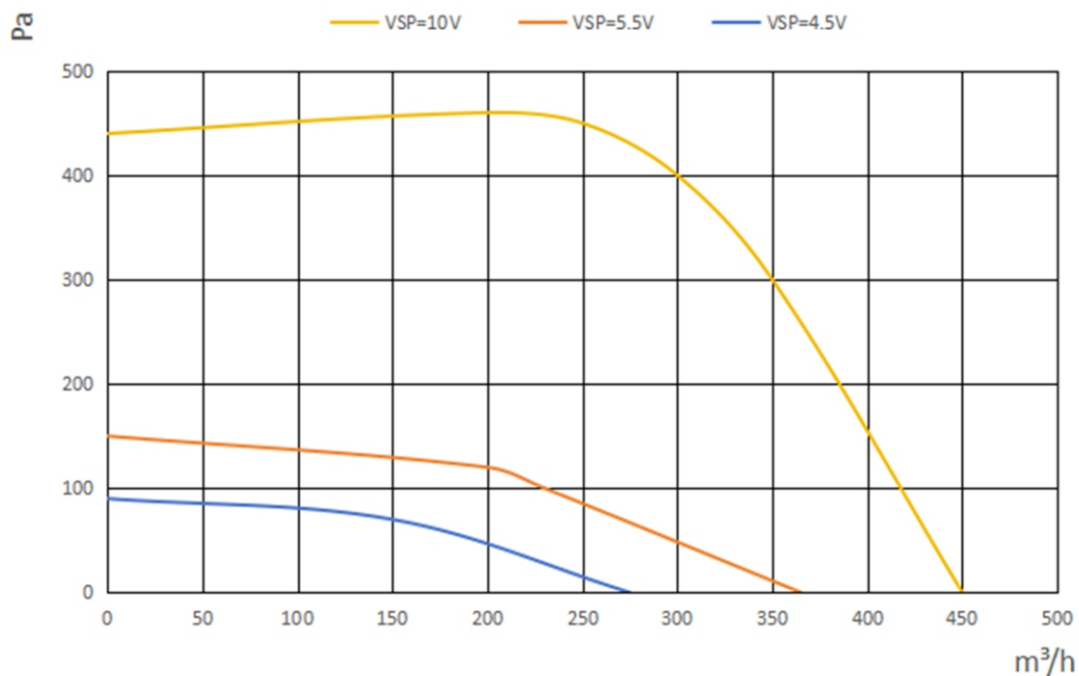

## Outline Drawing

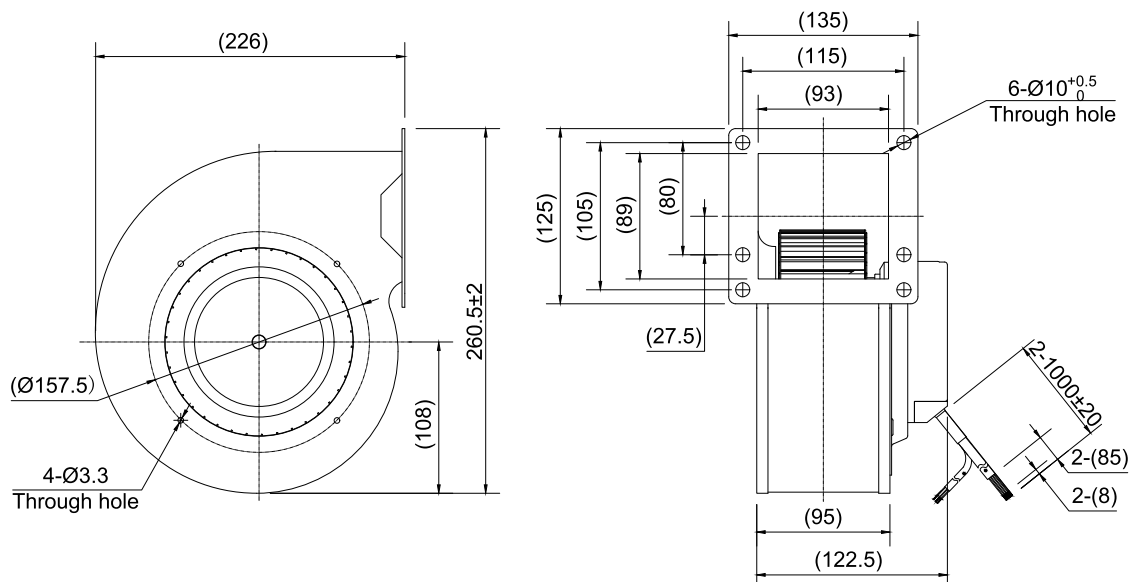

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A160-A7-01 | 220                  | 0.60               | 80               | 1500               | 420                           | 630                | Class B    | 52                 |


## Performance Curve

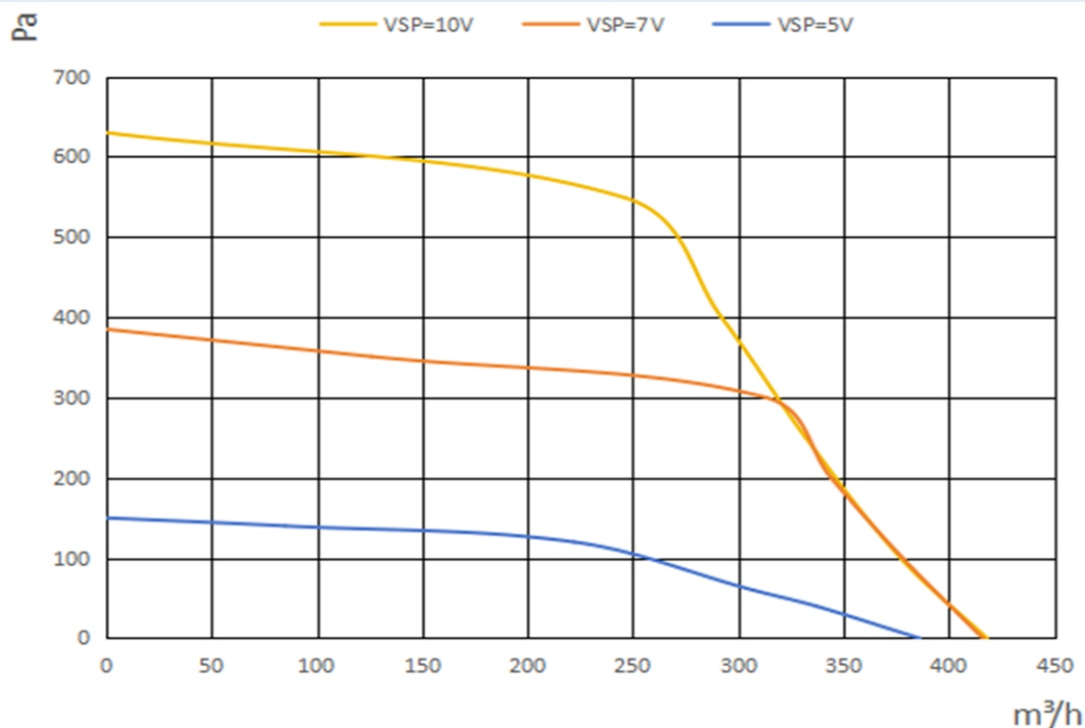

## Outline Drawing

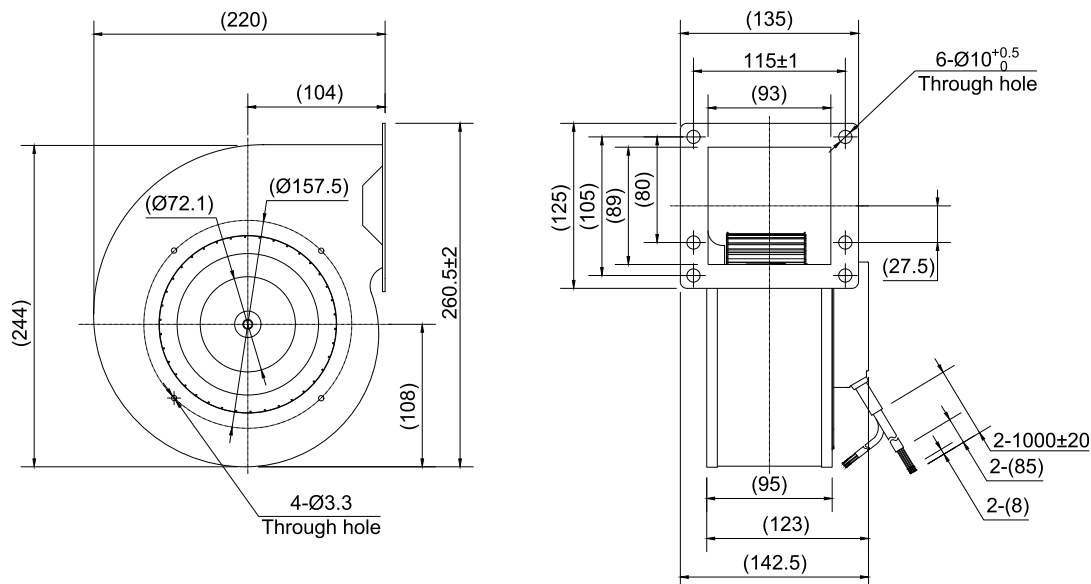

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A160-A7-02 | 220                  | 0.86               | 120              | 1900               | 512                           | 835                | Class B    | 65                 |


## Performance Curve

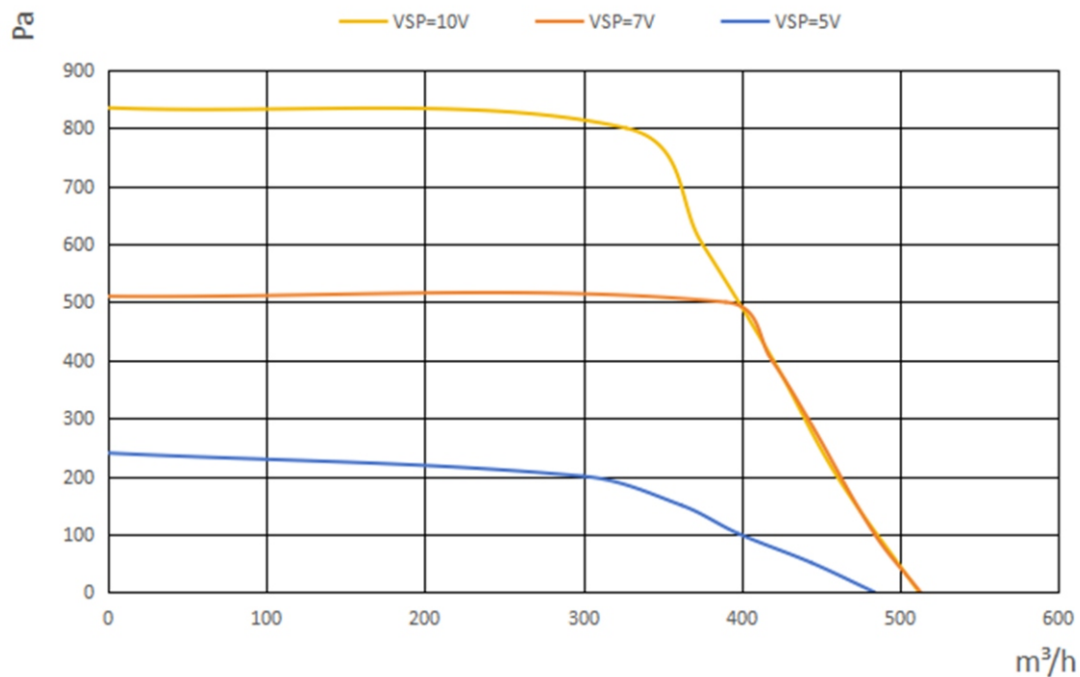

## Outline Drawing

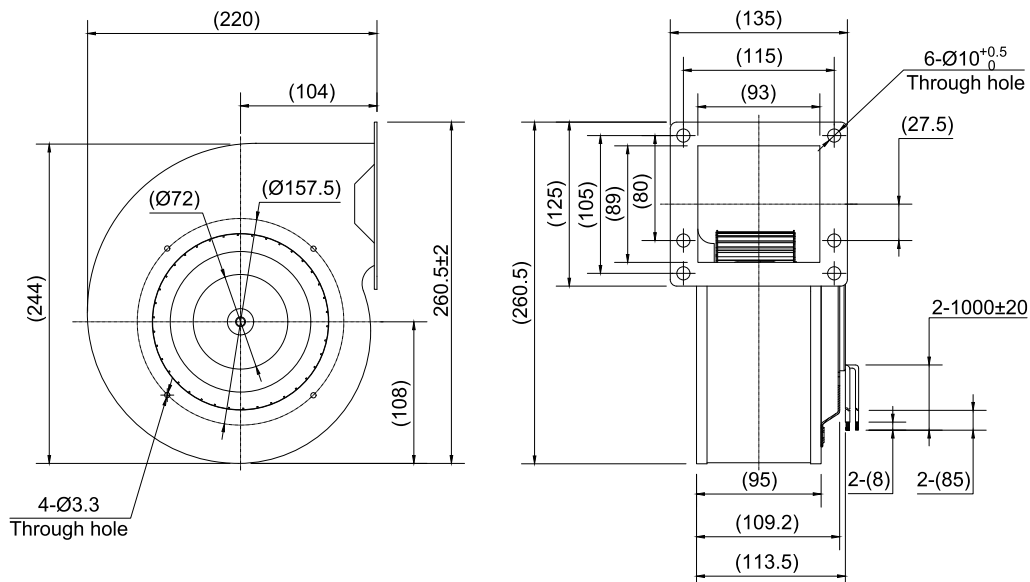

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A160-A7-03 | 220                  | 0.72               | 100              | 1750               | 490                           | 900                | Class B    | 64                 |


## Performance Curve

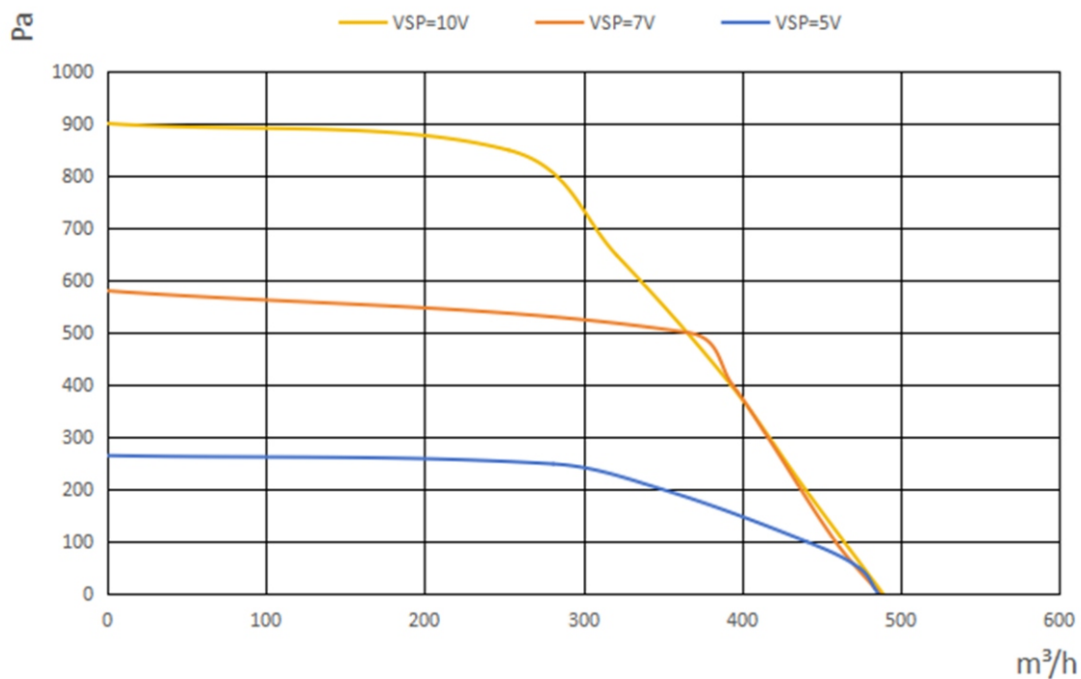

## Outline Drawing

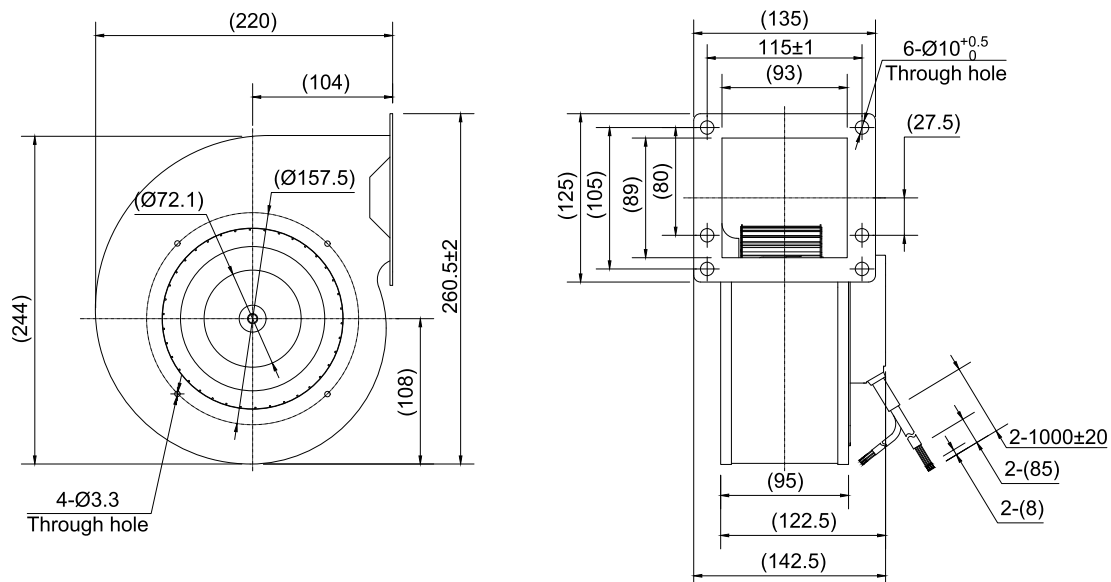

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-2A160-A9-04 | 220                  | 0.75               | 110              | 1900               | 516              | 610                | Class B    | 66                 |

## Performance Curve

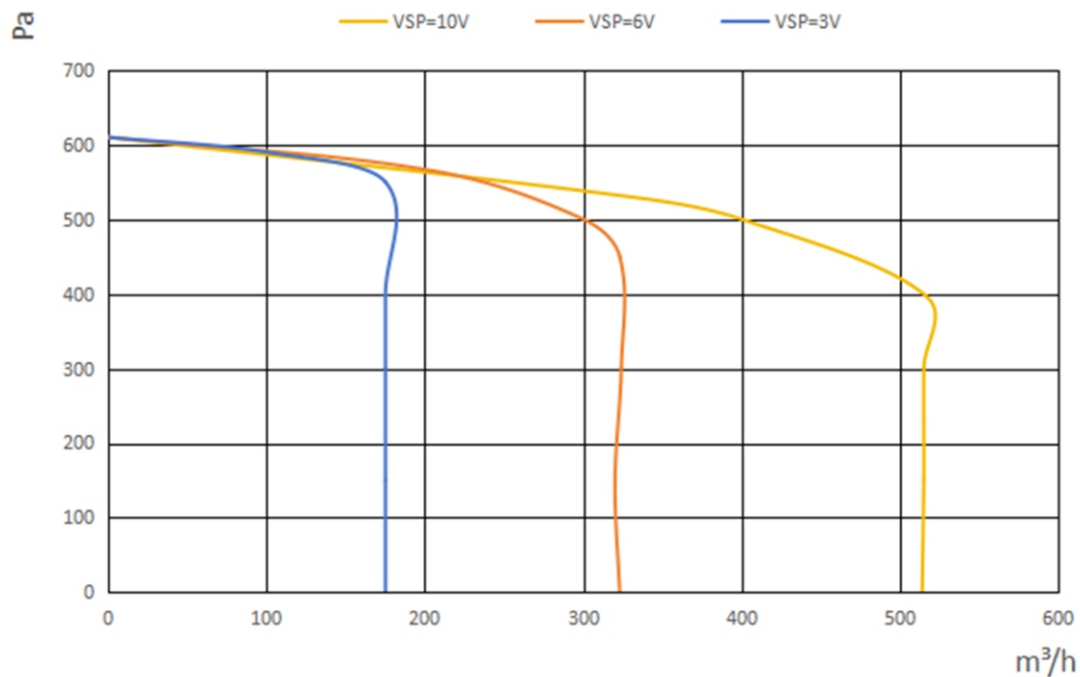


## Outline Drawing

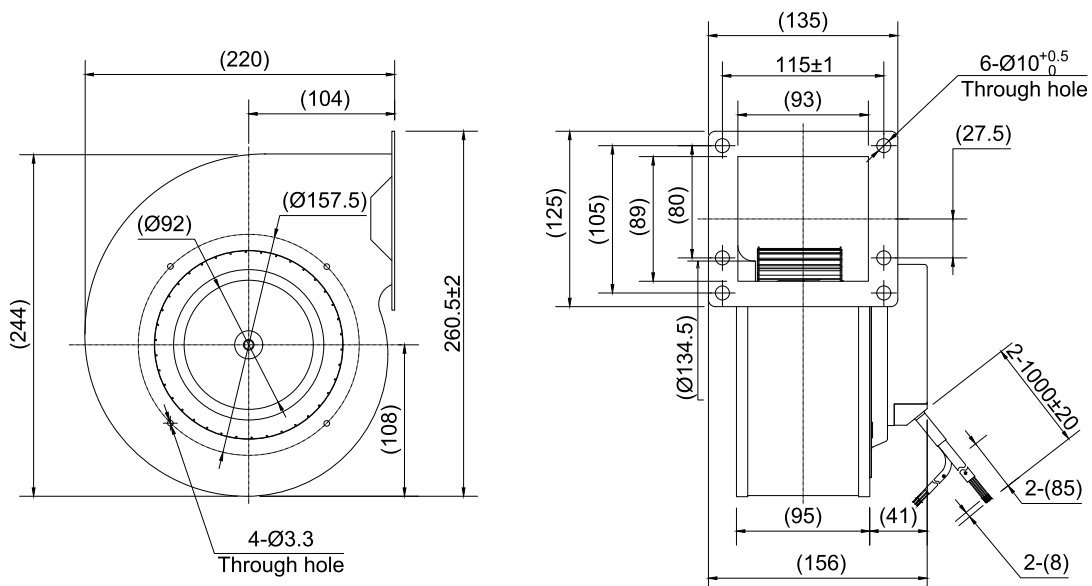



# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A160-A9-05 | 220                  | 1.00               | 150              | 2150               | 600                           | 620                | Class B    | 67                 |


## Performance Curve

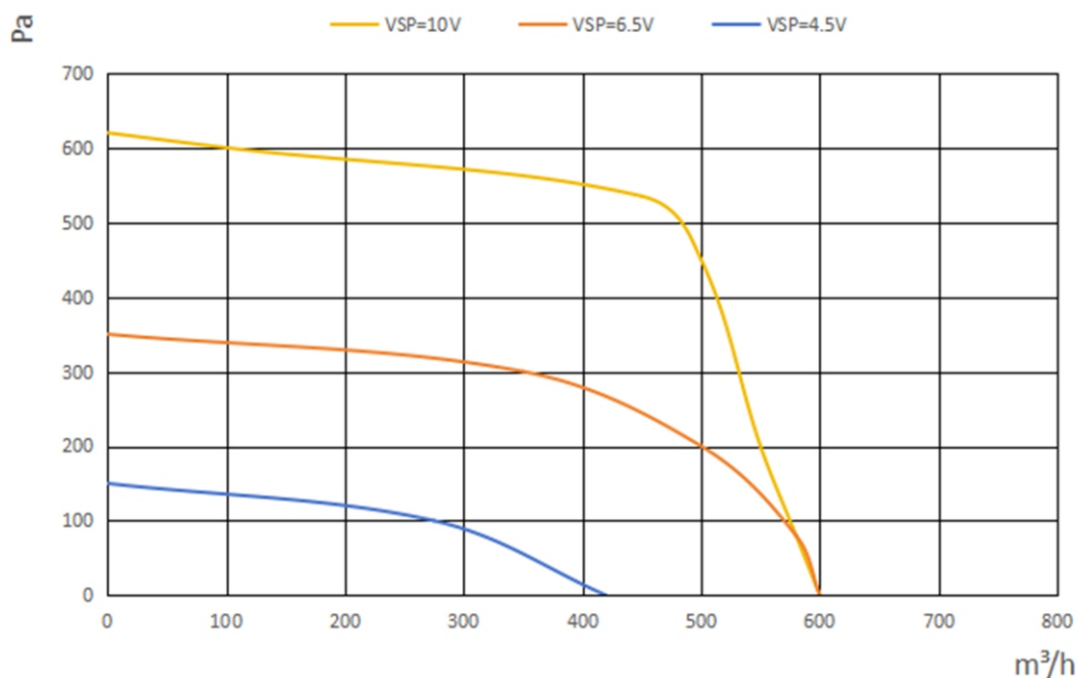

## Outline Drawing

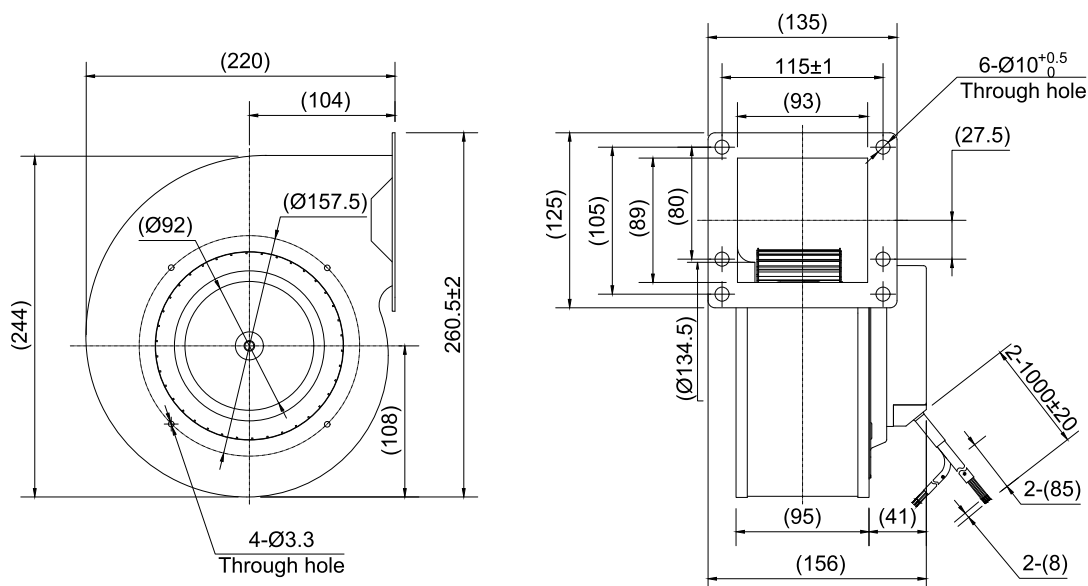

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-2A180-A9-01 | 220                  | 0.60               | 90               | 1200               | 600              | 700                | Class B    | 59                 |


## Performance Curve

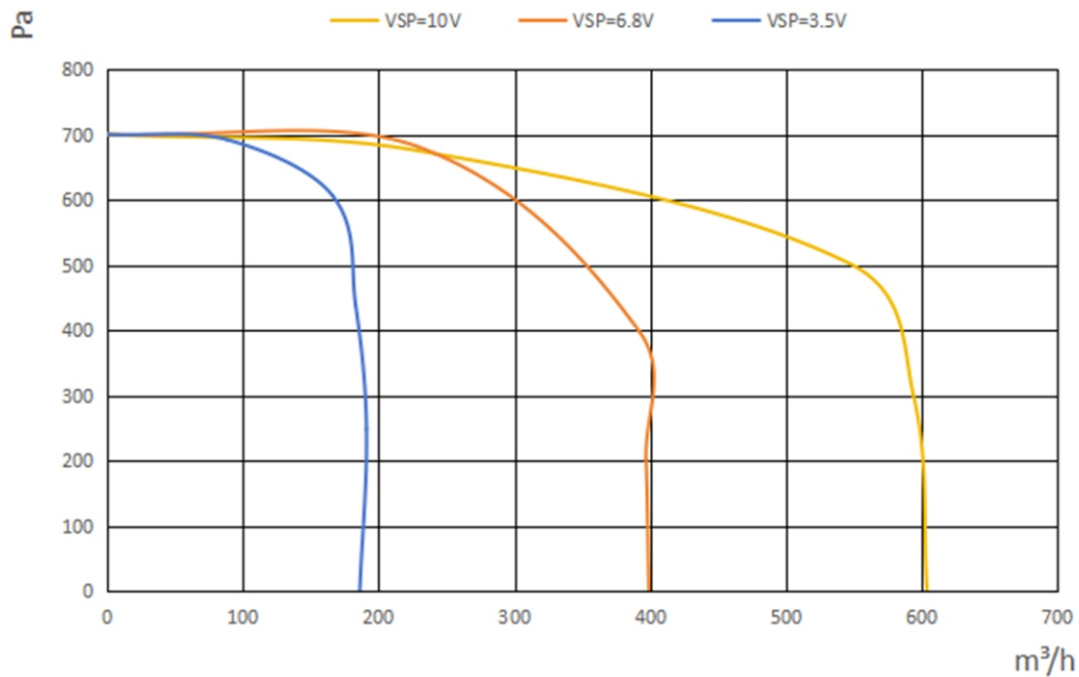

## Outline Drawing

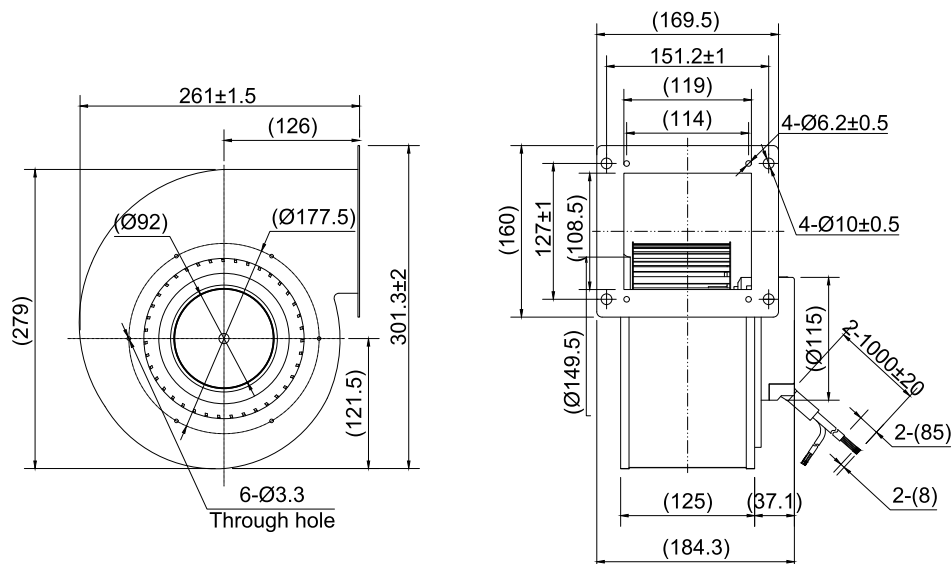

# EC Single Inlet Blower Fan



**Impeller Material:** PA66

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A180-A9-02 | 220                  | 1.30               | 180              | 1600               | 740                           | 680                | Class B    | 64                 |


## Performance Curve

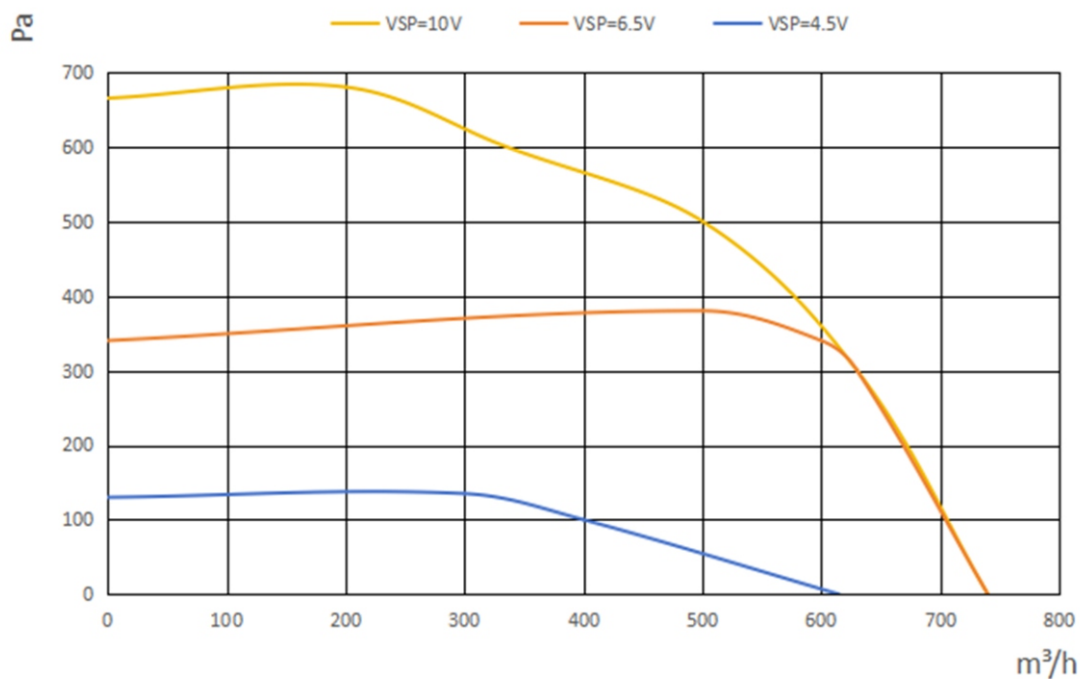

## Outline Drawing

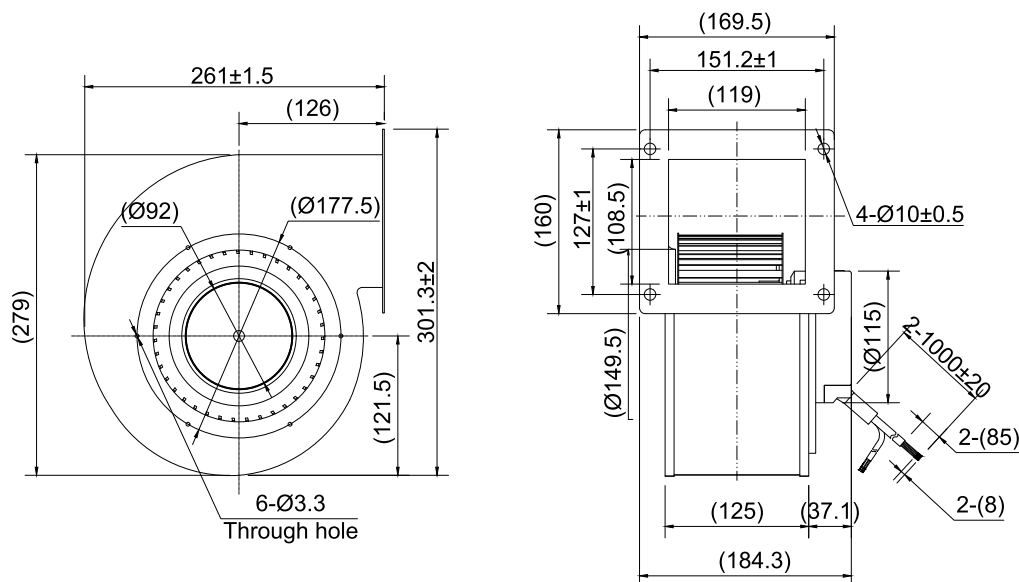

# EC Single Inlet Blower Fan




**Impeller Material:** Galvanised Sheet Steel  
**Direction of Rotation:** Clockwise, seen on rotor  
**Speed Control:** 0-10VDC/PWM  
**Type of Protection:** IP44  
**Operation Mode:** S1  
**Bearing:** Maintenance-free ball bearings  
**Ambient Temperature:** - 25 °C ~ +60 °C  
**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-2A180-A2-03 | 220                  | 1.30               | 300              | 1600               | 1250             | 950                | Class B    | 74                 |

## Performance Curve

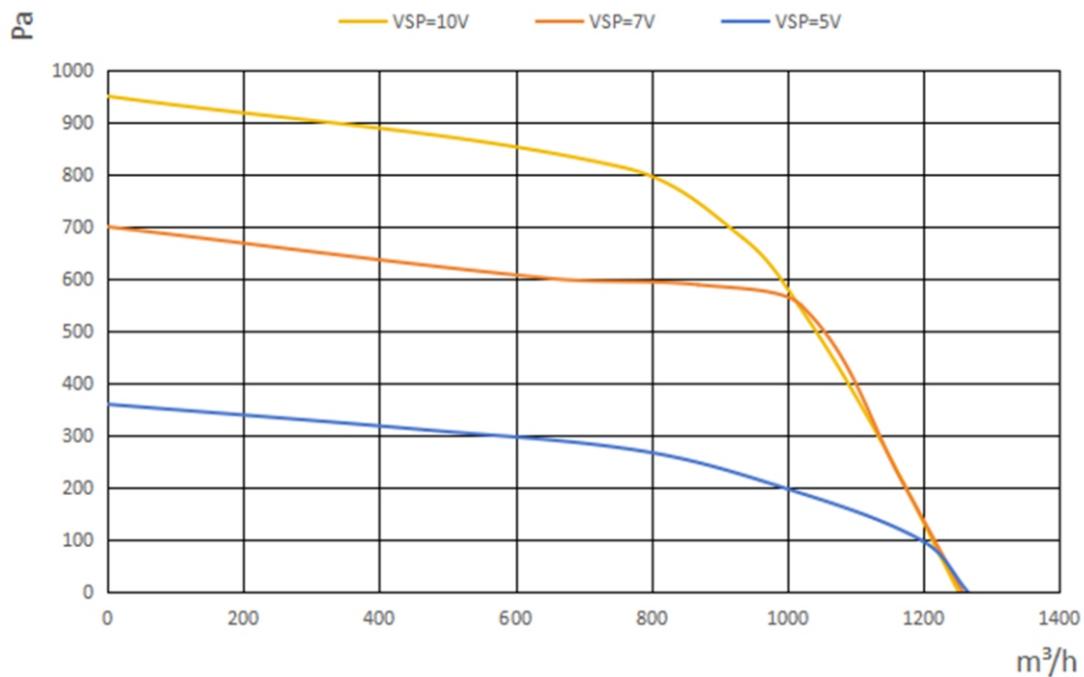

## Outline Drawing

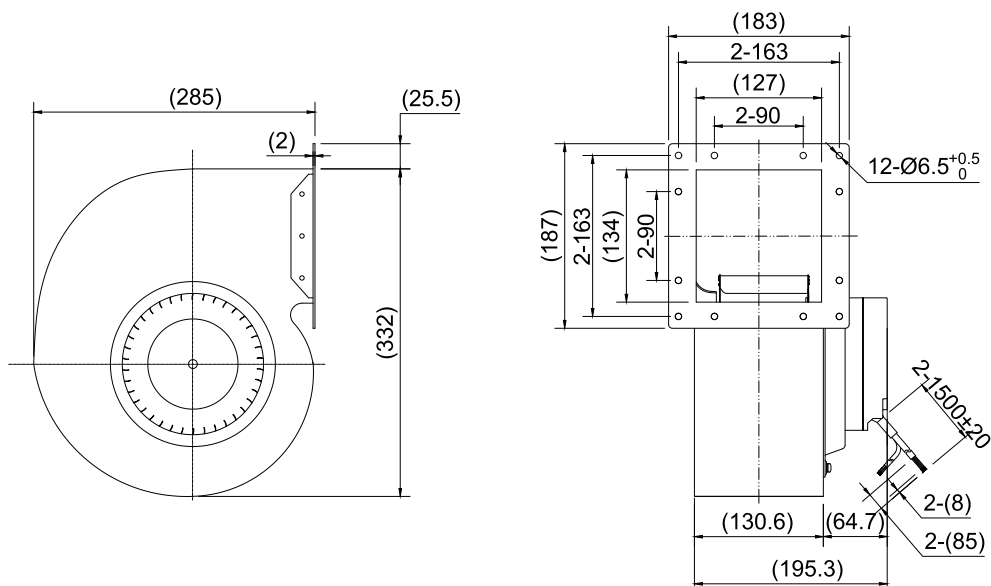

# EC Single Inlet Blower Fan




**Impeller Material:** Galvanised Sheet Steel  
**Direction of Rotation:** Clockwise, seen on rotor  
**Speed Control:** 0-10VDC/PWM  
**Type of Protection:** IP44  
**Operation Mode:** S1  
**Bearing:** Maintenance-free ball bearings  
**Ambient Temperature:** - 25 °C ~ +60 °C  
**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A200-A2-01 | 220                  | 1.60               | 280              | 1400               | 1380                          | 820                | Class B    | 64                 |

## Performance Curve

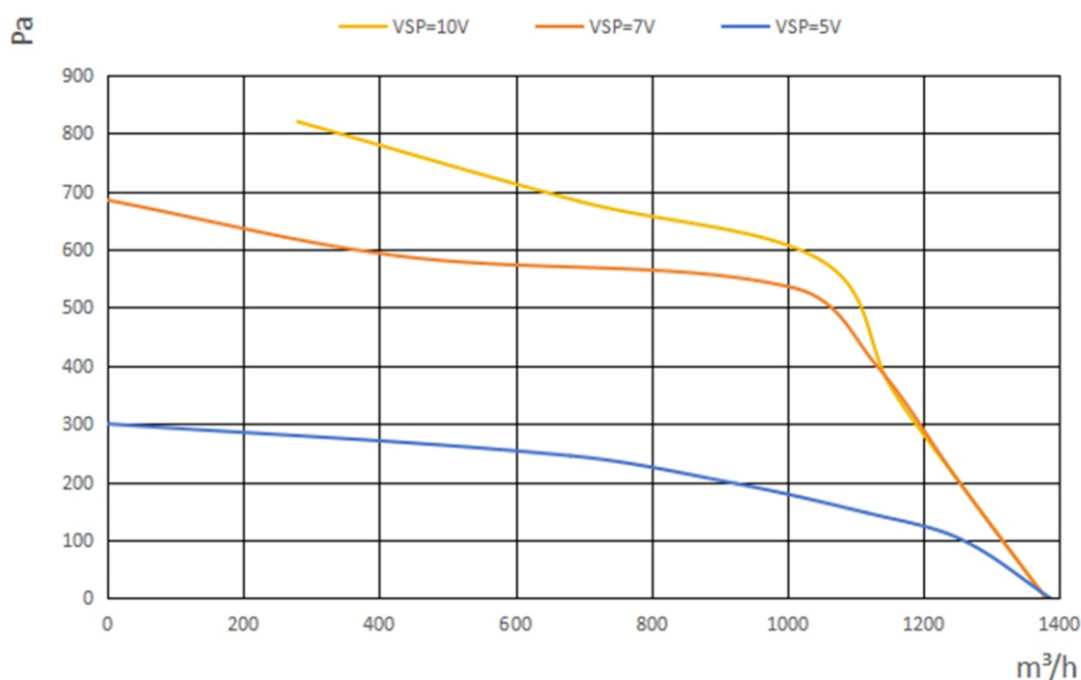

## Outline Drawing

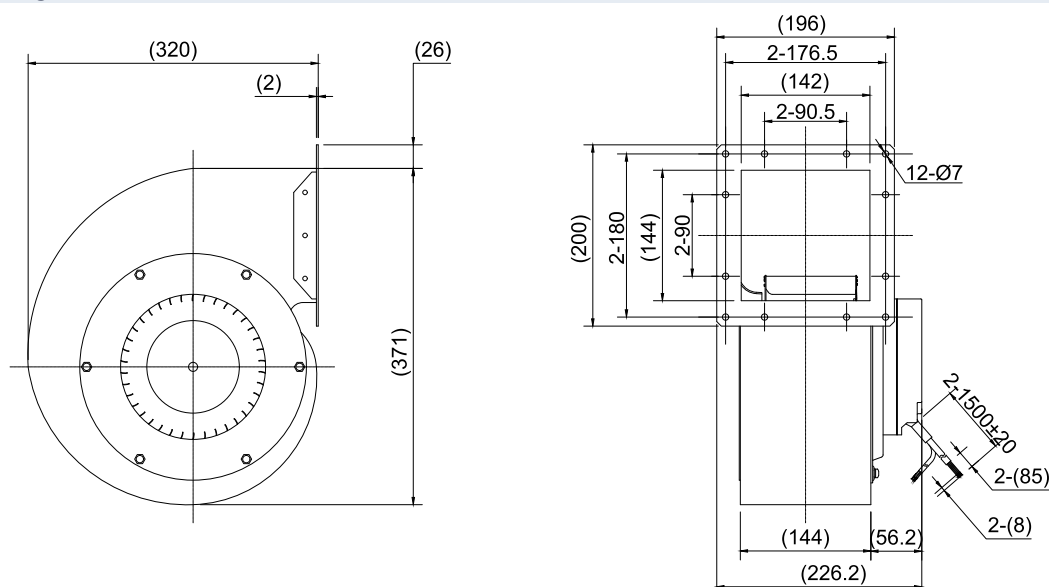

# EC Single Inlet Blower Fan




**Impeller Material:** Galvanised Sheet Steel  
**Direction of Rotation:** Clockwise, seen on rotor  
**Speed Control:** 0-10VDC/PWM  
**Type of Protection:** IP44  
**Operation Mode:** S1  
**Bearing:** Maintenance-free ball bearings  
**Ambient Temperature:** - 25 °C ~ +60 °C  
**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-2A225-A2-01 | 220                  | 1.85               | 400              | 1250               | 1710             | 980                | Class B    | 69                 |

## Performance Curve

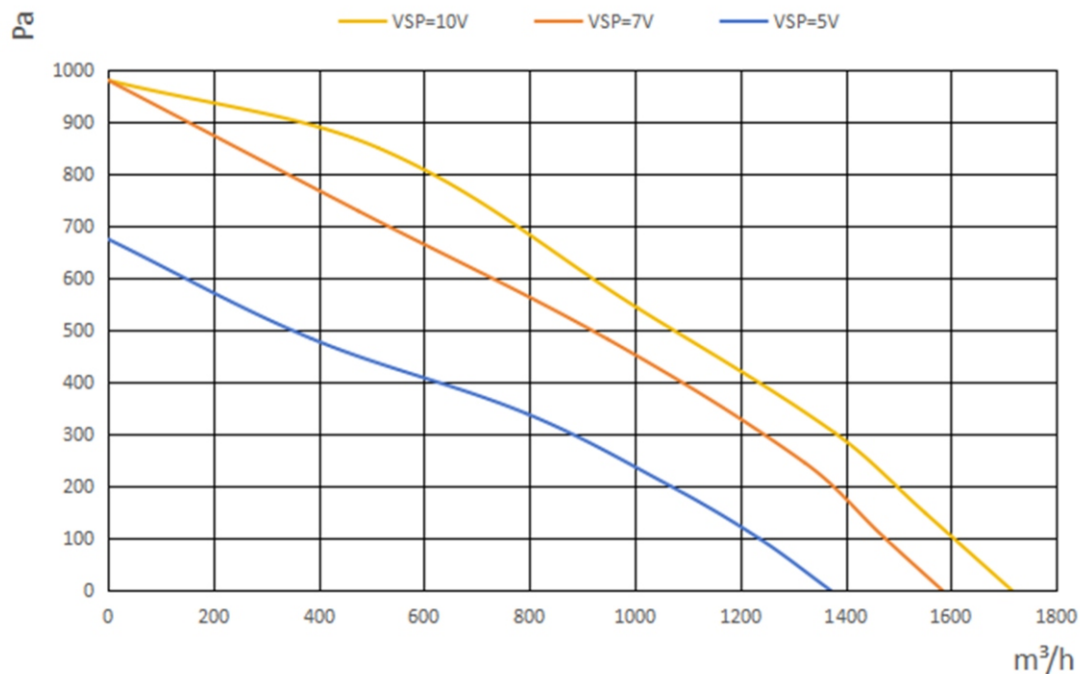

## Outline Drawing

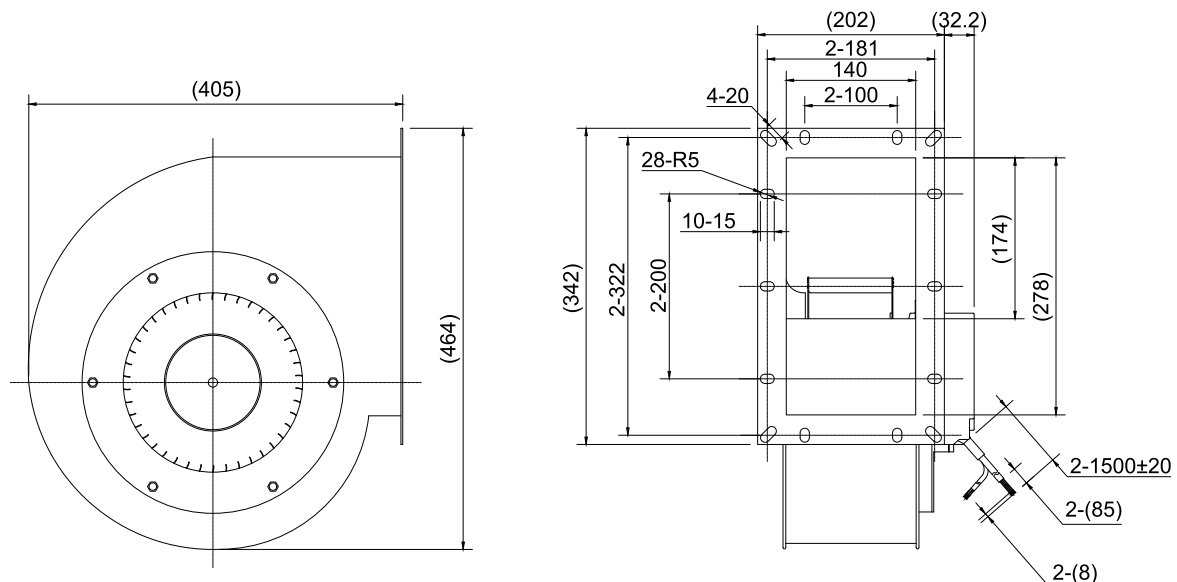

# EC Single Inlet Blower Fan



**Impeller Material:** Galvanised Sheet Steel

**Direction of Rotation:** Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| S3E-2A250-A2-01 | 220                  | 1.55               | 330              | 950                | 1915                          | 985                | Class B    | 69                 |

## Performance Curve

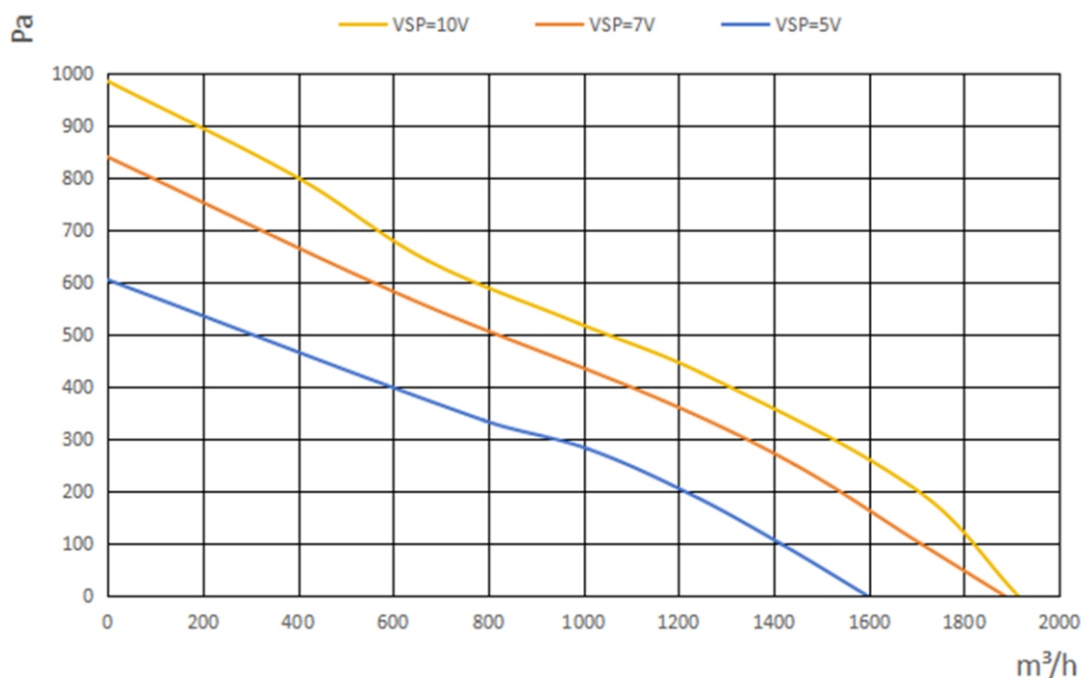

## Outline Drawing

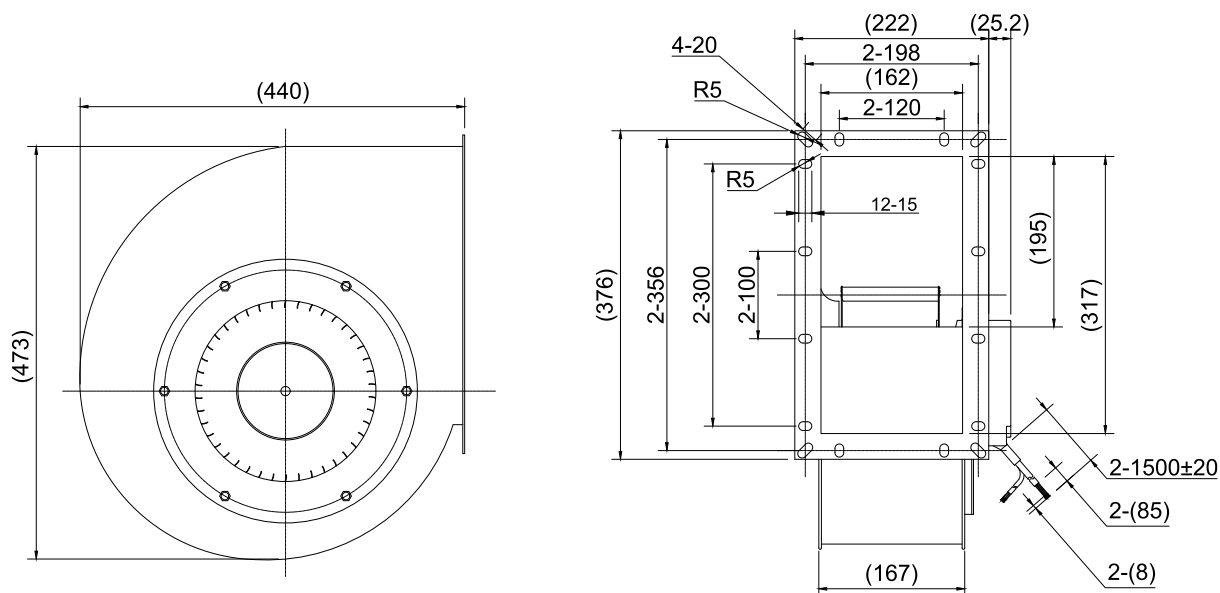



# EC Single Inlet Blower Fan




**Impeller Material:** Galvanised Sheet Steel  
**Direction of Rotation:** Clockwise, seen on rotor  
**Speed Control:** 0-10VDC/PWM  
**Type of Protection:** IP55  
**Operation Mode:** S1  
**Bearing:** Maintenance-free ball bearings  
**Ambient Temperature:** - 25 °C ~ +60 °C  
**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| S3E-3A280-A3-01 | 380                  | 1.60               | 950              | 1150               | 3000             | 650                | Class F    | 79                 |

## Performance Curve

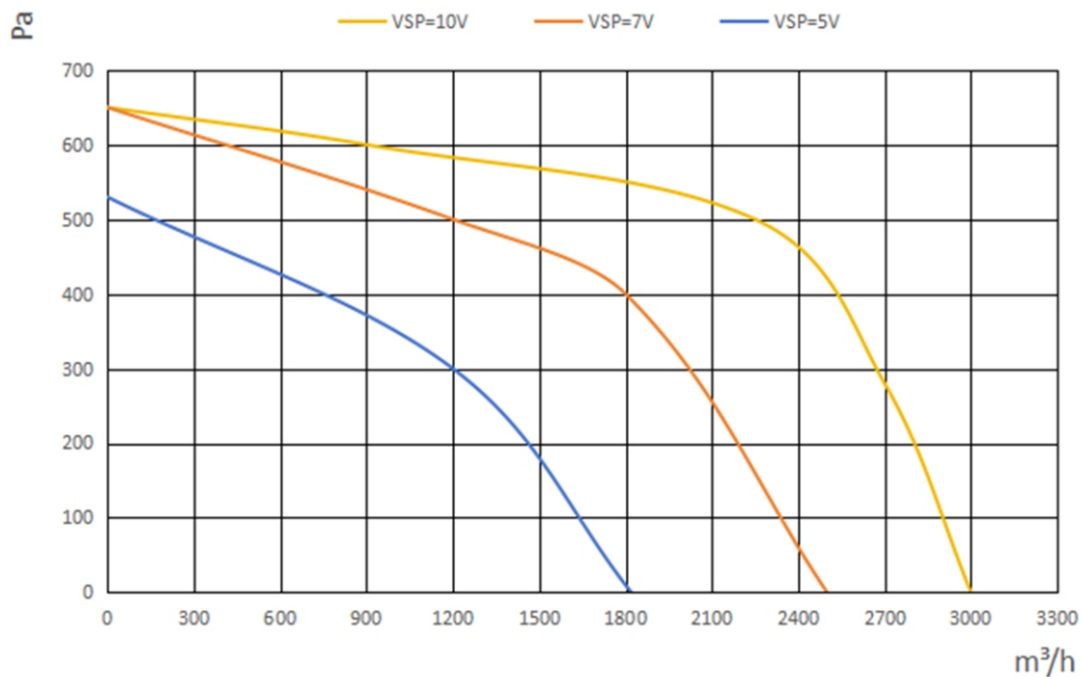

## Outline Drawing

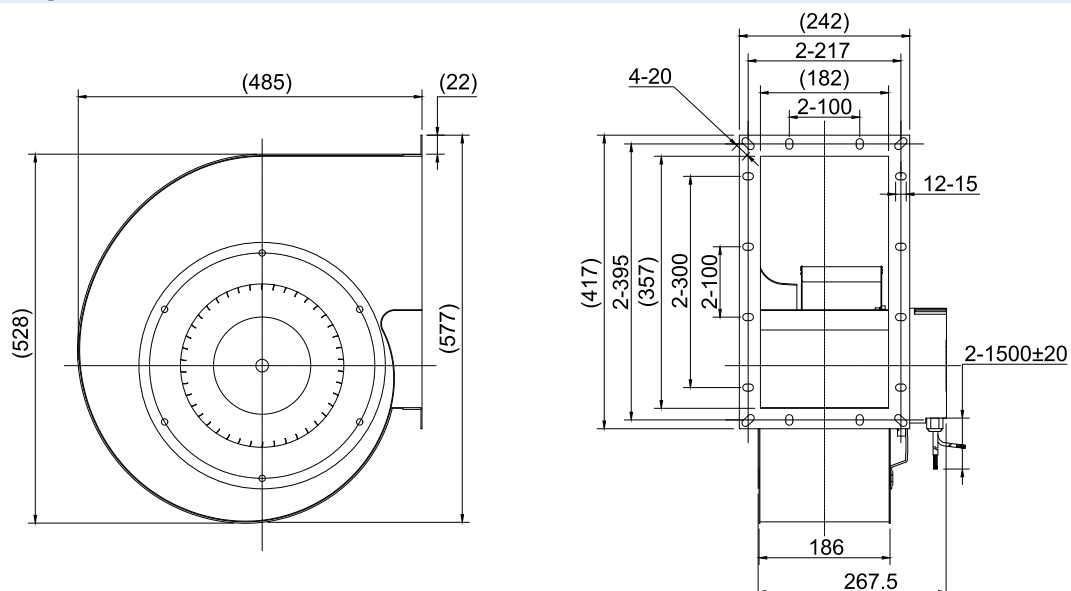



# 02

## EC Dual Inlet Blower Fan

# EC Dual Inlet Blower Fan




**Impeller Material:** Galvanised Sheet Steel  
**Direction of Rotation:** Clockwise, seen on rotor  
**Speed Control:** 0-10VDC/PWM  
**Type of Protection:** IP44  
**Operation Mode:** S1  
**Bearing:** Maintenance-free ball bearings  
**Ambient Temperature:** - 25 °C ~ +60 °C  
**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m <sup>3</sup> /h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|-------------------------------|--------------------|------------|--------------------|
| D3E-2A120-A7-01 | 220                  | 0.55               | 70               | 1900               | 420                           | 260                | Class B    | 59                 |

## Performance Curve

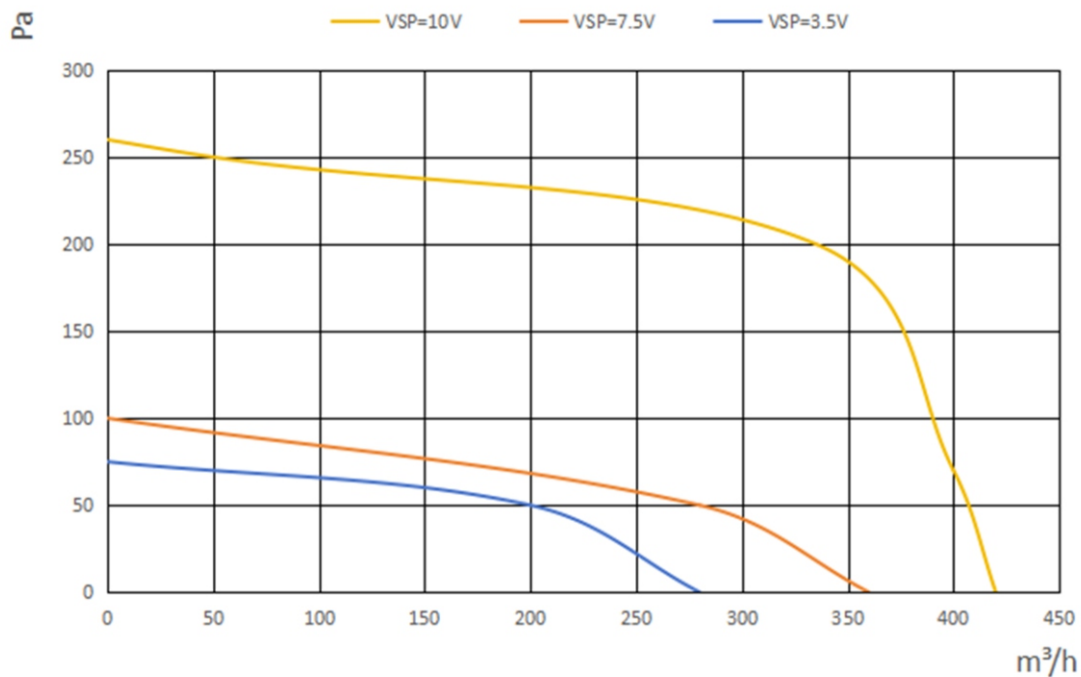

## Outline Drawing

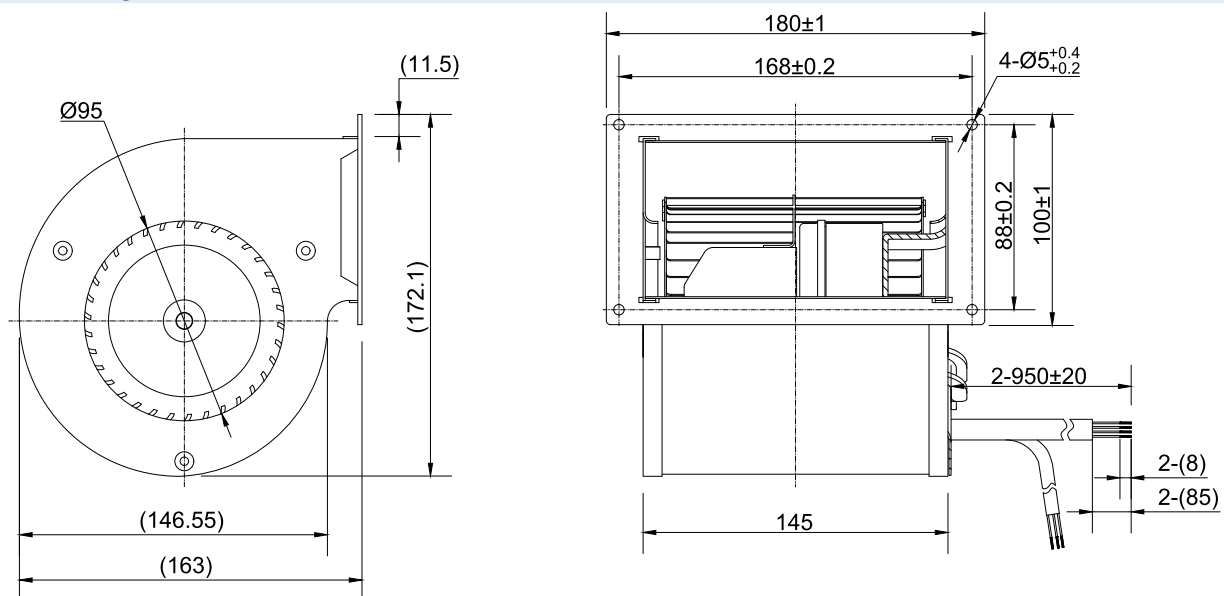

# EC Dual Inlet Blower Fan



**Impeller Material:** Galvanised Sheet Steel

**Direction of Rotation:** Counter-Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz




## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| D3E-2A133-A7-01 | 220                  | 0.60               | 80               | 1500               | 585              | 250                | Class B    | 59                 |

## Performance Curve

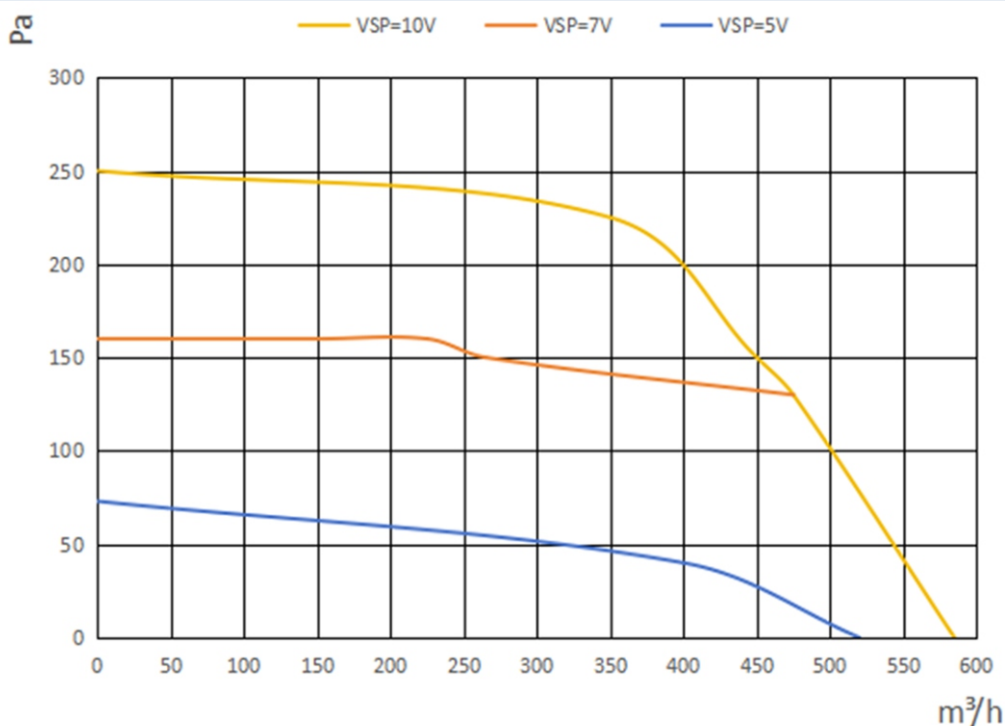

## Outline Drawing

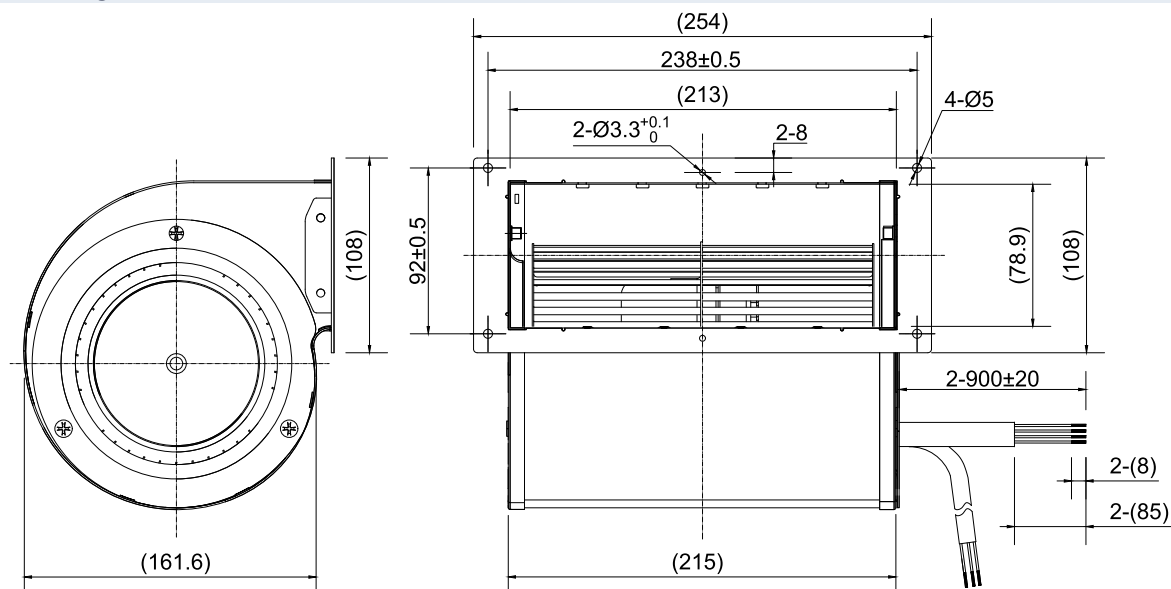

# EC Dual Inlet Blower Fan



**Impeller Material:** Galvanised Sheet Steel

**Direction of Rotation:** Counter-Clockwise, seen on rotor

**Speed Control:** 0-10VDC/PWM

**Type of Protection:** IP44

**Operation Mode:** S1

**Bearing:** Maintenance-free ball bearings

**Ambient Temperature:** - 25 °C ~ +60 °C


**Frequency:** 50/60 Hz



## Technical Parameters

| Model No.       | Rated Voltage<br>VAC | Rated Current<br>A | Rated Power<br>W | Rated Speed<br>RPM | Air Flow<br>m³/h | Air Pressure<br>Pa | Insulation | Noise Level<br>dBA |
|-----------------|----------------------|--------------------|------------------|--------------------|------------------|--------------------|------------|--------------------|
| D3E-2A133-A9-02 | 220                  | 0.80               | 115              | 1700               | 660              | 320                | Class B    | 60                 |

## Performance Curve

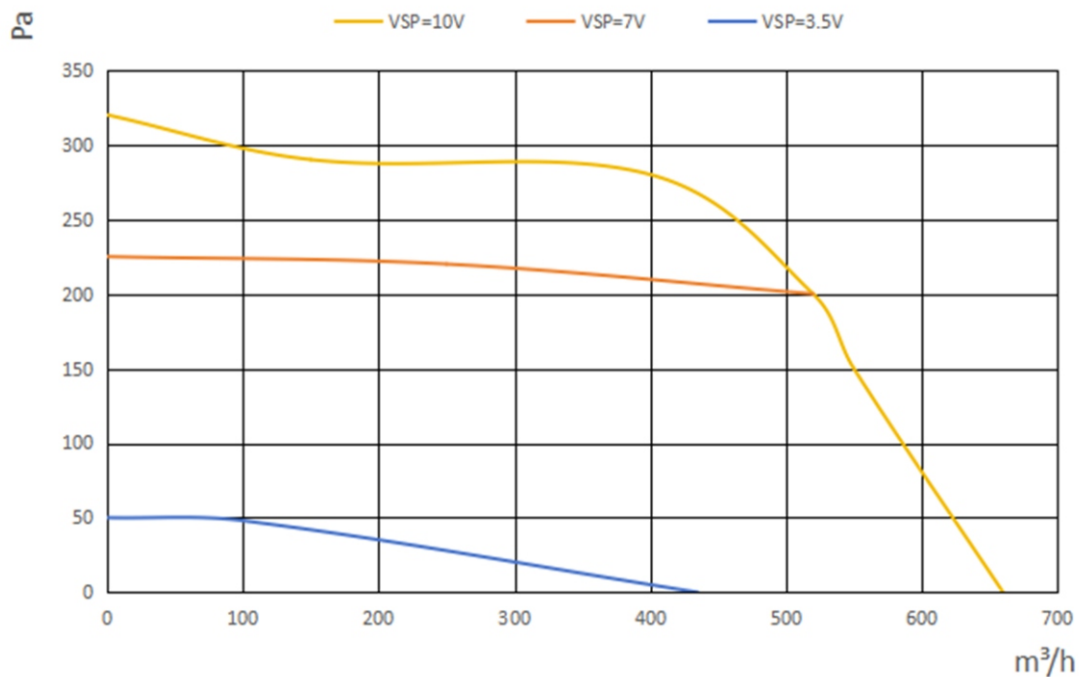

## Outline Drawing

