

EC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 25 °C ~ +60 °C


Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A146-A9-01	220	0.60	80	1300	830	520	Class B	61

Performance Curve

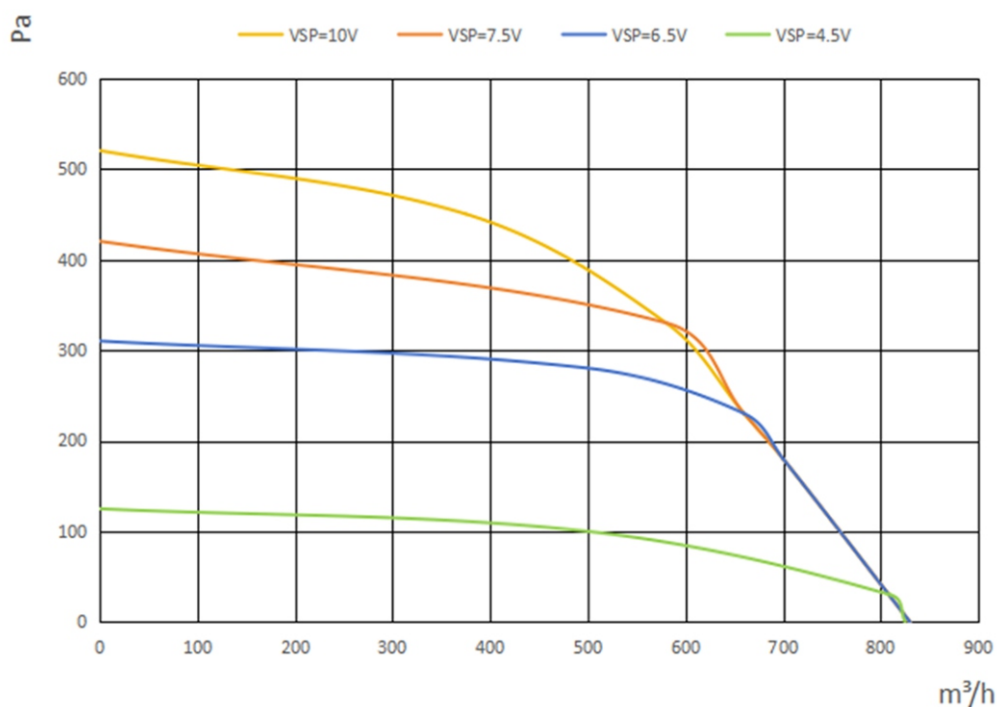

Outline Drawing

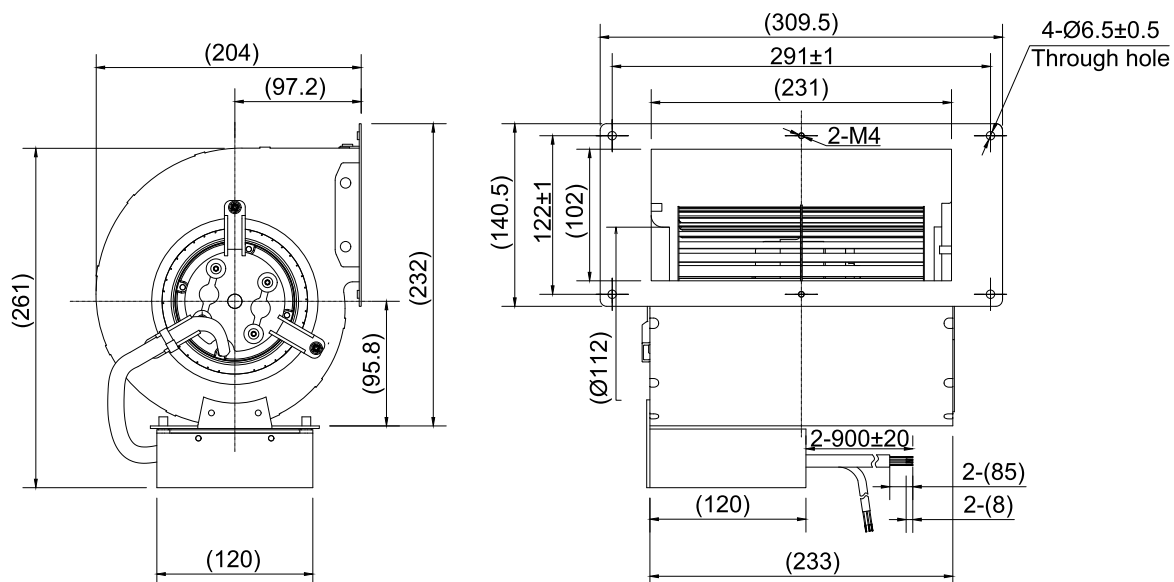

EC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 25 °C ~ +60 °C


Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A146-A9-02	220	1.10	165	1700	1110	640	Class B	65


Performance Curve

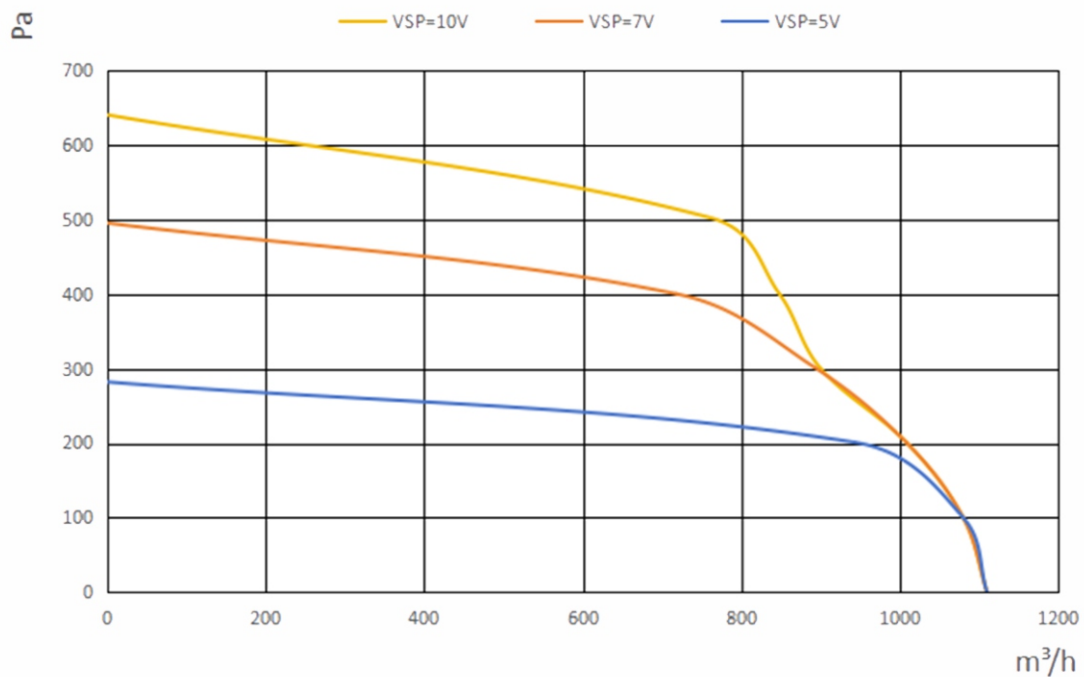

Outline Drawing

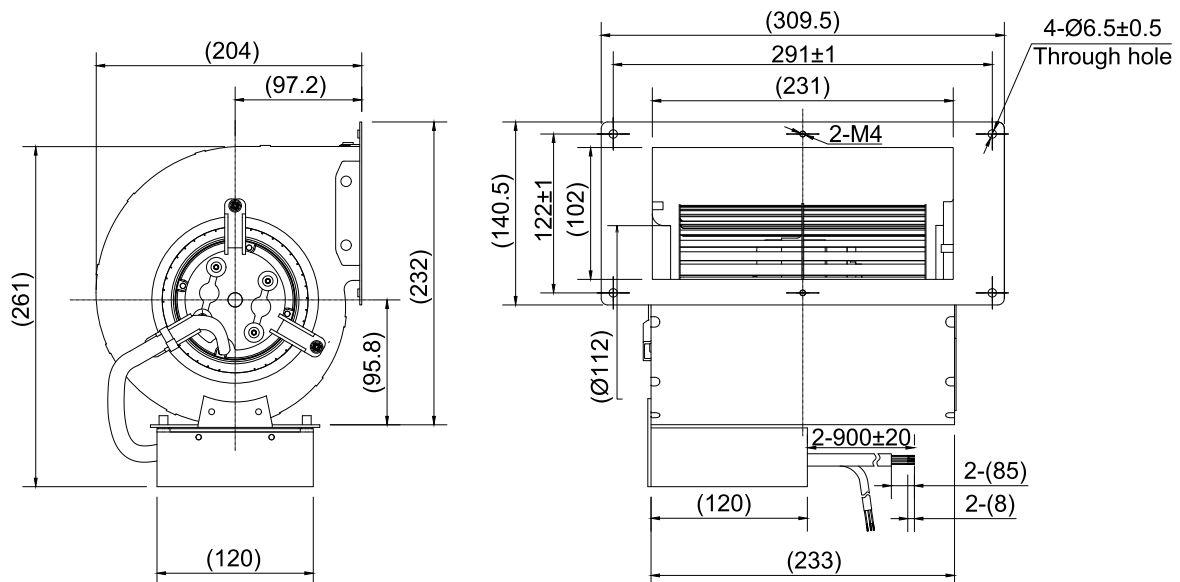

EC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 20 °C ~ +40 °C


Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A160-A9-01	220	0.90	120	1150	1270	815	Class B	60


Performance Curve

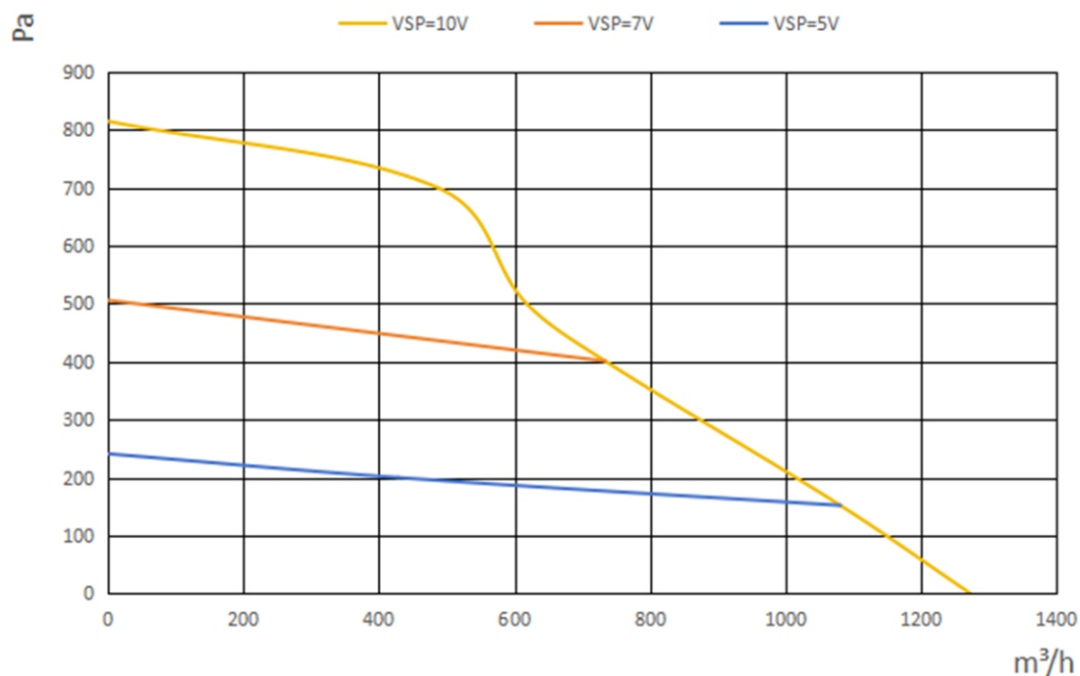

Outline Drawing

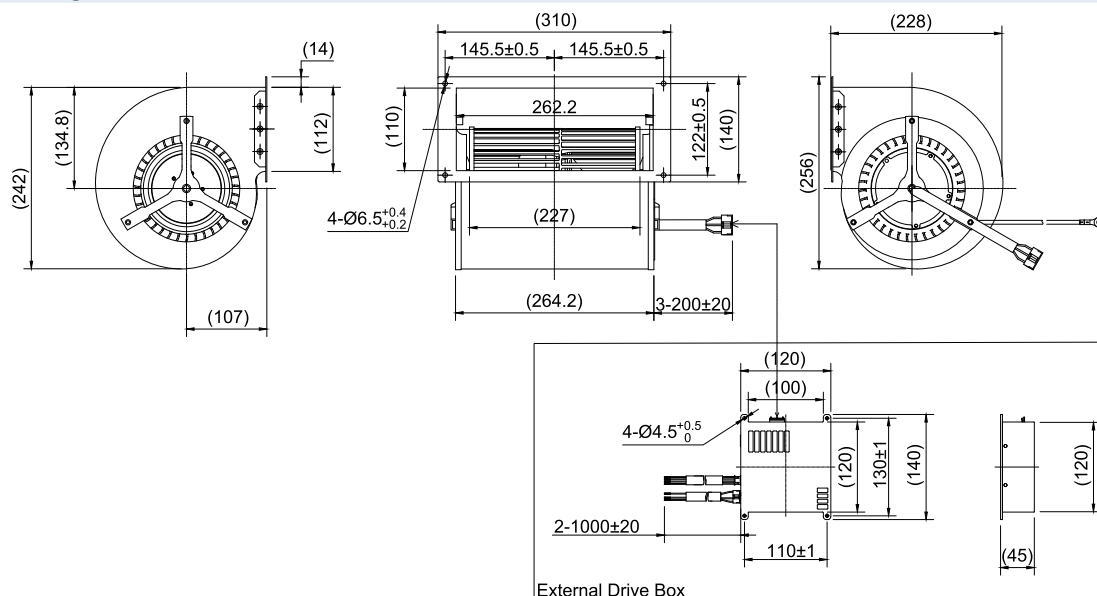

EC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 20 °C ~ +40 °C


Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A160-A9-02	220	1.50	260	1500	1620	780	Class B	70

Performance Curve

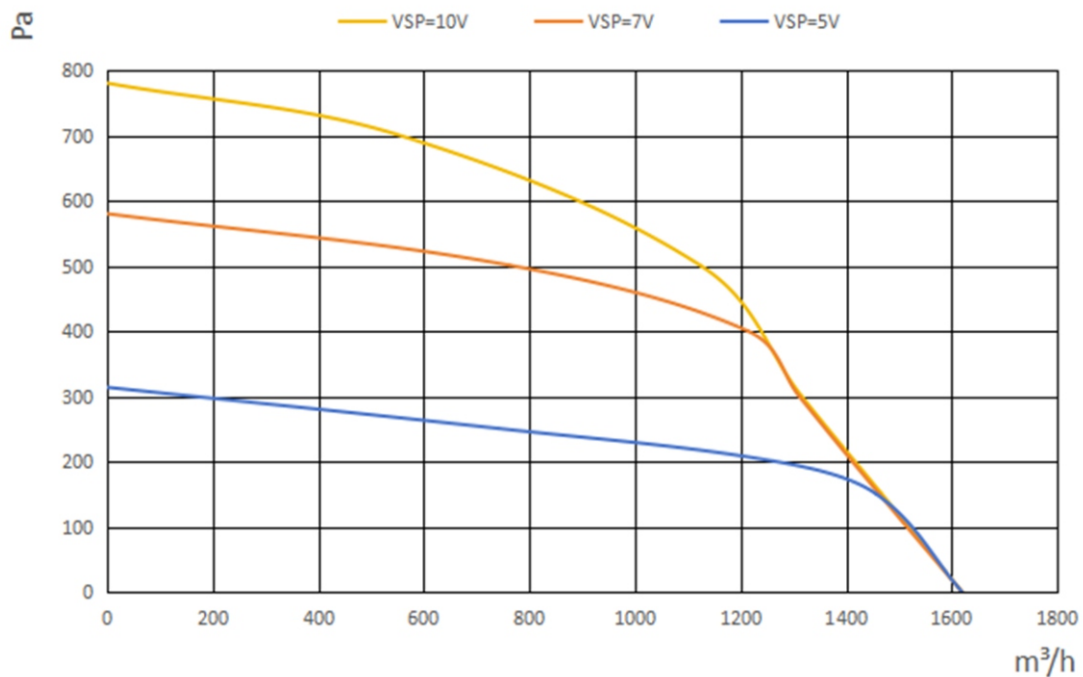

Outline Drawing

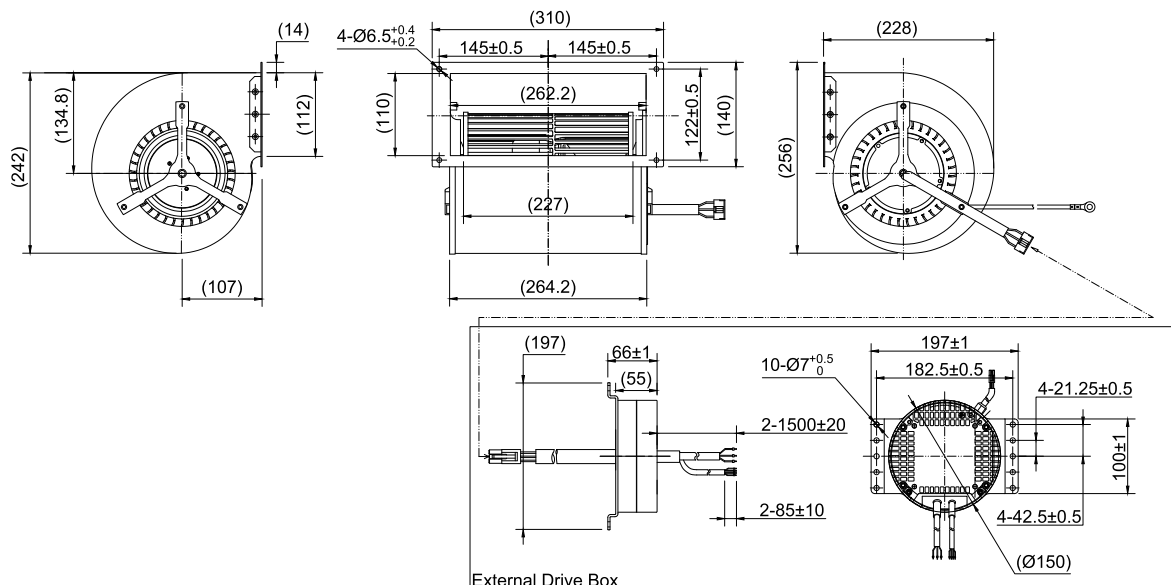

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A180-A2-01	220	1.90	400	1550	1980	720	Class B	74

Performance Curve

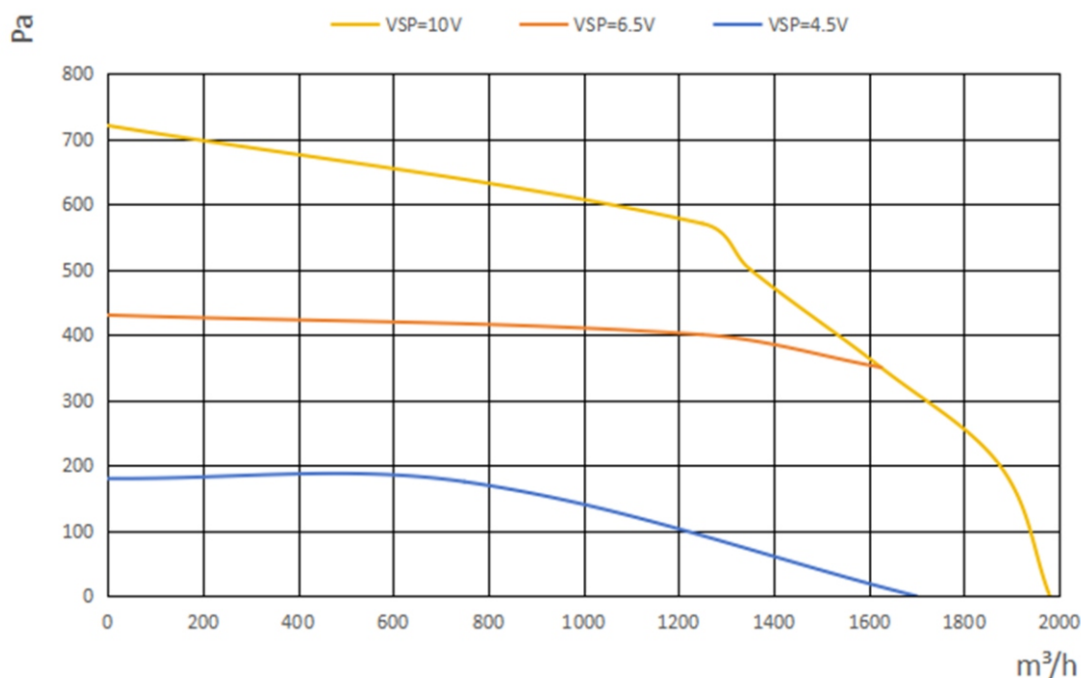

Outline Drawing

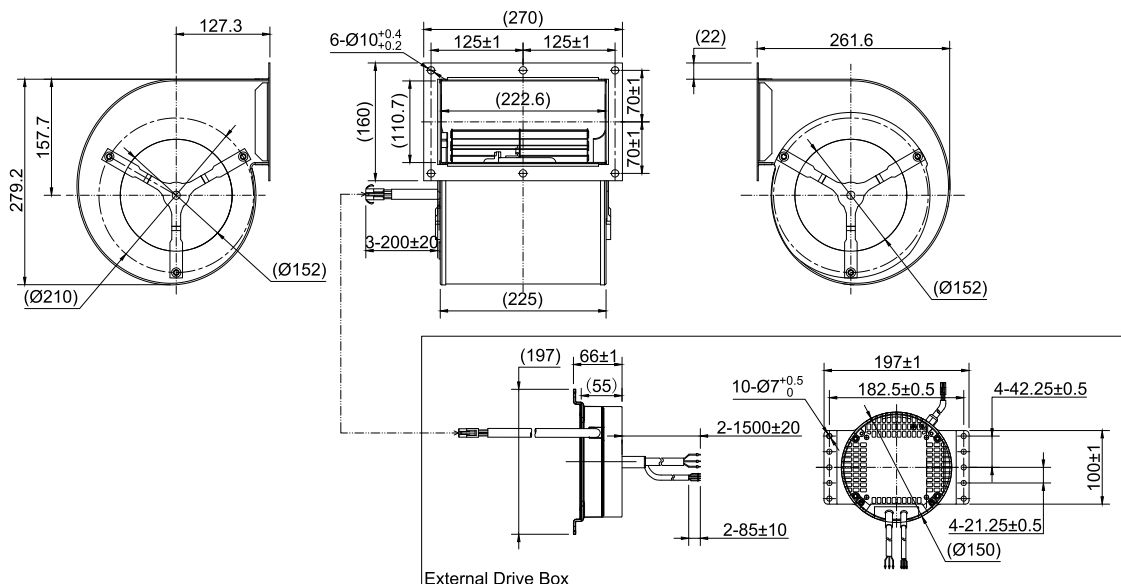

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A200-A2-01	220	1.36	300	1150	2000	1000	Class B	64

Performance Curve

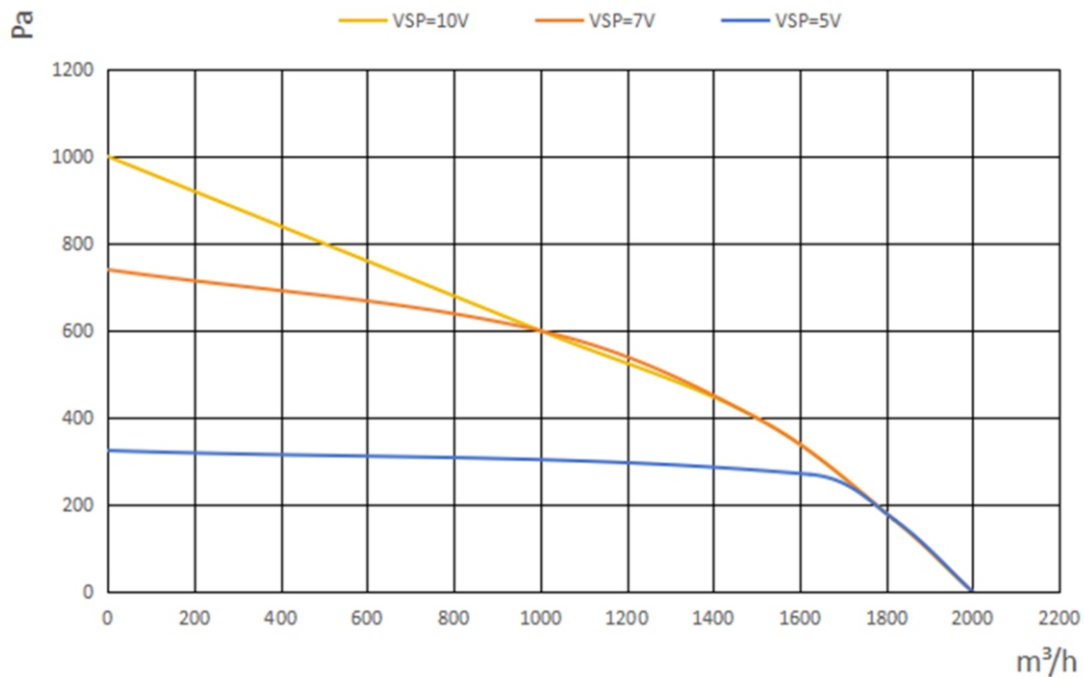

Outline Drawing

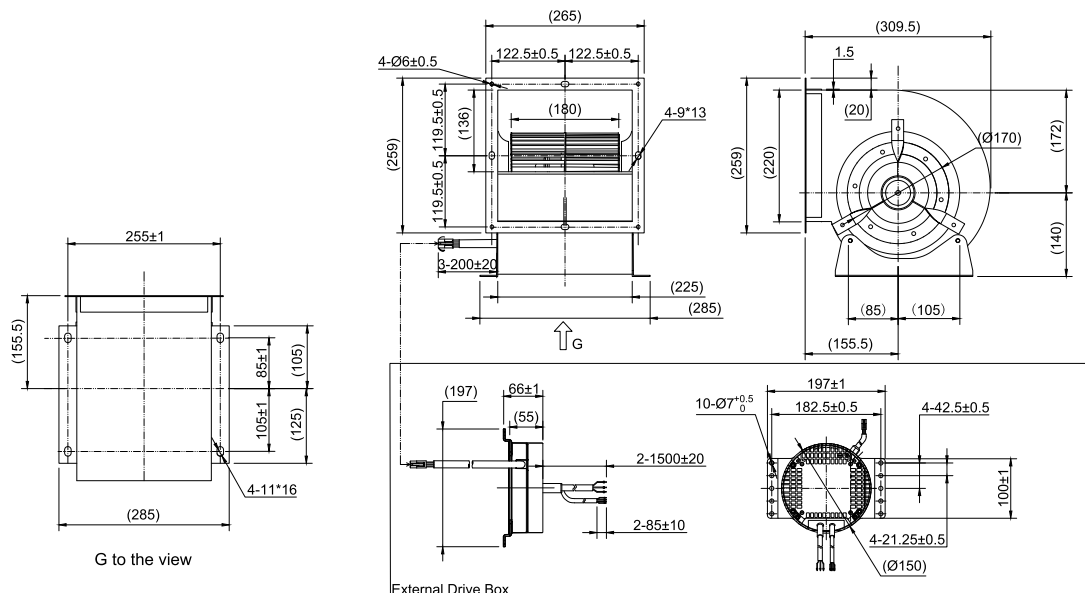

EC Dual Inlet Blower Fan



Impeller Material: Galvanised Sheet Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 25 °C ~ +60 °C


Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A225-A3-01	220	3.50	750	1250	3400	360	Class B	77

Performance Curve

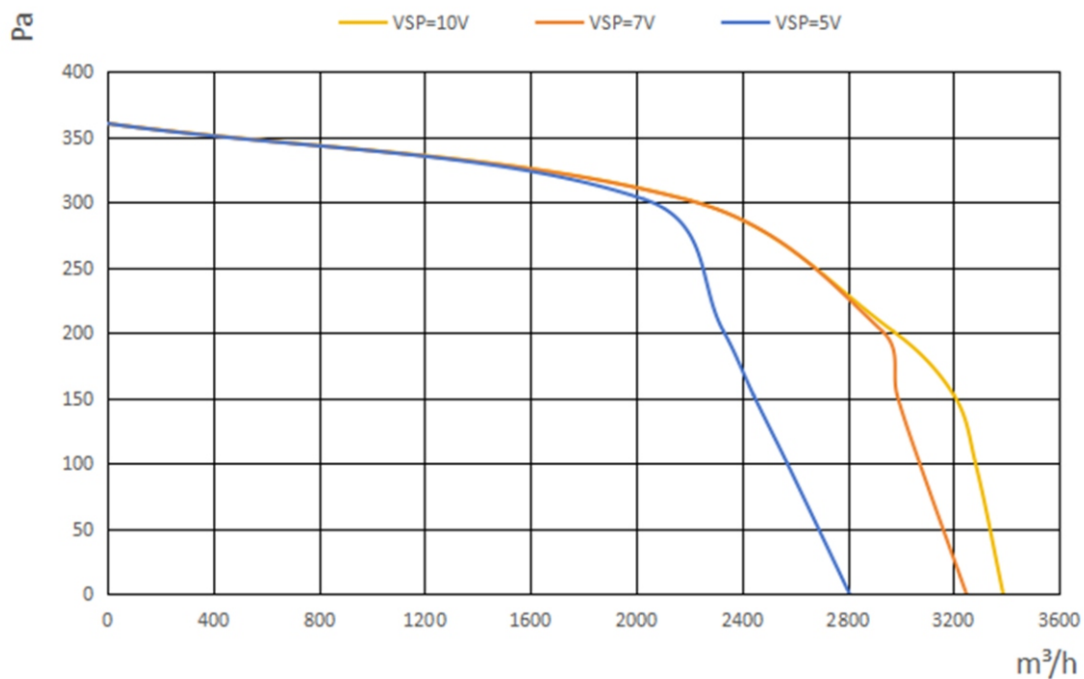

Outline Drawing

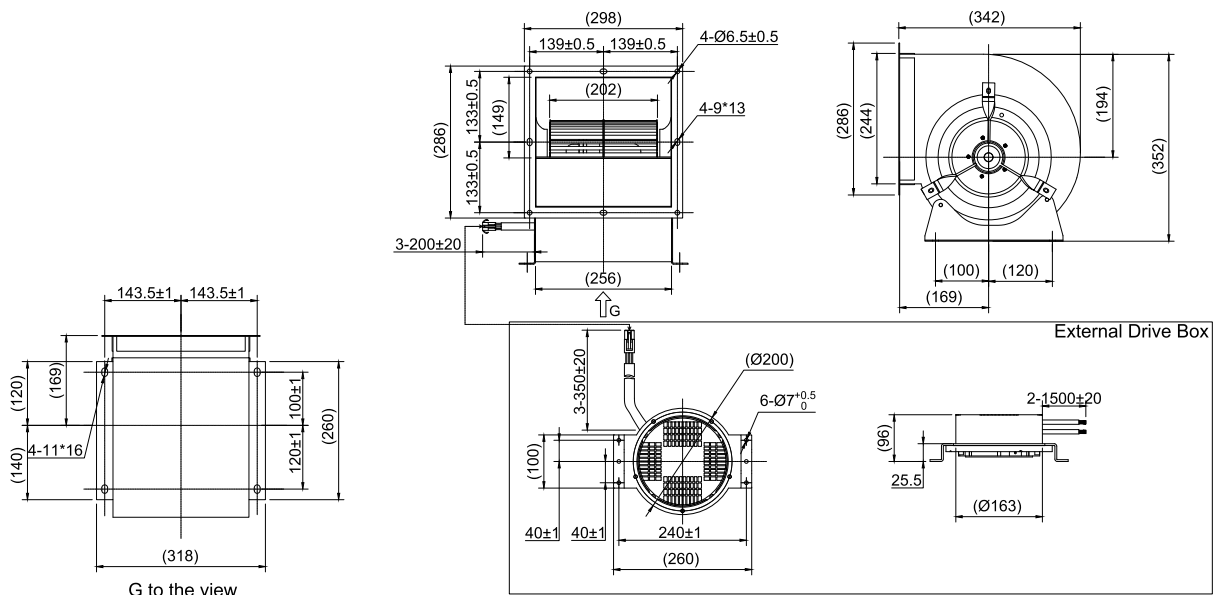

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-3A225-A3-02	380	1.80	1050	1450	3500	560	Class F	78

Performance Curve

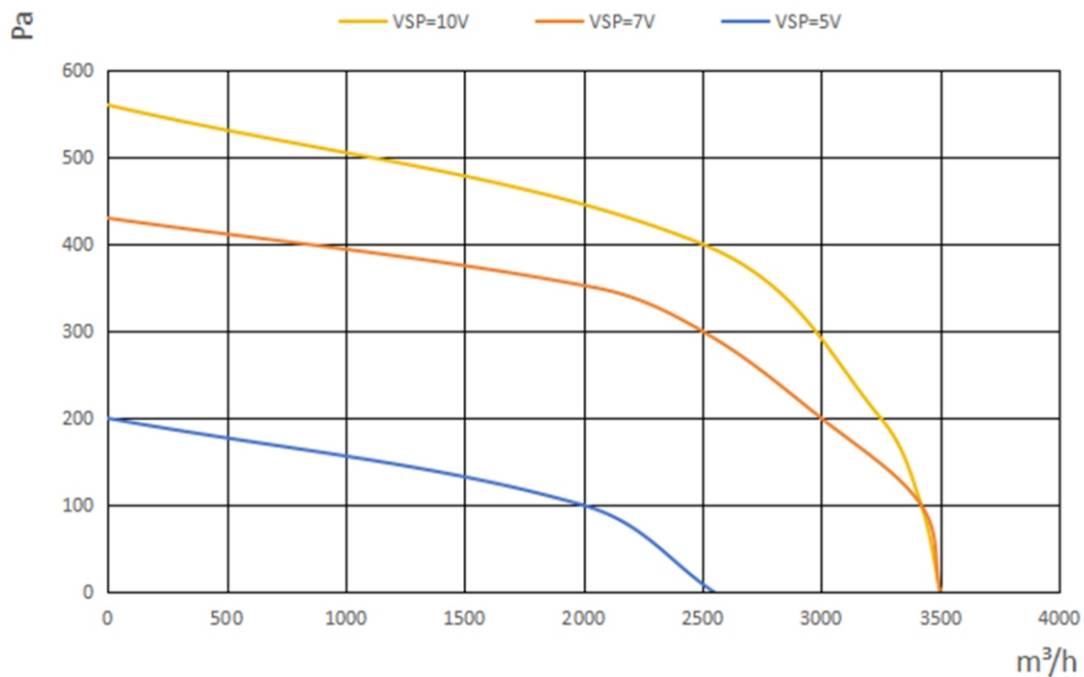

Outline Drawing

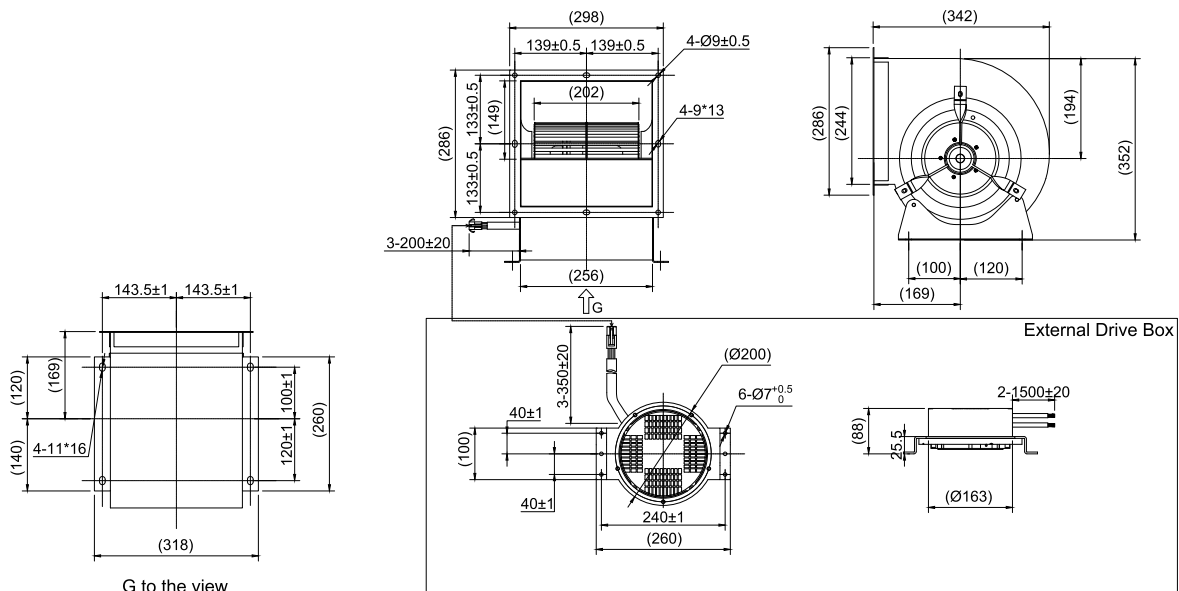

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A250-A3-01	220	3.50	750	960	3940	470	Class B	75

Performance Curve

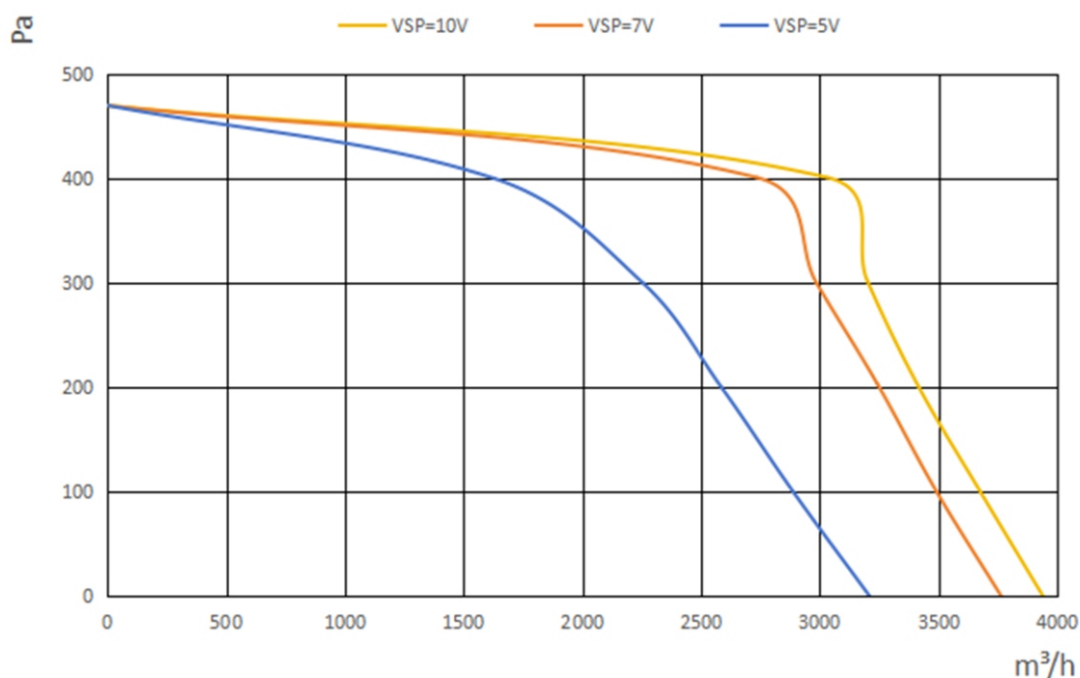

Outline Drawing

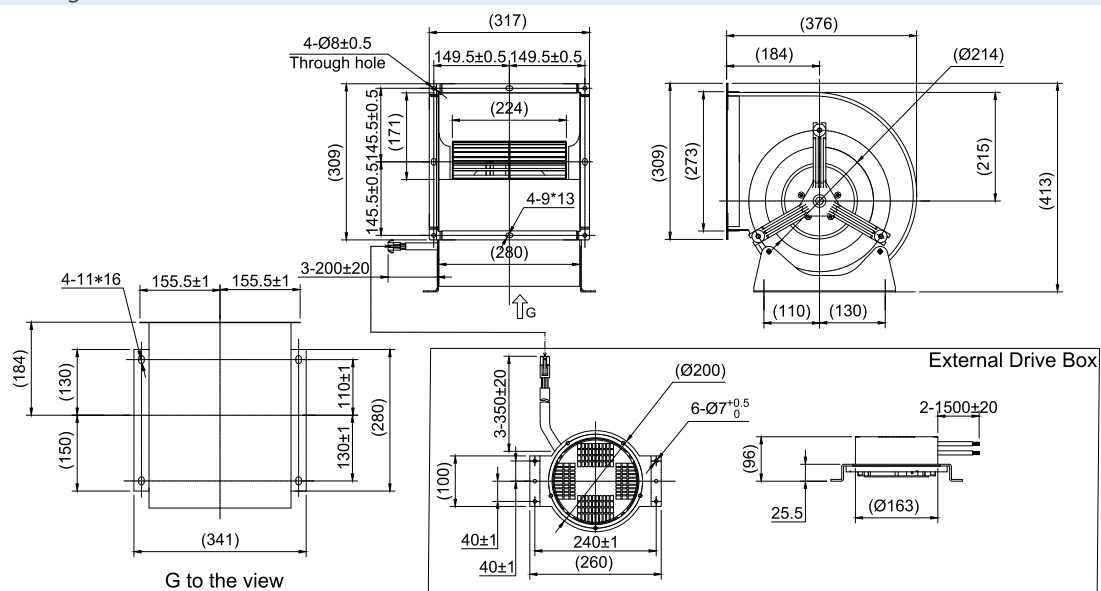

EC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings

Ambient Temperature: - 25 °C ~ +60 °C


Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-3A250-A3-02	380	1.20	655	920	3640	725	Class B	74

Performance Curve

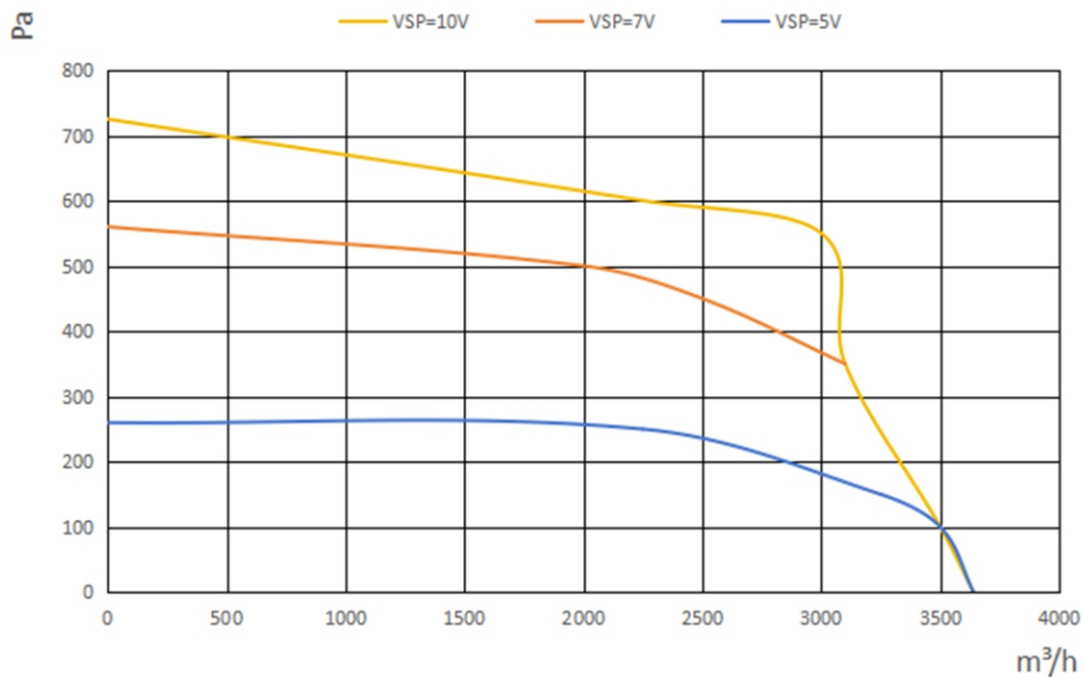

Outline Drawing

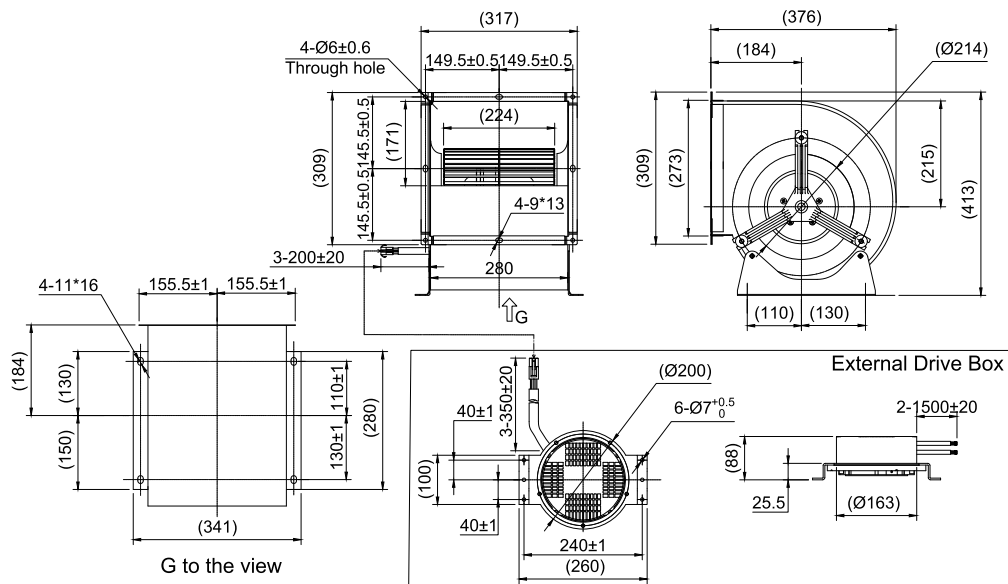

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-2A280-A3-01	220	3.50	750	820	4300	575	Class B	74

Performance Curve

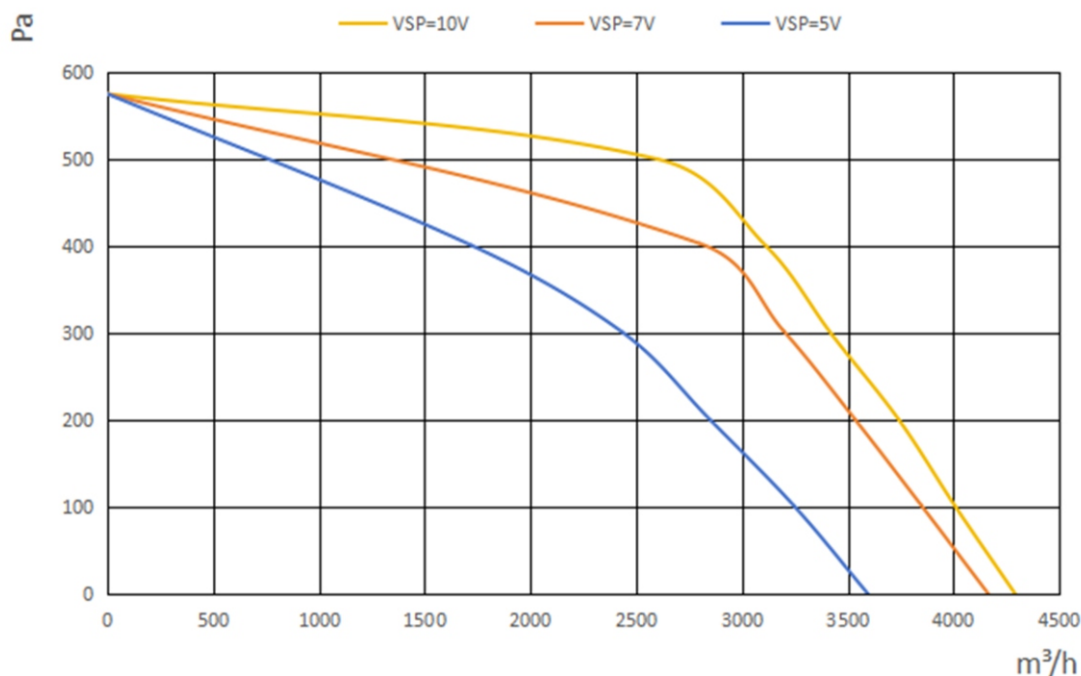

Outline Drawing

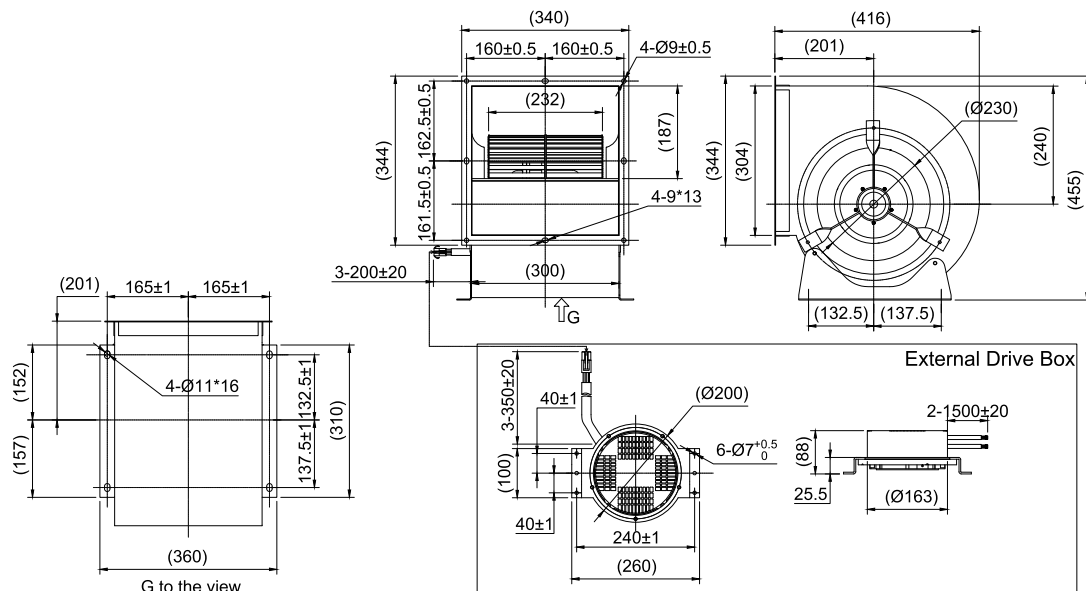

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-3A280-A3-02	380	1.10	600	800	4060	890	Class F	72

Performance Curve

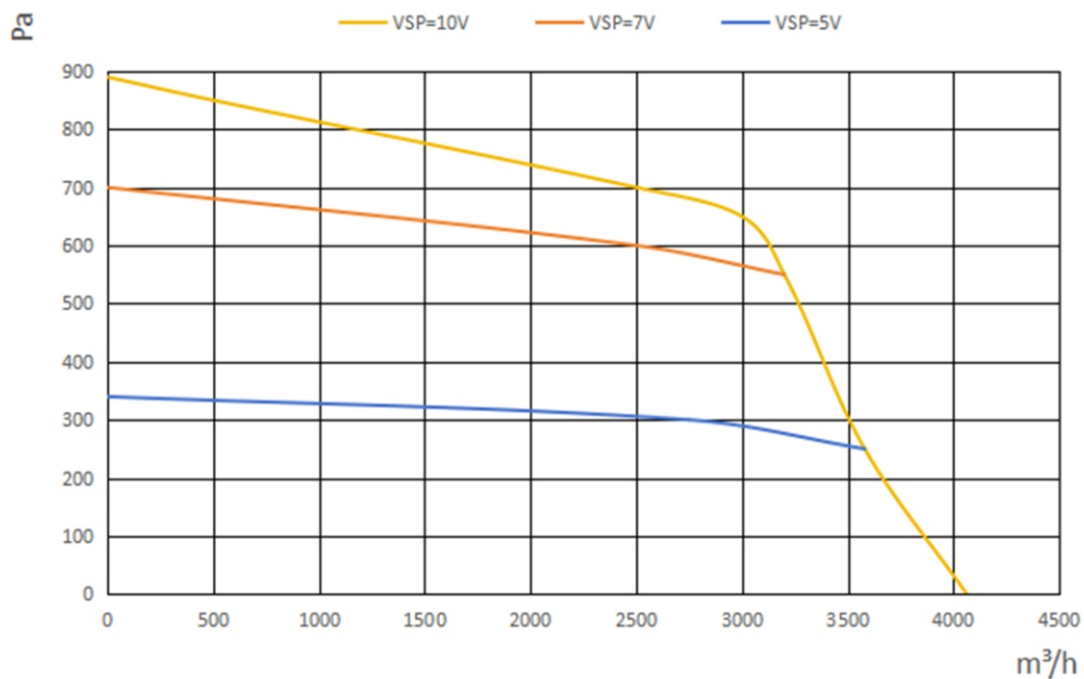

Outline Drawing

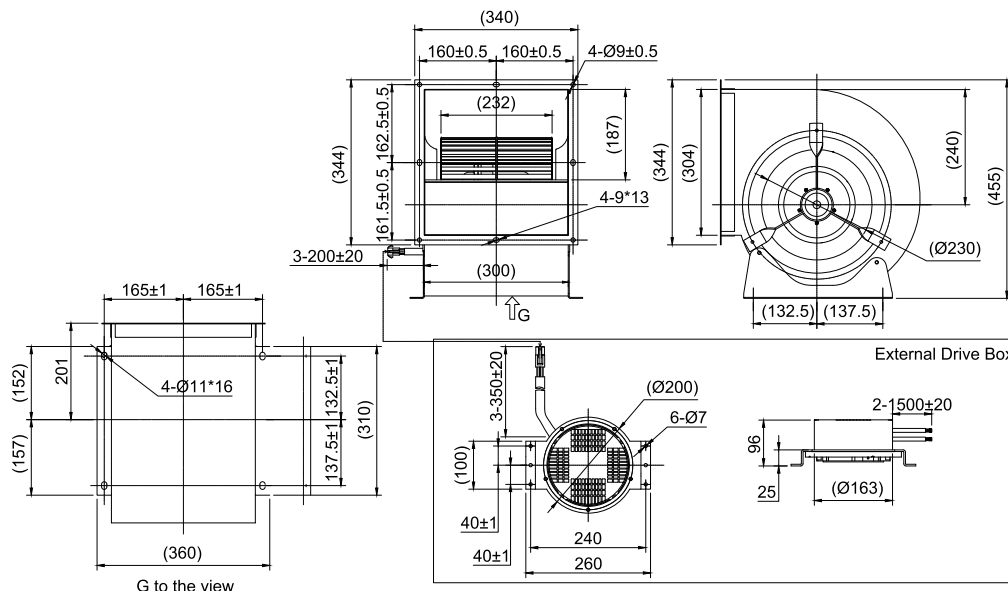

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP54
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-3A315-A8-01	380	4.00	2400	1070	8500	765	Class F	81

Performance Curve

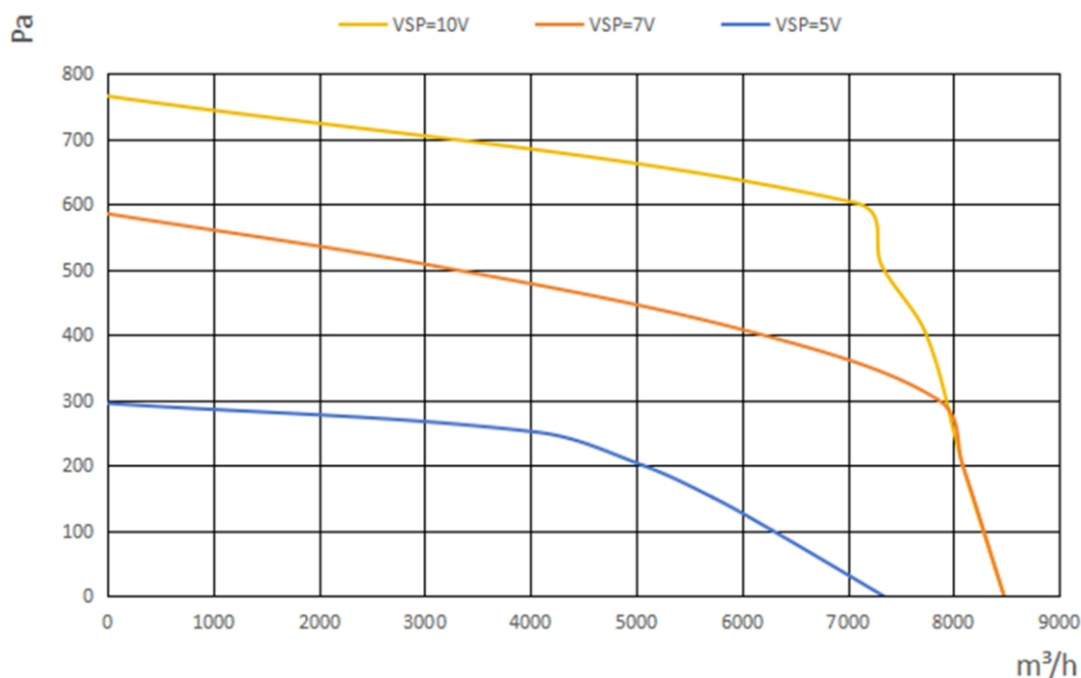

Outline Drawing

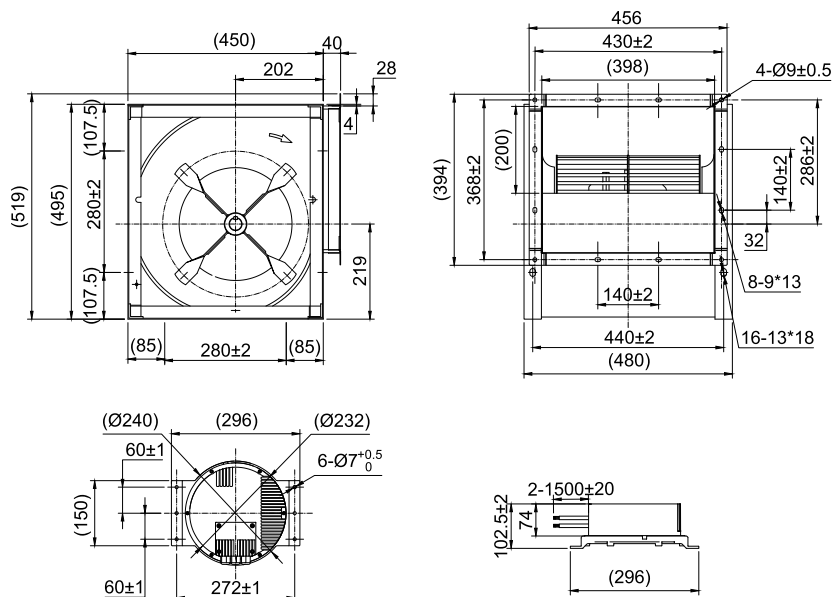

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-3A355-A8-01	380	3.00	1700	760	8550	1080	Class F	81

Performance Curve

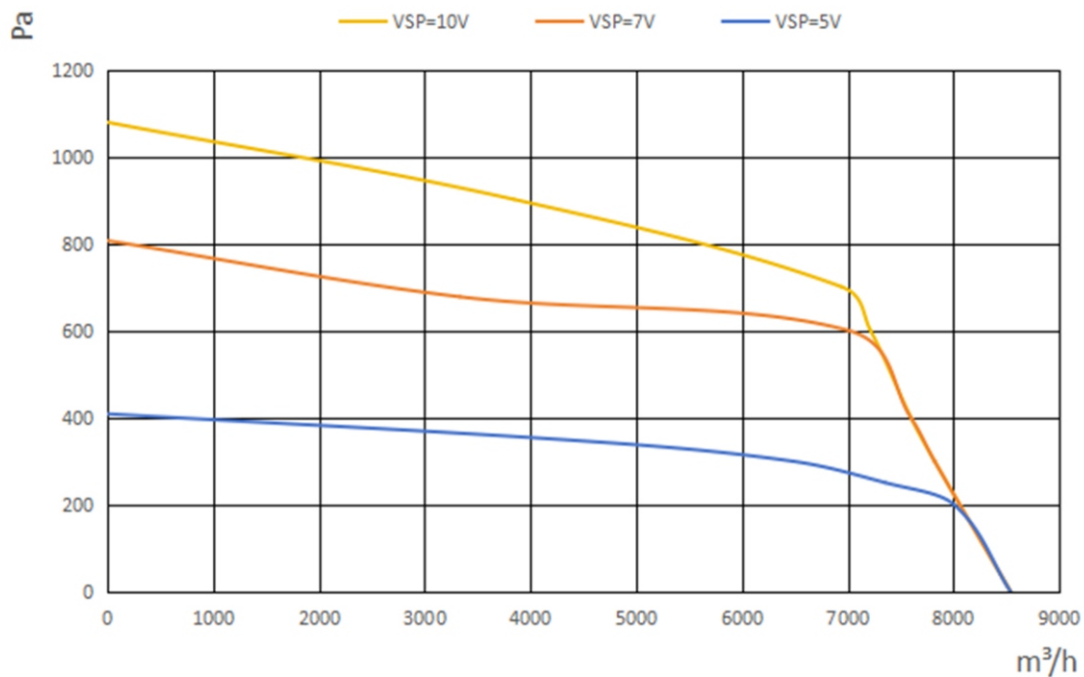

Outline Drawing

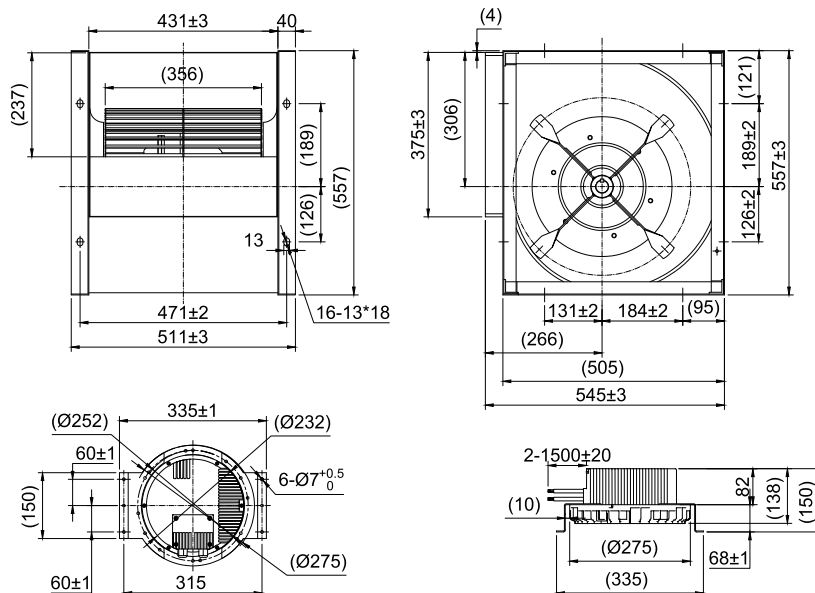

EC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP44
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C
Frequency: 50/60 Hz




Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3E-3A400-A8-01	380	3.30	2000	735	10000	1060	Class F	80

Performance Curve

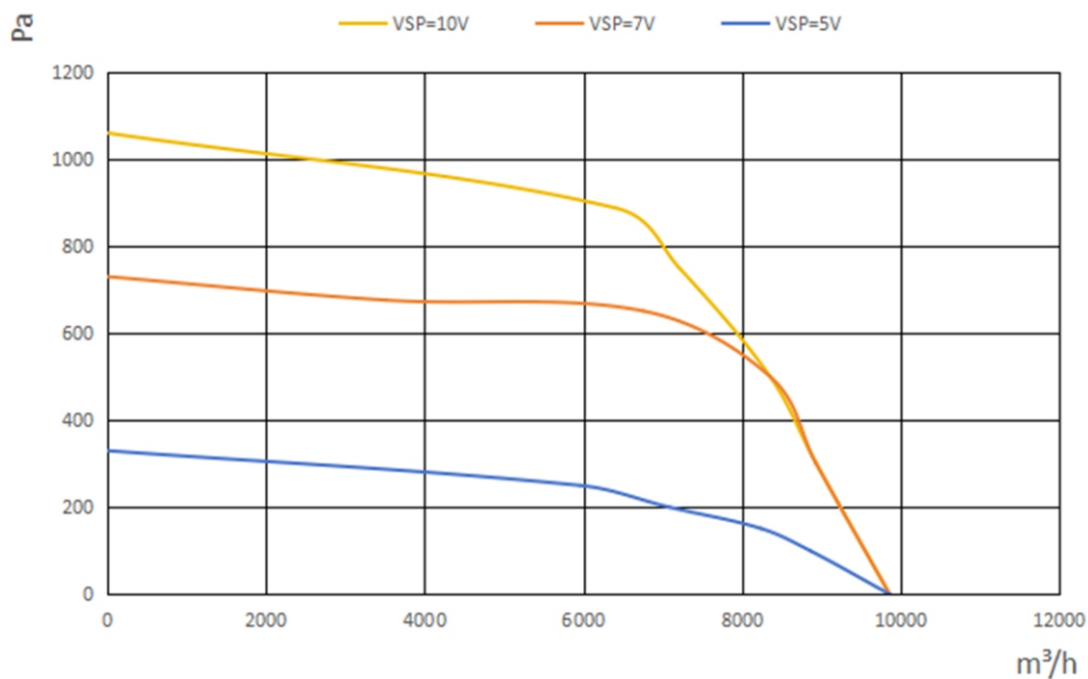


Outline Drawing

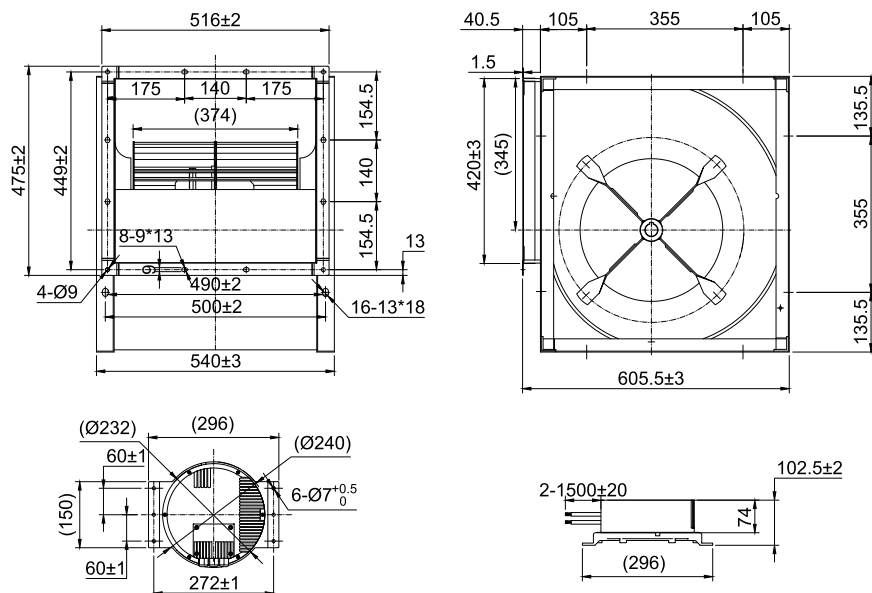

03

DC Single Inlet Blower Fan

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-48120-A7-01	48	1.98	95	2400	360	300	Class B	60


Performance Curve

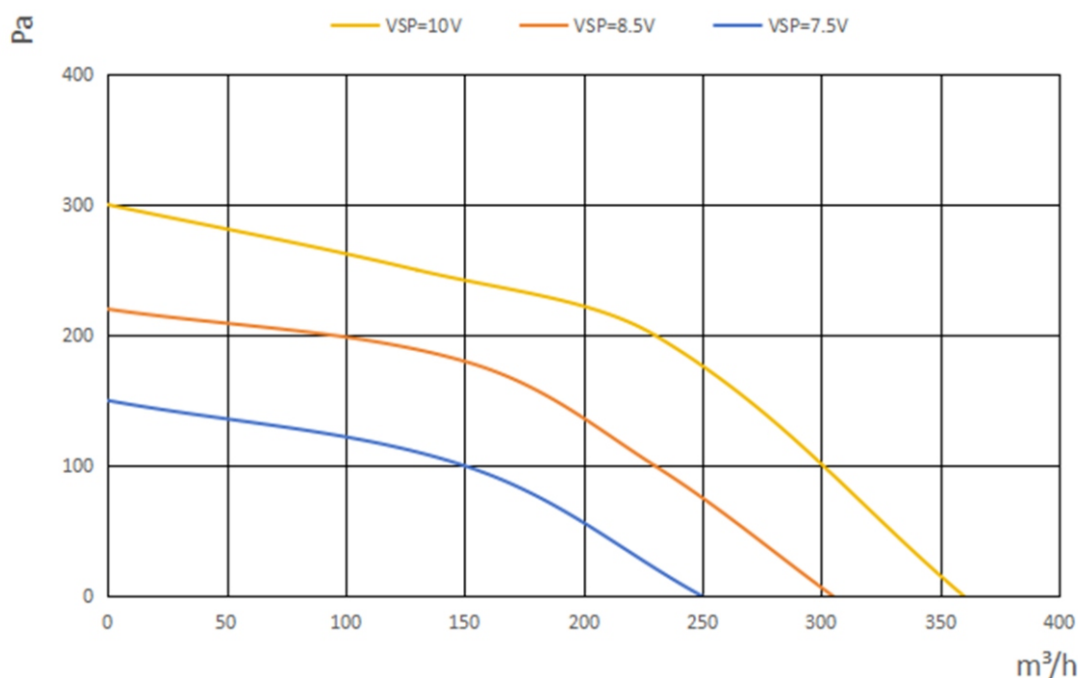

Outline Drawing

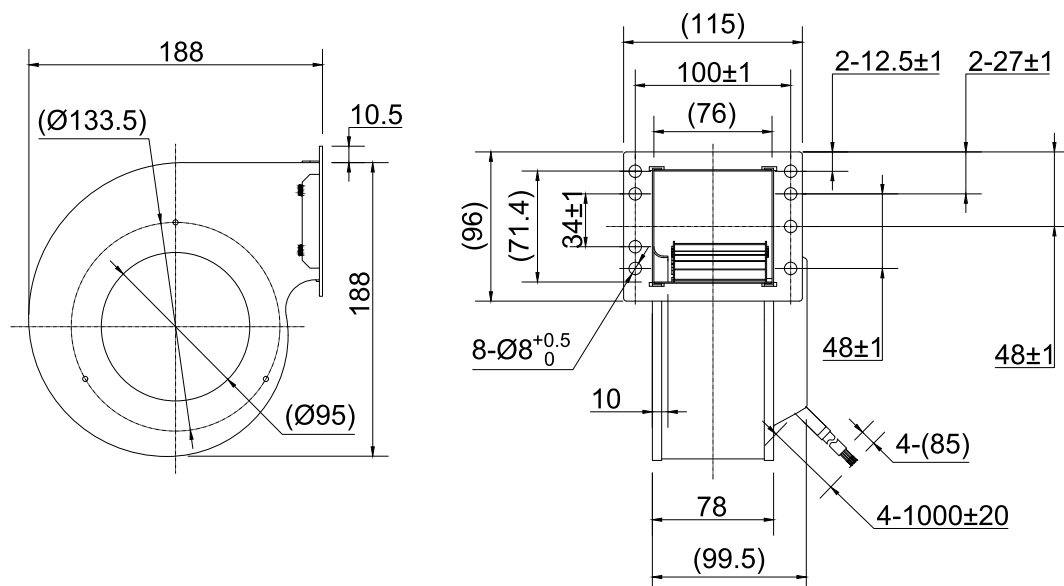

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-24120-A7-02	24	3.95	95	2400	350	330	Class B	60


Performance Curve

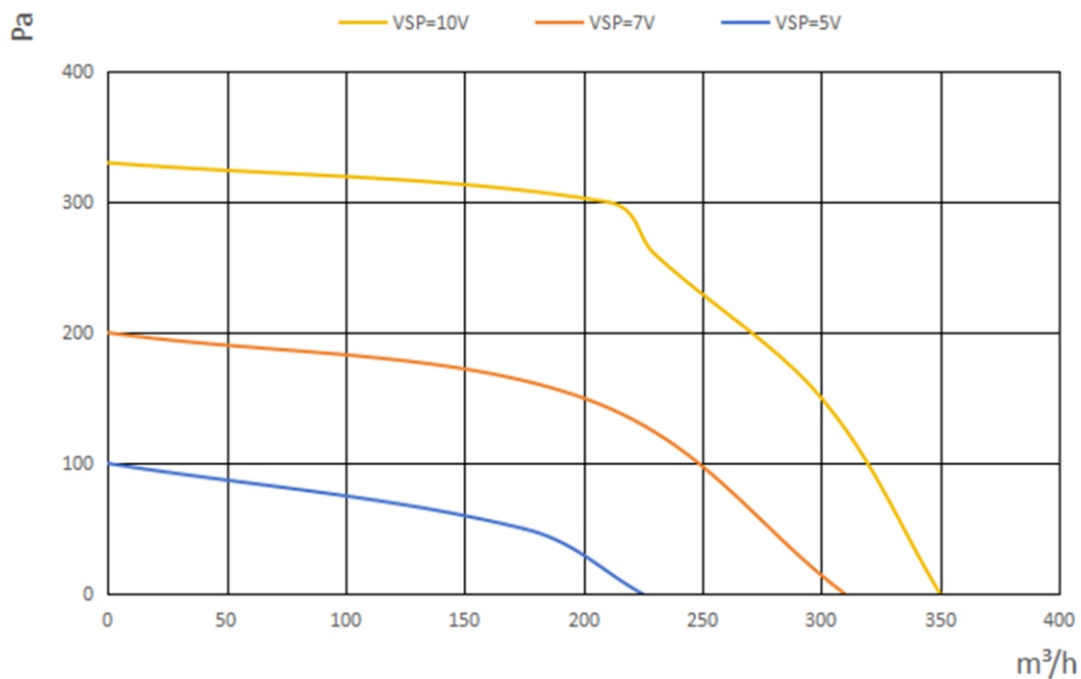

Outline Drawing

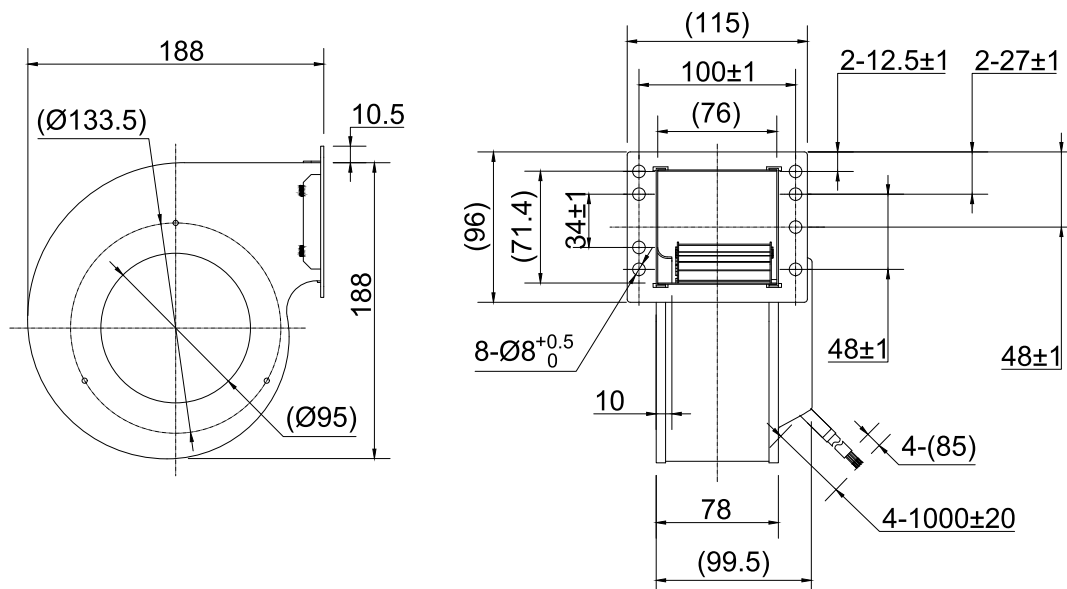

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D120-A7-03	310	0.21	65	2200	310	240	Class B	57

Performance Curve

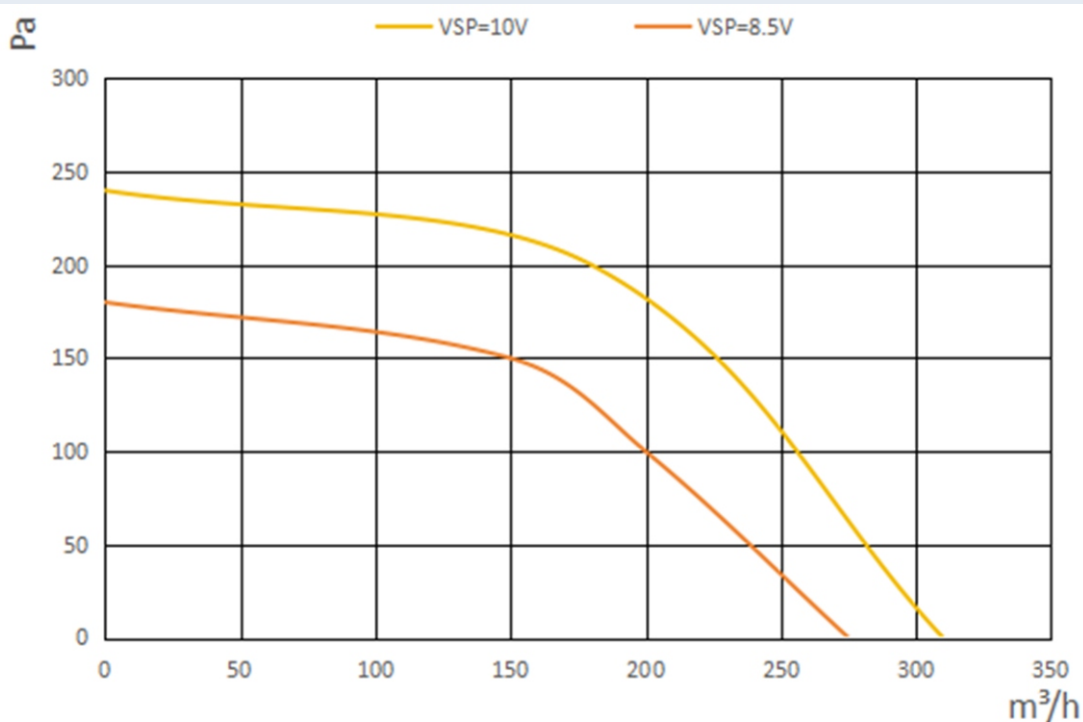

Outline Drawing

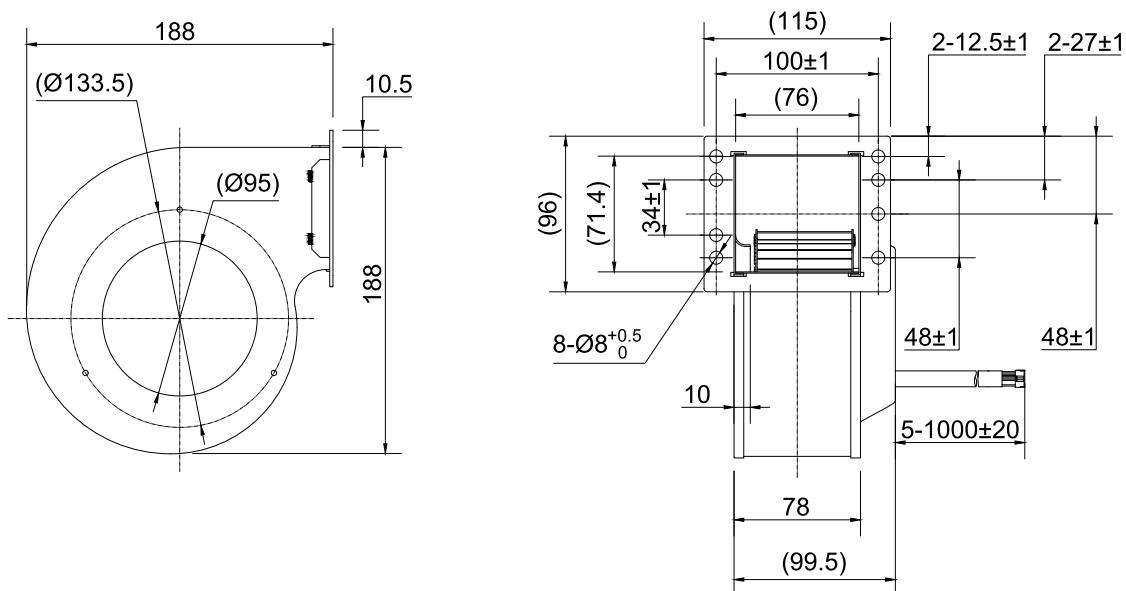

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C



Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-48133-A7-01	48	1.25	60	2040	310	250	Class B	63

Performance Curve

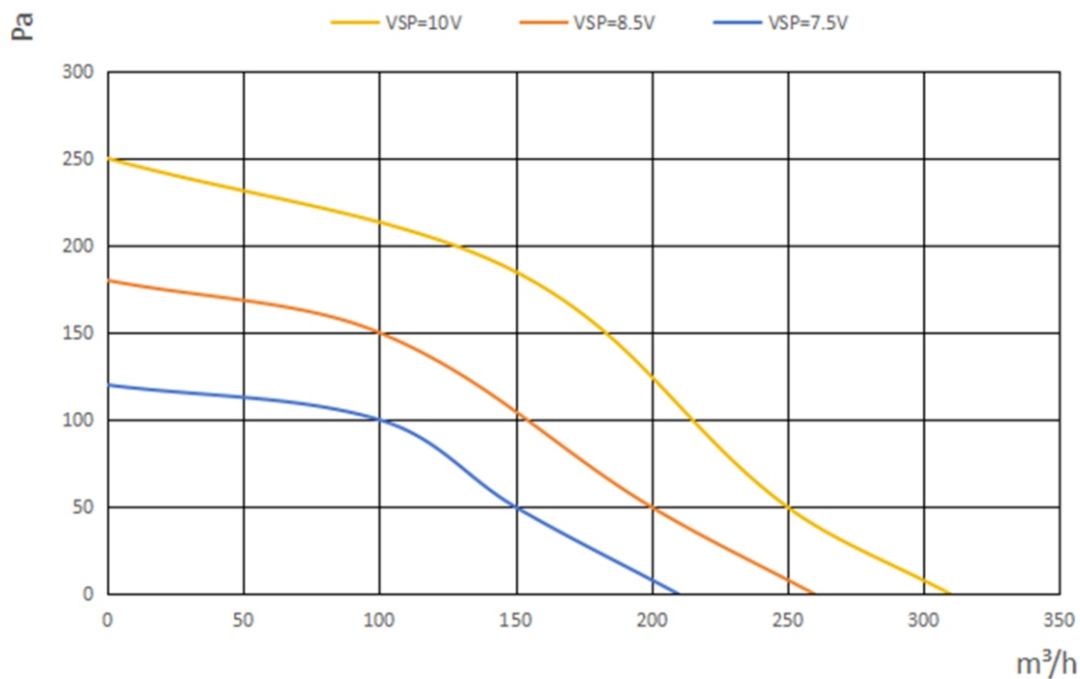

Outline Drawing

