

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-24133-A7-02	24	3.54	85	2150	340	390	Class B	63

Performance Curve

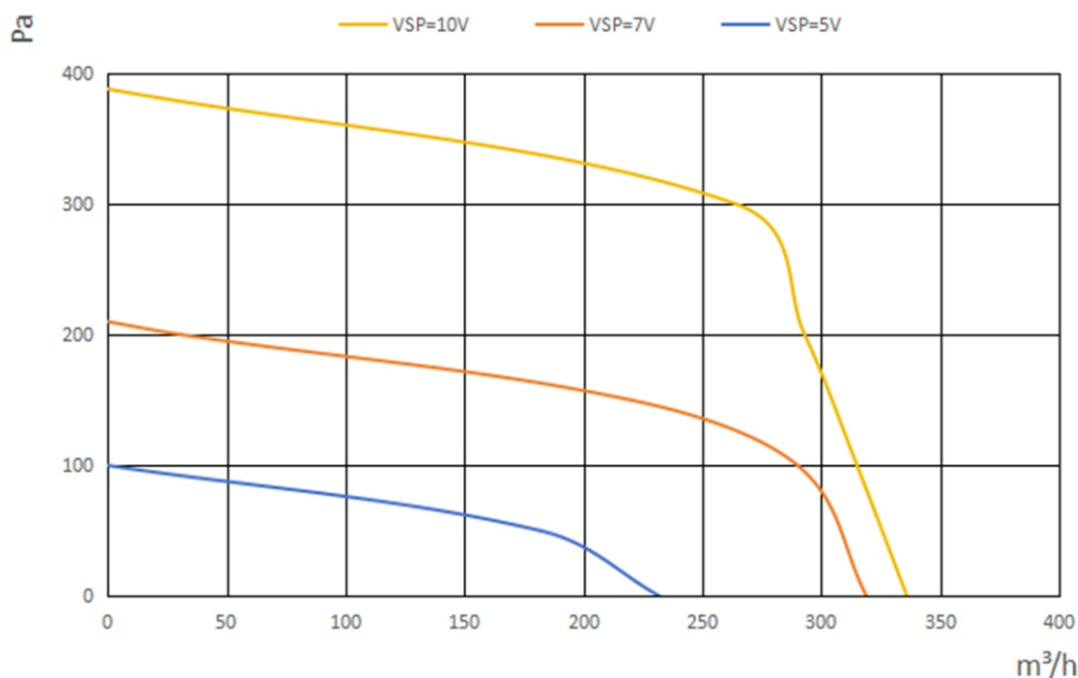

Outline Drawing

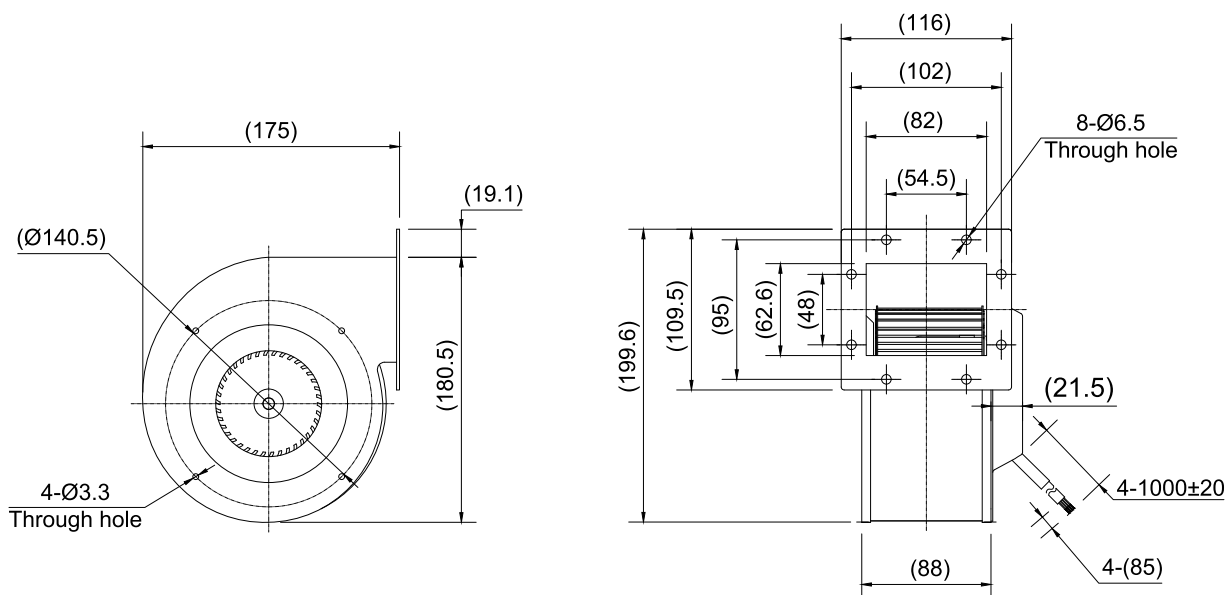

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D133-A7-03	310	0.21	65	2100	310	310	Class B	59


Performance Curve

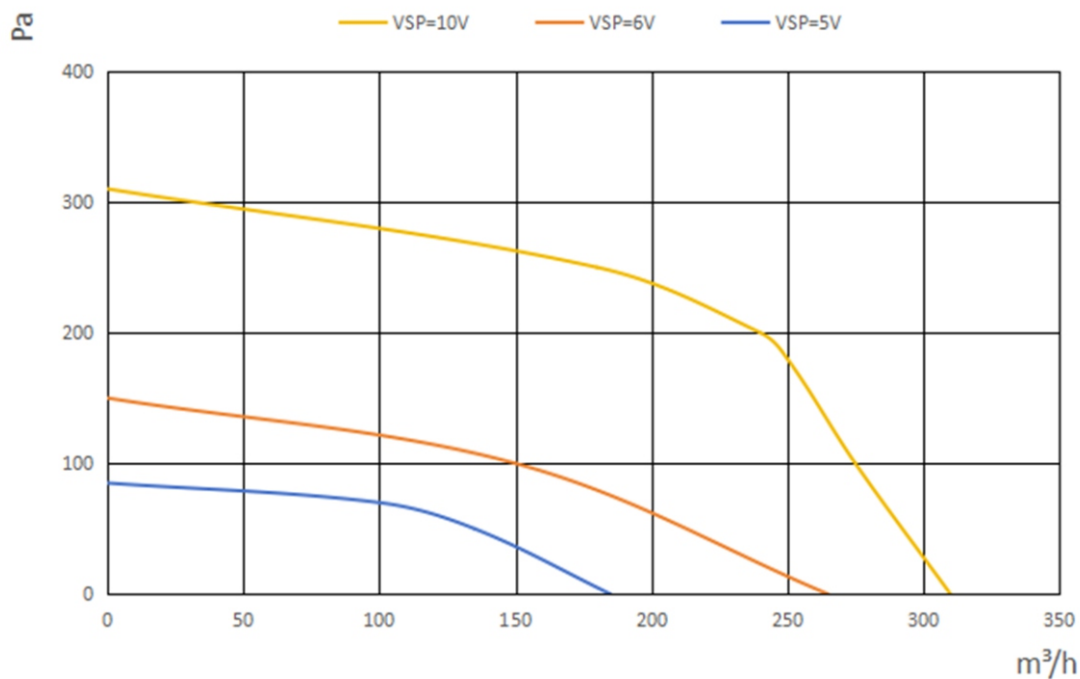

Outline Drawing

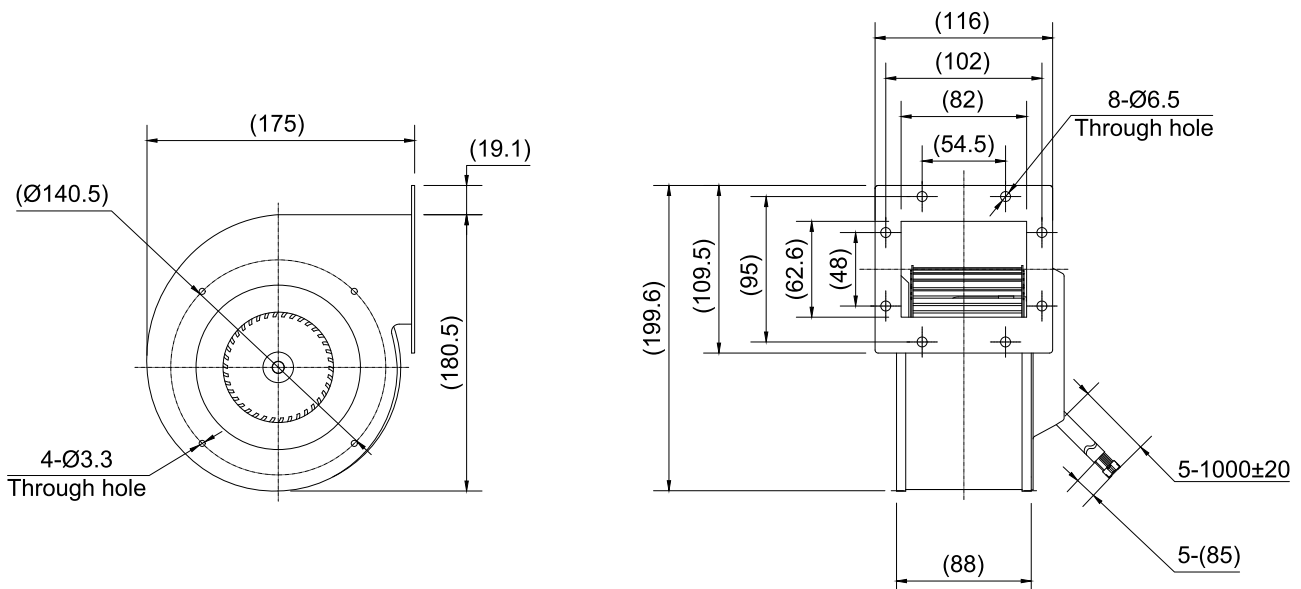

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-48140-A7-01	48	1.67	80	1800	450	385	Class B	65


Performance Curve

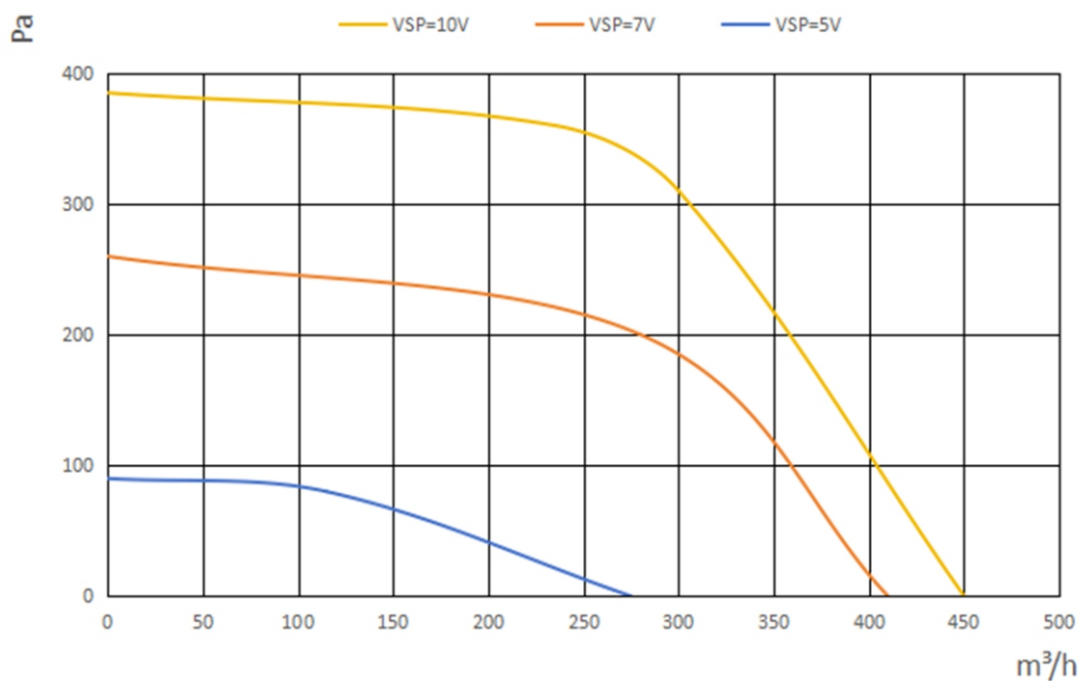

Outline Drawing

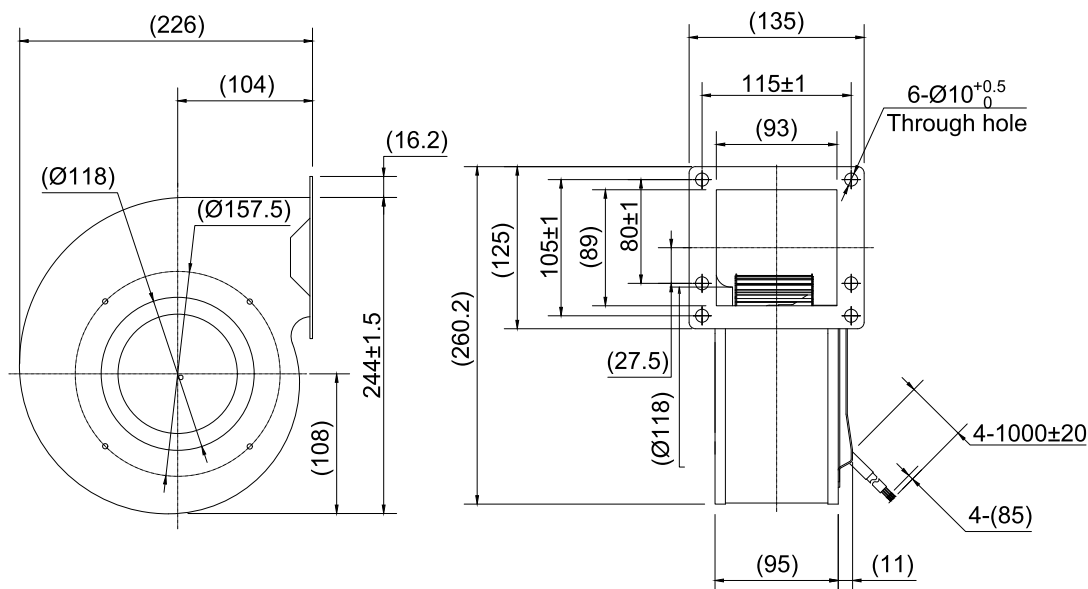

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-24140-A7-02	24	3.10	75	1700	430	430	Class B	61


Performance Curve

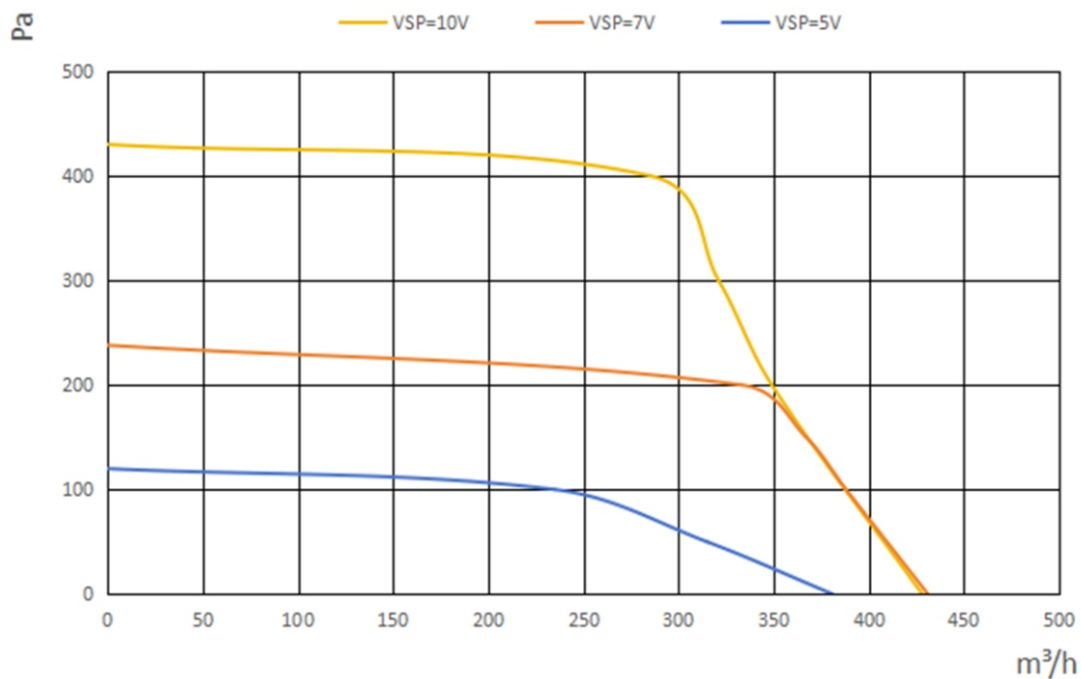

Outline Drawing

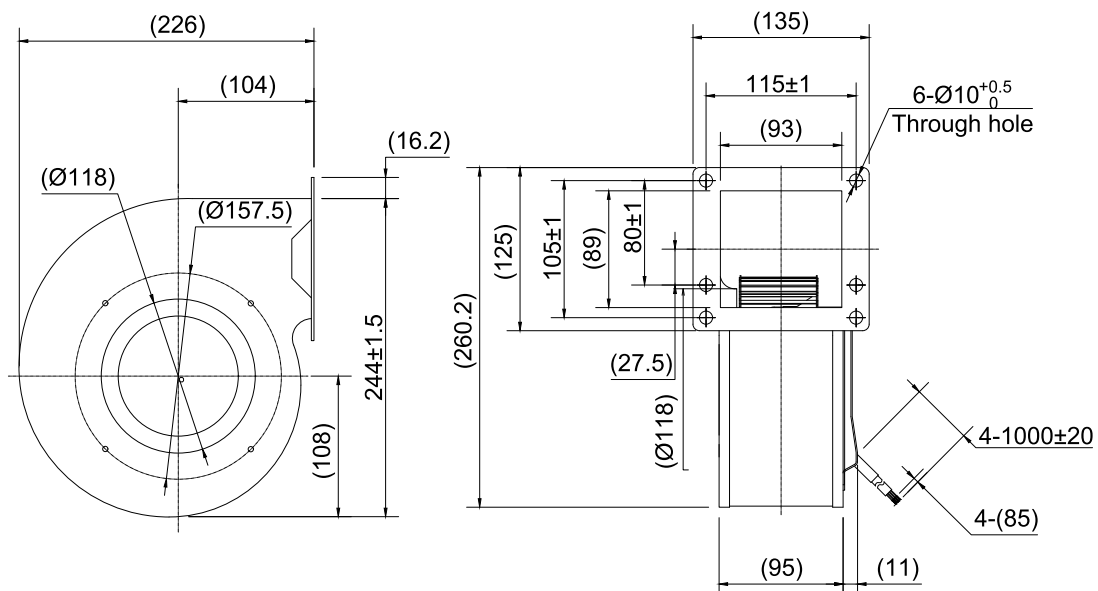

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D140-A7-03	310	0.26	80	1800	430	430	Class B	71


Performance Curve

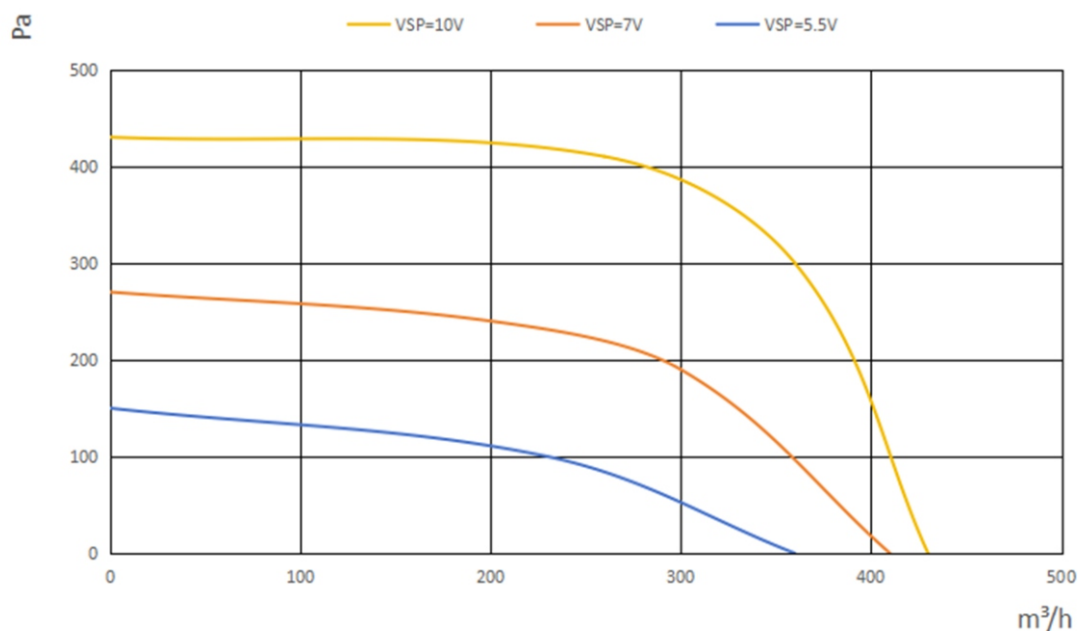

Outline Drawing

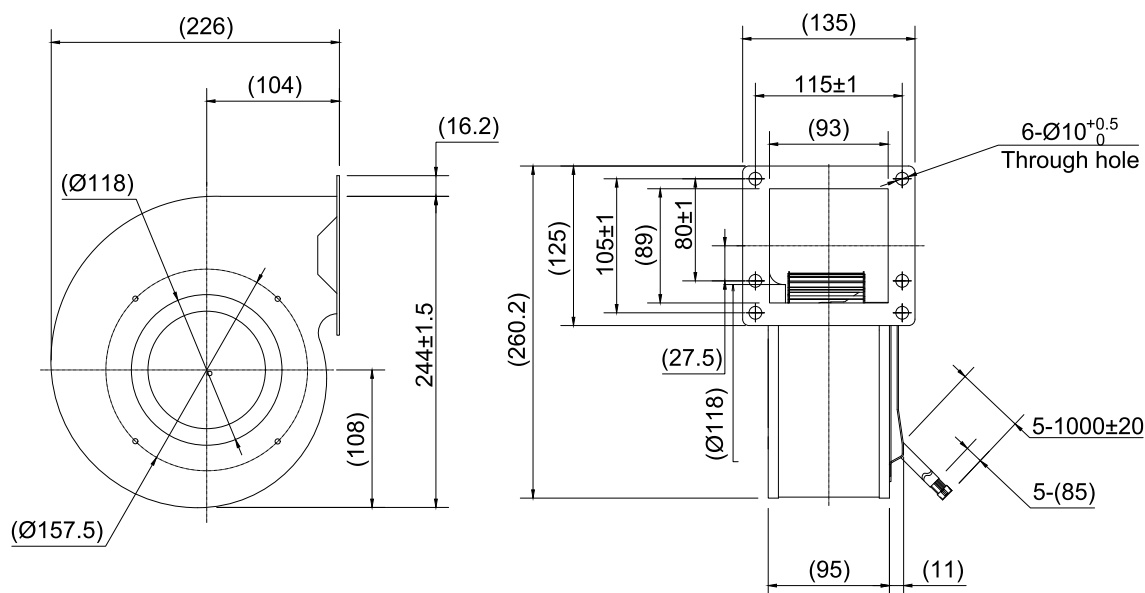

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-24160-A7-01	24	2.70	65	1450	450	500	Class B	57


Performance Curve

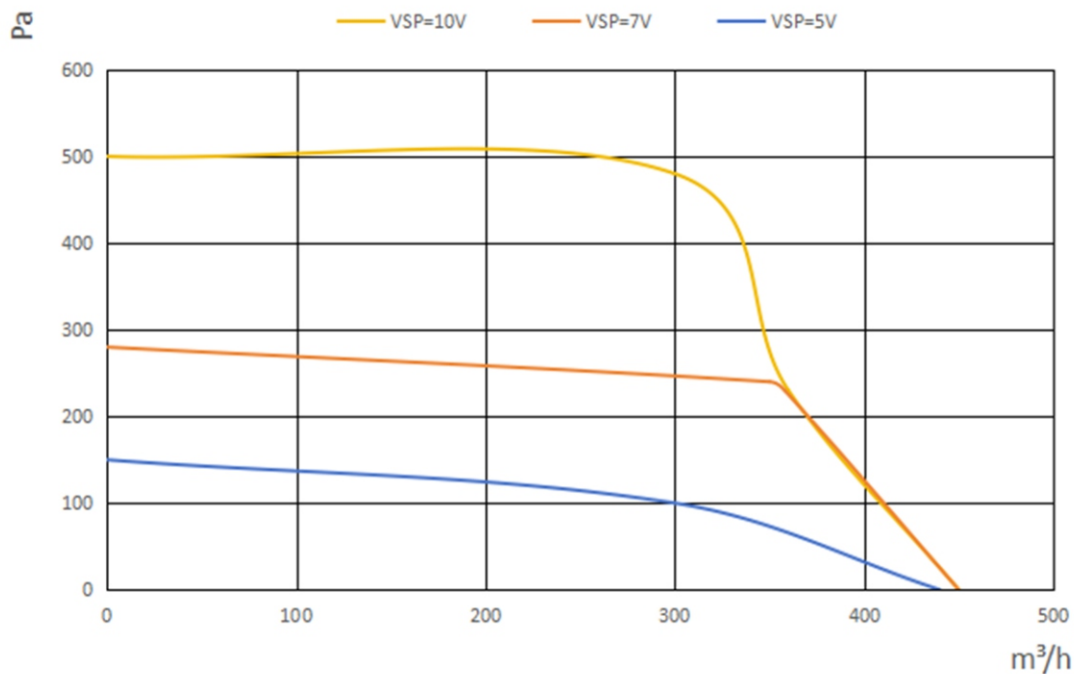

Outline Drawing

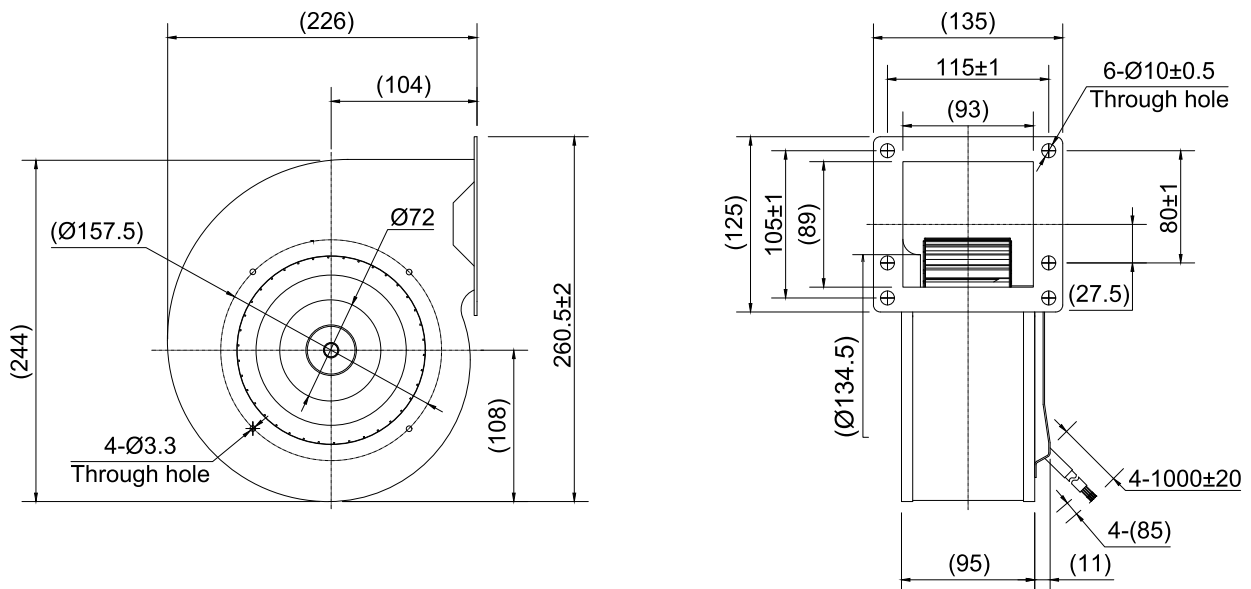

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D160-A7-02	310	0.26	80	1600	420	620	Class B	61


Performance Curve

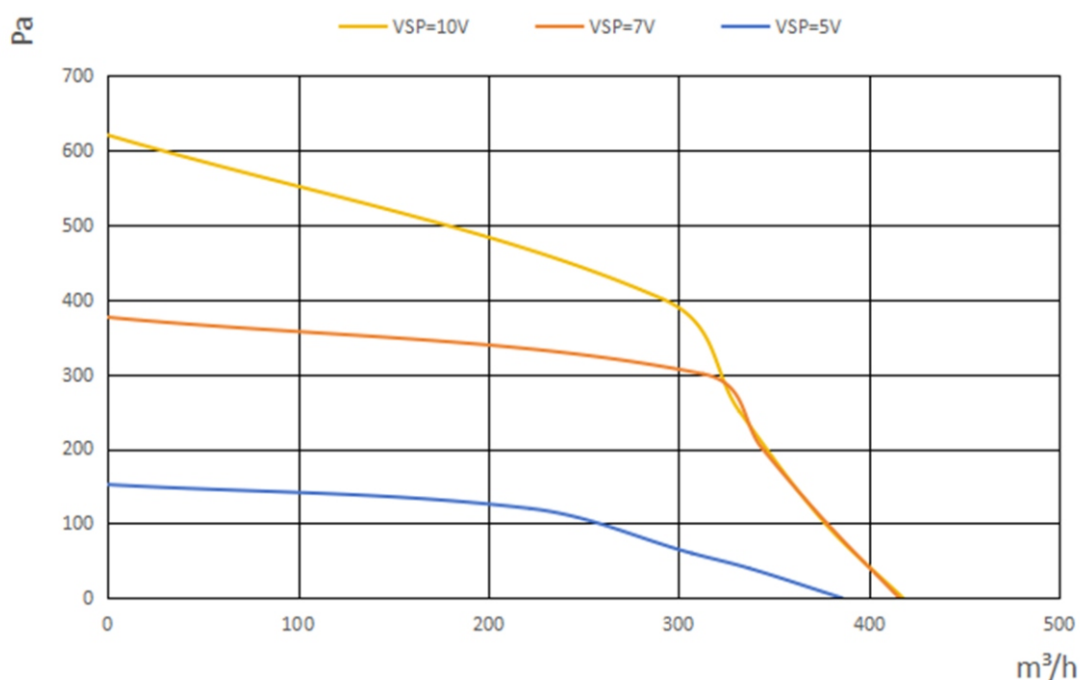

Outline Drawing

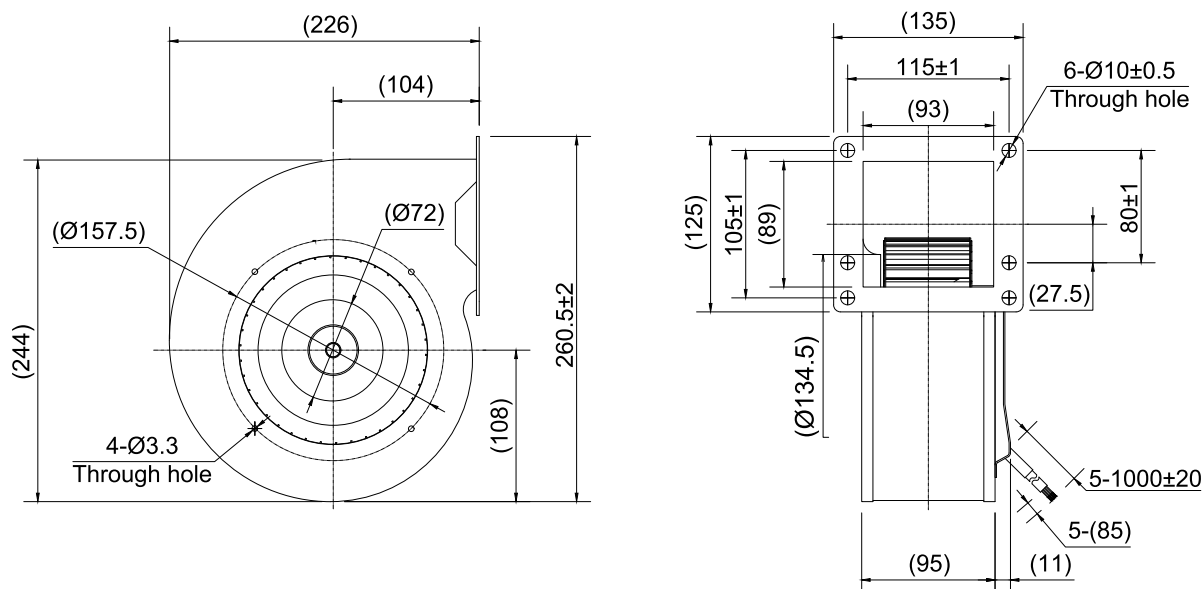

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D160-A7-03	310	0.39	120	1900	500	810	Class B	65


Performance Curve

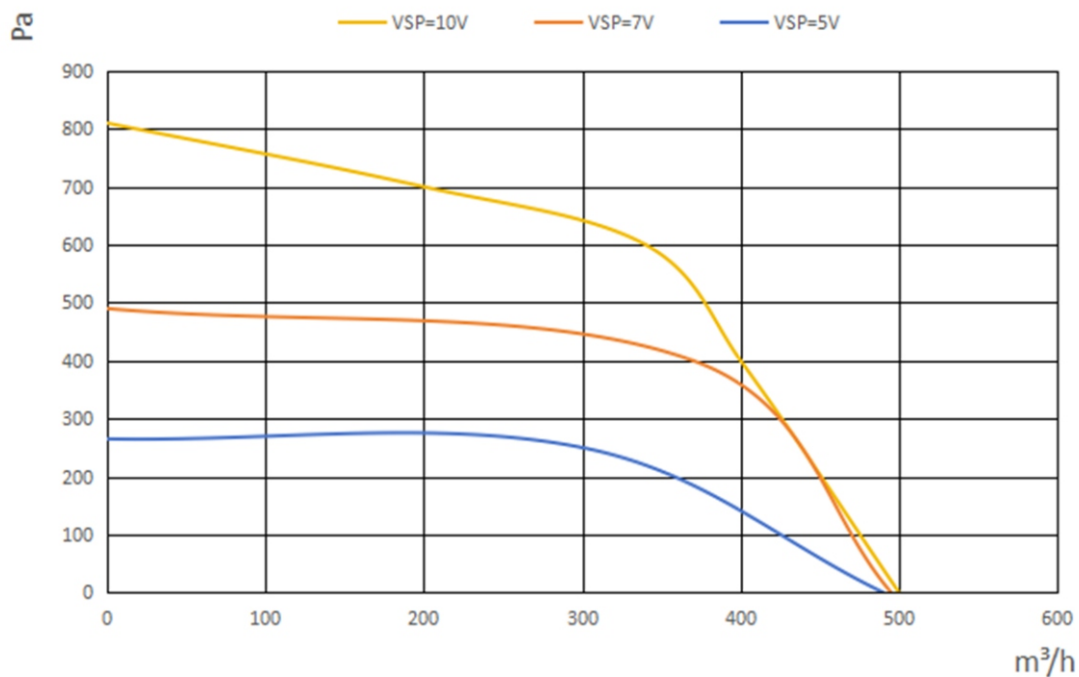

Outline Drawing

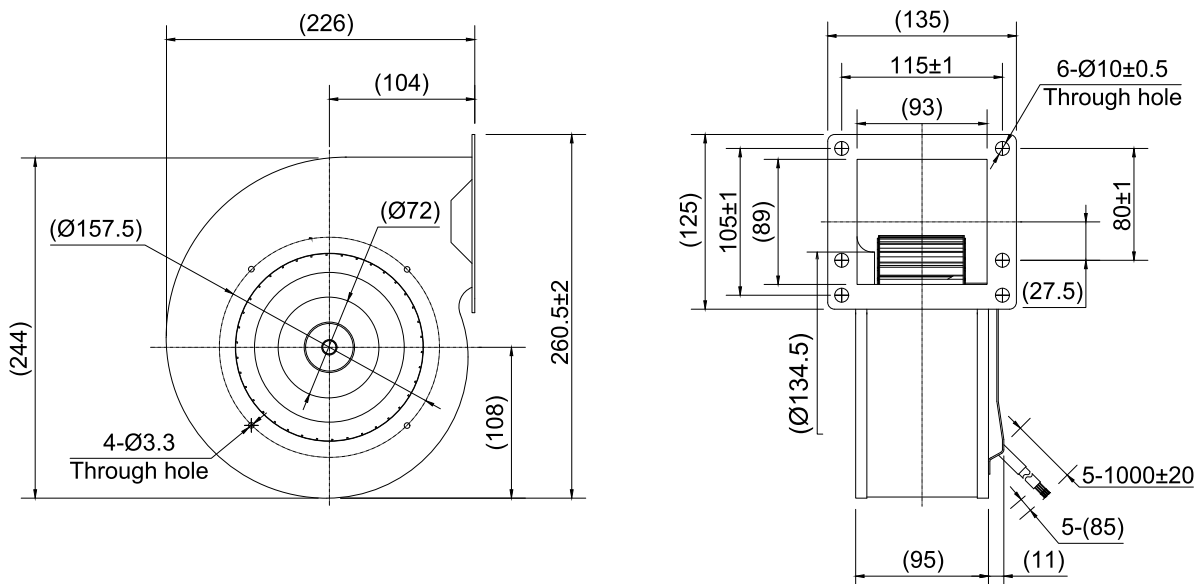

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-48160-A9-04	48	2.20	105	1950	530	630	Class B	62


Performance Curve

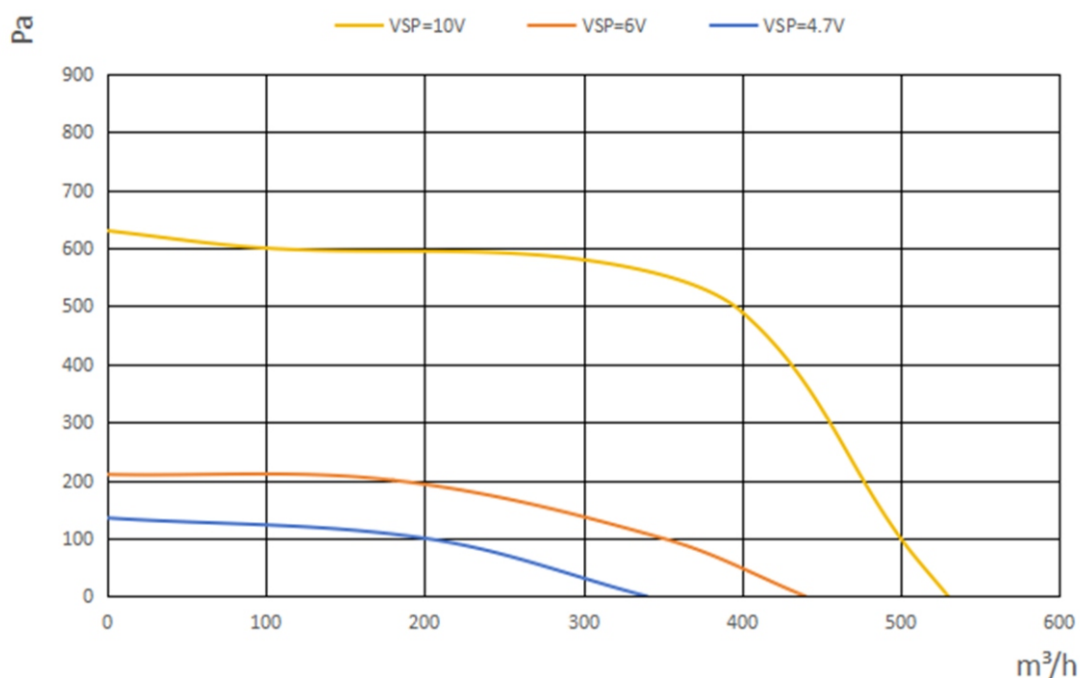

Outline Drawing

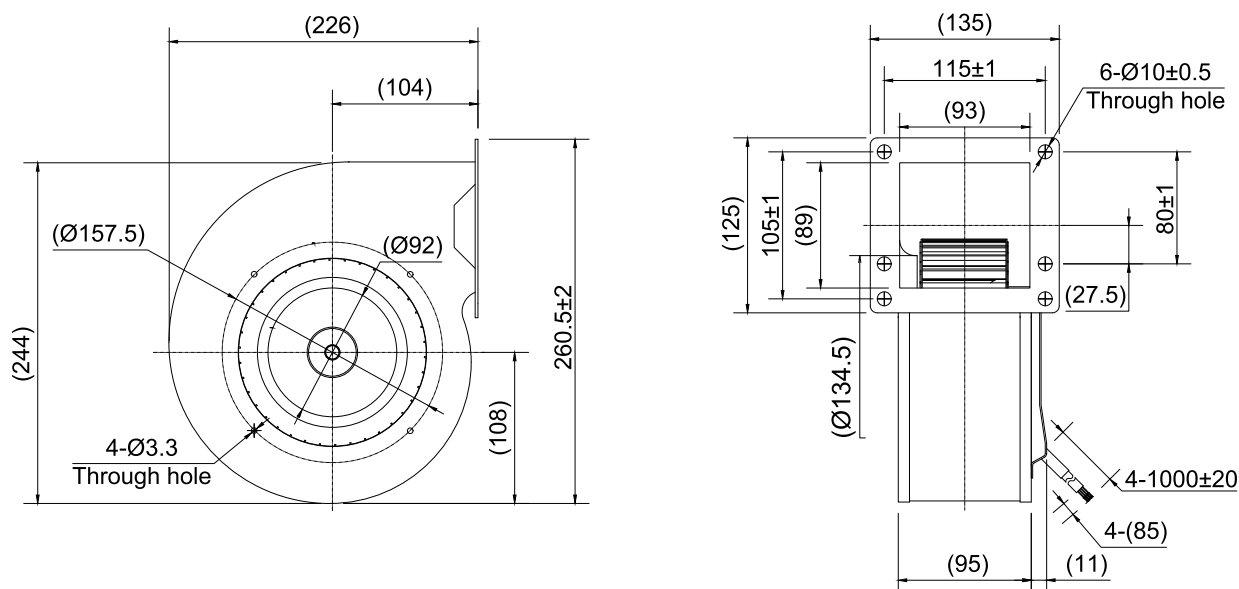

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-24160-A9-05	24	6.00	145	2050	580	505	Class B	67


Performance Curve

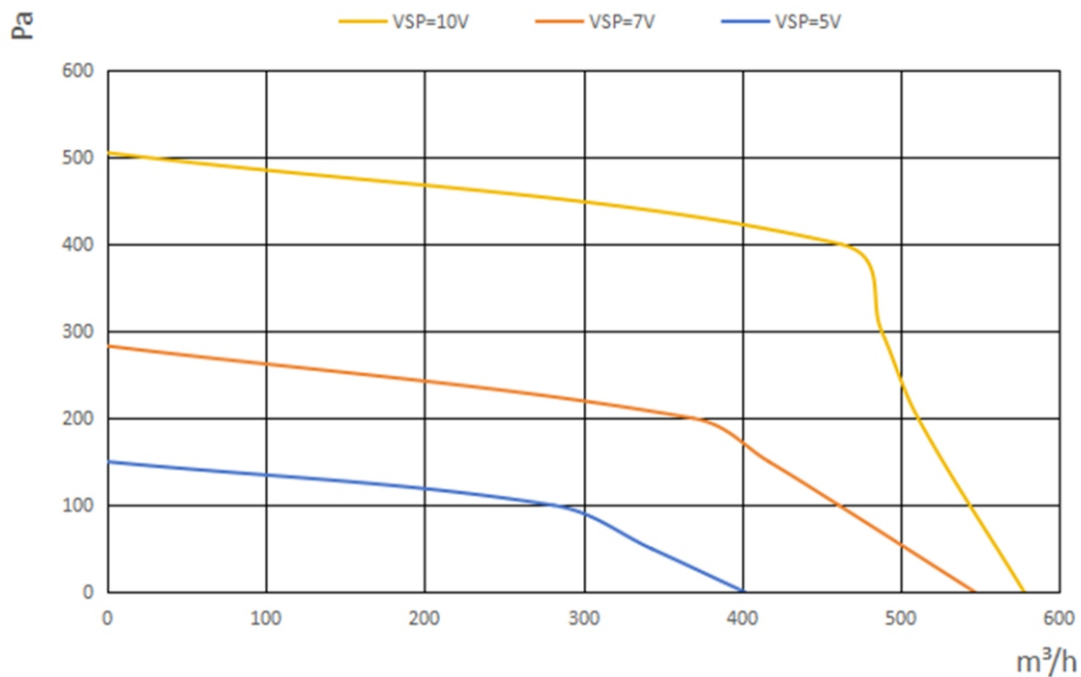

Outline Drawing

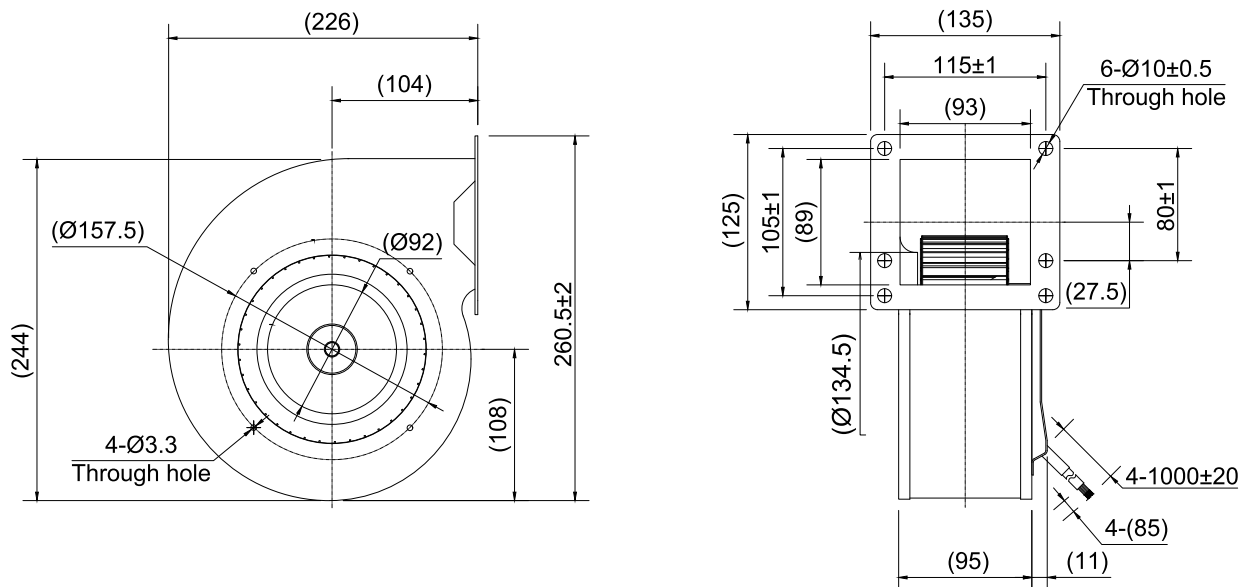

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D160-A9-06	310	0.71	220	2400	660	580	Class B	66


Performance Curve

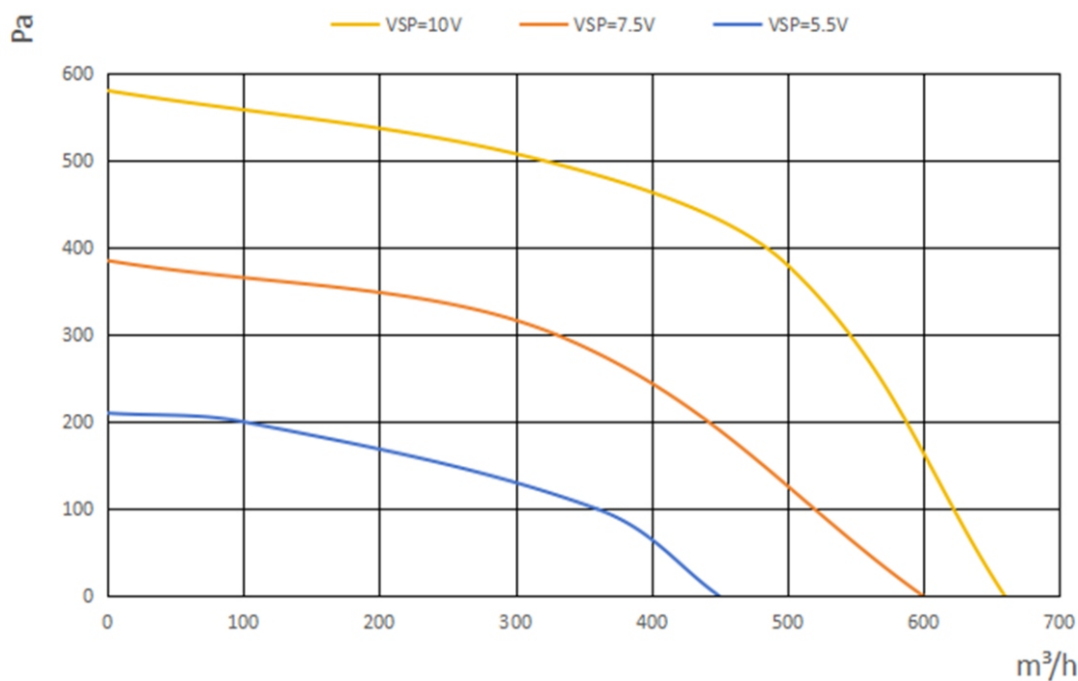

Outline Drawing

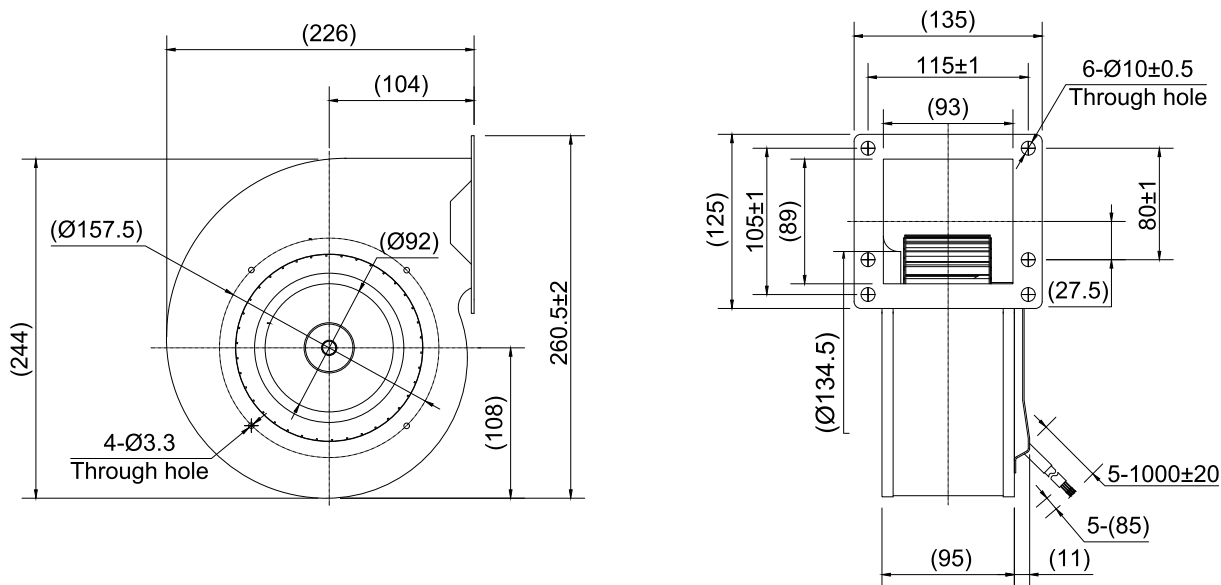

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-48180-A9-01	48	1.9	90	1250	600	600	Class B	67


Performance Curve

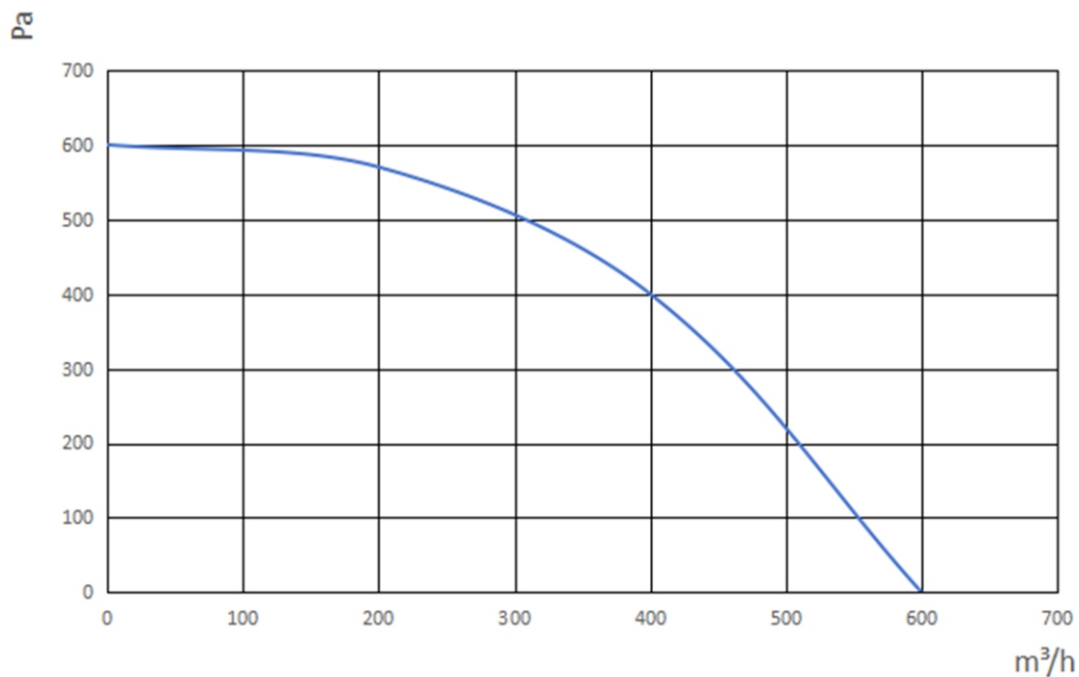

Outline Drawing

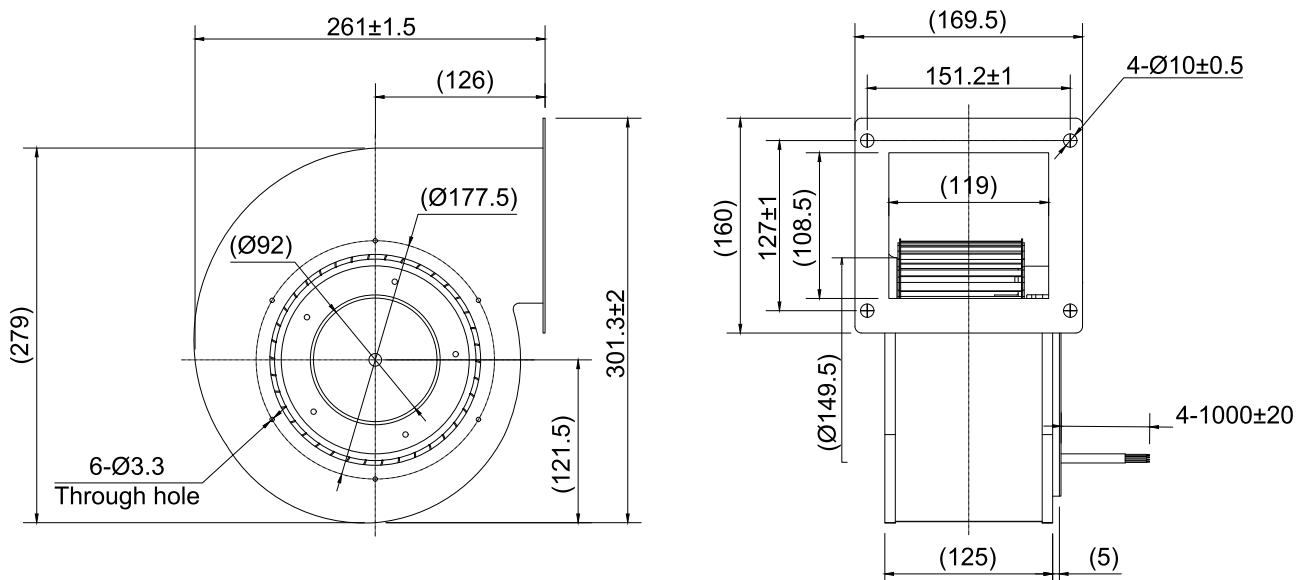

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-24180-A9-02	24	3.80	90	1250	620	600	Class B	67


Performance Curve

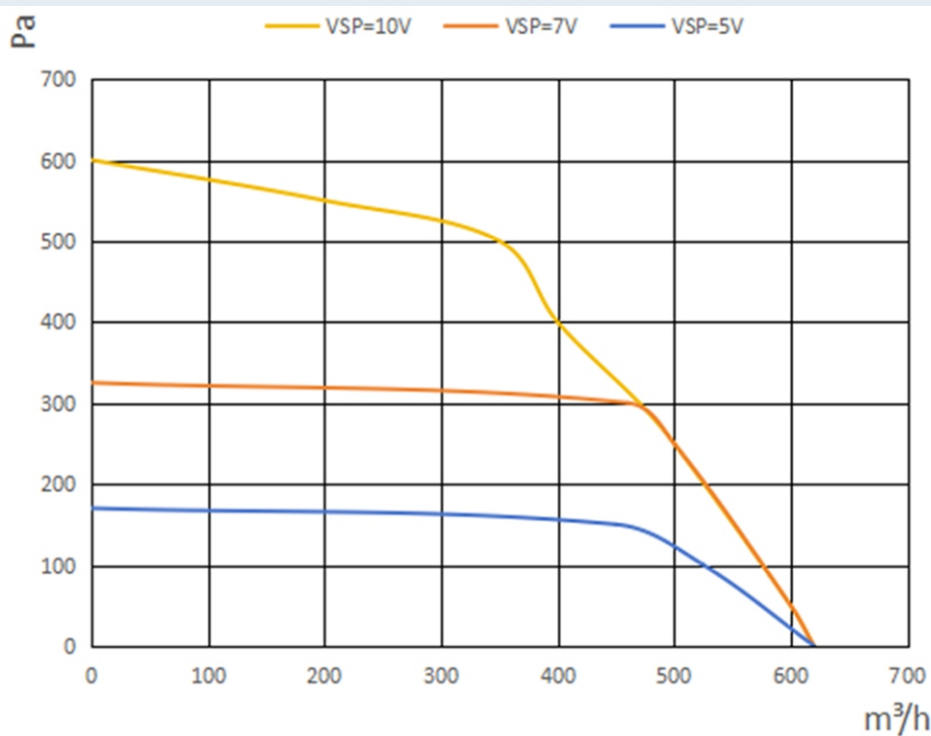

Outline Drawing

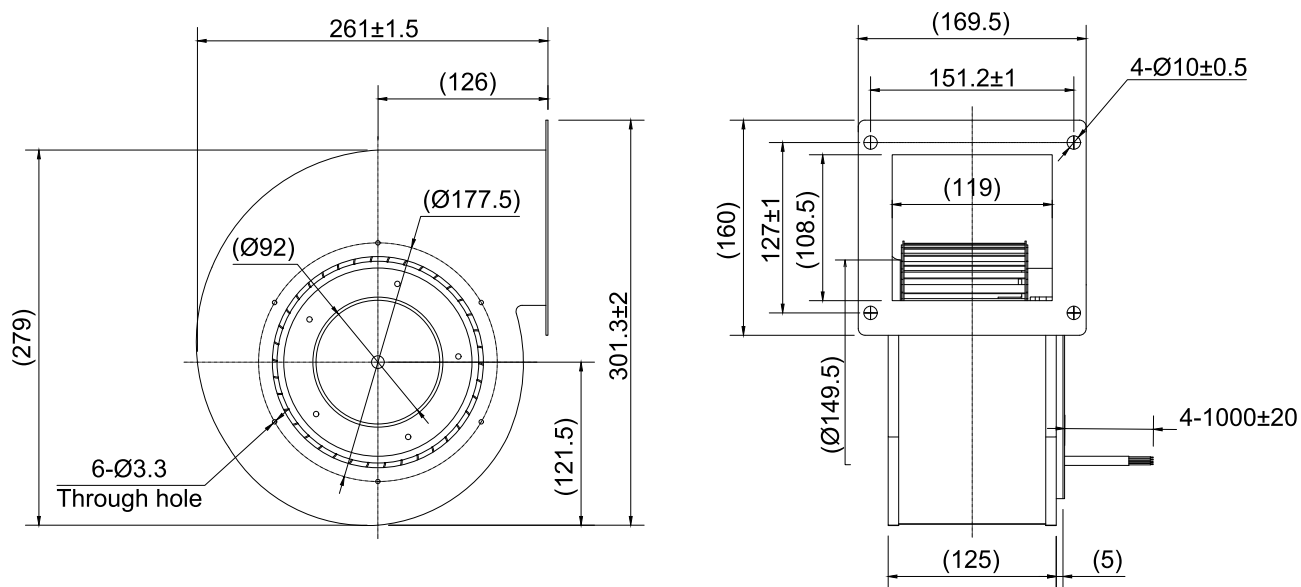

DC Single Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
S3D-3D180-A9-03	310	0.58	180	1600	740	680	Class B	65

Performance Curve

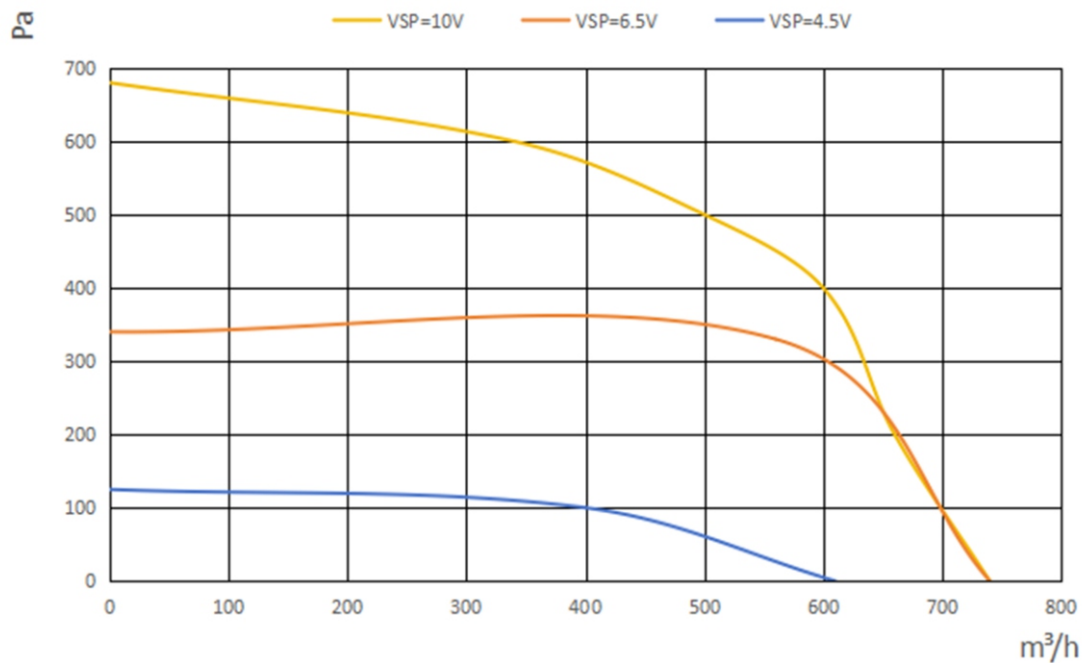

Outline Drawing

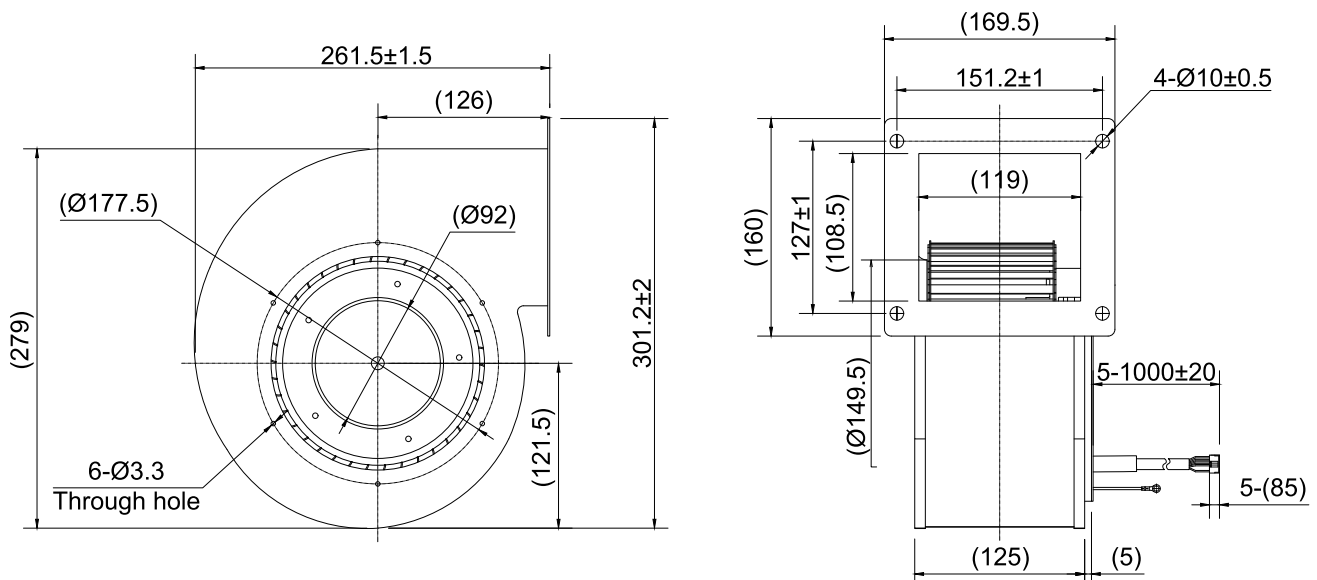

04

**DC Duel Inlet
Blower Fan**

DC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP42
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-24133-A9-01	24	3.30	80	1600	660	320	Class B	64

Performance Curve

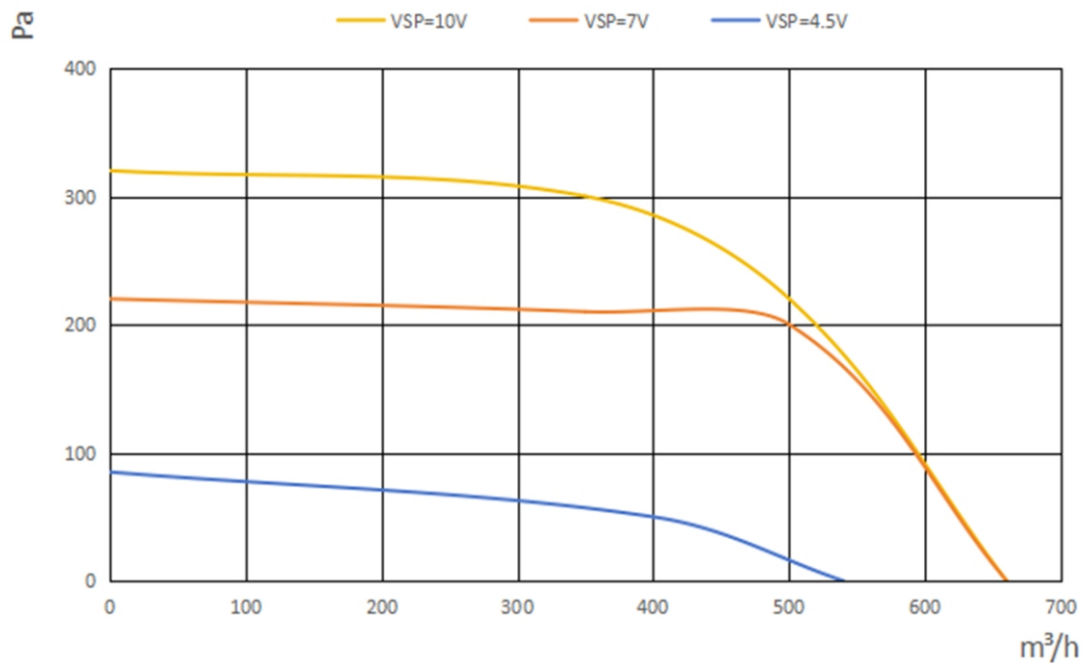

Outline Drawing

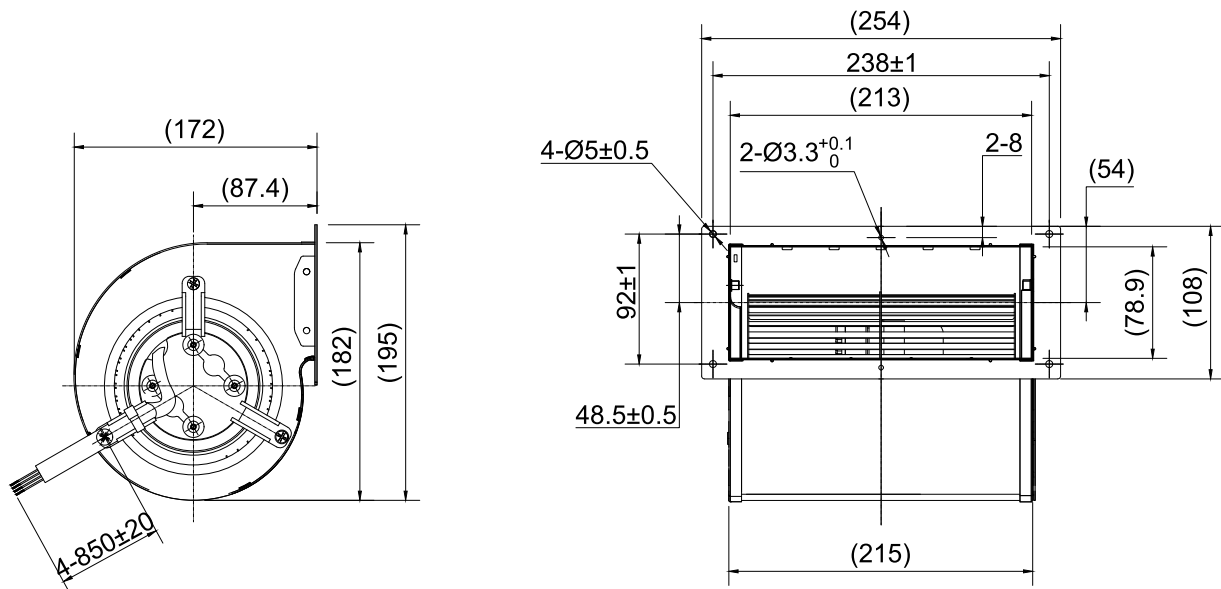

DC Dual Inlet Blower Fan



Impeller Material: Galvanised Sheet Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-48133-A9-02	48	1.70	80	1600	660	320	Class B	64

Performance Curve

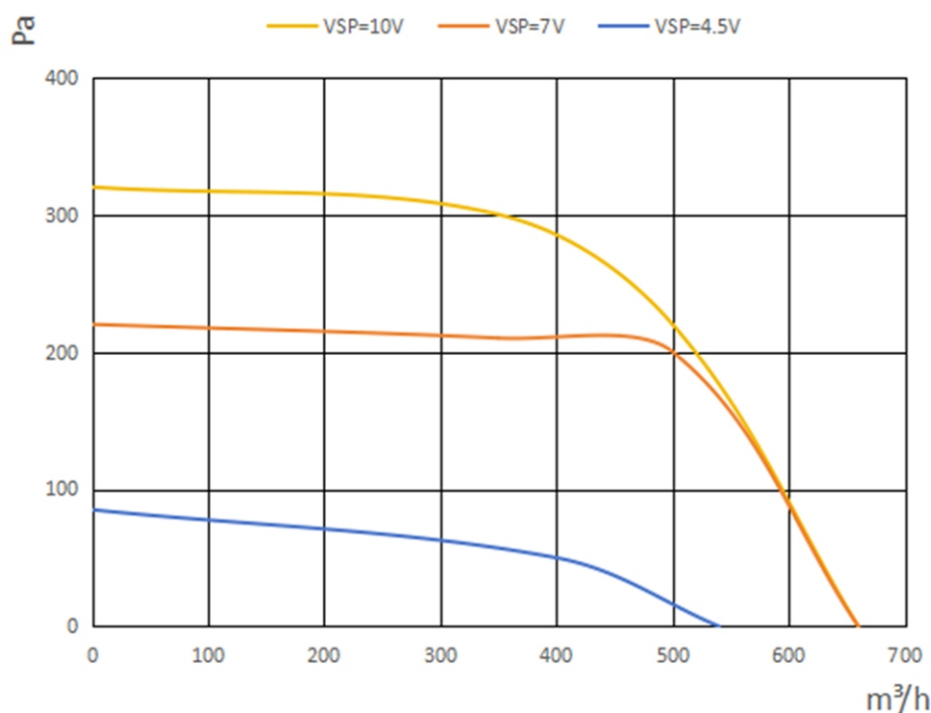

Outline Drawing

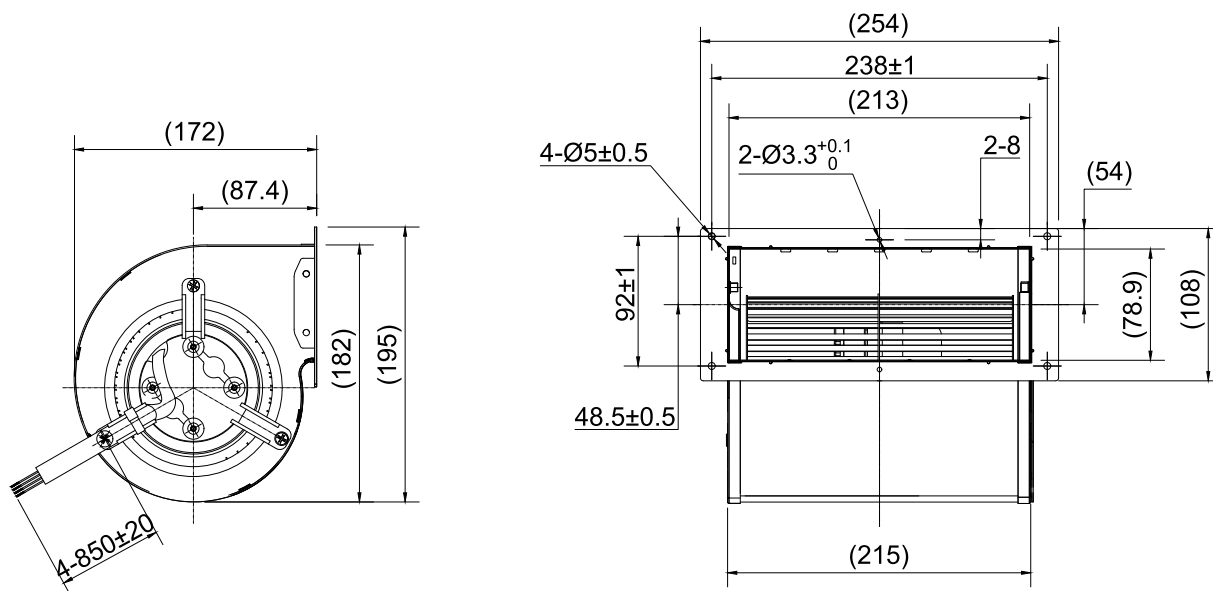

DC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP42
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-3D133-A9-03	310	0.52	160	1950	800	400	Class B	69

Performance Curve

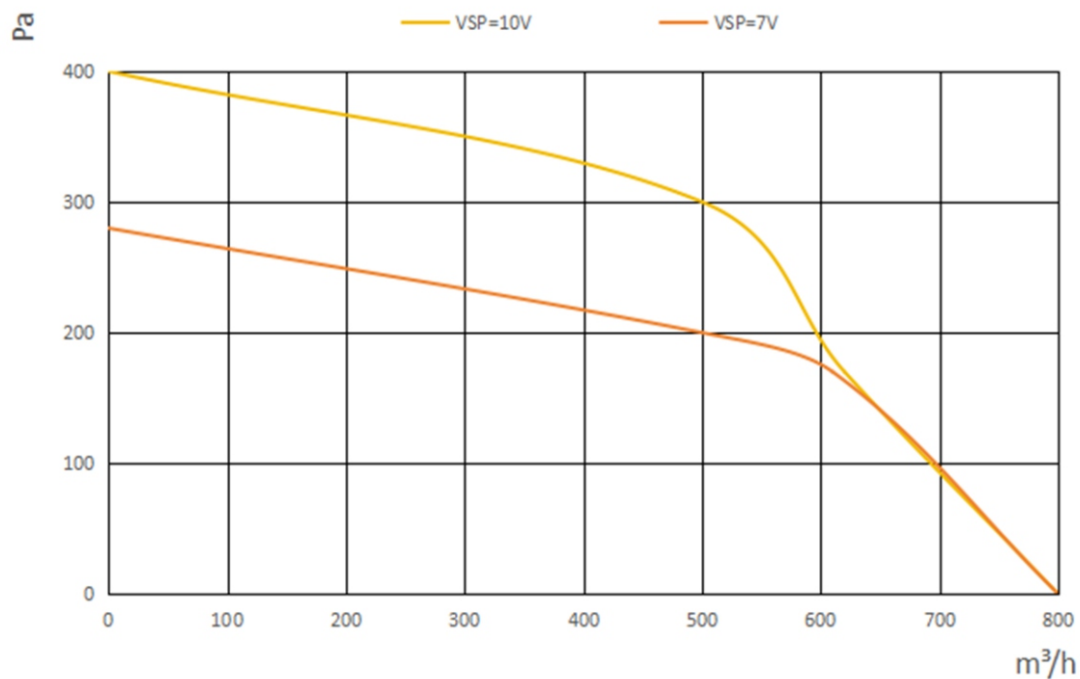

Outline Drawing

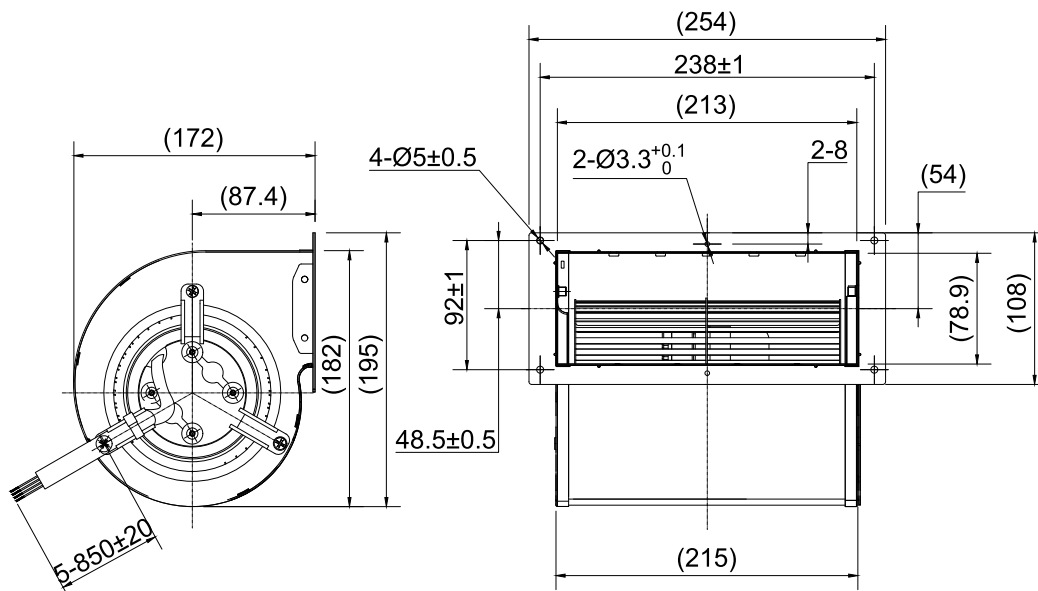

DC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-24146-A9-01	24	4.60	110	1400	870	290	Class B	61

Performance Curve

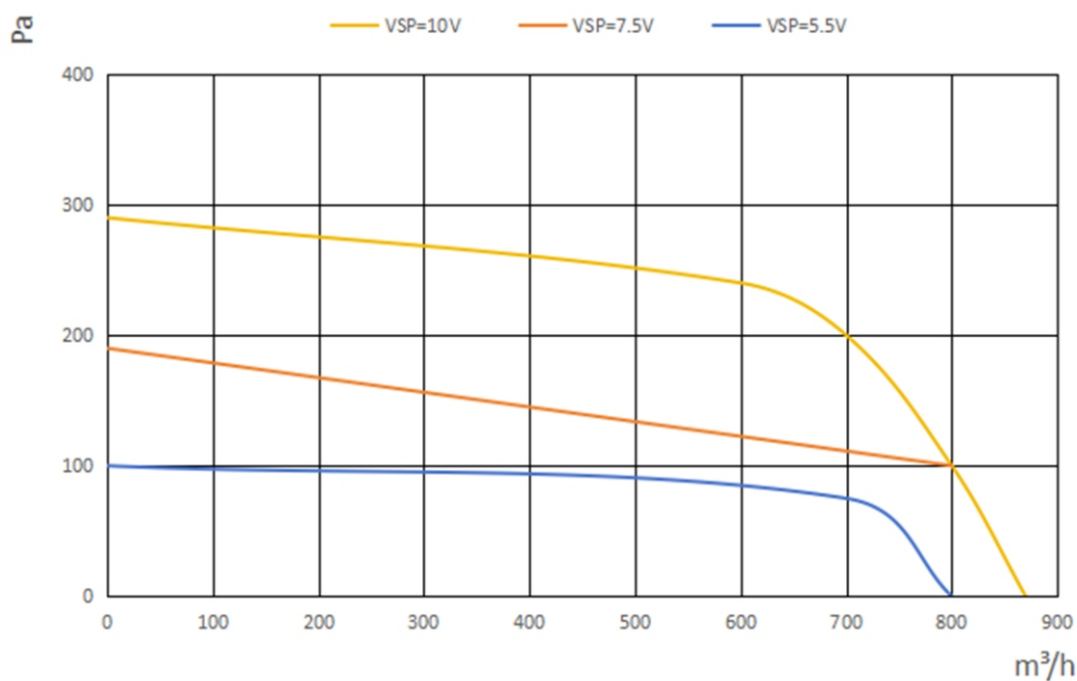

Outline Drawing

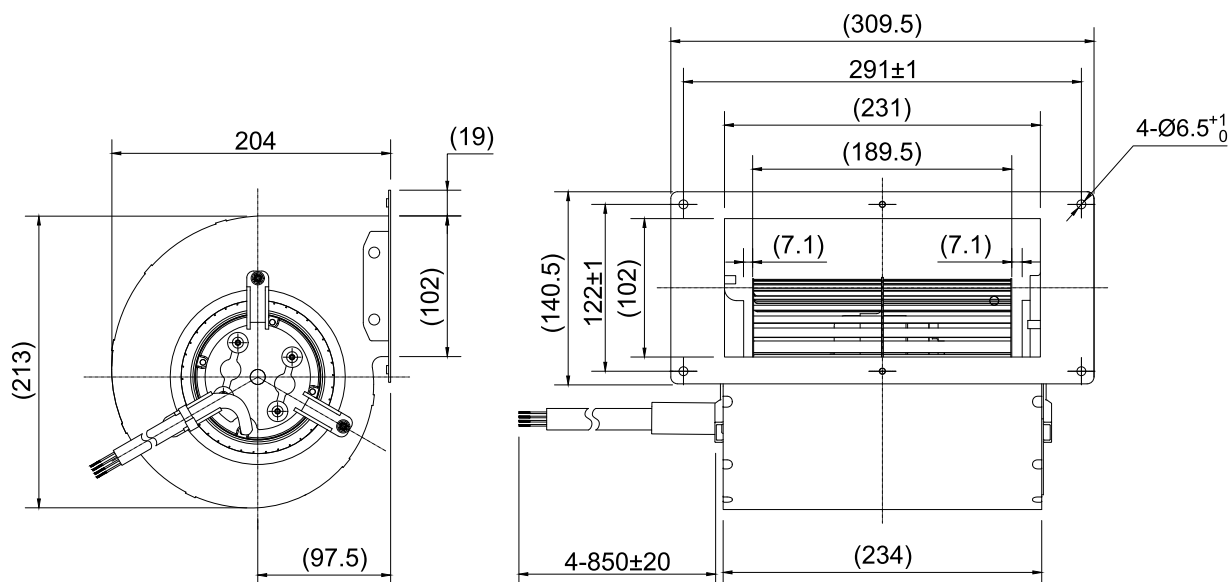

DC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C



Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-48146-A9-02	48	2.30	110	1400	870	290	Class B	61

Performance Curve

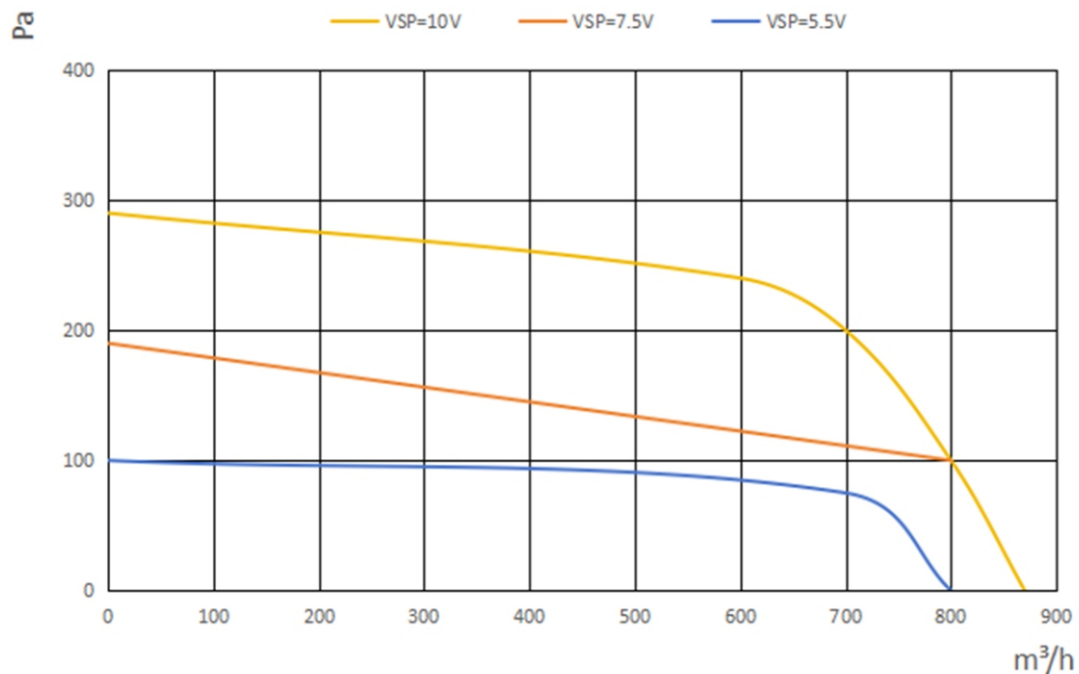

Outline Drawing

