

DC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-3D146-A9-03	310	0.58	180	1650	1080	505	Class B	67


Performance Curve

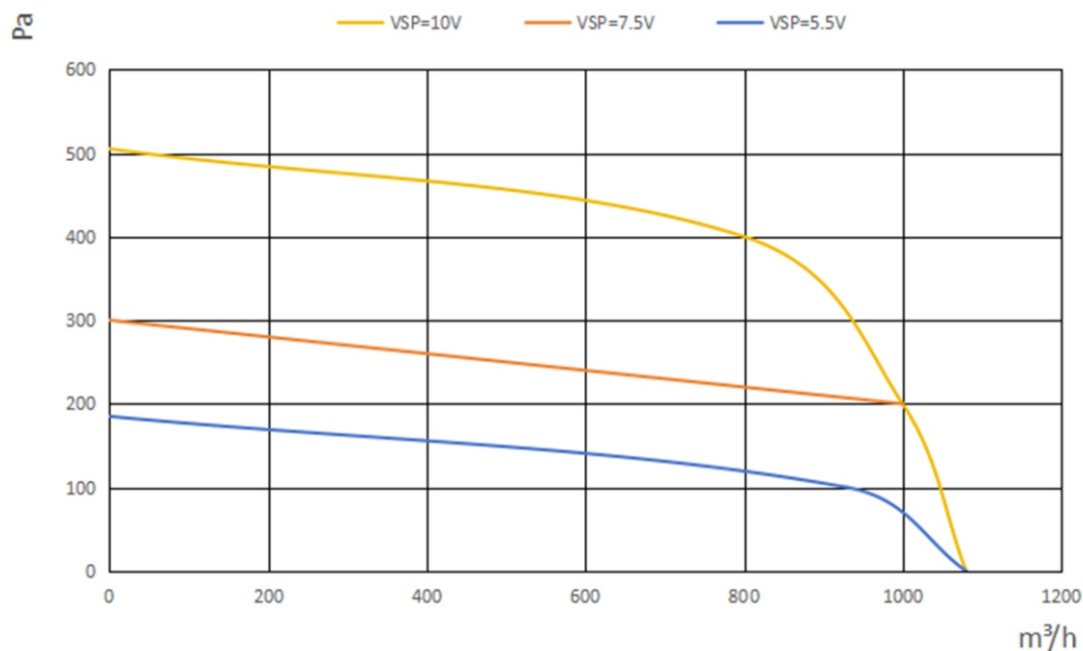

Outline Drawing

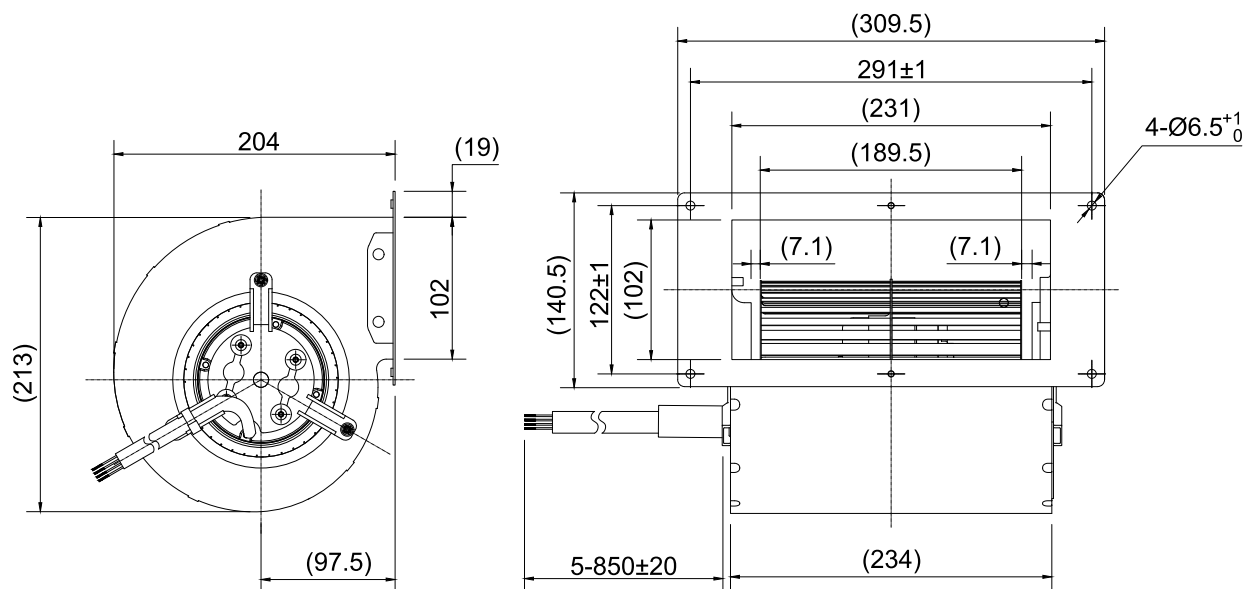

DC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 20 °C ~ +40 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-3D160-A9-01	310	0.32	100	1100	1100	740	Class B	57


Performance Curve

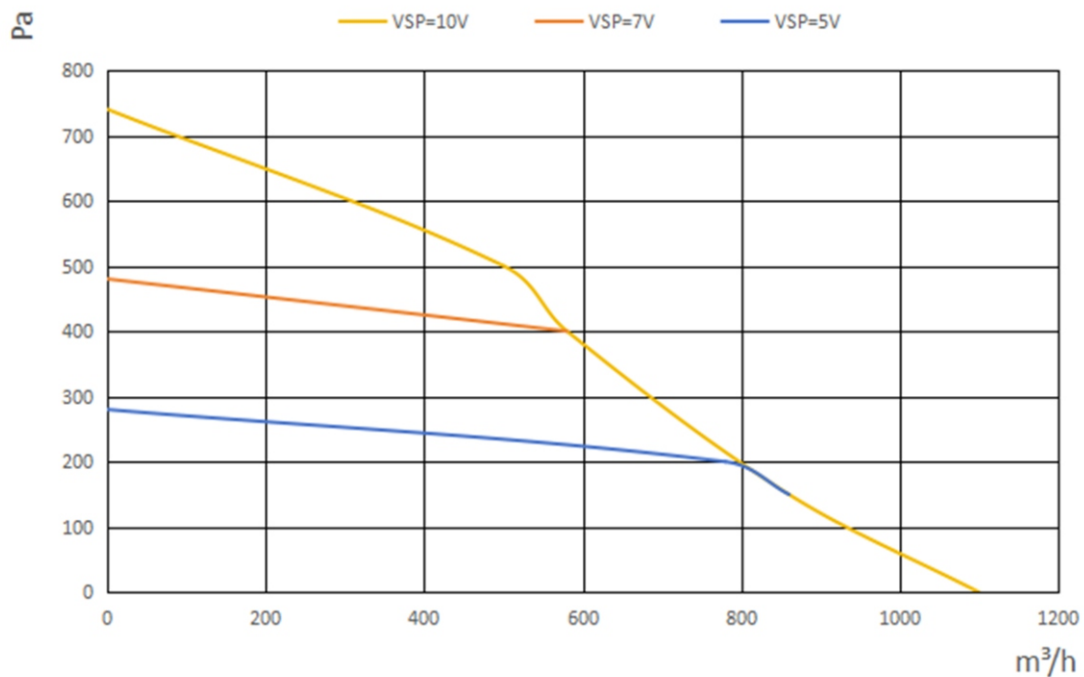

Outline Drawing

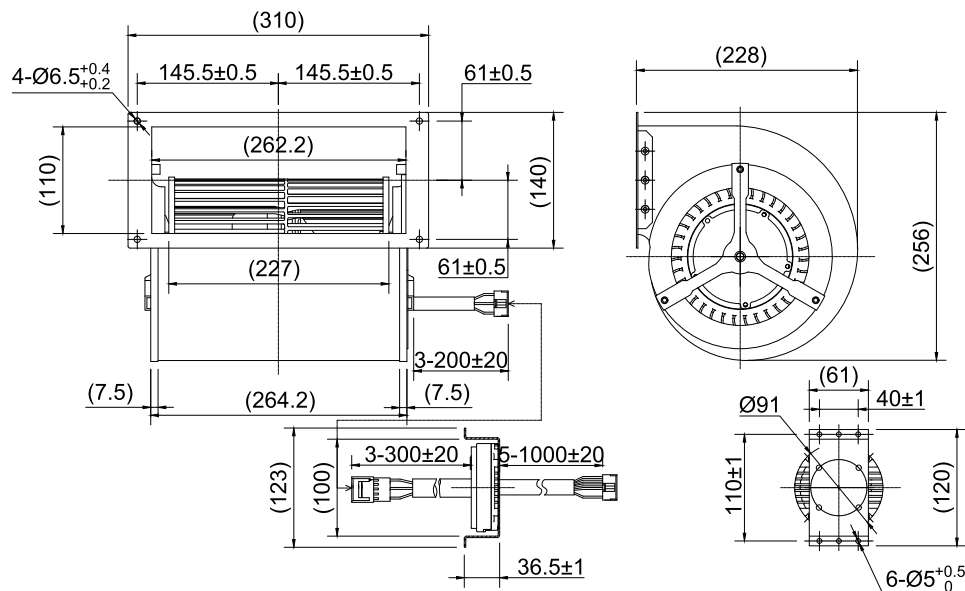

DC Dual Inlet Blower Fan



Impeller Material: PA66

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP42

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 20 °C ~ +40 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-3D160-A9-02	310	0.44	135	1250	1290	770	Class B	59

Performance Curve

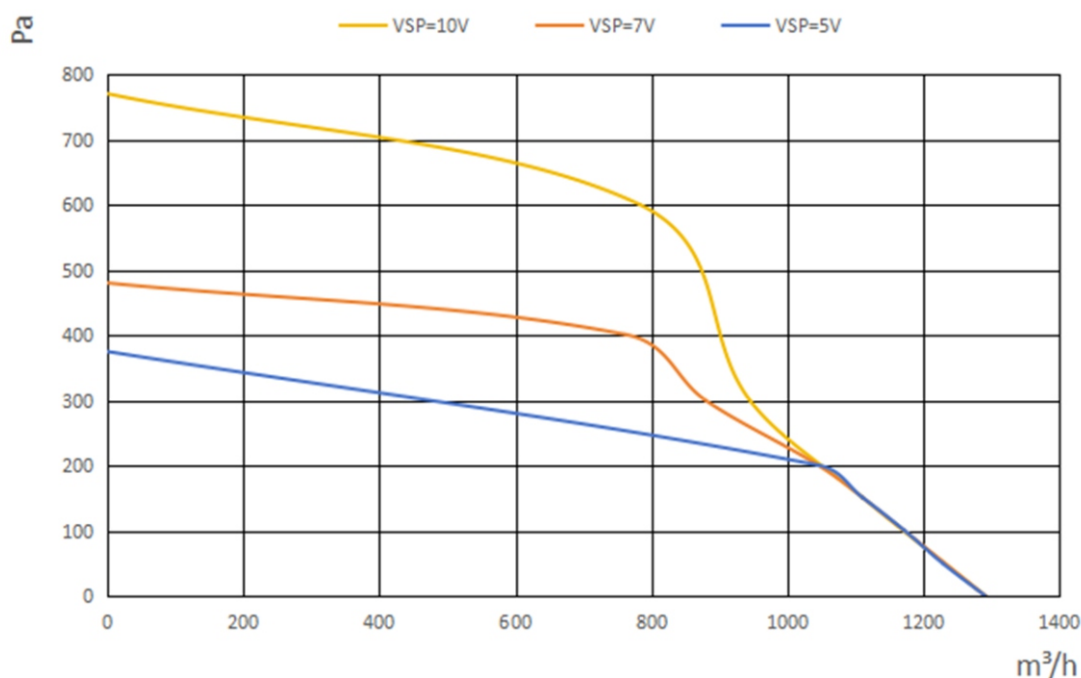

Outline Drawing

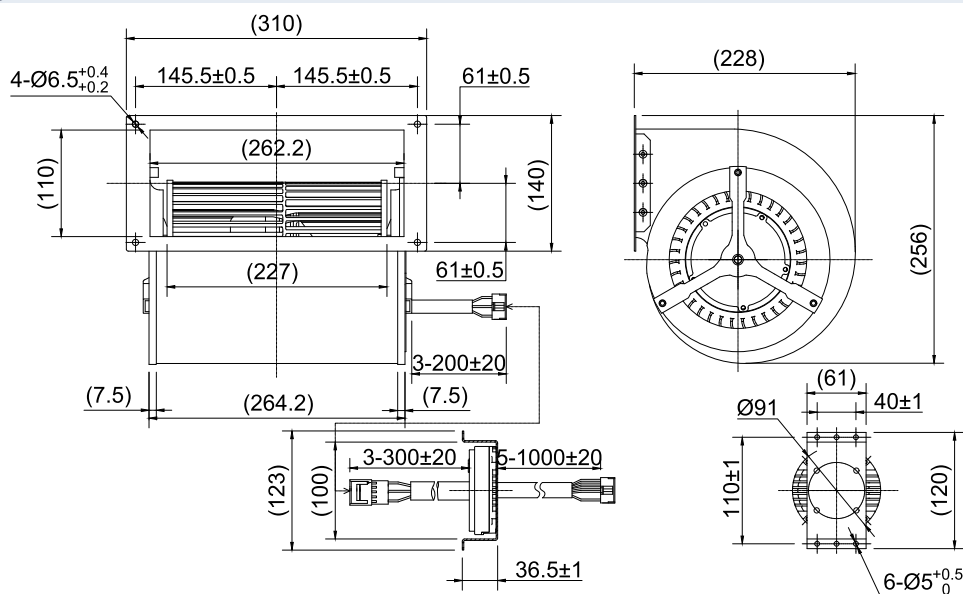

DC Dual Inlet Blower Fan




Impeller Material: Galvanised Sheet Steel
Direction of Rotation: Clockwise, seen on rotor
Speed Control: 0-10VDC/PWM
Type of Protection: IP42
Operation Mode: S1
Bearing: Maintenance-free ball bearings
Ambient Temperature: - 20 °C ~ +40 °C




Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed RPM	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA
D3D-3D180-A2-01	310	0.65	200	1150	1630	830	Class B	71

Performance Curve

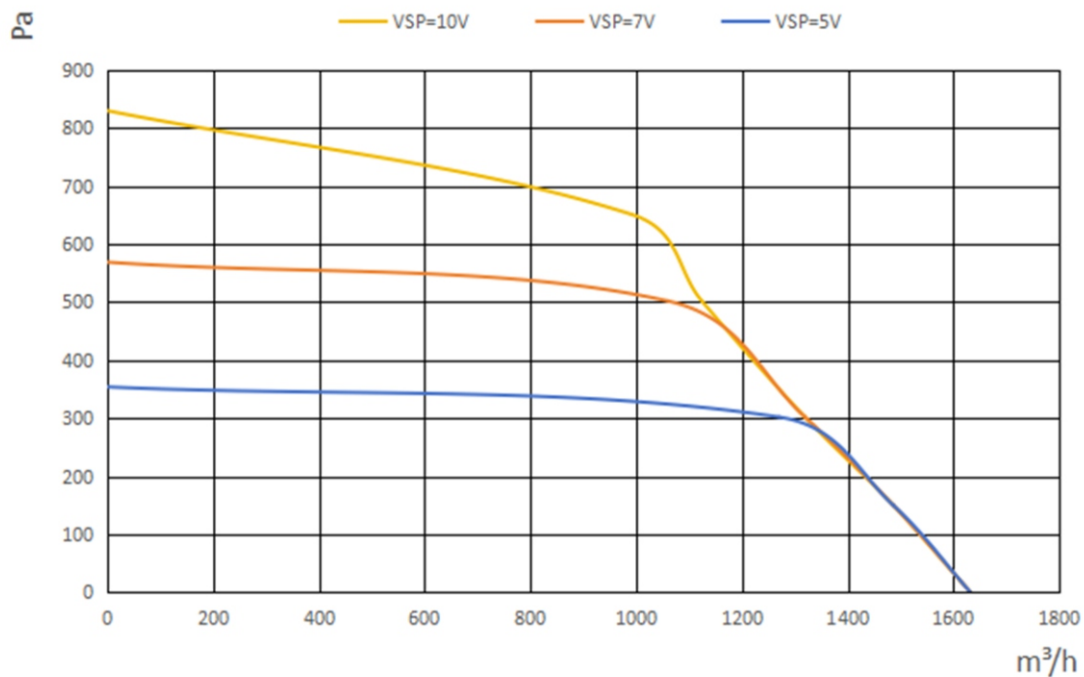

Outline Drawing

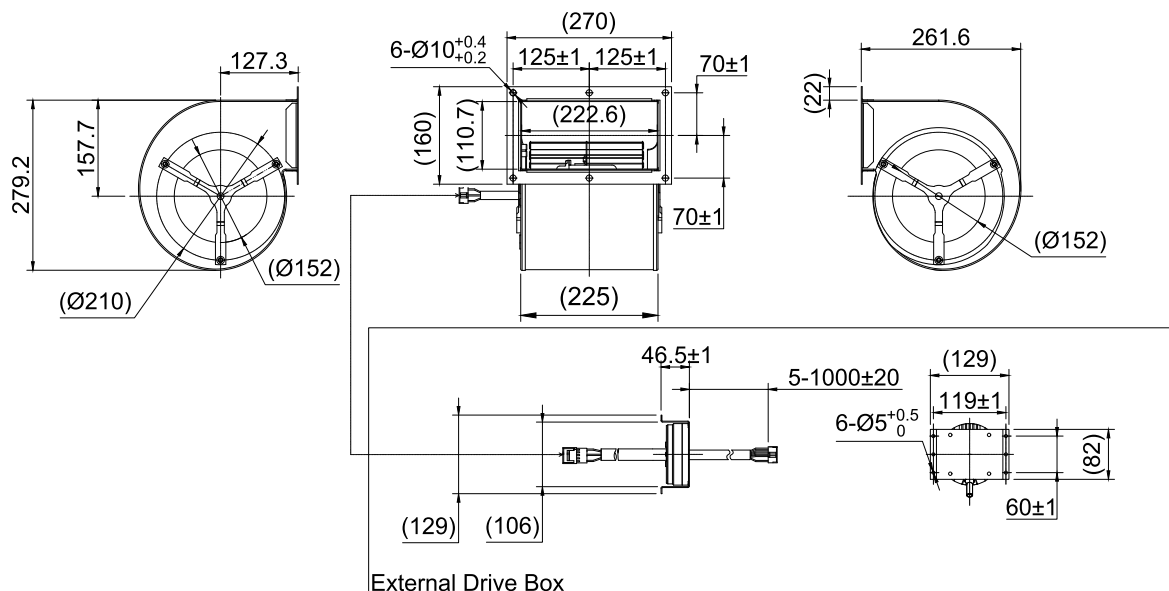

05

Impeller of Blower Fan

Impeller of Blower Fan



Impeller Material: Galvanized Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C



Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed rpm	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA	Curve
F3D-xx097-S5-00	24/48	1.60/0.80	38.4	2500	150	400	Class B	62	A
F3D-xx108-S7-00	24/48	2.10/1.05	50.0	2800	240	350	Class B	64	B
F3D-xx120-S7-00	24/48	2.80/1.40	67.0	2580	310	340	Class B	65	C
F3D-xx133-S7-00	24/48	2.40/1.20	58.0	2000	220	310	Class B	64	D


Performance Curve

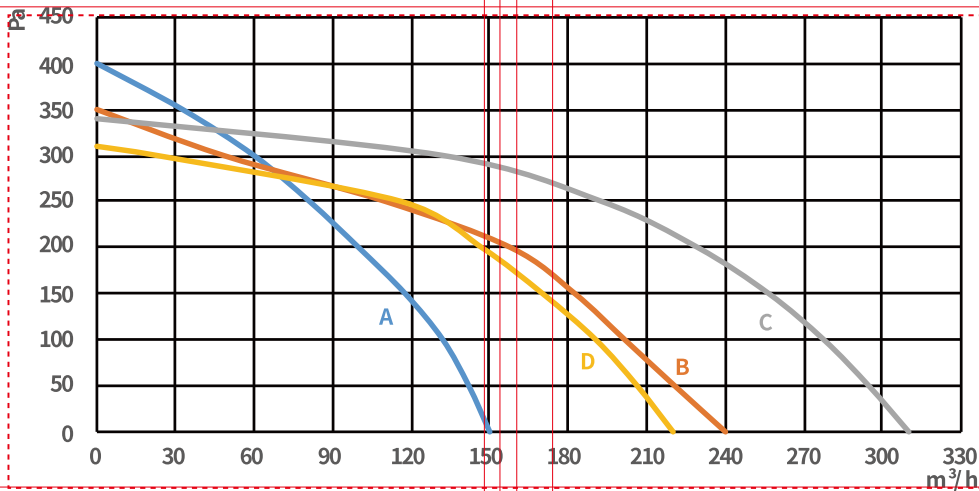


Dimensions in mm

Model No.	H1	H2	D0	D1	D2	n-M1	L
F3D-xx097-S5-00	60	44.6	53	97	40	4-M2.5	500
F3D-xx108-S7-00	66	51.0	72	108	58	4-M4	500
F3D-xx120-S7-00	72	61.0	72	120	58	4-M4	500
F3D-xx133-S7-00	66	46.0	72	133	58	4-M4	500

Outline Drawing

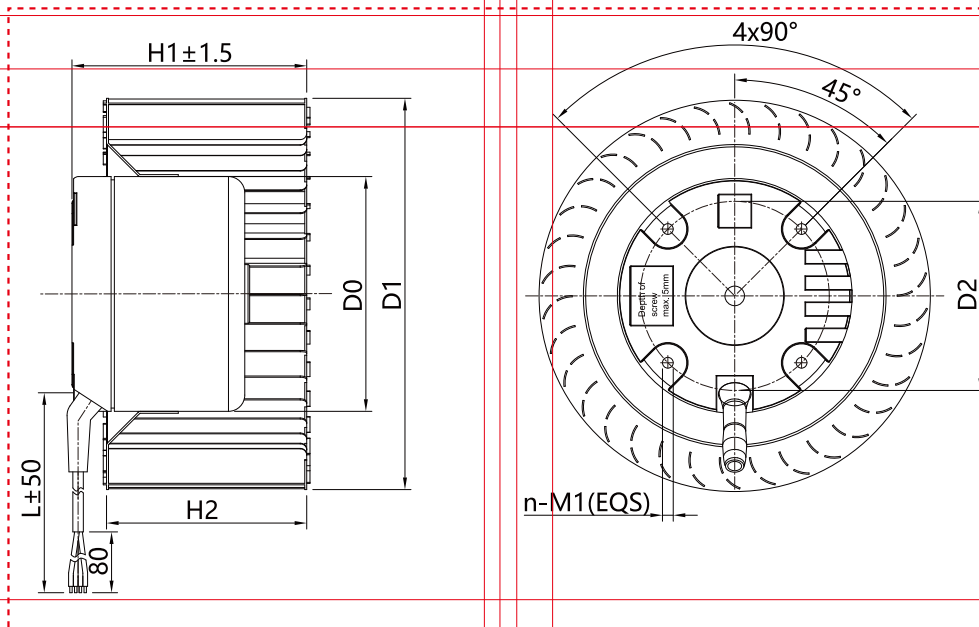

Impeller of Blower Fan



Impeller Material: Galvanized Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C



Technical Parameters

Model No.	Rated Voltage VDC	Rated Current A	Rated Power W	Rated Speed rpm	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA	Curve
F3D-xx140-S9-00	24/48	6.25/3.10	150	2560	590	554	Class B	70	A
F3D-xx160-S9-00	24/48	6.25/3.10	150	2050	630	620	Class B	71	B
F3D-xx180-S9-00	24/48	8.40/4.20	200	1600	970	670	Class B	70	C
F3D-48200-S2-00	48	4.60	220	1600	1000	980	ClassF	74	D


Performance Curve

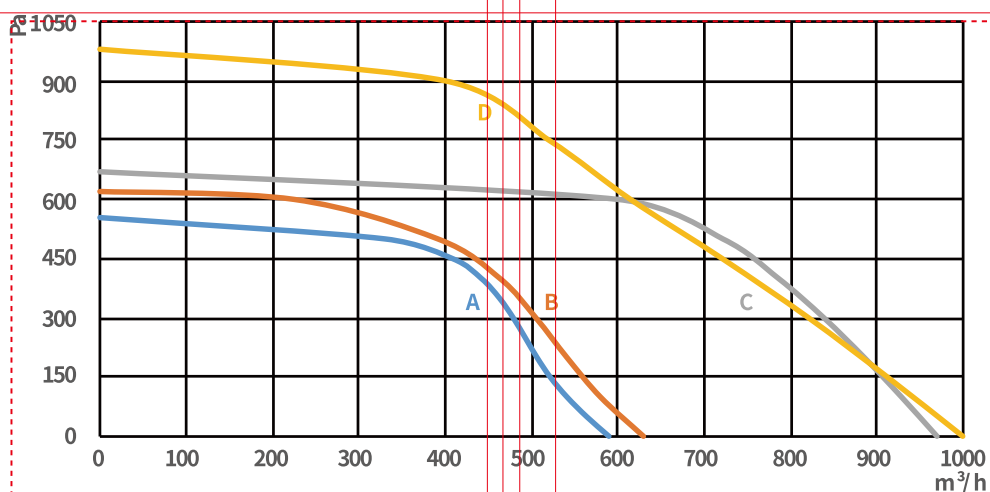

Dimensions in mm

Model No.	H1	H2	D0	D1	D2	n-M1	L
F3D-xx140-S9-00	80	59	92	140	58	4-M4	500
F3D-xx160-S9-00	80	62	92	160	58	4-M4	500
F3D-xx180-S9-00	120	92	92	180	58	4-M4	500
F3D-48200-S2-00	135	102	102	200	92	4-M5	500

Outline Drawing

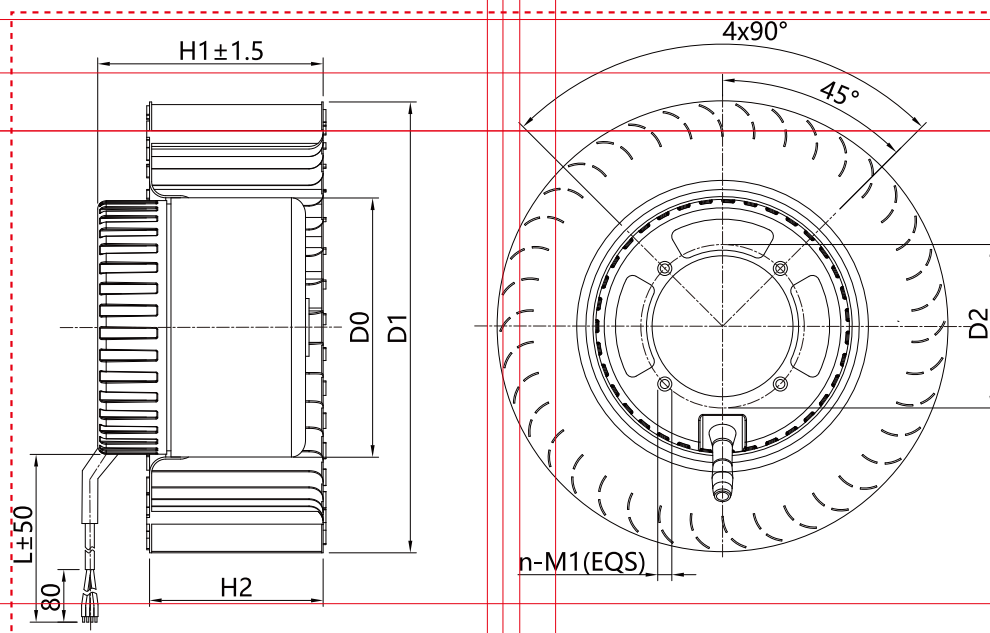

Impeller of Blower Fan



Impeller Material: Galvanized Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C



Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed rpm	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA	Curve
F3E-2A108-S7-00	230	0.38	50	2,800	240	350	Class B	64	A
F3E-2A120-S7-00	230	0.48	65	2,580	310	340	Class B	65	B
F3E-2A133-S7-00	230	0.41	58	2,000	220	310	Class B	64	C


Performance Curve

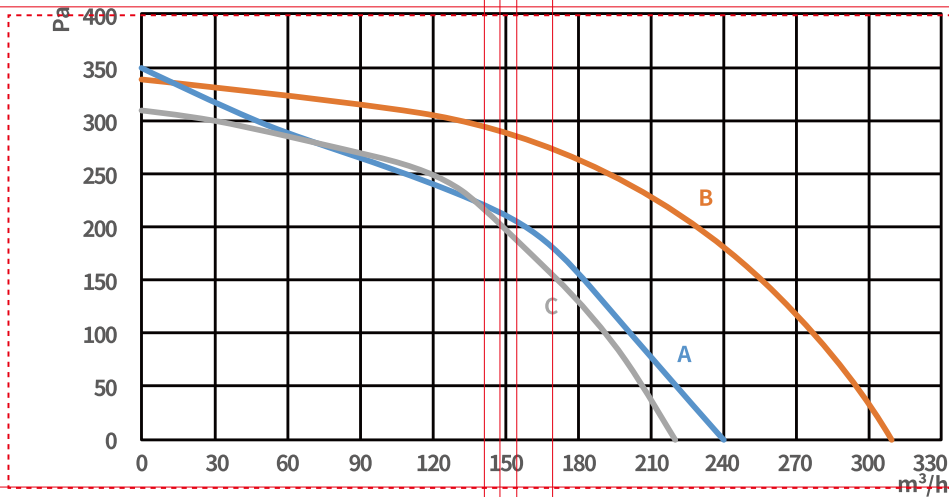


Dimensions in mm

Model No.	H0	H1	H2	D0	D1	D2	D3	D4	D5	n-M1	m-M2	L
F3E-2A108-S7-00	94	68.0	51	108	72	92	115	58	105	4-M4	4-M4	500
F3E-2A120-S7-00	98	72.0	61	120	72	92	115	58	105	4-M4	4-M4	500
F3E-2A133-S7-00	81	55.0	46	133	72	92	115	58	105	4-M4	4-M4	500

Outline Drawing

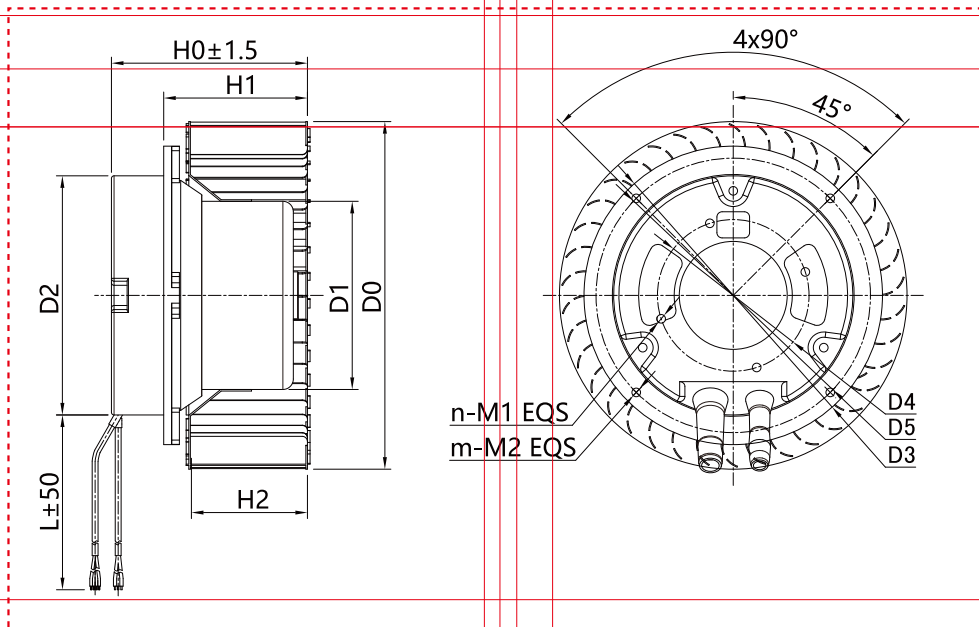

Impeller of Blower Fan



Impeller Material: Galvanized Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44


Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C




Technical Parameters									
Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed rpm	Air Flow m³/h	Air Pressure Pa	Insulation	Noise Level dBA	Curve
F3E-2A140-S9-00	230	1.06	150	2,560	590	554	Class B	70	A
F3E-2A160-S9-00	230	1.06	150	2,050	630	620	Class B	71	B
F3E-2A180-S9-00	230	1.35	200	1,600	970	670	Class B	70	C
F3E-2A180-M9-01	230	1.50	220	2,100	750	610	Class B	72	D

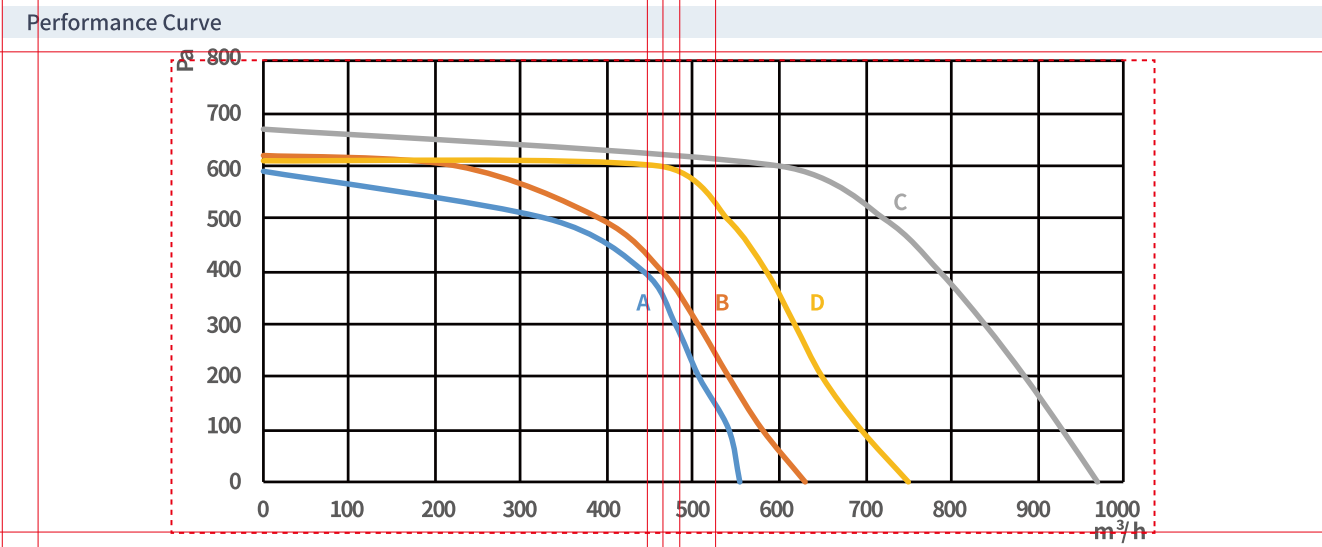

Dimensions in mm												
Model No.	H0	H1	H2	D0	D1	D2	D3	D4	D5	n-M1	m-M2	L
F3E-2A140-S9-00	109	80	59	140	92	115	133	90	125	4-M5	4-M5	500
F3E-2A160-S9-00	106	77	62	160	92	115	133	90	125	4-M5	4-M5	500
F3E-2A180-S9-00	139	110	92	180	92	115	133	90	125	4-M5	4-M5	500
F3E-2A180-M9-01	105	76	52	180	92	115	133	90	125	4-M5	4-M5	500

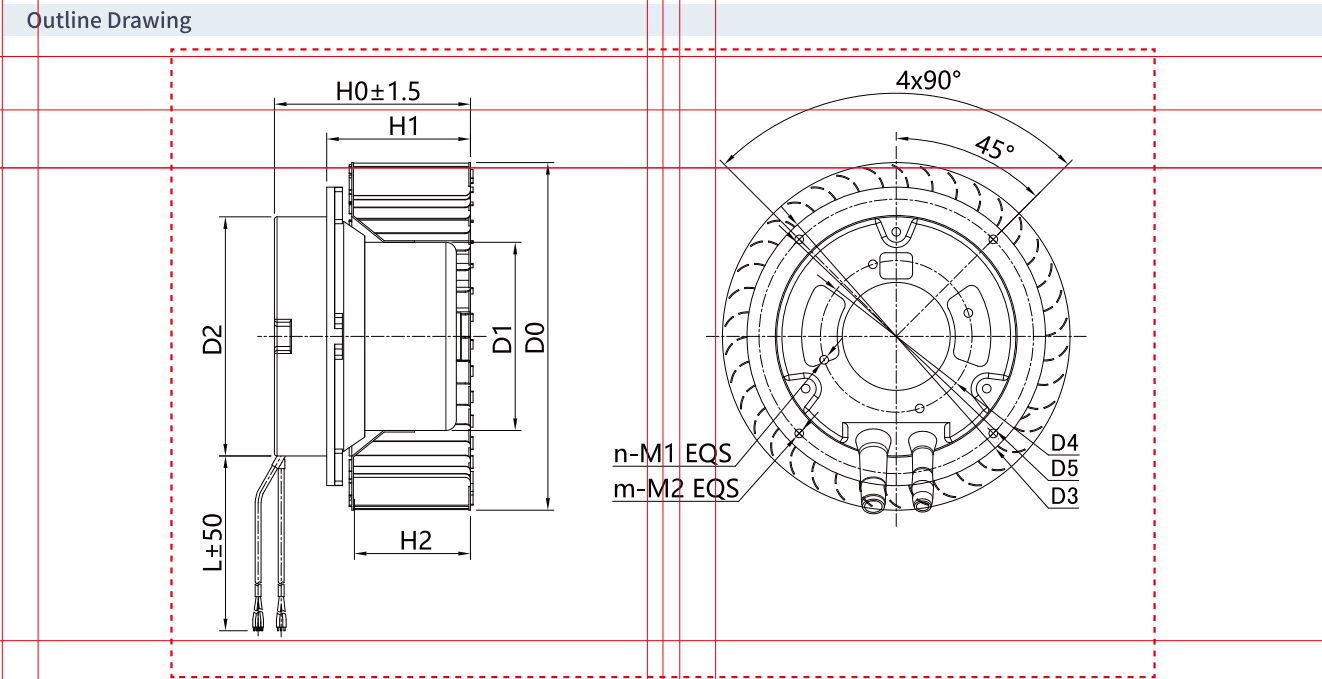

Impeller of Blower Fan



Impeller Material: Galvanized Steel

Direction of Rotation: Clockwise, seen on rotor

Speed Control: 0-10VDC/PWM

Type of Protection: IP44

Operation Mode: S1

Bearing: Maintenance-free ball bearings


Ambient Temperature: - 25 °C ~ +60 °C



Technical Parameters

Model No.	Rated Voltage VAC	Rated Current A	Rated Power W	Rated Speed rpm	Air Flow m ³ /h	Air Pressure Pa	Insulation	Noise Level dBA	Curve
F3E-2A180-S2-00	230	2.20	495	2,460	1,220	1315	Class F	76	A
F3E-2A200-S9-00	230	1.50	220	1,600	1,000	980	Class F	74	B
F3E-2A200-S2-00	230	2.50	500	1,900	1,650	700	Class F	76	C


Performance Curve

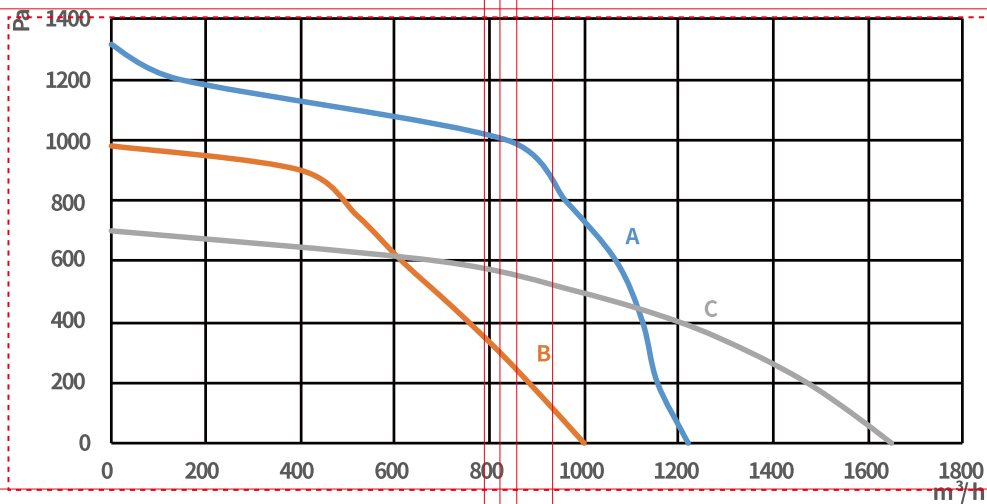

Dimensions in mm

Model No.	H0	H1	H2	D0	D1	D2	D3	D4	D5	m*M2	k*M3	L
F3E-2A180-S2-00	175	110	92	180	102	150	178	90	164	4*M5	4*M6	500
F3E-2A200-S9-00	130	99	83	200	92	115	133	90	125	4*M5	4*M5	500
F3E-2A200-S2-00	191	126	102	200	102	150	178	90	164	4*M5	4*M6	500

Outline Drawing

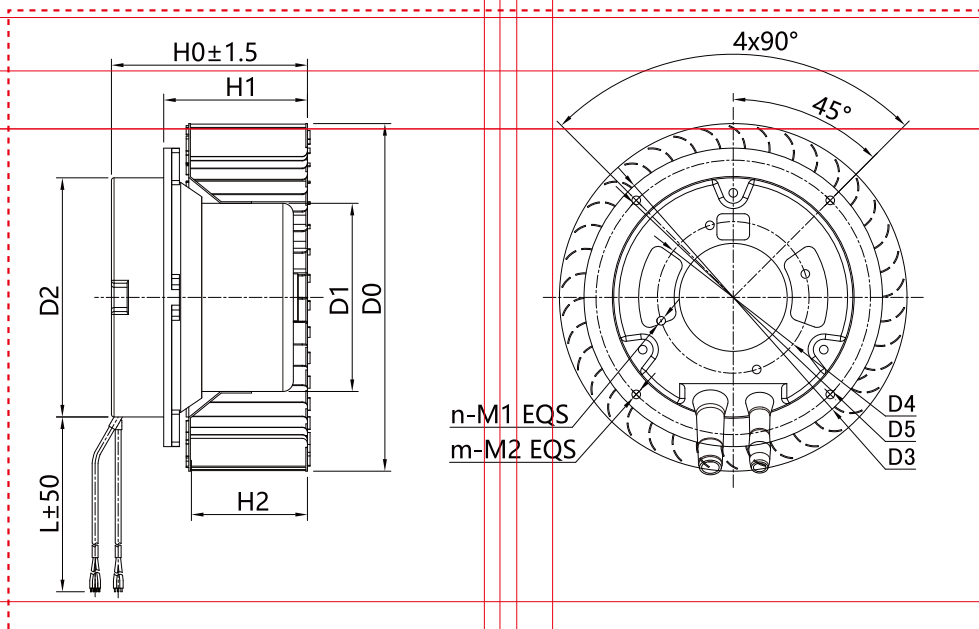



SM49C2405E-26A



www.seemtek.com



+86 512 6922 3858



sales@seemtek.com



No.88 Chengyang Road, Xiangcheng District, Suzhou, Jiangsu, China 215131