



Tailoring Solutions for Fan Industry

Maintenance-Free EC Fans:

Cooling Tower Efficiency Redefined

Engineered with intuitive controls, seamless BMS integration, and C5+2H corrosion resistance—redefining industry standards.


Seemtek Fan (Suzhou) Co., Ltd.

☎ +86 512 6922 3858

✉ info@seemtek.com


📍 No. 888, Litanghe Road, Xiangcheng District, Suzhou, China 215131

Challenges in Traditional Cooling Tower Systems

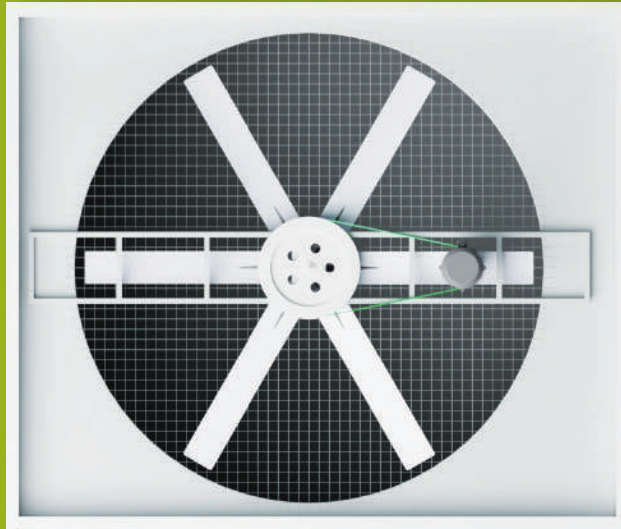

Low Efficiency

- > Excessive Drive-Train Efficiency Loss
- > Low Efficiency of AC Motors
- > High Transmission Loss in Belt Drive Systems
- > Flow Maldistribution Degrading Heat Exchanger Performance

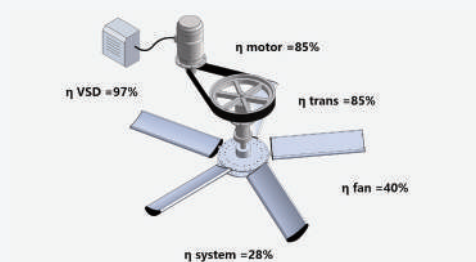

Complex Maintenance

- > Premature Bearing Fatigue Failure
- > High Maintenance Cost of Traditional Fans
- > Difficulty in Lifting and Installing Large Traditional Fans into Equipment Rooms



Intelligence Lag



Weak Corrosion Resistance



Seemtek EC Fan Retrofit: Proven Solutions



High Efficiency

- > Advanced EC motor efficiency
- > Aerodynamically optimized impellers
- > No belt-driven losses
- > Lower dynamic pressure loss



Maintenance-Free Design

- > Rapid-Deployment
- > Pre-Lubricated Dual-Sealed Deep Groove Ball Bearings cooling tower solutions.




Plug-and-Play EMS Integration

- > Modbus-ready and easy to integrate with energy management systems



C5+2H Anti-Corrosion

- > Salt Spray & Chemical Resistance

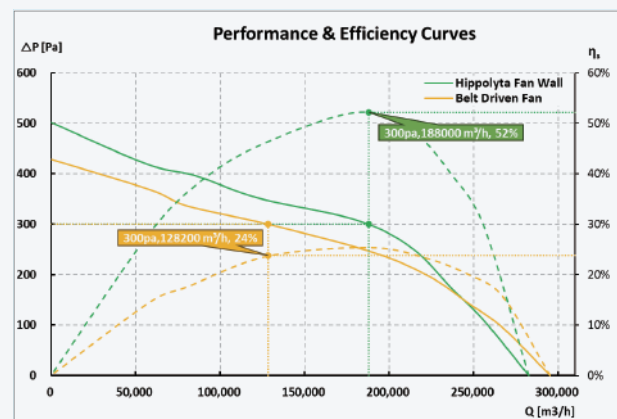

Smart Fan Wall System Architecture




Solution Matching



Powered by Selection Software

- > Leveraging HVAC application expertise and EC fan technology to deliver optimized cooling tower solutions.
- > Energy savings analysis with direct ROI generation for cooling tower projects.
- > Per-project one-click export of energy retrofit proposals for rapid client presentation.

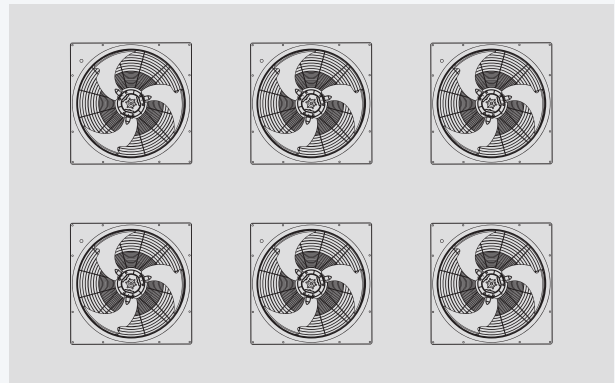

Axial Fan



Aerodynamic trailing-edge blades and outlet guide vanes achieve 52% peak efficiency



Multilayer surface treatment and sealed enclosure for IP56 extreme-duty protection



Adaptive static pressure optimization across cooling tower variants




Maintenance-Free Bearing System






Control System

- ✓ **Group Control for Fan Operation**
--> Enables centralized status control and real-time feedback monitoring.
- ✓ **Constant Airflow or Static Pressure Control**
--> Maintains precise operating conditions.
- ✓ **Fault Alarm & Energy Consumption Display**
--> Real-time diagnostics with power usage visibility.
- ✓ **Remote Control Capability**
--> MODbus, 0-10V, and 0-20mA interfaces for seamless integration with existing inverters or energy management systems.
- ✓ **Pre-installed Wiring Module**
--> Tool-free plug-and-play installation with quick-connect field assembly.

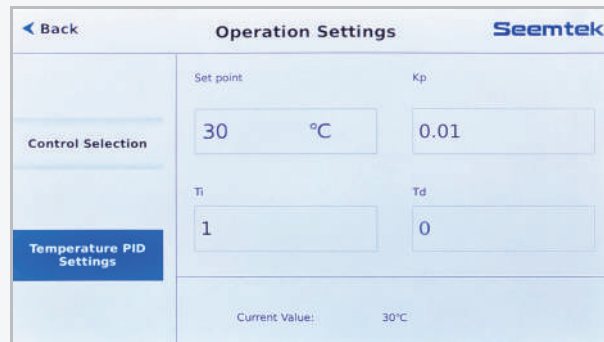

Structural Modules

- ✓ **Rapid-Assembly Design**
--> Incorporates dimensional allowances for facilitating on-site assembly, significantly reducing labor hours.
- ✓ **Corrosion-Protected Component Installation**
--> Ensures integrity of surface anti-corrosion coatings during mounting.

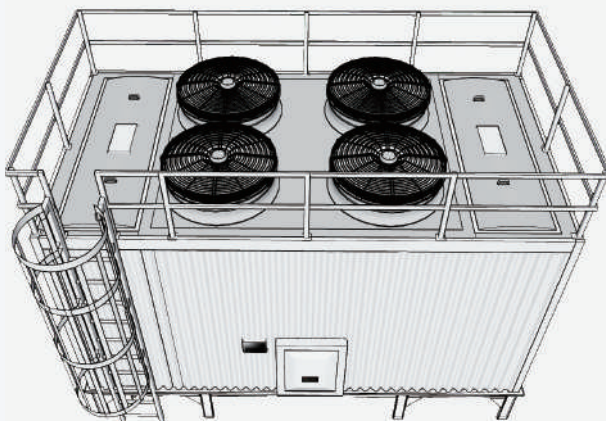


From Evaluation to Execution: 4-Step



On-Site Measurement & Assessment

Accurate evaluation of airflow, pressure, and energy consumption data as the foundation for retrofit design.

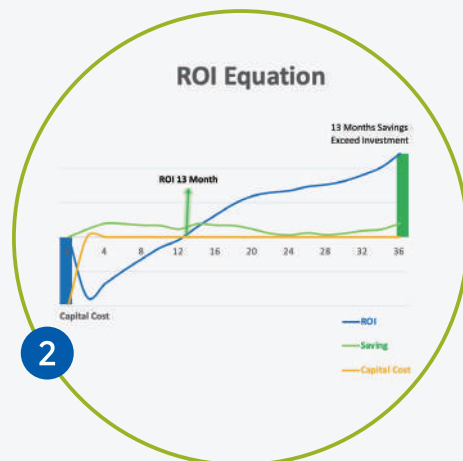

Energy Saving Proposal

Industry-specific ROI-focused solutions that address key operational pain points.




Execution

Includes deconstruction of old fans, new frame installation, wiring layout, and EC fan/control system deployment.



Commissioning & Handover




Systematic Modbus integration, sensor calibration, and functional validation to deliver a complete retrofit solution.

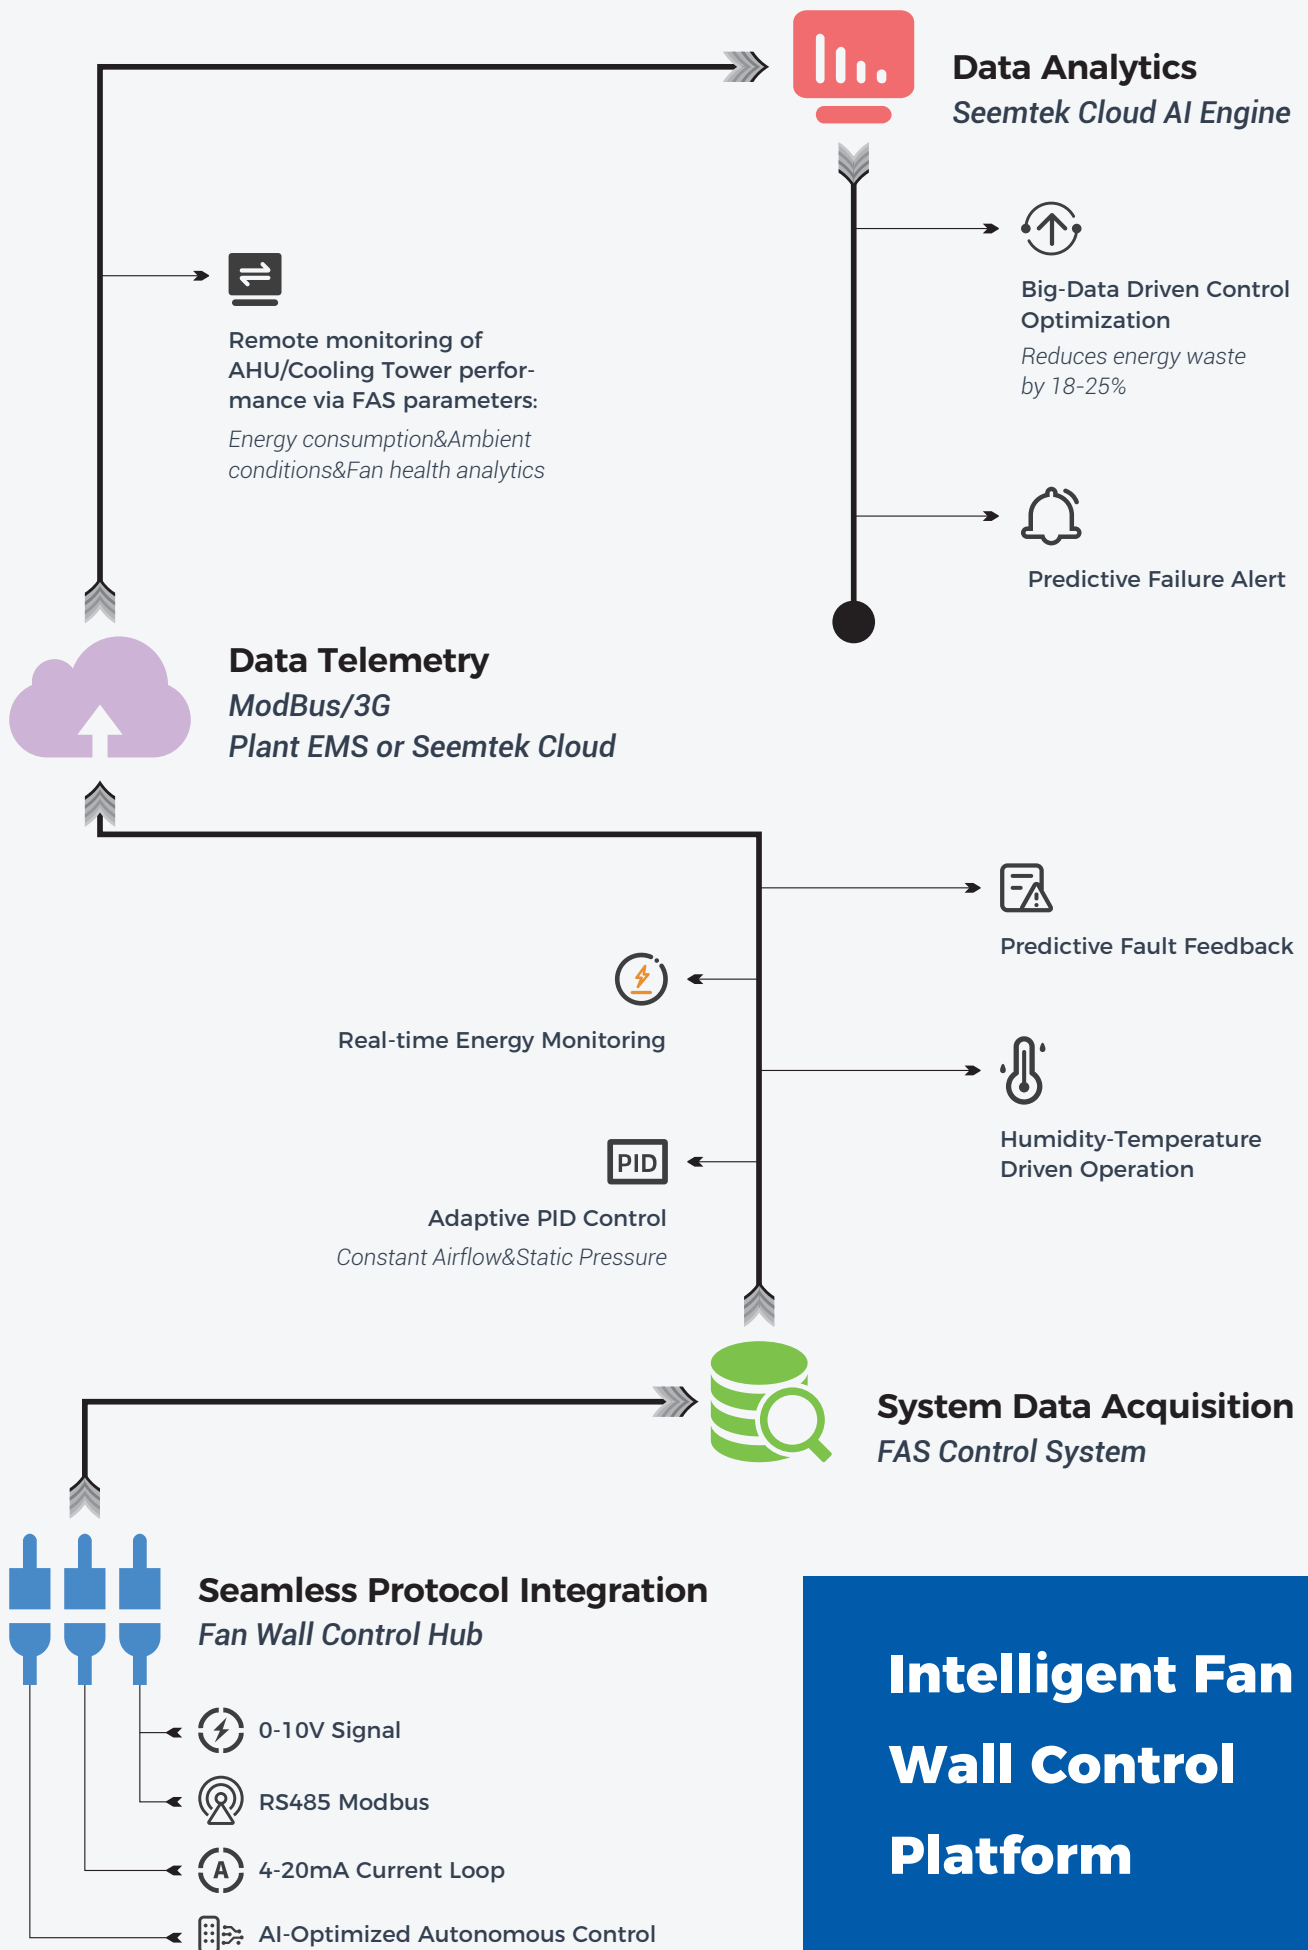

Hippolyta

*Engineered for Low Static Pressure
& High-Temp/Humidity/Corrosion
Environments*

- ✓ Sealed Bearings
- ✓ Endshield Protection
- ✓ Shaft Construction
- ✓ C5 Corrosion Protection Rating
- ✓ Terminal Box Protection
- ✓ Bionic Airfoil Blades
- ✓ Connection Integrity
- ✓ Shaft Extension Protection

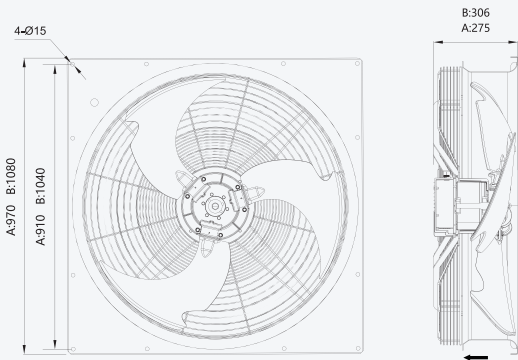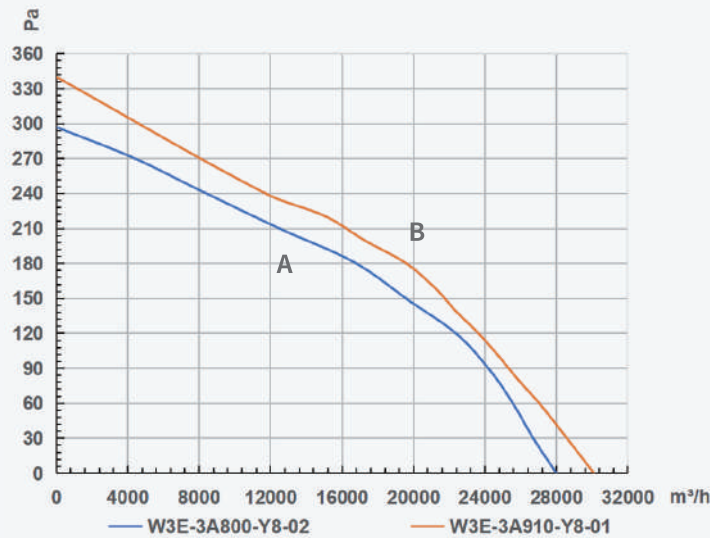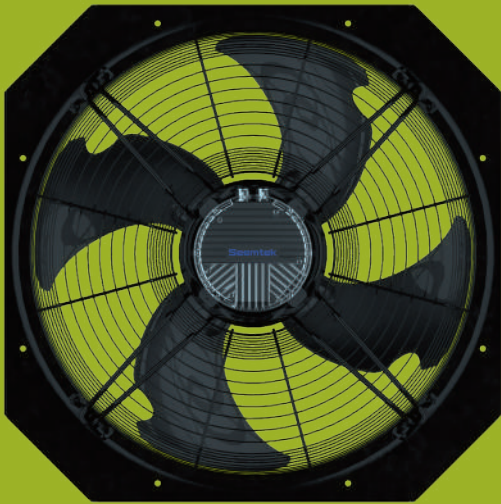

Technical Parameters

Model No.	Rated Voltage VAC	Frequency Hz	Current A	Rated Power W	Speed RPM	Air Flow m³/h	Noise Level dBA	Curve
W3E-3A800-Y8-H2	380	50/60	4.60	2220	1020	28000	72	A
W3E-3A910-Y8-H1	380	50/60	4.75	2250	1000	30100	73	B