

AIR QUALITY MONITORING

Introduction:

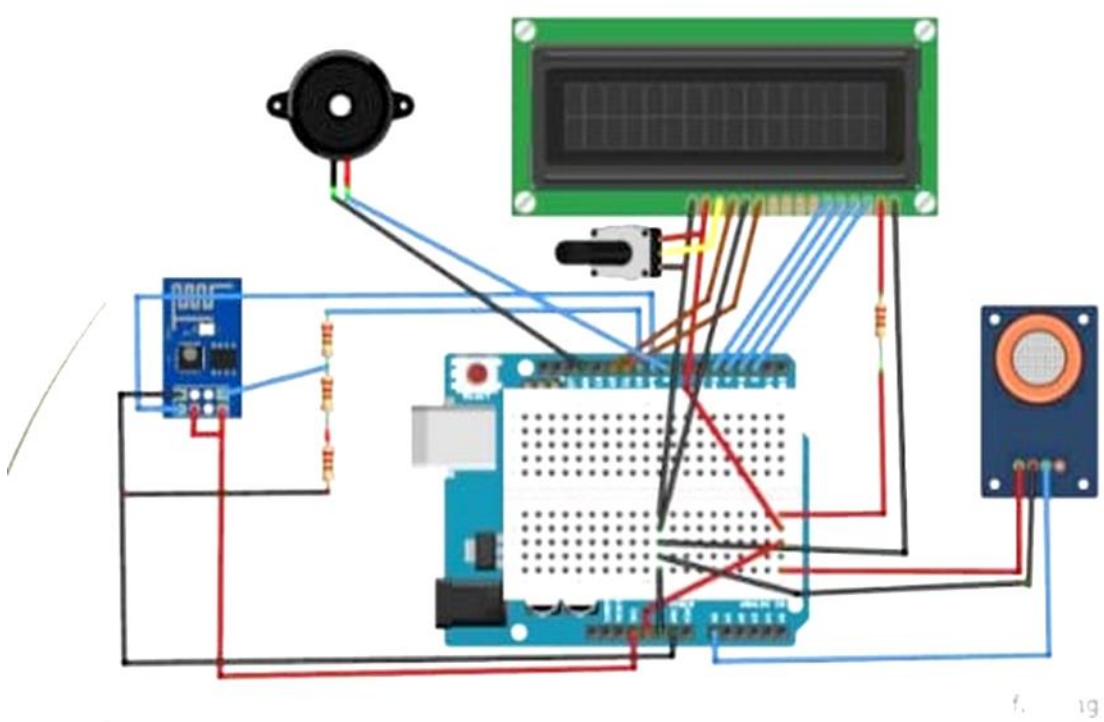
The project involves setting up IoT devices to measure air quality parameters and make the data publicly available for raising awareness about air quality and its impact on public health. The objective is to create a platform that provides real-time air quality information to the public. This project includes defining objectives, designing the IoT monitoring system, developing the datasharing platform, and integrating them using IoT technology and Python

Idealogy:

- ✚ The project to set up IoT devices for measuring air quality parameters and creating a platform for real-time air quality information dissemination holds significant promise for addressing environmental and public health challenges.
- ✚ By following a design thinking approach, the project aims to create a user- centred and impactful solution.

Required Components for air quality monitoring:

- ✚ MQ135 Gas sensor
- ✚ Arduino Uno
- ✚ Wi-Fi module ESP8266
- ✚ 16X2 LCD
- ✚ Breadboard
- ✚ 10K potentiometer
- ✚ 1K ohm resistors
- ✚ 220 ohm resistor
- ✚ Buzzer

Circuit of IoT Based air quality monitoring:

The MQ135 sensor can sense NH₃, NO_x, alcohol, Benzene, smoke, CO₂ and some other gases, so it is perfect gas sensor for our Air Quality Monitoring Project. When we will connect it to Arduino then it will sense the gases, and we will get the Pollution level in PPM (parts per million). MQ135 gas sensor gives the output in form of voltage levels and we need to convert it into PPM. So for converting the output in PPM, here we have used a library for MQ135 sensor, it is explained in detail in “Code Explanation” section below.

Sensor was giving us value of 90 when there was no gas near it and the safe level of air quality is 350 PPM and it should not exceed 1000 PPM. When it exceeds the limit of 1000 PPM, then it starts cause Headaches, sleepiness and stagnant, stale, stuffy air and if exceeds beyond 2000 PPM then it can cause increased heart rate and many other diseases.

When the value will be less than 1000 PPM, then the LCD and webpage will display “Fresh Air”. Whenever the value will increase 1000 PPM, then the buzzer will start beeping and the LCD and webpage will display “Poor Air, Open Windows”. If it will increase 2000 then the buzzer will keep beeping and the LCD and webpage will display “Danger! Move to fresh Air”.