

Phase-space Engineering Dashboard

Engineering measurements

Build 3745369692fd; 36/36 runs. Tiles show the selected case; worst across all runs: frame p95 10.43 ms, age p95 40.97 ms. Dirty runs are non-quotable.

SELECTED CASE

rhythmic-channels-trace

RECORDED RUNS

36

FRAME P95 · MS

10.09

3 repeats20.00 limit

AGE P95 · MS

40.71

3 repeats100.00 limit

LIVE DISPLAY

100.0%

3 repeats100.0% reference

WITHIN 20 MS

99.9%

3 repeats95.0% reference

MEDIAN FPS

119.61

3 repeats60.00 reference

ACCEPTED SAMPLES

46056

3 repeats

CLIPPED FRACTION

0.0%

3 repeats


SKIPPED NOTIFICATIONS

0

3 repeats


FRAME P95 — WORST RUN VS TARGET

Frame p95 by case (ms)

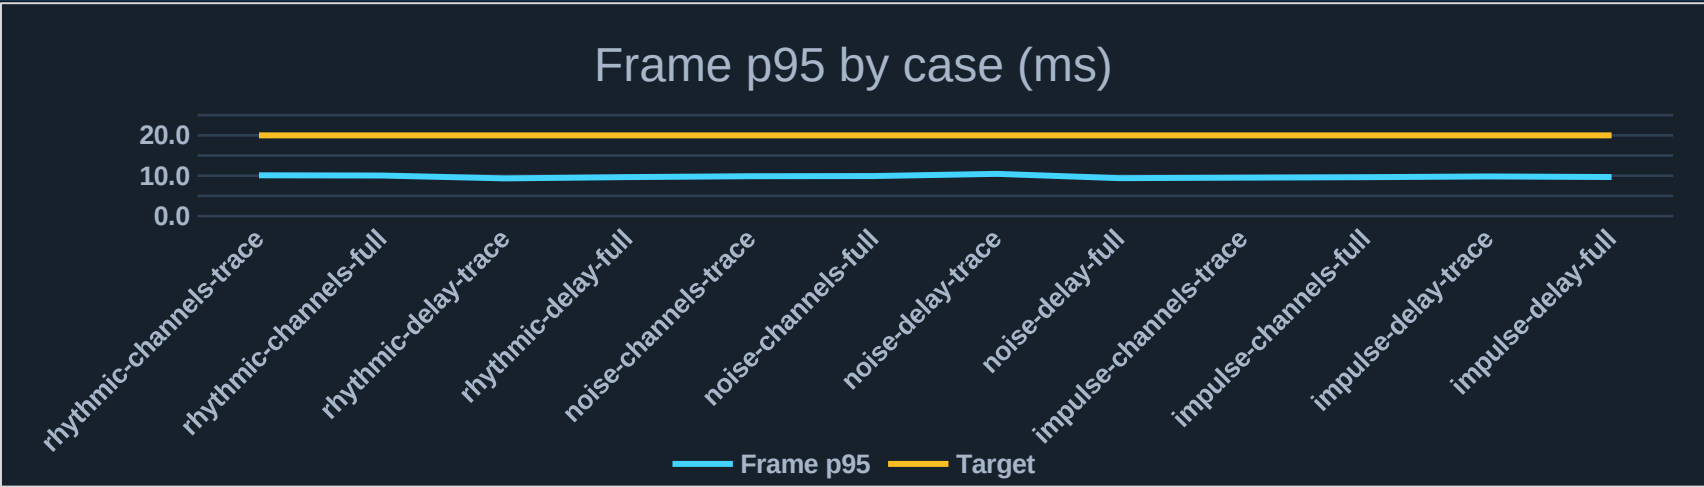


AGE P95 — WORST RUN VS TARGET

Age p95 by case (ms)

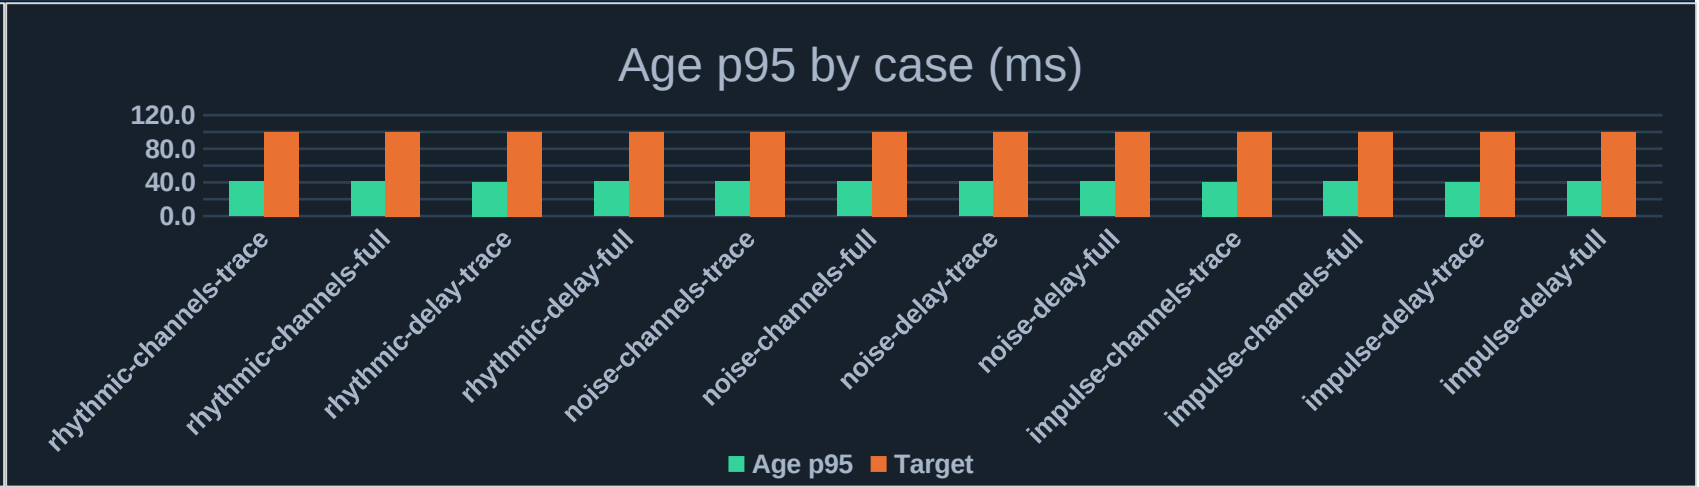


FRAME INTERVAL DISTRIBUTION — ALL RECORDED FRAMES

Frame intervals

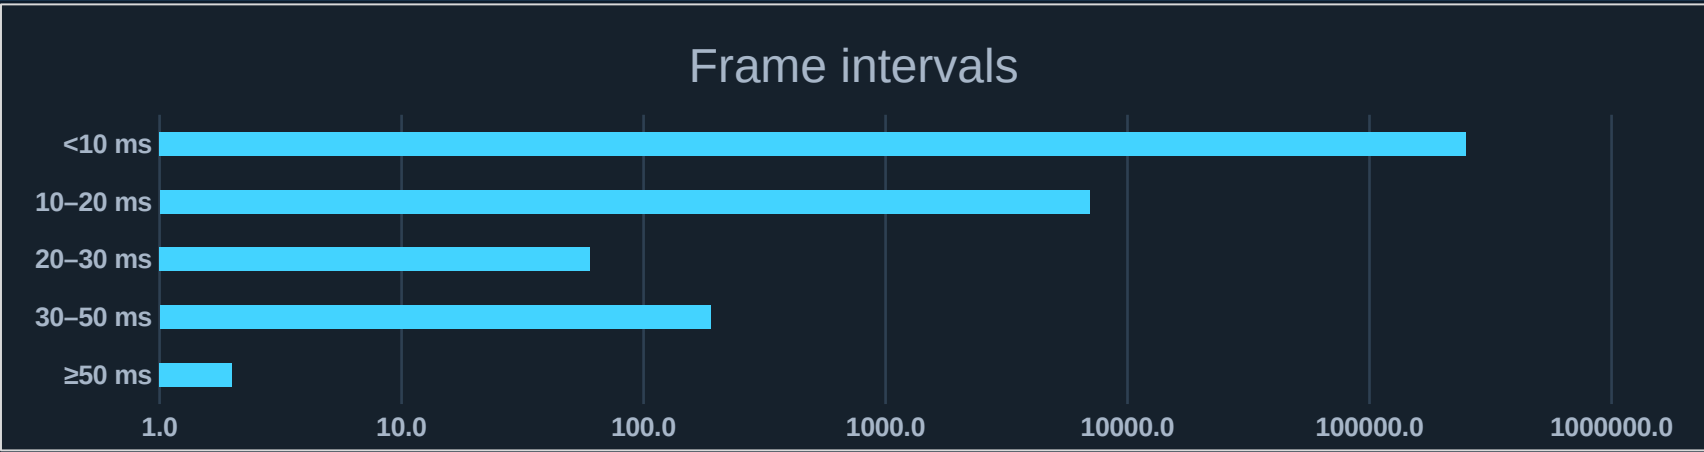

CASE VERDICTS — FIXED THREE-RUN RULE

Case verdicts

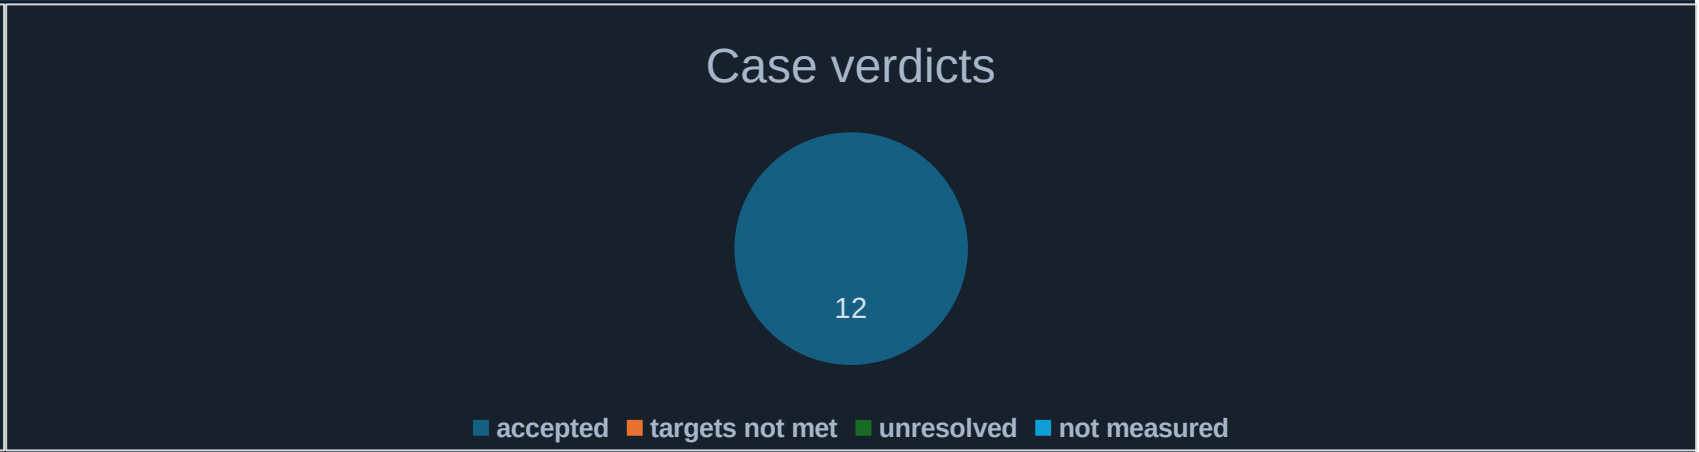

MEASURED ENGINEERING RESULTS — NO COGNITIVE INFERENCE

Metric	Direction	Observed	Reference	Difference	Difference %	Reference status
Frame p95 ms	Lower	10.09	20.00	-9.91	-49.5%	Within reference
Age p95 ms	Lower	40.71	100.00	-59.29	-59.3%	Within reference
Live fraction	Higher	100.0%	100.0%	0.00	0.0%	Within reference
Within 20ms	Higher	99.9%	95.0%	0.05	5.2%	Within reference
Median FPS	Higher	119.61	60.00	59.61	99.3%	Within reference
Accepted samples	Higher	46056.00				Observed
Clipped fraction	Lower	0.0%				Observed
Skipped notifications	Lower	0.00				Observed

Three p95 values per case; min/median/max are in the report. No pooled percentile. Historical logs supply text and scores only.

Targets apply only to this recorded hardware and build. Unresolved cases remain unresolved; follow-up requires a new protocol.