



ABRIGO®

A SHIELD OF PROTECTION





**ALL SAFE
COMMITMENTS
UNDER
ONE ROOF**






TESTING PROCEDURES AND FACILITIES



SAFE WORKING ENVIRONMENT

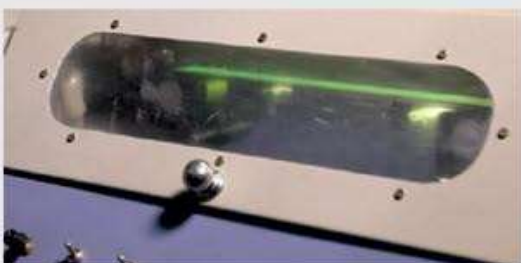



UNCOMPROMIZED
SAFETY

FALL INDICATOR



Profile

From the beginning our motto is to make this world a safer place to work in. **ABRIGO** is a well-known name that spells & pronounces the safety story in a unique way. As a leading supplier to many industries and construction sites, **ABRIGO** has over the years earned a reputation in the world of safety of trust and reliability.

ABRIGO specializes in the field of fall protection, head protection, safety shoes, safety spectacles, hand safety and rope-access and rescue. In short, **ABRIGO** is a one stop shop for personal protective equipment, providing solutions for protection from head to toe. Leading the way with new advanced products and solutions with every passing year. We manufacture the uppermost quality equipment conforming to BIS, DGMS & EN norms.

ABRIGO manufacturing set-up is spread over an extent of around 1,20,000 square feet area. All our systems & processes are assessed by GEPTESZT-Hungary & registered to ISO 9001-2015.

Along with a wide spread distribution network, **ABRIGO** has its offices in several parts of the country, operated by trained and technical sales personnel to provide the finest support and services required.

Since year 1988 to 2020 **ABRIGO** brings its ever expanding range, in today's emerging world we are committed to provide finest solution in the field of industry safety.

The journey at **ABRIGO** is never ending. There is a long way to go, many more visions to accomplish and we believe in joining hands with our valued customers for a safer planet.

A Shield Of Protection



**UNCOMPROMIZED
QUALITY**

CERTIFICATIONS

Product Certification (CE)

Nearly 50 products manufactured by ABRIGO are CE certified. Our Certificates have been issued by Certifying Body GEPTESZT-Hungary, in accordance with Article 10 of the PPE Directive (EU) 2016/425. The Notified Body Number of GEPTESZT is 2233.

As per Module C certificate all products marked CE 2233 must have a valid E.C. type examination certificate issued under Article 10.

Quality Management System (ISO 9001: 2015)

Under this certification organizations to demonstrate their ability to consistently provide products and services that meet customer and regulatory requirements and to demonstrate continuous improvement.

• **EN 358:** Belt For Work Positioning, Restraint & Work Positioning Lanyards.

• **EN 361:** Full Body Harness

• **EN 813:** Sit Harness

• **EN 362:** Hooks & Connectors

• **EN 354:** Lanyards

• **EN 355:** Energy Absorber

• **EN 795:** Anchorage Devices

• **EN 353-2:** Guided Type Fall Arrester Including A Flexible Anchorage Line.

• **EN 360:** Retractable Type Fall Arrester

• **EN 341:** Descender Device for Rescue

• **EN 1891:** Low Stretch Kernmantle Rope

• **EN 567:** Mountaineering Equipment's Rope Clamps

• **EN 12278:** Mountaineering Equipment's Pulleys

• **EN 397:** Safety Helmet

• **EN 20345:** Safety Shoes

• **IS 2925:** Safety Helmet

• **IS 3521:** Fully Body Harness (Staunch Series)

• **IS 15298:** Safety Shoes





TABLE OF CONTENTS

1. Work Positioning Belts.....	5-6
2. OWD Series- Oil/water/dust Repellent Harnesses & Lanyards.....	7-11
3. Antistatic Series- Antistatic Harnesses & Lanyards.....	12-15
4. Blaze Series- Fire Retardant Harnesses And Lanyards	16-19
5. Plush Series- Dura Comfort Harnesses	20-24
6. Startling Series- Harnesses And Lanyards	25-38
7. Staunch Series- Eco Harnesses & Lanyards	39-46
8. Suspension Trauma	47
9. Comfy Seat	48
10. Temporary Horizontal Life Line.....	49



11. Lanyards.....	50-61
12. Anchorage And Web Slings.....	62-63
13. Rope Grab Fall Arrester.....	64-65
14. Retractable Fall Arrester Blocks	66-67
15. Confined Space Entry	68-73
16. Kits- For Special Application	74-81
17. Safety Footwear	82-90
18. Hi Visible Jackets.....	91-94
19. Safety Eyewear.....	95-97
20. Industrial Hard Hats	98-99

Harnesses & Belts






A full body harness is a body holding device used to protect workers from falls by distributing the force of the fall over a large area of the body, ensuring that the subject of the fall remains suspended in an upright position after the fall has occurred. It is designed to minimize the risk of injuries caused by suspension.

A full-body harness is the single most important equipment choice you can make for your crew. Safety harnesses provide comfort and confidence, and directly affect the user's productivity. **ABRIGO** harnesses are thoughtfully designed to provide comfort, freedom of movement, ease-of-use, lumbar support, positioning rings and tool carrying options. While many of **ABRIGO** safety harnesses can be used on majority of jobs, we also manufacture innovative full-body harnesses for specific uses within different industries-and you can rest assured that all **ABRIGO** are harnesses meet all applicable standards and regulations.

How To Wear A Full Body Harness

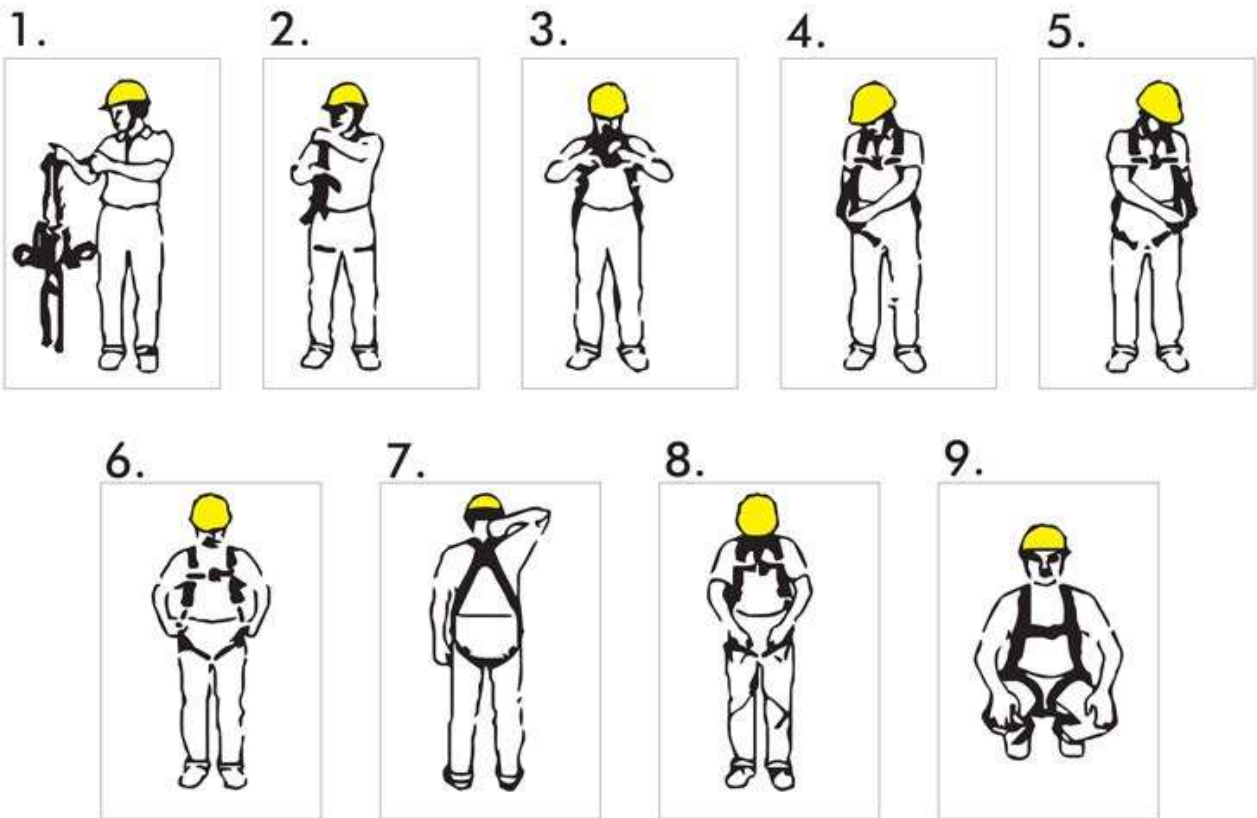

In the construction industry, working at heights is a standard part of the job. But with increased height also comes an increased risk of falling.

1. Slip the harness over your shoulders like a vest.
2. Make sure the D-ring is in the middle of your back, directly between your shoulder blades.
3. Pull each leg strap up and fasten the buckles together.
4. Stand up straight and adjust the length of the side body straps as needed to make sure there is no slack.
5. Fasten the chest strap about mid-chest high.
6. Adjust the chest strap as necessary to remove any slack.
7. Make sure the shoulder straps and leg straps are snug, while still allowing full range of motion.
8. Eliminate any excess slack by tightening the straps in the buckle.
9. Make sure the loose ends of the straps are tucked into the strap retainers.
10. With your hand held flat, you should be able to fit your fingers underneath your leg straps.

Attachment Points on the Harness:

The labels marked as 'A' denote the attachment points on the harness. In certain areas the labels are marked 'A/2' meaning that two similar points held together shall constitute a single attachment point.


The Fall Indicator is a small label stitched to the back side of the shoulder strap and it flies out of the harness in the event of a fall, revealing a **"DO NOT USE"** sign.



Work Positioning Belts

Work positioning belts and lanyards should not be used for fall protection systems

Step for workpositioning Belt

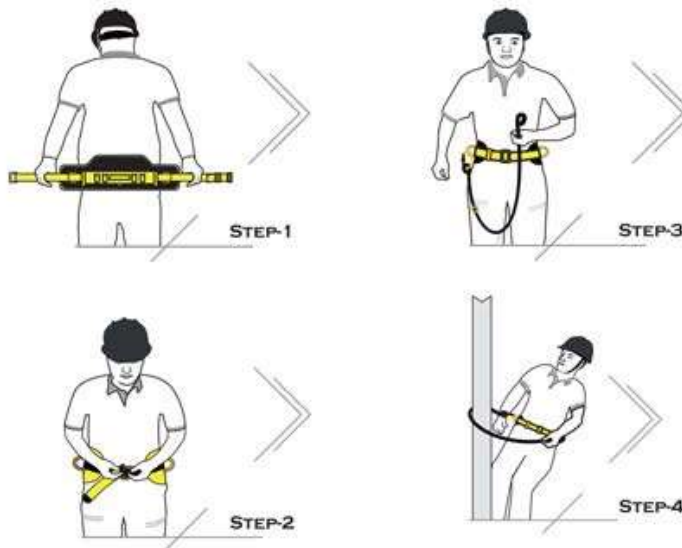

Work positioning belts are used for two main purposes for those working at height. They are commonly used as restraint belts; meaning that the belt worn by a person who is working close to a potential fall. The person therefore sets up a height safety system that makes it impossible for him / her to reach the falling edge often using a restraint belt and an adjustable restraint lanyard. This is working with restraint rather than fall arrest and therefore because the restraint system makes it impossible for them to reach the fall zone shock absorbing fall arrest equipment is not needed. The other main use is as a work positioning belt; used in conjunction with an EN 360 fall arrest harness to give the benefits of an EN 360/EN 358 harness. A pole strap connects to the work positioning belt to give additional support to the worker though does not provide fall protection. A separate fall arrest (shock absorbing) device must also be attached to the EN 360 harness.

ABRIGO work positioning belts Designed to support the user in a hands-free work position at height. This belt can be used on its own when there is no risk of a fall, or in conjunction with a harness for fall arrest protection.

AB-001 (Work positioning belt with wide back pad)

- The belt freely slides on the back support.
- Quick size adjustment.
- Maximum weight of the user 100 kg.
- Two lateral D-rings for work positioning.
- Width of back pad 22 centimetres.
- Tool holding webbing loops.
- Stitching thread: High tenacity polyamide.
- Conforms to EN 358: 2001.



AB-002 (Work positioning belt with slender back pad)

- The belt freely slides on the back support.
- Quick size adjustment.
- Maximum weight of the user 100 kg.
- Two lateral D-rings for work positioning.
- Width of back pad 14 centimetres.
- Tool holding webbing loops.
- Stitching thread: High tenacity polyamide.
- Conforms to EN 358: 2001.



AB-003 (Work positioning belt with slender back pad)

- The belt freely slides on the back support.
- Quick size adjustment.
- Maximum weight of the user 100 kg.
- Two lateral D-rings for work positioning.
- Width of back pad 15 centimetres.
- Stitching thread: High tenacity polyamide.
- Weight: 1 kg.
- Conforms to EN 358: 2001.



OWD

s e r i e s

OWD Technology Persistent Performance




Oil Repellent



Water Repellent



Dust Repellent



Repels: Oil,
Water and Dust
hence highly
resistant to
abrasion and
wear.

ABRIGO introduces OWD range of harness and lanyards specially designed for worker engaged in petrochemical and oil industry.

ABRIGO webbing specially designed to form affine structure on the textile shell. Water or substance such as oil or dirt simply run off its surface. OWD Technology is characterised by a high level of water resistance a natural self-cleaning effect and a durable protective function any residue can easily be rinsed off with a little water.

Special Features:

- Ideal for water and sewerage application.
- Ideal for all heavy-duty applications and harsh environment.
- Ideal for utilities application.
- High UV resistance.
- Aluminium D-rings and powder coated buckles provide excellent corrosion resistance.

AB-65(OWD)



CE



ABRIGO OWD harnesses and lanyard suit various applications, right from climbing, work positioning, rope access and rescue. OWD harnesses and lanyards confirm to all relevant **EN standards**.

Comes with automatic buckles which is easy to use for single-hand adjustment. With special feature of dura comfort back, shoulder and thigh padding. AB-65(OWD) is a multipurpose harness for all applications like climbing, work positioning, rope access and rescue.

Model	Attachment Elements	Adaptability	Conformity
AB-65 (OWD)	1 Aluminium dorsal D-ring, 1 Aluminium sternal D-ring for fall arrest, 1 Aluminium ventral D-ring at waist level for rope accesses work and 2 Aluminium lateral D-ring for work positioning.	Adjustable shoulder and thigh straps with adjustable waist belt. Automatic buckles at thigh straps for easy to use.	EN 361:2002 EN 358:1999 EN 813:2008

"For your safety" visit our website: www.abrigo.in

OWD

s e r i e s



AB-33(OWD)

With a special feature of dura comfort back, shoulder and thigh padding. AB-33(OWD) is a positioning harness.



AB-33W(OWD)

OWD basic harness comes with one chest attachment D-ring and a dorsal attachment D-ring for fall arrest, shoulder and thigh straps are fully adjustable.

Model	Attachment Elements	Adaptability	Conformity
AB-33 (OWD)	1 Aluminium dorsal D-ring, 1Aluminium chest attachment D-ring for fall arrest, and 2 Aluminium lateral D-ring for work positioning.	Adjustable shoulder and thigh straps with adjustable waist belt.	EN 361: 2002 EN 358: 1999
AB-33W (OWD)	1 Aluminium dorsal D-ring and 1Aluminium chest attachment D-ring for fall arrest.	Adjustable shoulder and thigh straps.	EN 361: 2002

"For your safety" visit our website: www.abrigo.in

AB-428(OWD)



ABRIGO offers traditional 44mm webbing pole strap which is adjustable and made up of OWD technology.



SPECIFICATIONS

- Made from 44 mm wide oil repellent webbing incorporated with 44mm tubular webbing for abrasion resistance.
- Available length: Adjustable up to 2 meters.
- Attachments elements: Incorporated with steel karabiner hook at both ends.
- Conforms to EN 358: 2001.



OWD

s e r i e s



AB-253 (OWD)

SPECIFICATIONS

- Expandable single leg fall arrester lanyard. Elastic in nature and prevents tripping over the lanyard.
- Available length: 1.5 meters relaxed length and 2 meters expanded length.
- Attachment elements: Aluminium rebar hook at one end and aluminium karabiner at the other end.
- Conforms to EN 354:2010.

ABRIGO OWD Lanyards which are CE certified are provided with different configuration of hooks to suits various applications.



AB-253W (OWD)

SPECIFICATIONS

- Expandable forked fall arrester lanyard. Elastic in nature and prevents tripping hazards.
- Available length: 1.4 meters to 1.6 meters relaxed length & 2 meters expanded length.
- Attachment elements: Steel karabiner at one end and steel scaffolding hooks at another ends.
- Conforms to EN 354: 2010.



AB-253WS (OWD)

SPECIFICATIONS

- OWD Double lanyard with shock absorber.
- Available length: 1.8 meters to 2 meters.
- Attachment elements: Steel karabiner at one end and steel scaffolding hook at another ends with shock absorber.
- Conforms to EN 355:2002.

ANTISTATIC

ABRIGO Introduces Antistatic Range Of Harnesses And Lanyards

ABRIGO harnesses and lanyards is designed to offer a perfect solution for working safely in a potentially explosive atmosphere. It is made of Polyester with 5 conductive threads to achieve the anti-static property.

ANTISTATIC

s e r i e s



Increased Security

The antistatic material prevents the risks of an electrostatic discharge igniting the explosive atmosphere thus allowing the user to work in complete safety in these high-risk environments. The **ABRIGO** antistatic harness is the perfect solution for work at height in explosive atmospheres. It is particularly suitable for petrochemical and mining environments.

Conforms to EN 361 : 2002 (Fall arrest Harness)

ABRIGO Introduces antistatic forked fall arrester lanyards for safe working at height. In combination with antistatic harness, the usage of these lanyards completes a safe fall protection gear during work at height in hazardous conditions.

AB-253W(TIC) Antistatic E.A. Lanyard



CE

Specifications

- Conforms to EN 355:2002.
 - Material: 44 mm wide antistatic webbing.
 - Attachment Elements: Aluminium karabiner with energy absorber at one end and Aluminium scaffolding hook at other ends.
- Available lengths: 1.5 meter, 1.8 meter & 2 meter.



AB-253(TIC) Antistatic E.A. Lanyard

CE

Specifications

- Conforms to EN 355:2002.
 - Material: 44 mm wide antistatic webbing.
 - Attachment Elements: Aluminium karabiner with energy absorber at one end and Aluminium scaffolding hook at other ends.
- Available lengths: 1.5-meter, 1.8 meter & 2 meter.

ANTISTATIC

s e r i e s

Why Antistatic

A unique challenge while working at height is faced in those areas which have an explosive atmosphere. Besides height, the other big hazard is the presence of volatile compounds in the air. This air can suddenly burst into flames in the event of generation of spark. Products made of polymer and plastics are susceptible to create sparking because they tend to accumulate charge on them. Thus, all regular Harnesses, made of polyester or similar polymers have a tendency to accumulate charge on them which leads to spark generation.

ABRIGO, Anti-Static webbing also does not allow dust particles to accumulate.

Antistatic range of **ABRIGO** Harnesses & Lanyard should be used in explosive work environment for providing complete and resistant of working at height without facing additional hazard of fire due to sparking. **ABRIGO** antistatic range of products are also an ideal choice for use during work at height in the industries which require a contaminant-free and dust free environment.

INDUSTRIES:

- Oil And Gas
- Petrochemicals Plants
- Medical And Surgical Industries
- Electronic Industry
- Pharmaceutical Industry
- Filling Station.



BLAZE

The BLAZE range of ABRIGO harnesses & lanyards have been specially designed for workers engaged in welding and hot work at height.

BLAZE

series

Flame Resistant Full Body Harness



AB-24(FR)



The webbing of the blaze series harnesses and lanyards is made from a special yarn which is flame resistant and can withstand temperatures up to 371°C without any damage.

The harness is provided with adjustable chest, shoulder and thigh straps. Two front attachment textile loops in addition to the dorsal d-ring for fall arrest. The harness conforms to EN 361:2002. The webbing is also tested in accordance with ISO 15025:2002 and assessed in accordance with ISO 9150:1998.

Now be tension free because spark will not affect your fall protection gear!



AB-99(FR)



The harness is provided with adjustable chest, shoulder and thigh strap. Comes with two front attachment textile loops in addition to the dorsal D-ring for fall arrest. 2 lateral D-ring at waist level on the sides of work positioning. Soft dura padding on waist for extended comfort. The harness conforms to EN 361:2002 & EN 358:1999. The webbing is also tested in accordance with ISO 15025:2002 and assessed in accordance with ISO 9150:1998.

Blaze Lanyards



ABRIGO offers Flame Resistant Lanyards which are compatible with blaze series Flame Resistant Full Body Harnesses to ensure complete protection to the workers engaged in welding & hot work at height.

BLAZE

s e r i e s



AB-342
(FR)



Blaze work positioning lanyard



AB-253
(FR)



Blaze forked lanyard



AB-253W
(FR)



Blaze fall arrester forked lanyard

Model	Use	Material	Length	Attachment Elements	Conforms To
AB-342 (FR)	For work positioning	30mm wide flame-resistant webbing	Ring adjuster allows length adjustment to maximum 2 meters	Provided with screw locking karabiner at both ends of attachment.	EN 358:1999
AB-253 (FR)	For Restraint	44mm wide flame-resistant webbing	Available in 1 meter, 1.5 meters & 2 meters	At one end karabiner and two steel scaffolding hooks at other ends	EN 354: 2010
AB-253W (FR)	For Fall Arrest	44mm wide flame-resistant webbing	Available in 1 meter, 1.5 meters & 2 meters	At one end karabiner and two steel scaffolding hooks at other ends	EN 355: 2002

PLUSH

Superior & long lasting quality

PLUSH

s e r i e s

Plush is the Finest Series of **ABRIGO** Harnesses and comes with the uppermost features of Ergonomics, Comfort and Safety, Quick Connect Automatic Buckles, and a Tangle-Free Design.



Conforms to EN 361: 2002, EN 358: 1999 & EN 813: 2008

Plush-1



CE

The Plush Harness is designed with a back pad, shoulder pads and improved elasticity in the shoulders for added comfort. Specially designed for worker during extended hours.

Plush1 Harness has a single dorsal attachment Aluminium D-ring, and two front attachment textile loops for fall arrest. It is designed for use for fall protection during extended hours of working at height.

Model	Material	Standard	Application	Attachment Points				Weight	Adjustability
				Dorsal	Sternal	Lateral	Ventral		
Plush 1	Polyester	EN 361:2002	Fall Arrestor	✓	✓			1690 gms	Fully adjustable shoulder, chest strap & thigh straps

Long Working Hours At Height Makes Your Body Pain And Exhausted

Plush-2



CE

Plush 2 Harness is the fall arrest and work positioning harness that is very easily donned thanks to its design and the fast automatic buckles on the chest and leg loops allow the harness to be donned with both feet on the ground. The sternal attachment textile loops can be attached to a rope grab to allow safe anchorage while climbing. The two lateral Aluminium D-rings on this harness provide attachment for work positioning lanyards. The cotton mesh provides great level of comfort to the back while working at height.

Model	Material	Standard	Application	Attachment Point				Weight	Adjustability
				Dorsal	Sternal	Lateral	Ventral		
Plush 2	Polyester	EN 361:2002 EN 358:1999	Fall Arrester+ Work Positioning	✓	✓	✓		1995 gms	Adjustable shoulder, thigh-straps and waist belt

Plush-3



Comfortable harness for fall arrest, work positioning and suspension



Plush 3 Harness is for fall arrest, work positioning and suspension harness is designed for greater comfort in all situations. Wide, semi-rigid waist belt and leg strap give excellent support. Its lightweight, breathable construction maximizes air flow. The DOUBLE BACK SELF-LOCKING buckles at the rear of the harness, shoulder and the leg straps, allow for a shorter adjustment when the dorsal attachment point is used. The harness has an integrated fall indicator on the dorsal attachment point. It is certified to North American and European Standards. Plush 3 features leg loops with DOUBLE BACK SELF-LOCKING buckles.

Model	Material	Standard	Application	Attachment Point				Weight	Adjustability
				Dorsal	Sternal	Lateral	Ventral		
Plush 3	Polyester	EN 361:2002 EN 358:1999 EN 813:2008	Fall Arrester+ Work Positioning+ Rope Access	✓	✓	✓	✓	2420 gms	Fully adjustable shoulder, chest strap & thigh straps



STARTLING

s e r i e s

ABRIGO STARTLING range of full body harness comes in the catchy color combination of orange and black equipped with features that provide full comfort to the wearer and this range of harness withstands the highest test of safety standard as laid out in the European norms and its CE certified.

Ideal choice for a variety of applications like-Petrochemical Industry, Paint, Water Treatment, Food Processing, Off-Shore and General Industry.

Equipped with comfort pad with the thermoformed backrest and thigh with sponge lining and comfort pad.

A comfort of safety at height

With a highly innovative and ergonomic design, the Startling series provides a unique comfort and freedom of movement experience to users to let them concentrate on their job and do great work at height, safely.

STARTLING Series conforms to all relevant EN standards, unique serial number and bar-coding system help the user to inspect the harnesses on time.

This series is completely focused on the user comfort and is easy for them to use the harness in all favourable conditions. All adjustment buckles are provided with a unique "Pull Grip" feature to easily pull down with thumb and easy to adjust straps for a good fit.

STARTLING series come with wrinkle free webbing feature which has been treated to resist external stress and hold their shape.

AB-65



AB-65 is a comfortable harness and very versatile in its use. It will adjust its shape according to the movement of the worker to avoid fatigue while working.

Its the most popular harness specially designed and high resistant polyethylene back plate for holding D-ring even after the fall. It's a multi purpose harness carrying out rescue of a fall victim by descent.

Special tower harness in the ABRIGO STARTLING series



The X design keeps the straps wide to minimize chaffing

CE



Applications

- Tower
- Rope Access
- Building Envelope
- Window cleaning
- Rescue



Web Keepers : All End Straps equipped with unique plasticweb keepers for minimizing the chances of accidental opening of web ends, hence ensure that the Harness is snugly fit at all times. Also, it gives better grip while adjustment.

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-65	High tensity yarn	Forged steel	EN 361:2002 EN 358:1999 EN 813:2008	FA+WP+R	✓	✓	✓	✓	✓	Fully adjustable shoulder and thigh straps.	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

STARTLING

s e r i e s

AB-75



AB -75 is a rope access, style harness that is suitable for a range of work at height activities including suspended works. Equipped with comfort pad on waist and leg straps. The karabiner at the front of harness enables the wearer to easily wear or remove the harness by detaching the shoulder straps.

Applications

- Tower
- Rope Access
- Building Envelope
- Window cleaning
- Rescue

CE

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-75	High Tensity Yarn	Forged Steel	EN 361:2002 EN 358:1999 EN 813:2008	FA+WP+R	✓	✓	✓	✓	✓	Fully adjustable shoulder and thigh straps.	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue



AB-51



Having all the adjustability features **ABRIGO** AB-51 is a specialized harness for work positioning at height in industries like construction, light and heavy industries, services/logistics, oil, gas and chemical.

CE

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal ☒	Sternal ☐	Lateral ☉	Ventral ☐			
AB-51	High tensile yarn	Forged steel	EN 361:2002 EN 358:1999	FA+WP	✓		✓		✓	Adjustable Shoulder, thigh straps & waist belt	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

"For your safety" visit our site: www.abrigo.in

STARTLING

s e r i e s

AB-33



AB-33 is a versatile and ergonomic harness with large work positioning belt and a breathable work pad.

CE

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal ☒	Sternal ☐	Lateral ☐	Ventral ☐			
AB-33	High Tensity Yarn	Forged steel	EN 361:2002 EN 358:1999	FA+WP	✓	✓	✓		✓	Adjustable shoulder, chest, waist belt thigh straps	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

AB-73



Adjustable shoulder, thigh and waist straps, sliding plates for easy adjustments of chest straps equipped with 2 chest attachment D-ring and all the adjustability features. Ideal harness for tower climbing, work positioning and working on mast.



Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-73	High Tensity Yarn	Forged steel	EN 361:2002 EN 358:1999	FA+WP	✓	✓	✓		✓	Adjustable shoulders , thigh strap & waist belt	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

STARTLING

s e r i e s

AB-99



AB 99 with distinctive design and extended padding is a harness which provides high level comforts for users in all applications. AB 99 is designed for users with a maximum capacity upto 140 kg including tools.

Adjustable shoulder, thigh, waist straps sliding plates for easy adjustment of chest straps consists of front attachment textile loops. This harness is the best harness for tower climbing and work positioning at height.



Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-99	High Tensity Yarn	Forged steel	EN 361:2002 EN 358:1999	FA+WP	✓	✓	✓		✓	Adjustable shoulders, thigh strap & waist belt	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue



AB-22 (Gold)



AB 22 (Gold) is the classic all-rounder among all work harnesses, one size fits all. This harness is light and easy to put on. Simple, good and safe.



CE

Special design and high resistant polyethylene back plate for holding D-Ring even after the fall.

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-22 (Gold)	High Tensity Yarn	Forged steel	EN 361:2002	FA	✓					Adjustable thigh & Chest strap.	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

"For your safety" visit our site: www.abrigo.in

STARTLING

s e r i e s

AB-24



The basic duo harness is a full body harness with two textile attachment points for fall arrestor, in this harness you will find light weight and comfort with more efficiency.

CE

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-24	High Tensity Yarn	Forged steel	EN 361:2002	FA	✓	✓				Adjustable shoulder, chest & thigh straps	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

AB-81 (Gold)



2 chest attachment D-ring and a dorsal attachment D-ring for fall arrester. Shoulder and thigh straps differentiated by dual color scheme.

CE



Special design and high resistant polyethylene back plate for holding D-ring even after the fall.

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal ☒	Sternal ☐	Lateral ☐	Ventral ☐			
AB-81 (Gold)	High Tensity Yarn	Forged steel	EN 361:2002	FA	✓	✓				Adjustable shoulder, thigh & chest straps	✓

STARTLING

s e r i e s

AB-22 (Gold SH)



AB-22 (Gold SH) is a basic CE-compliant harness, having sliding plates for easy adjustments and ideally positioned sit straps for extended comfort.

CE

Model	Material of webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal ☒	Sternal ☐	Lateral ☐	Ventral ☐			
AB-22 (Gold SH)	High Tensity Yarn	Forged steel	EN 361:2002	FA	✓					Adjustable shoulder, Chest & thigh strap.	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

B-65



ABRIGO offers Sit Harness for sports and adventure.

ABRIGO offers adventure sit harness very light, specially designed keeping in mind the needs of Mountaineers and Adventure Geeks.

- The revolutionary fully adjustable hip harness with unique comfort extremely light weight & the minimal packing size.
- Consists of two lateral D-rings for work positioning and ventral D-ring for rope access.
- This harness is used by mountaineers, tree-climbers and loggers, for positioning and rope access.
- Adjustable thigh straps & waist belt.
- With wide and semi-rigid waist belt for excellent support.
- The waist belt and the leg straps are provided with a soft padding that provides best possible comfort to the wearer.
- The rear attachment point on the waist belt allows connection of a restraint lanyard facilitating it to be used by personnels for tree climbing, logging and for rope access.
- The two lateral attachment points equally distribute the weight around the waist belt for comfort when leaning back.
- Conforms to EN358:1999 & EN 813:2008

CE



STARTLING

s e r i e s



CE

AB-33W

AB 33W comes with one chest attachment D-ring and a dorsal attachment D-ring for fall arrest shoulder and thigh straps are fully adjustable and differentiated by dual colours.



AB-54

The Suspension Strap incorporated on the shoulder strap of the Harness AB-54 has a D-ring which can be used to connect to the Rescue Equipment, when in need. It is not to be used for suspension but for retrieval. The Suspension Strap otherwise lies attached to the shoulder strap with the Velcro binding, when not in use.

Model	Material Of Webbing	Material of D-ring & buckle	Standard	Application	Attachment Point				Comfort Padding	Adjustability	Impact Indicator
					Dorsal	Sternal	Lateral	Ventral			
AB-33W	High Tensity Yarn	Forged steel	EN 361:2002	FA	✓	✓				Adjustable shoulder, thigh & chest straps	✓
AB-54	High Tensity Yarn	Forged steel	EN 361 :2002 EN 358 :1999 EN1497:2007	FA+WP+R	✓	✓	✓		✓	Adjustable shoulder, Chest & high straps	✓

FA - Fall Arrest / WP - Work Positioning / R - Rescue

Inspecting the Harness

Inspect your harness before each use. Check the buckles, webbing, and the D-rings. Check the manufacturer label for additional user information. If the harness is damaged or worn, do not wear it.

Buckles

Many full body harnesses have interlocking buckles. Look for bent, cracked or nicked buckles. Test the buckle to make sure the coupling is secure.

Webbing

Look for frayed, cracked, cut, burned or damaged webbing and loose or broken stitching.


D-rings

Look for bent, cracked and nicked or gouged rings.

Manufacturers Label


Inspect the manufacturer label on the harness. The manufacturer label on a full body harness will contain the following information:

- Manufacturer or vendor identification
- Size of harness
- Date the harness was manufactured
- Model number
- Tracking number

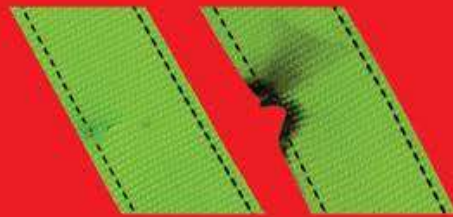

STAUNCH

s e r i e s

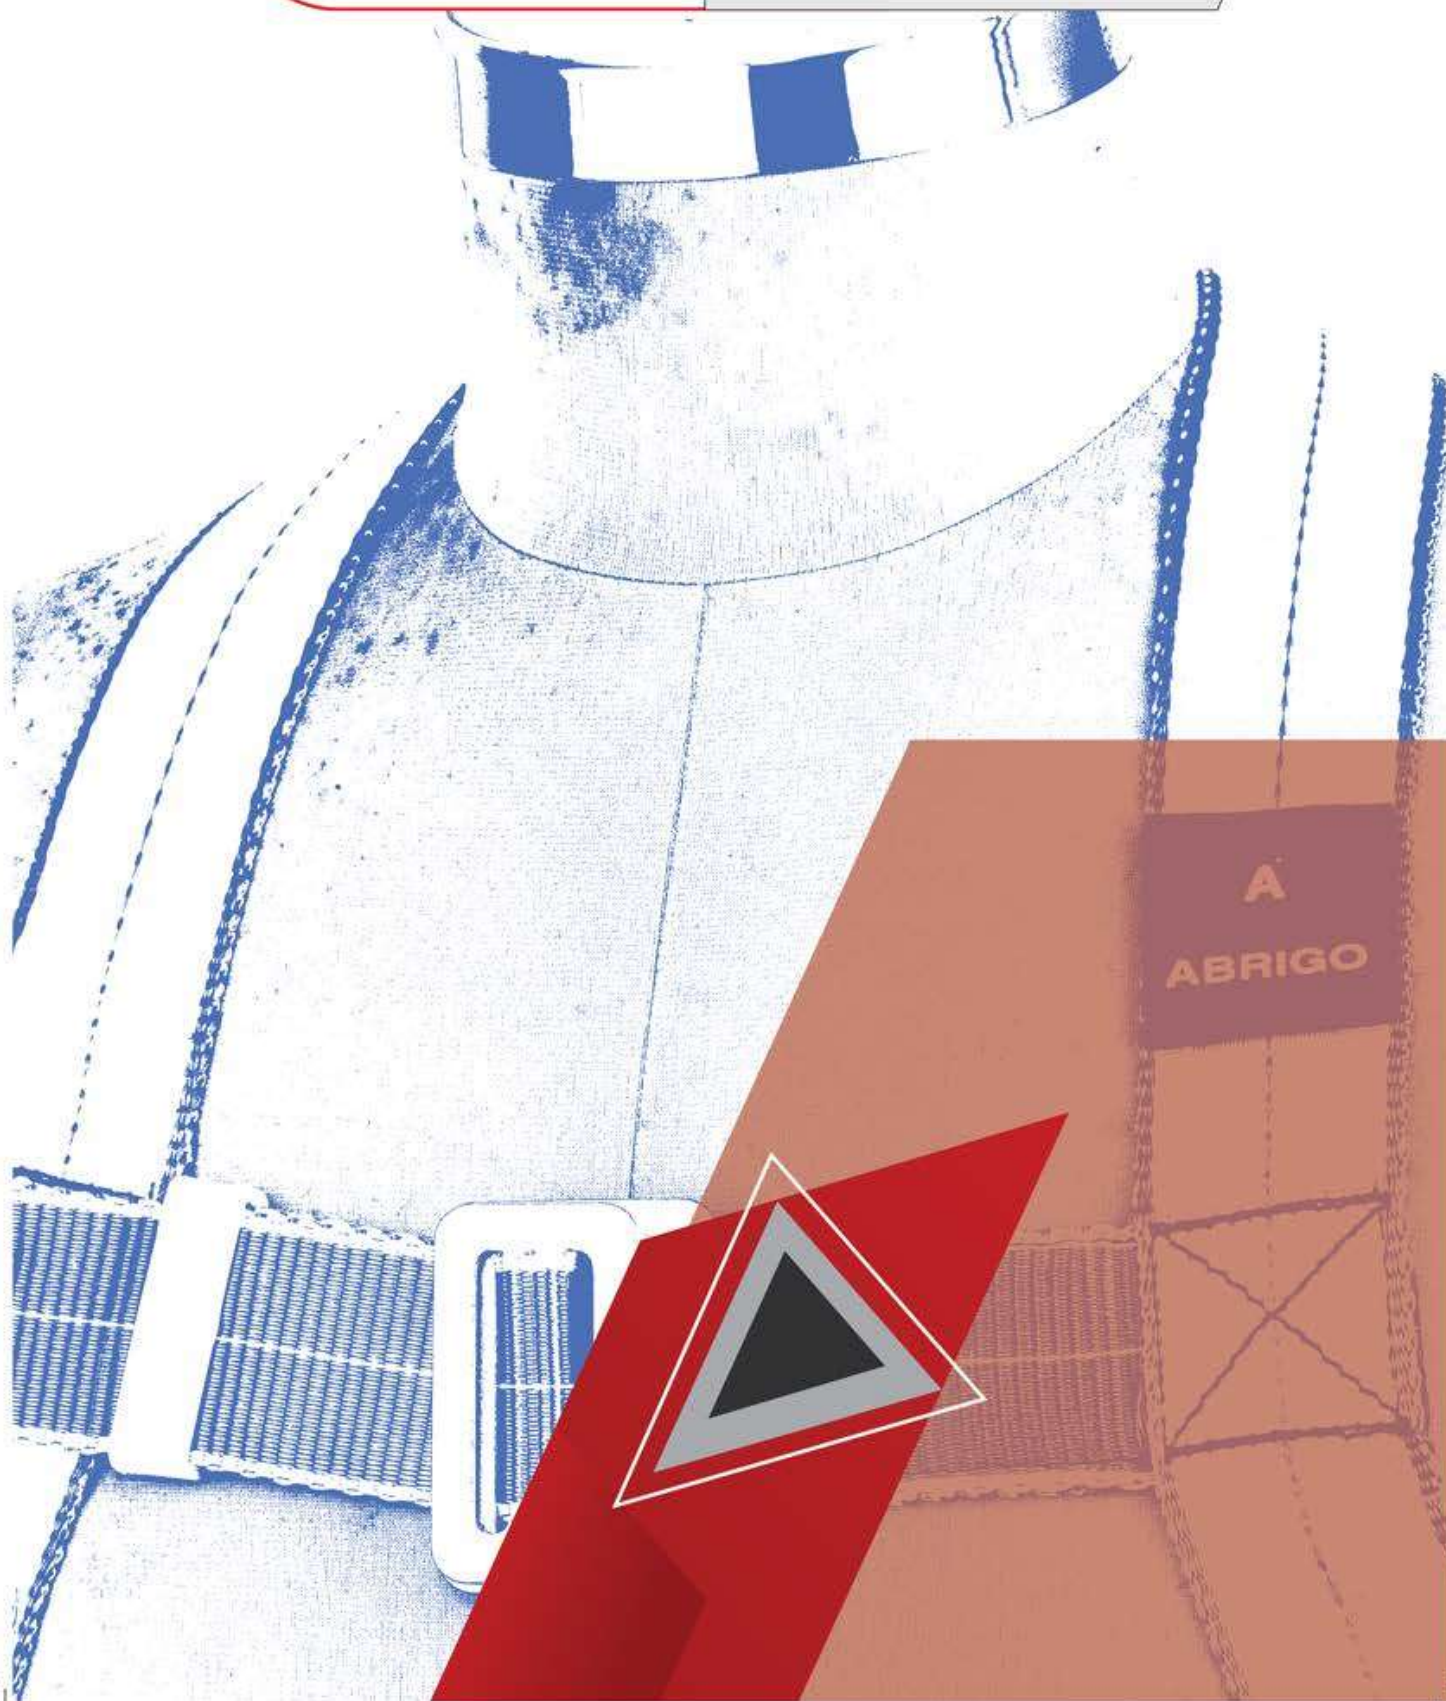

AB-22 (Class A)



Equipped with adjustable chest and thigh straps, AB-22 (Class A) is the basic harness for fall arrest.



Model	Material Of Webbing	Material of D-ring & buckle	Standard	Attachment Point				Adjustability	Impact Indicator
				Dorsal D	Sternal S	Lateral L	Ventral V		
AB-22	Polyester	Forged steel	IS 3521:1999	✓				Adjustable Chest & Thigh Strap	✓

STAUNCH

series



AB-22
(SH Class A)

Equipped with adjustable chest, shoulder and thigh straps, AB-22 (SH) is the basic harness for fall arrest.



AB-82
(Class L)

With dorsal and sternal D-ring for fall arrest and for tower climbing.

Model	Material Of Webbing	Material of D-ring & Buckle	Standard	Attachment Point				Adjustability	Impact Indicator
				Dorsal D	Sternal D	Lateral D	Ventral D		
AB-22 (SH)	Polyester	Forged steel	IS 3521:1999	✓				Adjustable Shoulder, Chest & Thigh Strap	✓
AB-82	Polyester	Forged steel	IS 3521:1999	✓	✓			Adjustable Chest & Thigh Strap.	✓



AB-81
(Class L)

A tower climbing harness that's safe and comfortable while you are working at heights all day.



AB-81(H)
(Class L)

A tower climbing harness that's safe and comfortable while you are working at heights all day. Straight thigh straps for better comfort.

Model	Material Of Webbing	Material of D-ring & buckle	Standard	Attachment Point				Adjustability	Impact Indicator
				Dorsal ☒	Sternal ☒	Lateral ☒	Ventral ☒		
AB-81	Polyester	Forged steel	IS 3521:1999	✓	✓			Adjustable chest, Shoulder & thigh strap	✓
AB-81(H)	Polyester	Forged steel	IS 3521:1999	✓	✓			Adjustable chest, Shoulder & thigh strap	✓

STAUNCH

series



AB-18
(Class L)

Equipped with two chest attachment textile loops. A dorsal attachment D-ring for fall arrester.



AB-41
(Class D)

With dorsal and sternal D-ring for fall arrest and for tower climbing.

Model	Material of Webbing	Material of D-ring & buckle	Standard	Attachment Point				Adjustability	Impact Indicator
				Dorsal D	Sternal D	Lateral D	Ventral D		
AB-18	Polyester	Forged steel	IS 3521:1999	✓	✓			Adjustable chest & thigh strap.	✓
AB-41	Polyester	Forged steel	IS 3521:1999	✓	✓			Adjustable thigh strap	✓



AB-71
(Class P)

Two lateral D-rings at sides for positioning on tower with the features of AB-22.



AB-91
(Class E)

A harness used for rescue in confined spaces lowering or raising of personnel in confined spaces.

Model	Material of Webbing	Material of D-ring & buckle	Standard	Attachment Point				Adjustability	Impact Indicator
				Dorsal ☒	Sternal ☒	Lateral ☒	Ventral ☒		
AB-71	Polyester	Forged steel	IS 3521:1999	✓		✓		Adjustable chest, & thigh strap	✓
AB-91	Polyester	Forged steel	IS 3521:1999	✓				Adjustable chest, shoulder & thigh strap	✓

Safety for you

ABRIGO STAUNCH series also comes with an option of Polypropylene lanyard of 3 meters to 1.5 meters splices at the dorsal D-ring.



Model: AB-202

Link connecting polypropylene rope with one end snap hook and another end connected at the dorsal D-ring with a choice of staunch series harnesses. Length available from 1.5 meter to 3 meters. Available sizes: 12mm to 14mm.



Model: AB-201

Link connecting polypropylene rope with one end scaffolding hook and another end connected at the dorsal D-ring with a choice of staunch series harnesses. Length available from 1.5 meter to 3 meters. Available sizes: 12mm to 14mm.

AB-T01



There's nothing more dangerous than a plummeting tool. Featuring coils, swivels, shock-absorbing stretch cord, lock stitching and more than enough weight capacity. It's now easy and affordable to end the falling tools reign of terror. Built to be durable and long lasting, our tethers are thoughtfully designed to prevent dropped objects. **ABRIGO** Tool tethers are suitable for most tools, including hard hats, hand tools, even tools weighing up to 10kgs.

ABRIGO lanyard comes as a bright coloured elasticated 15mm tubular webbing, having a relaxed length of 90 cm (so that the lanyard does not unnecessarily come in the way while working), and extended length of 140cm (to allow maximum reach while using the tool). The Y-shaped lanyard allows the user to attach and carry 2 tools.

Abrigo Care Even After A Fall!

Avoids the effect of suspension trauma with Abrigo suspension safety strap



Often, employers believe their job is complete if they can keep their workers safe from an impact injury during a fall event. Unfortunately, according to the Occupational Safety and Health Administration (OSHA), timely rescue and post-fall suspension trauma are often ignored when employers are building a fall protection plan. To the employee waiting for rescue, suspension trauma is a real and very serious threat. Greater knowledge of what suspension trauma is and how it affects the body is needed to develop a plan to control the hazards it presents.

The Suspension Trauma Safety Strap was designed to help a worker overcome the potential negative health impacts of suspension trauma (otherwise known as Orthostatic Intolerance). This condition can occur when a person remains suspended at height (after a fall) for even short periods of time. Suspension in a harness may cause blood to pool in the veins of the legs which can result in unconsciousness, if not rescued promptly, serious injury or death may occur.

The Suspension Trauma Safety Strap is designed to prevent suspension trauma while a worker is awaiting rescue. The Suspension Trauma Safety Strap allows the worker, who is suspended, to stand up in their harness and to relieve the pressure being applied to the arteries and veins around the top of the legs. The continuous loop design allows both sides of the harness to relieve the pressure being applied to the legs. The strap accommodates either having one foot or both feet in the loop at a time - it will relieve the pressure to both sides with just one foot in allowing for added movement of the legs. The strap allows for increased comfort, balance and improved circulation in the legs while suspended and waiting for rescue.

Details

- Suspension Trauma Safety Strap
- Allows user to stand in Harness after a fall
- Attaches to almost any Harness
- Fast and easy installation
- Extremely compact and lightweight design
- Simple and fast Zipper Style Deployment
- Continuous Loop design
- In-field Re-settable design
- Weight Capacity: 125 Kgs
- Dimensions: 2.10 x 1.45 x 2.00 Inches.

Comfy Seat



When Protracted Suspension Is Required AB-C001

This accessory by **ABRIGO** can be attached to **ABRIGO** harnesses -Plush 3, AB-65 and AB-75 having a ventral D-ring at the waist level to which the karabiner is attached. When done, the COMFY seat provides a comfortable seating for extended time during long hours of work, suspended at a height.

Features

- The Aluminium re-enforcement in the COMFY-SEAT makes it vigorous yet light in weight, weighing not more than 1.4 kg.
- The loops at the end of the polyester webbing straps can be easily attached to the ventral D-Ring of the harnesses mentioned.
- Straps are adjustable and equipped loops.
- Easy positioned on the back when not in use.
- Dura cushioned sides prevents the webbing straps from cutting into the thighs.
- The webbing straps have a breaking strength of more than 23 kN.
- Ergonomic & comfortable working chair.

Material Description

- Webbing: Polyester
- Width: 43mm Webbing
- Breaking Strength: 23 kN
- Metal Components: EN8 Steel
- Weight: 1300 gms



Temporary Horizontal Lifeline BA-795

You can depend on **ABRIGO** Temporary Horizontal Lifeline systems for mobility and fall protection. These temporary safety systems are used to protect workers operating in the horizontal plane who may not have continuous access to suitable anchorage points.



Conforms to EN 795:2012(Class B)


When used in combination with personal protective equipment, a temporary horizontal lifeline acts in a manner similar to a permanent HLL: the fall protection system can arrest a fall, limiting the amount of force that is transferred both to the worker and the stanchions.

The BA-795 is a temporary horizontal lifeline made with 44mm polyester webbing equipped with a steel ratchet to put the system into tension after adjusting the required length. Supplied with two screw locking karabiner on both ends.


The whole system is supplied in a bag, which is permanently attached to the assembly and forked ends in order to anchor to a structure without the need to add the anchorage sling or to hang directly the adapted anchorage point. Minimum breaking strength : 25 kN

Available length – 5 meter to 30 meter

Two persons can work simultaneously

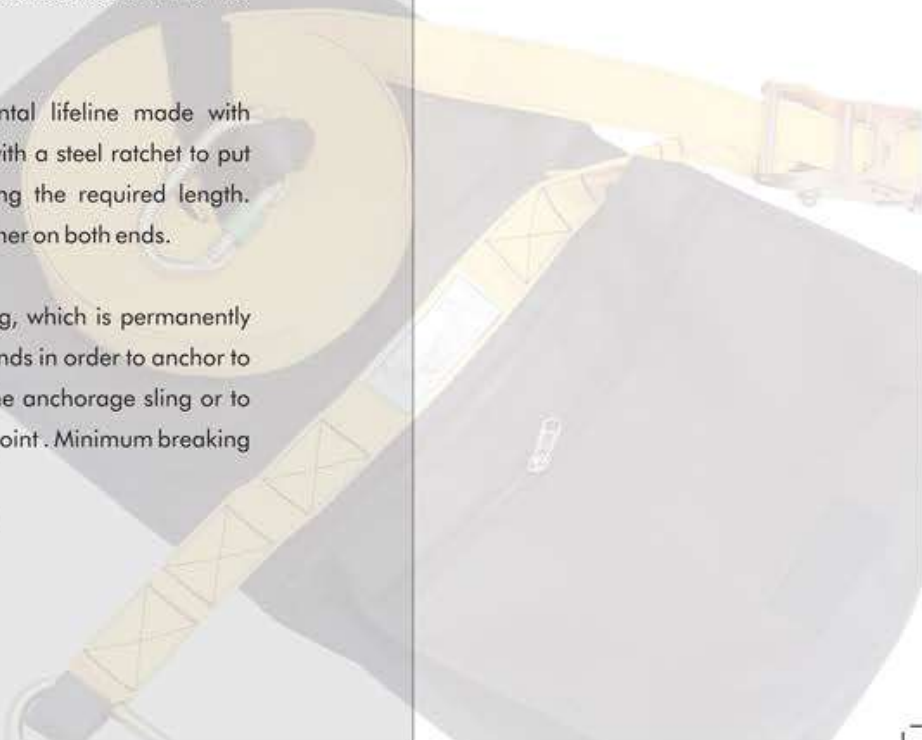

Lanyards

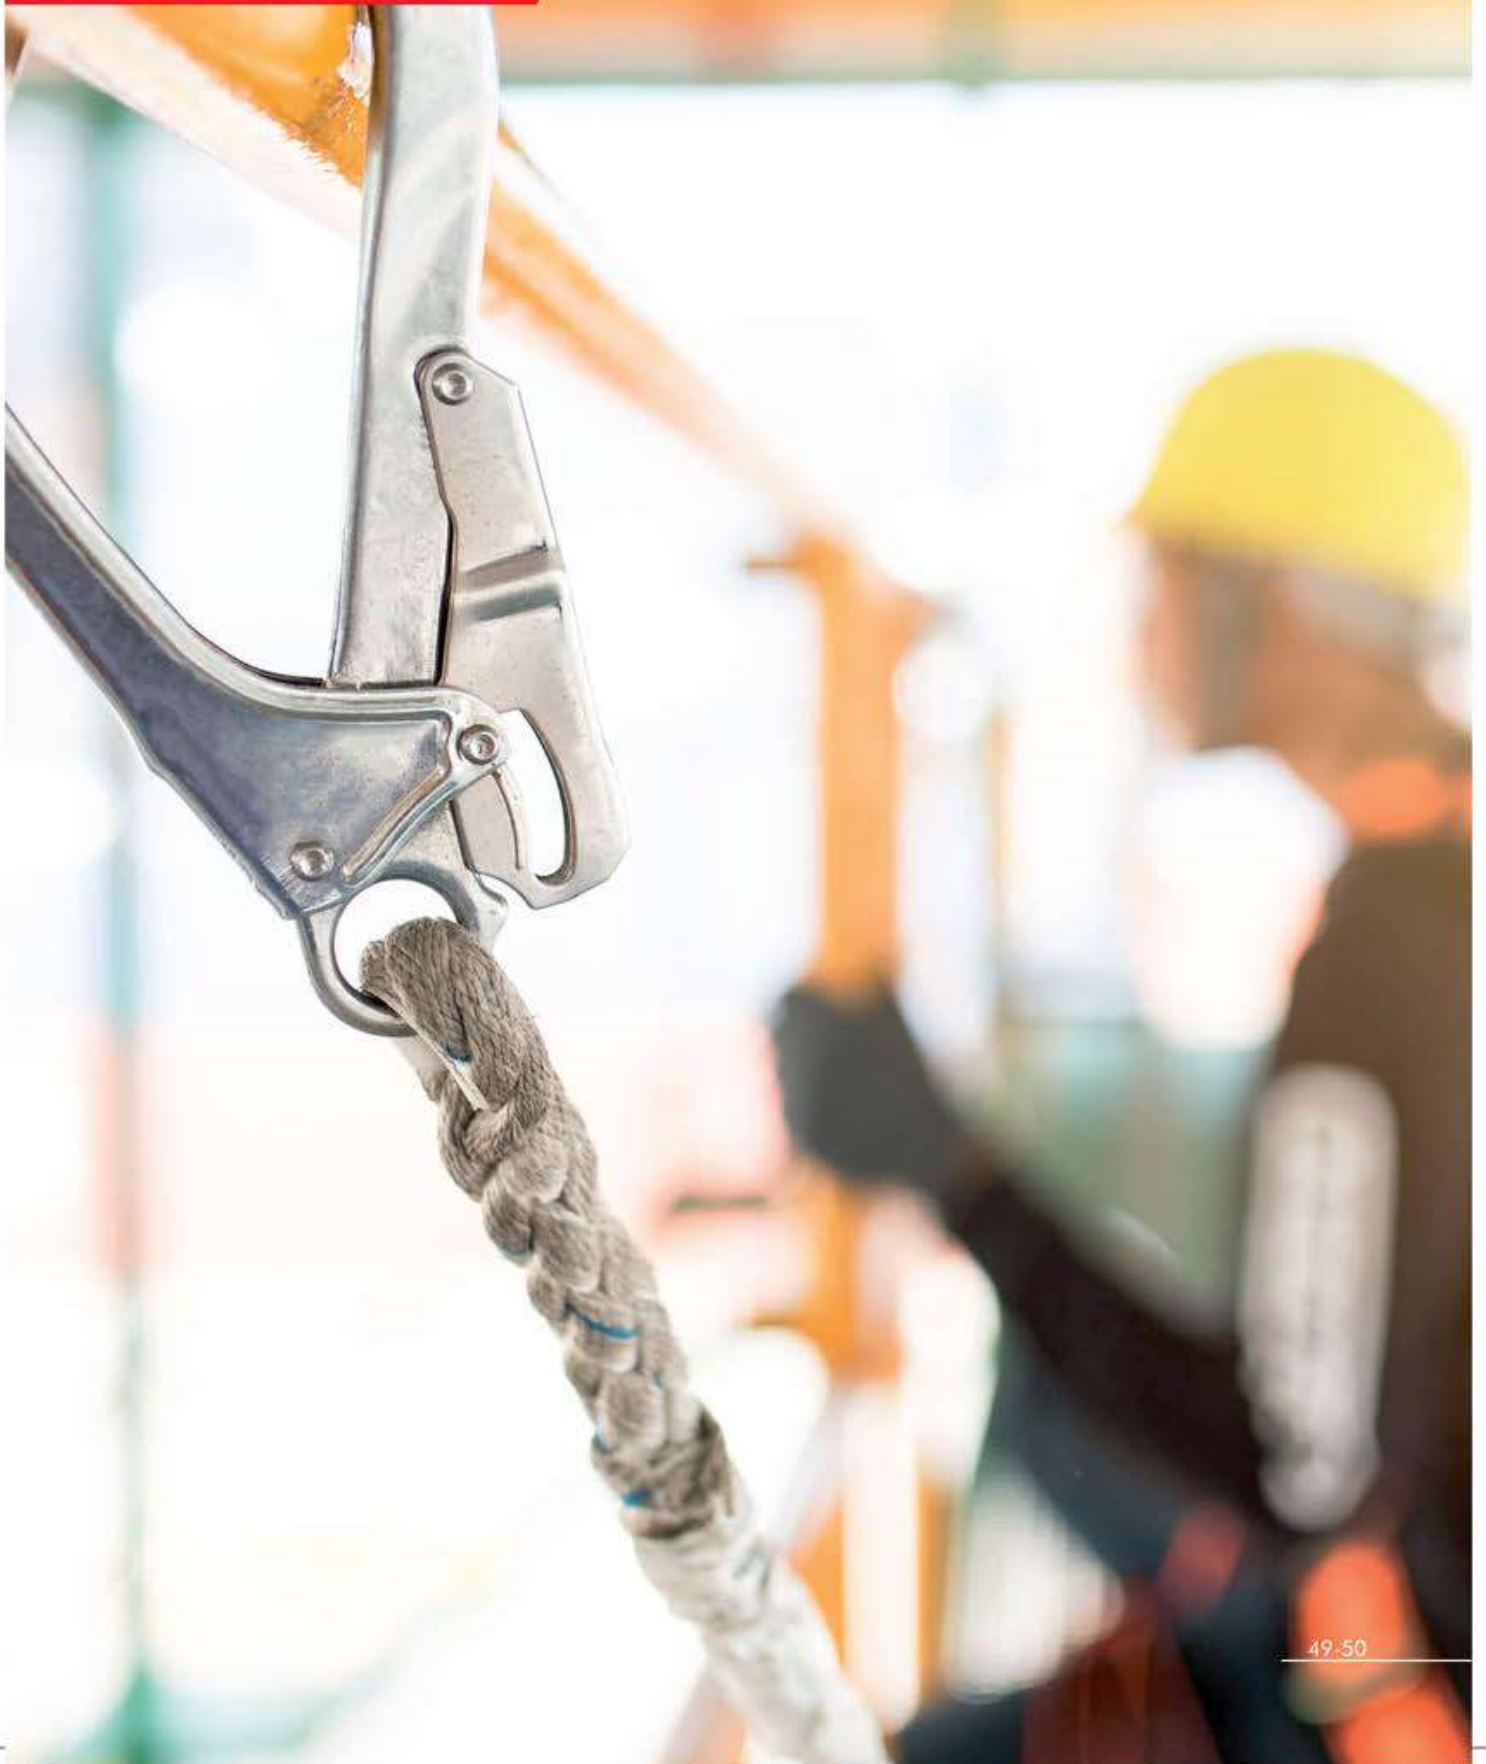

Lanyards

Lanyards

A **Lanyard** is a flexible rope, or strap which generally has a connector at each end for connecting the body belt or **Body Harness** to a deceleration device, lifeline, or anchorage point.

The Fall Arrest Lanyards incorporate a shock absorbing element which is capable of limiting the force felt on the body of the worker to less than 6 kN.

Depending upon the specific usage, Lanyards are classified as follows:

- **Fall Arrester Lanyards:** Come incorporated with an energy absorber to reduce the impact of fall, and hence are used for fall arrest.
- **Work Positioning Lanyard:** These **Lanyards** are designed to hold the user in restraint, so a fall cannot occur, or to hold the user in a position of work where a fall may occur.
- **Restraint Lanyards:** These lanyards are designed to hold the user in **Restraint**.
- **Forked Lanyards:** Forked lanyards (or y-shaped lanyards) provide 100% tie-off required during progressive movement from one anchor point to the next, upwards or side-ways.

ABRIGO offers a comprehensive range of **Lanyards** made of twisted rope, kernmantle rope or webbing, and different connector combinations, as per the need of the users.

Work Positioning Lanyards



ABRIGO offers a range of Work Positioning Lanyards which can be used by the worker to position himself at a height in a safe and supported manner, and work with both hands free.

ABRIGO Work Positioning Lanyards have a Minimum Breaking Strength of 16kN, and are certified as per EN 358:1999

AB-S002 Protective Sleeve



ABRIGO offers a protective sleeve which is abrasion resistant protective sleeve over the work positioning rope lanyards. This Sleeve of length 30cm is provided incorporated onto the rope lanyard. This Sleeve works to prevent any abrasion of the rope when the lanyard is used around a structure in the event of work-positioning.

This sleeve can be incorporated with any work positioning Lanyards of ABRIGO

AB-422 A Work Positioning Lanyard With Ring Type Adjuster.



- Made up of 14mm diameter polyamide 3-strand twisted rope.
- Has a Manual Ring-type adjuster of forged alloy steel.
- Maximum length is 2.0 meter.
- Easy to connect Steel Karabiners at both the ends for attachment.
- Conforms to EN 358:1999

Lanyards



AB-142

CE

A Work Positioning Lanyard With Grip Adjuster

Made up of 14mm diameter polyamide 3-strand twisted rope.

- Equipped with convenient rope-grab adjuster for easy length adjustment.
- Maximum length is 2.0 meter.
- Easy to connect steel karabiners at both the ends for attachment.
- Conforms to EN 358:1999

A Webbing Work Positioning Lanyard With Ring Type Adjuster

- Made up of 35mm wide polyester webbing.
- Manual ring type adjuster of forged alloy steel.
- Easy to connect steel karabiners at both the ends for attachment.
- Maximum length is 2.0 meters
- Conforms to EN 358:1999



AB-342

CE



AB-143

CE

A Work Positioning Lanyard With Ring Type Adjuster

- Made up of kernmantle rope of diameter 10.5mm.
- Easy to connect steel karabiners at both the ends for attachment.
- Manual ring type adjuster made of forged alloy steel.
- Maximum length is 2.0 meter.
- Conforms to EN 358:1999

Restraint Lanyards



Restraint Lanyards

These lanyards are designed to hold the user in restraint, so a fall can not occur, or to hold the user in a position of work where a fall may occur. If a work positioning lanyard is being used the user should be backed up with a fall arrest device. A lanyard to EN 354:2010 may also be used in a fall protection system as a sub component if suitable and compatible with the proposed system. They are available in various lengths.

ABRIGO Fall Restraint Lanyards come in various options of connecting element:

Twisted Rope Lanyard | Webbing Lanyard | Kernamentale Rope Lanyards | Expandable Lanyards

ABRIGO Restraint Lanyards are available in different lengths- 1.0-meter, 1.5-meter, 1.8meter and 2.0 meters

ABRIGO offers all the Lanyards in different configurations of connectors, as per the need of the user.


Each Lanyard offers you distinct features.
Choose the lanyards that best suit your requirement.

Model	Standard	Attachment	Material	Lanyard
AB-531K	EN 354: 2010	Both sides steel karabiners	Polyamide	
AB-253L	EN 354: 2010	Both side loops	Polyester	
AB-531S	EN 354: 2010	One side karabiner and another side scaffolding hooks	Polyamide	
AB-531DK	EN 354: 2010	One side karabiner and another side scaffolding hooks	Kermmantle	
AB-253	EN 354: 2010	One side karabiner and another side scaffolding hooks	Polyester	

Energy Absorber



Whenever an energy absorber is used in a fall, it must be immediately removed from service and never used again. Under no circumstances should a previously deployed energy absorber be used again even if it has deployed only a little bit.

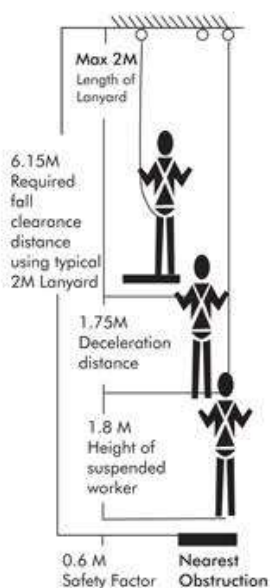

Total clearance distance
from Anchor Point= 6.0m

Energy absorbers are a critical component to any fall protection system. In the event of a fall an energy absorber reduces the energy exerted on the user in order to keep impact forces. The energy absorber is very compact to avoid hindering the user's movements or interfering with handling.



AB-100 is made up of 44mm wide webbing and is shrink wrapped. It limits the impact of fall to less than 6kN .

Conforms To: EN 355:2002


If a user falls onto a 2 meter long lanyard without an energy absorber, the force on the user and the anchor would be unacceptably high, therefore all fall arrest systems must contain an energy absorbing element, which limits the impact force to 6kN & conforms to EN 355:2002 . The minimum fall clearance distance required when using this energy absorber for a 2mtr lanyard is 6 meter.

Lanyards



How does the energy absorber work?

In the event of a fall the special webbing (Tear webbing) inside the Energy Absorber opens up. This opening of the webbing takes up most of the jerk which is felt as an impact when a fall occurs. Hence finally very little jerk is felt on the body of the worker. We can therefore imagine that if this Energy Absorber is absent from a fall protection system, the forces which are felt on the body of the worker can be very high and can result in injury.

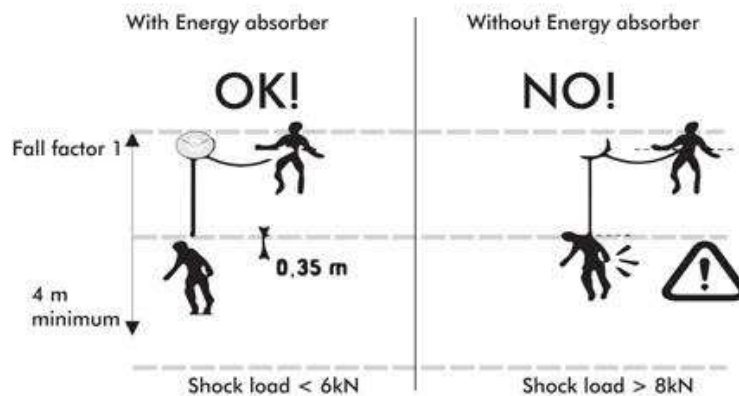

We advise to use energy absorbing lanyards for fall arrest applications.

Abrigo fall arrester lanyard length

The standard maximum length of the Fall Arrest Lanyard is 2 meters. Important thing to note is to have a lanyard long enough to be user friendly, however, kept as short as possible, to minimize the free fall distance. All Abrigo fall arrest lanyards are tested and certified as per EN 355:2002 for their maximum length of 2 meters



Lanyard should not exceed 2 meters

Lanyards

Design your Energy Absorbing Lanyard as per your requirements.

ABRIGO provides you an option to tailor your Energy Absorbing Lanyards as per your own job specific needs. Variety of Hooks and Connectors are available for connection on anchorage and termination ends. All lanyards with different combination of connectors mentioned below are individually certified as per EN 355:2002.

Model	Standard	Attachment	Material	Lanyards
AB-531SE	EN 355:2002	One Side Steel Karabiner And Another Side Steel Scaffolding Hook	Polyamide	
AB-253WS	EN 355: 2002	One Side Steel Karabiner And Another Side Steel Scaffolding Hook	Polyester	
AB-253WAS	EN 355: 2002	One side Aluminium karabiner and another side Aluminium scaffolding hook	Polyester	

Forked Lanyard



ABRIGO forked lanyards

ABRIGO forked lanyards come in Twisted ropes, kernmantle ropes and also in 44mm & 30mm wide polyester webbing and offer the facility to move in all directions while remaining safely anchored at all times.

Forked lanyards (or Y-Shaped Lanyards) provide 100% tie-off required during progressive movement from one anchor point to the next, upwards or side-ways. While using an Energy Absorbing Forked Lanyard make sure that only the Energy Absorber end of the lanyard is connected to the harness at its Dorsal attachment point. If this is not done so, the shock absorption element gets removed from the system, making it extremely dangerous in the event of a fall.

Forked Lanyards



AB-531



AB-531K



AB-253 WEA

Model	Lanyards	Connecting Element	Connector At Harness End	Connector At Anchorage End	Length
AB-531	Twisted Rope E.A. Forked Lanyard Conforms To EN 355:2002	12 mm Dia meter 3 Strands Twisted Polyamide Rope	Steel Screw Locking Karabiner	Steel Scaffolding Hooks At Both Ends	1.5 Meter, 1.8 Meter, 2 Meter.
AB-531K	Kernmantle Rope E.A. Forked Lanyard conforms To EN 355:2002	11 mm Dia meter Kernmantle Rope	Steel Screw Locking Karabiner	Steel Scaffolding Hooks At Both Ends	1.5 Meter, 1.8 Meter, 2 Meter
AB-253 WAE	E.A. Forked Webbing Lanyard conforms To EN 355:2002	44mm Wide Polyester Webbing	Aluminium Screw Locking Karabiner	Aluminium Scaffolding Hooks At Both Ends	1.5 Meter, 1.8 Meter, 2 Meter



AB-531 AS



AB-253 WNA



AB-531SH

Model	Lanyards	Connecting Element	Connector At Harness End	Connector At Anchorage End	Length
AB-531AS	Twisted Rope E.A. Forked Lanyard conforms To EN 355:2002	12 mm Dia meter 3 Stands Twisted Polyamide Rope	Aluminium Screw Locking Karabiner	Aluminium Scaffolding Hooks At Both Ends	1.5 Meter, 1.8 Meter 2 Meter
AB-253WNA	E.A. Forked Webbing Lanyard conforms To EN 355:2002	30 mm Wide Polyester Webbing	Aluminium Screw Locking Karabiner	Aluminium Scaffolding Hooks At Both Ends	1.5 Meter 1.8 Meter 2 Meter
AB-531SH	Twisted Rope E.A. Forked Lanyard conforms To EN 355:2002	12 mm Dia meter 3 Stands Twisted Polyamide Rope	Steel Snap Hook	Steel Scaffolding Hooks At Both Ends	1.5 Meter 1.8 Meter 2 Meter

Forked Lanyard



AB-531T



AB-531SS



AB-253WEX

Model	Lanyard	Connecting Element	Connector At Harness End	Connector At Anchorage End	Length
AB-531T	Twisted Rope E.A. Forked Lanyard Conforms To EN 355:2002	12 mm Dia meter 3 Stands Twisted Polyamide Rope	Steel Screw Locking Karabiner	Steel Tower Hooks At Both Ends	1.5 Meter, 1.8 Meter 2 Meter.
AB-531SS	Twisted Rope E.A. Forked Lanyard Conforms To EN 355:2002	12 Mm Dia meter 3 Stands Twisted Polyamide Rope	Steel Screw Locking Karabiner	Steel Snap Hooks At Both Ends	1.5 Meter 1.8 Meter 2 Meter
AB-531WEX	Expandable Twin Lanyard Conforms To EN 355:2002	44mm Wide Tubular Webbing	Steel Screw Locking Karabiner	Steel Scaffolding Hooks At Both Ends	1.5 Meter 1.8 Meter 2 Meter

Anchorage



Anchorage means a secure point of attachment for equipment such as lifelines, lanyards, or deceleration devices.

ABRIGO knows that finding a way to tie off is not always easy. **ABRIGO** offers wide range of anchorage devices which can be easily installed over a variety of structures to provide a safe and durable anchorage points for working at height where needed. **ABRIGO** anchorage devices are tested and engineered to adapt to nearly every anchorage need where connection of a fall arrest system to a 15kN anchor point is necessary.

Note: Anchor straps are specifically designed for fall protection use. You may not Substitute Rigging Slings of any kind. Also, remember that in this situation, you are using the strap around steel. Make sure to protect the strap from the edges if it is NOT a strap with built-in abrasion protection.

Be sure to keep in mind the rating of the strap. This form of anchor point, just as any other, must be able to support 15 kN per employee attached if being used as part of a fall arrest system. Connecting more could render this solution ineffective.

All These Anchorages Comply To The Latest European Standard EN 795:2012.

Let's look back at the situation where we had a piece of equipment on the roof that we were unable to tie off too. Well, this may still remain true, but what if there was some supporting structural steel available or an engineer determined that a piece of the equipment was suitable to be used as an anchor point? You still might not be able to find a place to connect your snap hook, but a simple anchor strap could provide you the connection you need.



Webbing Slings

ABRIGO provides a wide range of Anchorage Webbing Slings of various configurations and lengths that can be transformed in length as per the requirement.



CE

AB-795-597

- Made up of 43mm wide Polyester Webbing.
- Length: 1.2 meter or as requested.
- Has a D-ring at one end and textile loop at the other end.
- Strength: Minimum 18 kN for 3 minutes.
- Conforms to EN 795: 2012 Type B.



CE

AB-777

- Made up of 43mm wide Polyester Webbing.
- Length: 1.0-meter, 1.5meter & 2meter or as requested.
- Has a D-ring on both the ends.
- Strength: Minimum 18 kN for 3 minutes.
- Conforms to EN 795: 2012 Type B.



CE

AB-778

- Made up of 43mm wide Polyester Webbing.
- Length: 1.2 meter or as requested.
- Has a D-ring at one end and textile loop at the other end, also provided with a polyester covering on the load-bearing face of the webbing.
- Strength: Minimum 18 kN for 3 minutes.
- Conforms to EN 795:2012 Type B.



CE

AB-771

- Made up of 30 mm wide Polyester Webbing.
- Length: 0.7-meter, 1.0 meter. & 1.5 meter or as requested.
- Strength: Min 18 kN for 3 minutes.
- Conforms to EN 566:2017.


Rope Grab Fall Arrester



ABRIGO Fall arrest device that travels up and down a vertical lifeline rope. It grabs the rope via a cam design that locks a fallen worker in place on the lifeline. **ABRIGO** product offers hands-free operation and ultra-smooth travel action while ascending or descending. The cam and hinge design also allow for quick and easy installation on the rope.

The Anchorage line, in conjunction with the given Rope Grab provides the necessary Shock Absorption.

AB-300

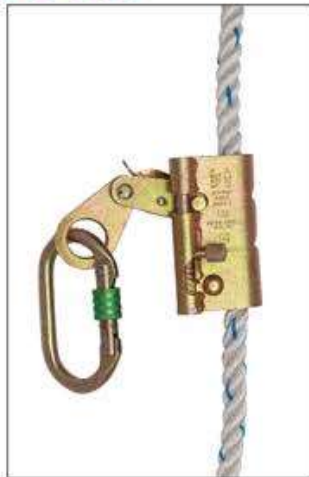

ABRIGO Rope Grab AB-300 is a detachable Rope Grab Device, made up of high strength steel. It moves freely along the polyamide twisted rope anchorage line (14mm to 16mm diameter), attached at its eye with the user, while he moves up and down. The rope grabs immediately 'grabs' on to the line in the event of a fall, thereby arresting the fall.

Conforms to EN 353-2:2002

AB-300 (EA)



Fall arrester with Energy Absorber Energy absorber AB-100 and steel karabiner as an attachment element

ABRIGO Key Features

- Allows the user to go up but not slide down accidentally. Keeps in stationary position when locked.
- **ABRIGO** Rope Grab is provided with exclusive Gravity Locking system that prevents incorrect usage. It is also equipped with a double security opening system, and hence will not open unless a deliberate action taken
- Conforms to EN 353-2:2002

Rope Grab Fall Arrester Anchorage Line



Twisted rope

Twisted rope anchorage line (to be used with **ABRIGO** fall arrester)

- Made of 3-strand polyamide twisted rope of diameter 14 mm
- One side loop; other side end stop knot (also available with both side loops)
- Length – 10-meter Anchor AB-10, 20-meter Anchor AB-20, 30-meter Anchor AB-30, 40-meter Anchor AB-40, 50-meter Anchor AB-50, 100 meter Anchor AB-100, 150 meter Anchor AB-150, 200 meter Anchor AB-200
- Longer lengths are also available on request



Kernmantle rope

Kernmantle rope anchorage line (to be used with **ABRIGO** fall arrester)

- Made of kernmantle rope of diameter 10.5 mm
- One side loop; other side end stop knot (Also available with both side loops)
- Length - 10-meter Anchor AK-10, 20-meter Anchor AK-20, 30-meter Anchor AK-30, 80-meter Anchor AK-80, 100-meter Anchor AK-100, 120-meter Anchor AK-120.
- Longer lengths are also available on request



Openable protective sleeve AB-OPC

- Designed to protect flexible anchorage lines against abrasion due to friction.
- Is made of flexible special polymer and is detachable.
- The width of AB-opc is: open: 150 mm fold: 60mm
- Can be opened/closed with the help of velcro tape stitched along its length.
- Standard length: 60cm.

"For your safety" visit our site: www.abrigo.in

Retractable Fall Arrester Blocks




In the event of a fall the braking mechanism on the drum holding the rope or webbing (that is attached to the users harness) is engaged and arrests the fall.

All self-retracting fall arrest blocks are designed for use in vertical / near vertical applications, & some have also been tested and approved for use in other applications, for example horizontally (such as a fall off a flat roof) where the classification / type of edge is also detailed (for example a smooth edge as small as 0.5mm radius).

ABRIGO Retractable Fall Arrester Blocks provide an Idyllic solution for such a problem.

Always check with manufacturers recommendations for that specific make and model of equipment, as some equipment requires additional special equipment to be used in conjunction with the fall arrest block. The maximum user mass capacity of a fall arrest block can also vary with the application of use.

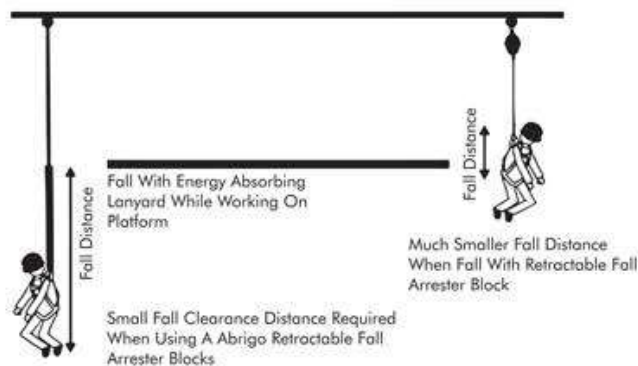

Features of ABRIGO Retractable Blocks

- Can be anchored to a single point and allows the user to move uninhibited at different levels.
- The connecting lanyard is such that it retracts, extends to different lengths as required, is always taut with no slack.
- In the event of a fall, the block locks immediately with minimum fall distance & lowers the impact of force to less than 6 kN.

ABRIGO introduces a built-in side handle with special grip for perfect comfort during carrying of heavier blocks. This special handle comes incorporated in all polymer casing, GI lanyard blocks of 10-meter size to 30-meter size

Retractable Fall Arrester Blocks

ABRIGO special device design makes it possible to also store the fall arresters on their side and stack them on top of each other



Model	Length	Material	Diameter of Rope	Standard	Minimum Breaking Strength	Anchorage End
RFA-50	5 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized steel wire rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.
RFA-60	6 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized Steel Wire Rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.
RFA-100	10 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized Steel Wire Rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.
RFA-150	15 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized Steel Wire Rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.
RFA-200	20 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized steel wire rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.
RFA-250	25 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized Steel Wire Rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.
RFA-300	30 Meters	Casing made up of high impact strength Polymer, to prevent breakage and is nearly imperishable.	Galvanized Steel Wire Rope of diameter 4.5 mm	EN 360:2002	12 kN	Anchorage Eye with swivel action. Prevents undue twist of rope while working or in the event of a Fall.

Confined Space Entry



Many workers are injured and killed each year while working in confined spaces. An estimated 60% of the fatalities have been among the would-be rescuers. A confined space can be more hazardous than regular workspaces for many reasons. To effectively control the risks ABRIGO provides equipment that allows easy overhead admission into and retrieval of personnel and material from such confined space areas.

TRIPOD AB-640

ABRIGO Tripod is one such product that can be used for easy access by a worker into confined spaces such as Man-holes, Tanks, etc. It provides a means of controlled ascent and descent, as well as protection from falls, should the depth of the space require it.

Features & Benefits

- For access in confined spaces.
- With two mounted pulleys at the head of the Tripod in the prolongation of the main leg for passing a cable
- It allows making configuration with one winch and one Self Retractable block.
- Having two auxiliary eye bolts as attachment points.
- Aluminium alloy cast head, legs in Aluminium.
- Steel support-shoes provided with rubber sole to increase friction and impart more stability.
- Strength of anchorage point greater than 12 kN
- Every Tripod is provided with inbuilt fixture for attaching our winch AB-641.
- Every Tripod is provided with Tripod Bag.

Product Specification

Length of tripod is 6 feet. Fully adjustable telescopic legs, adjustable height from 1.15 meter to 2.15 meter. Wheelbase: 1.5 diameter. Weight: 13 kgs. Maximum load capacity: 500kgs Conforms to EN 795:2012 Type B.



Winch



Winch AB-641

- To be used for raising or lowering of personnel or material into confined spaces.
- Equipped with Advanced Dual Load Advantage (DLA) Gear System within to give an effortless use of the Winch.
- Equipped with bolting fixture for robust fitting on to the tripod AB-640.



- Lifting Load capacity: 140 Kgs.
- Length: 20m & 25m.
- Conforms to EN 1496:2006 (Class A).
- To be used with a Retractable Fall Arrester when deployed for raising or lowering a person.

Grip Descender



The self-locking descender is a personal protection equipment. It must be assigned to only one user (it cannot be used by more than one person at a time – except for rescue work, which is a case of exceptional circumstances). The self-locking descender is designed to be used for a descent along a work rope, or exceptionally to rescue a second person. This equipment must therefore be reserved only for use by experts trained in these techniques. Regardless of the descender technique used, make sure during the use that the connector is properly positioned in the descender; pulling forces must be applied to the connector only along the large axis. The user must wear gloves.

Make sure that the rope end is always properly tied to prevent any risk that it unintentionally leaves the descender at the end of the rope – this will prevent serious injuries and even death.

ABRIGO grip descender is a light weight easy to operate device that is used with a Suspension Harness (AB-65, & Plush3). For additional comfort an Easy Seat can be used with the Suspension Harness.



AB-450

- Metal lever under all industrial conditions tested for 225 kg according to EN 12841 (rope access).
- EN 341-A: load range 30-180 kg (max. descent distance 190 m) Works on a 10.5 mm Kernmantle Rope.
- Material of construction is Aluminium Alloy & Metal. It is extremely light in weight and highly corrosion resistant.
- Weight: 375 grams
- Conforms to : EN 341 Type 2 class B & EN 12841

Grip Descender

AB-450(A)





ABRIGO Grip Descender for positioning along with back up fall arrest system.

Functioning Principles

- Self-Breaking
- Descend
- Press-stop

Features

- Works on a 10.5 mm Kernmantle Rope.
- Material of construction is Aluminium Alloy. It is extremely light in weight and highly corrosion resistant.
- Equipped with a unique dual self-braking system which initiates the brake as soon as the handle is released or clasped too tightly. (In panic situations)
- Conforms to EN 341-Class A.

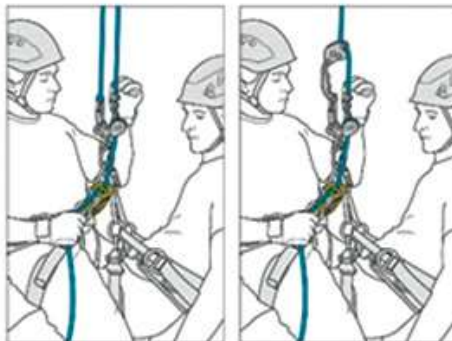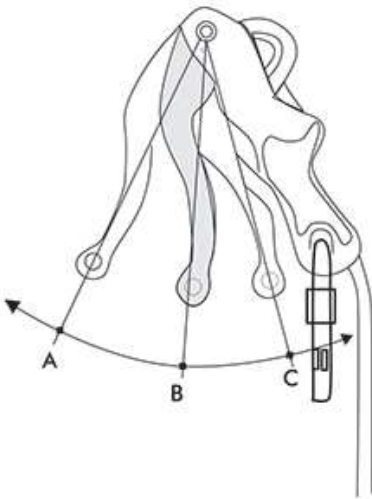

ABRIGO Descender Is Ideal For Rescue

Rescue evacuation – Descent Assisted by rescuer

Abrigo Rope Clamp



ABRIGO hand ascenders for safe and smooth ascent. Extra wide handle and attachment point for two karabiners will fit everyone from big wall climbers to workers at height or special forces.



AB-872 (R)

Net Weight: 200 grams.

For use on single rope 8 to 12mm Diameter Kernmantle Rope.

Finish: Coloured, Anodized.

Features

- Made up of Aluminium Alloy which is highly corrosion resistant and extremely light in weight.
- Ideal for use on single Kernmantle rope of diameter 8-12 mm.
- The unique design of the Cam allows optimal grip on the rope without damaging it.
- The Moulded Grip on the handle is ergonomically designed to allow easy and effortless grip.

Conforms to EN 567:2013

Pulley

Highly Efficient And Light Weight Pulley Abrigo Mini Compact Pulley Offers A Lightweight Solution For Setting Up Progress Capture Systems.



AB-871

Description

- Special side plates designed for use with a Prusik friction hitch in progress capture systems.
- Sheave mounted on sealed ball bearings for excellent efficiency.
- Compact and lightweight.

Specifications

- Rope compatibility: 8 to 11 mm
- Sheave diameter: 26 mm
- Ball bearings: Yes
- Efficiency: 91 %
- Maximum working load: $2.5 \text{ kN} \times 2 = 5 \text{ kN}$
- Weight: 84 grams
- Certification: EN 12278: 2007

Abrigo Double Pulley That Sets Up Progress Capture Systems Of High Mechanical Advantage.



AB-872

Description

- Special side plates designed for use with a Prusik friction hitch in progress capture systems.
- Parallel mounted sheaves and auxiliary attachment point for creating different types of hauling systems.
- Sheave mounted on sealed ball bearings for excellent efficiency.
- Compact and light weight.

Specifications

- Rope compatibility: 8 to 11 mm
- Sheave diameter: 26 mm
- Ball bearings: Yes
- Efficiency: 91 %
- Maximum working load: $2 \times 1.5 \text{ kN} \times 2 = 6 \text{ kN}$
- Weight: 155 grams
- Certification: EN 12278:2007

Low Stretch Kernmantle Rope (AB-301)



Specifications

- Made up of Polyamide.
- Available in various length on request.
- Maximum Roll Size: 300 mts.
- Available in Diameter of: 9mm, 10.5mm & 11mm.
- Conforms to EN 1891:1998

Maintenance & Window Cleaning Kit AB-W-00



AB-65
(Tower Harness) : 1 piece

This Kit is meant to fulfilling all the purposes and requirements of personnel engaged in maintenance jobs at height. Provides eventual comfort level to personnel working at height thereby fulfilling all his requirements. The specialized rescue equipment used in this kit enables instant rescue of personnel when suspended at a height after suffering a fall.



Grip Descender
AB-450 : 1 Piece



Steel Screw Locking Karabiner
AB-K60-77 : 2 Pieces



Rope Grab Fall Arrester
AB-300 : 1 Piece



Tool Bag :
1 Piece



Universal Kit Bag :
1 Piece



Twisted Rope Anchorage Line
AB-50 (50 meter) : 1 Piece



Kernmantle Rope Anchorage Line
AB-301 (50 meter) : 1 Piece



Cross ArmS/trap:
(1.3 meter) AB-795-597 : 2 Pieces

Painter Kit AB-CE-00



AB-65
(Tower Harness) : 1 piece

Painter is designed to minimize the risk and provide protection against, the danger of falling from heights while painting on exteriors and facades. The kit is precisely designed for painters to meet their specific requirements ensuring their complete safety along with high comfort levels.



Grip Descender
AB-450 : 1 Piece



Steel Screw Locking Karabiner
AB-K60-77 : 2 Pieces



Openable Protective Sleeve
AB-OPC : 4 Pieces



Twin Tool Lanyard (1.5 meter)
AB-T 01



Rope Grab Fall Arrester
AB-300 : 1 Piece



Twisted Rope Anchorage Line
14mm AB-50 (50 meter) : 1Piece



Kernmantle Rope Anchorage Line
AB-301 (50 meter) : 1 Piece



Cross Arm Strap
(1.3 meter) AB-795-597 : 2 Pieces



Universal Kit Bag :
1 Piece



Comfy Seat
AB-C001:1 Piece

Tower Kit AB-T-00



AB-33
(Tower Harness) : 1 piece

Tower Kit is designed for the person engaged in working on high rise tower with an extra facility of bigger Hooks & easily adjustable Lanyards to suit the requirement of the working individual. Conforms to all relevant CE norms.



Work Positioning Lanyard
AB-142 (2 meter) : 1 Piece



Kernmantle Rope Forked Lanyard
AB-531K (1.5 meter) : 1 Piece



Rope Grab Fall Arrester
AB-300 : 1 Piece



Tool Bag:
1 Piece



Universal Kit Bag:
1 Piece



Twin Tool Lanyard (1.5 meter)
AB-T 01



Twisted Rope Anchorage Line
AB-500 (14mm)
(50 meter) : 1 Piece



Cross Arm Strap
(1.3 meter) AB-795-597 :
2 Pieces

Fall Arrester System With Ratchet Hauling AB-RH-00



AB-65
(Tower Harness) : 1 piece

This Kit is designed for the person engaged in working on high rise tower with an extra facility of bigger Hooks and easily adjustable Lanyards to suit the requirement of the working individual.



Grip Descender
AB-450 : 1 Piece



Ratchet Hauling System
AB-2000 : 1 Piece



Cross Arm Strap
AB-777 (2 meter) : 1 Piece



Kernmantle Rope Anchorage Line
AB-301 (50 meter) : 2 Piece



Work Positioning Lanyard
AB-142 (2 meter) : 1 Pieces



Steel Auto Locking Karabiner
AB-K-77: 2 Pieces



Kernmantle Rope Forked Lanyard
AB-531K (1.5 meter): 1 Piece



Universal Kit Bag:
1 Piece

Self-Rescue System with Ladder AB-SL-00



ABRIGO introduces the Rescue Ladder System designed to rescue the victim from fall. The Ladder of 6.0m included in the Kit allows a victim to climb safely while the rescuer pulls rope slack through the Rope Grab included in the system. This eliminates the chance of a high impact secondary fall.



Rigging Plate
(AB-550) : 1 Piece



Cross Arm Strap
AB-777: (2 meter) : 1 Piece



Steel Auto Locking Karabiner:
AB-K-77: 2 Pieces



Rope Grab Fall Arrester
AB-300 : 1 Piece



Twisted Rope Anchorage Line
AB-50 (14MM) (10 meter) : 1 Piece



Universal Kit Bag:
1 Piece



Rescue Ladder
(6 meter) : AB-L11

Special Rescue Kit AB-SR-00



AB-65
(Tower Harness) : 1 piece

ABRIGO introduces Rescue Kit specifically designed for Rescuing a suspended casualty from Fall Arrest Lanyards, Rope Safety Lines & Fall Arrest Blocks, all possible from a point of safety. The Kit is provided with a 3 meter Telescopic Pole for extension to the fall victim, and hence does not require the rescuer to descend to the victim. Conforms to all relevant CE norms.



Aluminium Double Pulley
AB-873: 2 Pieces



Aluminium Single Pulley
AB-871: 1 Piece



Steel Auto Locking Karabiner
AB-K-77: 5 Pieces



Grip Descender
AB-450 : 1 Piece



Cross Arm Strap: (1.3 Meter)
AB-795-597: 2 Pieces



Rope Clamp: AB-872 : 1 Piece



Work Positioning Lanyard
AB-142 (2 Meter) : 1 Piece



Scaffolding Hook
AB-F60DR : 1 Piece



Kernmantle Rope Anchorage Line
AB-301 (10 Meter): 1 Piece



Polyamide Forked Lanyard
AB-531 (1.5 meter) : 1 Piece



Rescue Pole
AB-RES



Universal Kit Bag
1 Piece

Confined Space Kit AB-CK-00



AB-65
(Tower Harness) : 1 piece

This Kit is meant for person who are required to move into and for retrieval of personnel from Confined Spaces.



Twin Tool Lanyard (1.5 meter)
AB-T-01



Tripod Bag 9 feet



Tripod
AB 640 (7 feet)



Winch
AB 641 (25 Meters)



Retractable Block
RFA 200 (20 Metres)

Rescue Kit AB-RK-00



AB-65
(Tower Harness) : 1 piece

ABRIGO Provides a range of Self-Contained Kits for ready use in various applications. The Kits contain standard equipment and can be customized as per specific need.



Grip Descender
AB-450 : 1 Piece



Steel Auto Locking Karabiner
AB-K-77 : 6 Pieces



Rope Grab Fall Arrester:
AB-300: 1 Piece



Kernmantle Rope Anchorage Line
AB-301 (50 meter) : 1 Piece



Twisted Rope Anchorage Line
AB-50 (14mm) (50 meter) : 1 Piece



Knife
1 Piece



Cross Arm Strap
AB-795-597(1.3 meter) : 2 Pieces



Work Positioning Lanyard
AB-142 (2 meter) : 1 Piece



Universal Kit Bag
1 Piece



Polyamide Forked Lanyard
AB-531 (1.5 meter) : 1 Piece



Webbing Cow Tail
25 cm: 1 Piece



Cross Arm Strap AB-666
(0.5-meter): 1 Piece

Safety
Shoes



ABRIGO®
A SHIELD OF PROTECTION



Borax

Brief Specification:

Design	Low Ankle Sporty Looks
Upper	Buff CG & Buff Suede Black Leather
Sole	Direct Moulded PU Single Density
Lining	Beige Drylex
In-Socks	Orthocare Socks for Extreme Comfort
Toe Cap	Steel Toe 200 Joules
Sizes Available	38-46 / 4-12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Single/Double Density



Annite

Brief Specification:

Design	Low Ankle
Upper	Buff CG Black Leather
Sole	Direct Moulded PU Single Density
Lining	Grey CAN CAN
In-Socks	Orthocare Socks for Extreme Comfort
Toe Cap	Steel Toe 200 Joules
Sizes Available	38- 46 / 4 - 12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Single/Double Density



Flax

Brief Specification:

Design	Low Ankle
Upper	Grain Barton Black Leather
In-Sole	Direct Moulded PU Single Density
Lining	Red Liberty
In-Socks	Rockfort Padded Socks
Toe Cap	Steel Toe 200 Joules
Sizes Available	37-40 / 3-6
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Carbon Composite/Fiber Toe Single/Double Density



BW-621

Brief Specification:

Design	Low Ankle
Upper	Barton Black Genuine Leather
In-Sole	Direct Moulded PU Single Density
Lining	Black 150 GSM
In-Socks	EVA Socks
Toe Cap	Steel Toe 200 Joules
Sizes Available	39-47 / 5-13
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min



BW-624

Brief Specification:

Design	High Ankle
Upper	Buff Barton CG Black Leather
Sole	Direct Moulded PU Single Density
Lining	Black Cambrelle
In Socks	Orthocare Socks for Extreme Comfort
Toe Cap	Steel Toe 200 Joules
Sizes Available	38-46 / 4-12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Carbon Composite Toe



Fluorite

Brief Specification:

Design	Low Ankle
Upper	Barton Black Genuine Leather
Sole	Direct Moulded PU Double Density
Lining	Black Cambrelle
In-Socks	Rockfort Padded Socks
Toe Cap	Steel Toe 200 Joules
Sizes Available	38 - 46 / 4 - 12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Carbon Composite Toe



Gypsum

Brief Specification:

Design	Low Ankle
Upper	Buff Apollo Black Leather
Sole	Direct Moulded PU Single Density
Lining	Grey Cambrelle
In-Socks	Rockfort Padded Socks
Toe Cap	Steel Toe 200 Joules
Sizes Available	38-46 / 4-12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Carbon Composite Toe Single/Double Density



Hercules

Brief Specification:

Design	Low Ankle
Upper	Barton Black Genuine Leather
Sole	Direct Moulded PU Single Density
Lining	Grey Cambrelle
In-Socks	Orthocare Socks for Extreme Comfort
Toe Cap	Steel Toe 200 Joules
Sizes Available	38-46 / 4-12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD



Topaz

Brief Specification:

Design	Low Ankle
Upper	Barton Black Genuine Leather
Sole	Direct Moulded PU Single Density
Lining	Black Cambrelle
In-Socks	EVA Socks
Toe Cap	Steel Toe 200 Joules
Sizes Available	38-46 / 4-12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min



Regent

White Clean Room

Brief Specification:

Design	Low Ankle
Upper	Micro Fiber White
Sole	Direct Moulded PU
Lining	Femina
In-Socks	Fabtex with Eva
Toe Cap	Carbon Composite Toe 200 Joules
Sizes Available	39 -46 / 5-12
Standards	EN ISO :20345 & ISI:15
Slip Resistance	SRC
Optional Feature	API (Puncture Resistant)



Opera



Brief Specification:

Design	Low Ankle
Upper	Micro Fiber White
Sole	Direct Moulded PU
Lining	Drylex
In-Socks	Fabtex with Eva
Toe Cap	Carbon Composite Toe 200 Joules
Sizes Available	39 -46 / 5-12
Standards	EN ISO 20345
Electrical Resistance	Upto 15 KV for 1 Min
Slip Resistance	SRC
Optional Feature	Steel Mid Plate



Onyx

Brief Specification:


Design	Low Ankle
Upper	Buff Apollo Black Leather
Sole	Direct Moulded PU Single Density
Lining	Grey Cambrelle
In-Socks	Rockfort
Toe Cap	Carbon Composite Toe 200 Joules
Sizes Available	38-46 / 4-12
Standards	ISI: IS - 15 298 EN ISO - 20 345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD



Camelion

Brief Specification:

Design	Low Ankle
Upper	Buff CG Black Leather
Sole	Direct Moulded PU Single Density
Lining	Grey CAN CAN
In-Socks	Orthocare Socks for Extreme Comfort
Toe Cap	Carbon Composite Toe 200 Joules
Sizes Available	38- 46 / 4 - 12
Standards	ISI: IS :15298 EN ISO :20345
Electrical Resistance	Upto 15 KV for 1 Min
Heat Resistance	Max 120° C for 1 min
Optional Feature	Antistatic/ESD Single/Double Density

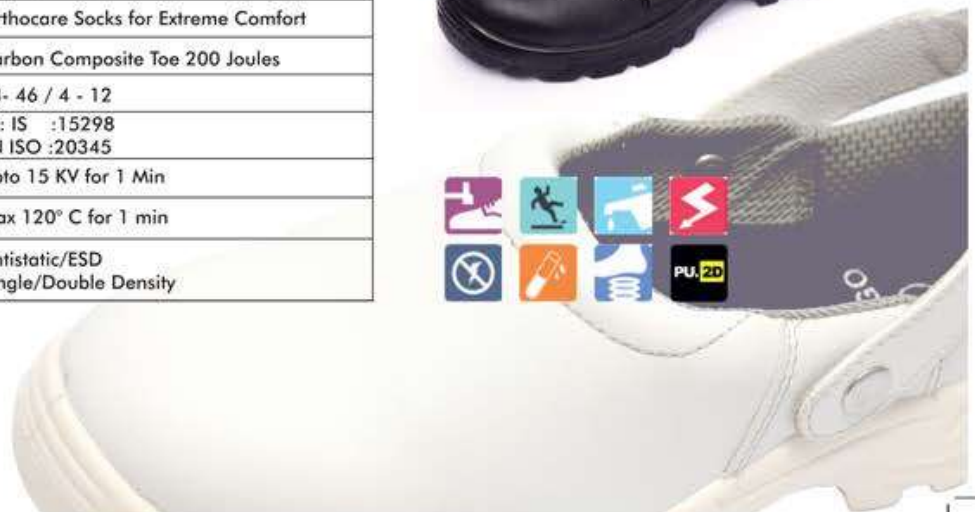

Trooper Gumboot



Brief Specification:

Design	Knee Length
Upper Sole	Polyvinyl Chloride
Length	15 Inches
Lining	Breathable Textile Lining
In-Socks	Eva Cushioned
Toe Cap	200 Joules Steel Toe
Sizes Available	40-45/6-11
Standards	ISI IS : 15298 EN ISO : 20345
Slip Resistance	SRC
Optional Feature	Steel Mid Plate



HI-VISIBLE Jackets



Innovator of HI-VISIBILITY jackets business in India. ABRIGO stringent testing process to ensure visibility & durability in extreme weather conditions.

User guidelines of hi-visible jackets as per Indian and international standards. ISO:20471 standards for high visibility warning clothing has reached 3 levels of risk areas and for that there are 3 levels of high visibility warning clothing that have to be used.

Example of workers in Class 1	Example of worker in Class 1
• Permit full and undivided attention to approaching traffic. • Provide ample separation of the worker from conflicting vehicle traffic. • Permit optimum complicity in background that are not complex. • Involve vehicle and moving equipment speed not exceeding 40KM/H.	• Workers directing vehicle operators to parking/service areas. • Road maintenance works. • Delivery vehicles drivers. • Roadside maintenance work.
Class:2 Complicity Level for use in activities where risk level exceeds those in class 1 such as:	Example of workers in Class 2
• Greater visibility is desired during inclement weather conditions. • Complex background is present. • Workers are performing task which divert attention from approaching vehicle traffic. • Work activities take place in or in proximity to vehicle traffic.	• Roadways construction workers, Utility workers, Emergency response personnel, Airport baggage handlers and Ground crew, Toll gate personnel, Accident site investigators & Law enforcement Personnel.
Class:3 Complicity Level for use in occupational activities where level risk exceeds those in class 2, such as where:	Example of workers in Class 3
• Workers are exposed to traffic speeds exceeding 80 km/h. • Pedestrian worker and vehicle operator have high risk loads clearly placing the pedestrian worker in danger. • The worker must be conspicuous through the full range of body motions at a minimum o/39 (128o feet), and must be identifiable as a person.	• Roadways construction workers • Utility workers • Survey crews • Emergency response personnel • Railway workers at high risk area (working on track such as gangman, Track machine staff, Night patrol man, Gate keeper(etc.)


Class of high visibility warning clothing	Class 3	Class 2	Class 1
Background material, m2.	0.80	0.50	0.14
• Retro reflective material or combined performance material used in conjunction with background material, m2. • Combined performance used without background material, m2.	0.20	0.13	0.10
• Material as per retro reflective band width.			0.20
• Sketch.			

Table 1 minimum coefficient of retro reflection (cd.lxI.X2) for retro reflective material.	330 cd/(lx.m2)
Table 2 minimum coefficient of retro reflection (cd.lxI.X2) for combined performance material	250 Cd/(lx.m2)

HI-VISIBLE Jackets



AP-161

- Class 1 garment
- Side opening (with elastic pattern) designed for more ventilation
- As per ISO: 20471

Available colour



AP-110

- Class 2 garment
- Cross belt (Harness)
- As per ISO: 20471

Available colour



AP-154

- Class 2 garment
- Multi pocket front opening pattern suitable for engineers & executives with multiple utility products
- As per ISO: 20471

Available colour



AP-152

- Class 1 garment
- 3 side opening pattern suitable for executives designed for more air ventilation & flexible fitting

Available colour





AP-106

- Class 2 garment
- Front zip pattern suitable for executives
- As per ISO: 20471

Available colour



AP-160

- Class 2 garment
- Hi-performance vest featuring 3m high gloss for aviation industry
- As per ISO: 20471

Available colour



AP-101

- Class 2 garment
- Hi-performance vest
- As per ISO: 20471

Available colour



Safety Eyewear



Scratch-Resistant Lenses
Indoor/outdoor lenses
Anti-Fog Lenses
Redefining the Ergonomics

ABRIGO Safety Eye Wear

- **Scratch-Resistant Lenses:** Which maintains the clear vision.
- **Indoor/Outdoor Lenses:** For use in all conditions of light modulations. Sleek and fashionable, offering all comfort features.
- **Anti-Fog Lenses:** To make sure that non fogging appears on those models of spectacles that seal the face area.
- **Anti-static lenses:** Models of spectacles that fit over the prescription glasses as well.
- **Redefining the Ergonomics:** Adjustable models to fit one and all. Vital Test through which **ABRIGO** Safety Eye wear Passes.



Drop Ball Impact Test



High Velocity Impact Test



Transmittance Test



Prismatic Refractive Power



Astigmatic Refractive Power



Stress view Test



Vision



Special features

- Scratch resistant coating
- Stainless screw
- Flame Resistant
- Tested for disinfection
- Optically tested



View



Special features

- Temple of both section is nylon
- Hard coated lens for scratch resistant
- Anti fog coating
- Flame resistant
- UV resistant stainless screw
- Tested for disinfection optically tested
- Resistant to corrosion
- Increased robustness



Ultra-S

Special features

- Extremely light weight, weighing only about 25 grams, thus providing tremendous comfort.
- Scratch resistant coating
- Stainless screw.
- Flame resistant
- Tested for disinfection
- Optically tested.

Safety Eyewear



Splash



Special features

- Anti Fog Coating
- Anti-Scratch Resistant
- Has a soft PVC shroud which imparts increased comfort to the wearer
- UV Resistance of 99.9 % for range 200-400nm.
- Light weight, weighing less than 75 grams



Ultra



Special features

- Extremely light weight. Weight only about 25 grams, thus providing tremendous comfort
- Scratch resistant coating
- Optically tested
- Tested for disinfection
- Stainless screw
- Unique wrap-around design for better coverage.
- High impact resistant optical class 1 polycarbonate hard coated lens for scratch resistance.



Ultra-N

Special features

- Extremely light weight. Weight only about 25 grams, thus providing tremendous comfort.
- Scratch resistant coating
- Optically tested
- Tested for disinfection
- Stainless screw
- Unique wrap-around design for better coverage.
- High impact resistant optical class 1 polycarbonate hard coated lens for scratch resistance.
- Night vision anti-glare yellow lens

Safety Helmet



Safety Helmet

IS:2925



CML 8669811



AC-200

- ACME Champion with Ratchet-Type Adjustment.
- The ratchet adjustment can be set to the correct head size by turning the hand-wheel. The adjustment position is locked when the hand wheel is released.
- The ACME champion helmets are provided in vast range of colours which are stabilized against ultra-violet degradation through appropriate UV stabilizers.

Available colour



AC-100

- Made of High density Polymer.
- Triple corrugation for enhanced strength.
- Provided with slide slots for fitting face and hearing protection accessories.
- Adjustable chinstrap.
- Comes with manual adjustment to suit most head sizes.
- The head band is made of non-irritant and soft-fabric to provide maximum comfort to the user.
- The four point attachment cradle within the shell has a unique angular placement to provide optimum shock absorption.




IS:2925



CML 8669811



Our Nationwide Presence

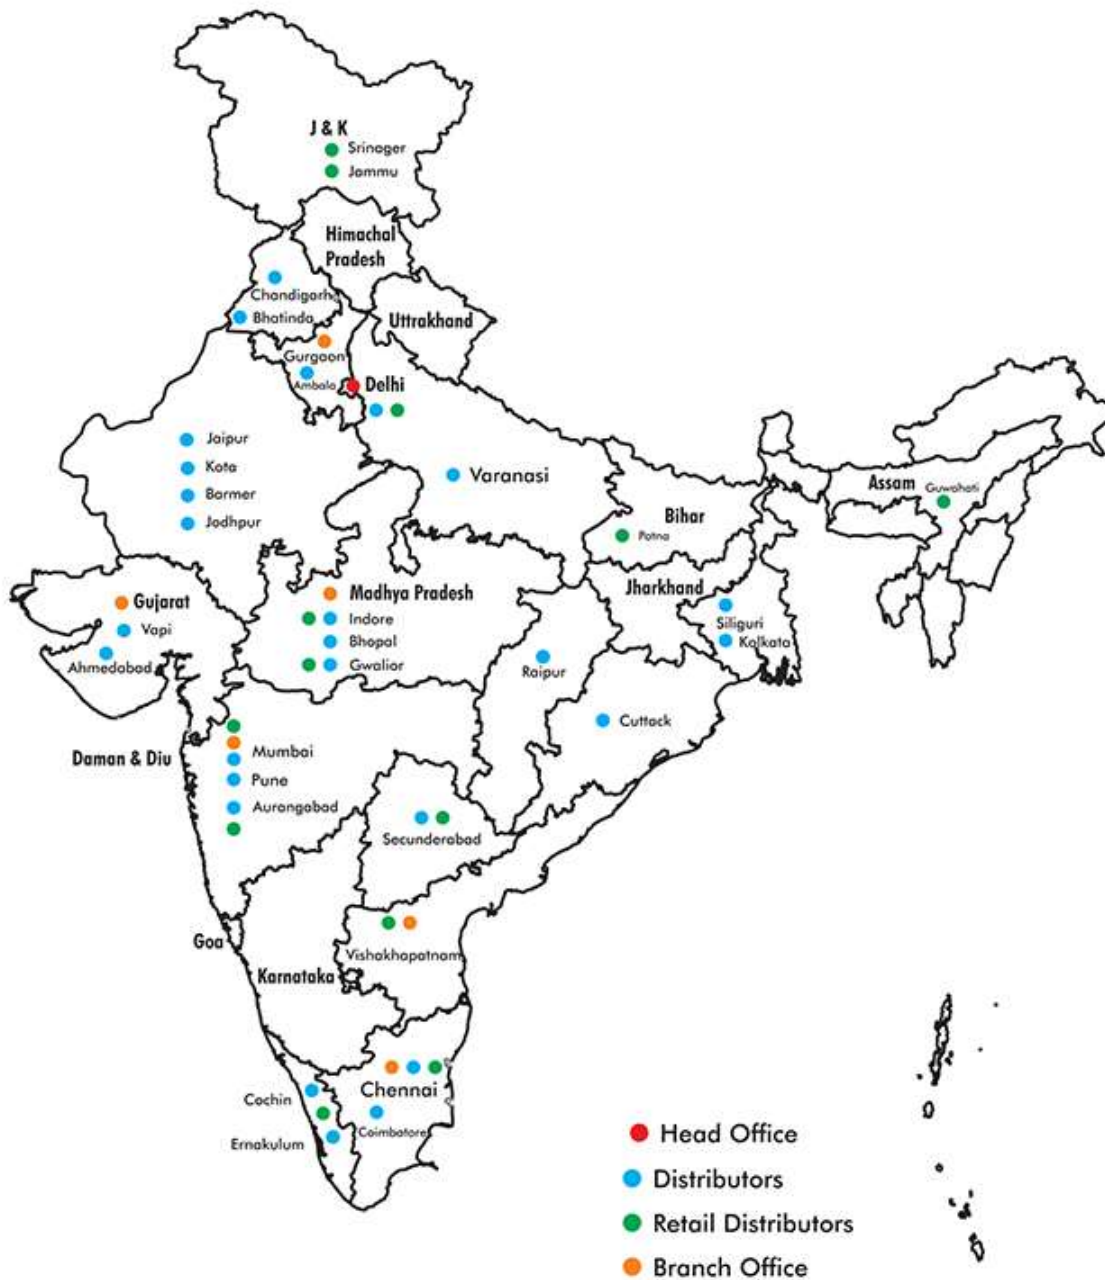

Design and specifications are subject to change without prior notice



Office Address

Delhi safety house
4133-34 Gali shah tara
Ajmeri gate
Delhi 110006
Rohit diwan
Ph: +91-9899219012
E- mail:delhisafetyhouse@abrigo.in

Factory Address

G-1047 Narela Industrial Area,
Delhi-110040, India
E- mail: sales@abrigo.in

Corporate Office

423, Ground Floor, Nimri Colony,
near Ashok Vihar, Phase-4,
New Delhi-110052, India
E- mail: info@abrigo.in
sales1@abrigo.in

info@prefacecommunications.com

www.abrigo.in

Vishakhapatnam: Ph: +91-7303224374 E-mail: southsales@abrigo.in Chennai: Ph: +91-8667501797 E-mail: chennai@abrigo.in

Delhi: Ph: +91-9999225981 E-mail: randhir@abrigo.in Punjab: Ph: +91-7827127947 E-mail: sales3@abrigo.in

Rajasthan: Ph: +91-9871002156 E-mail: marketing@abrigo.in