



^b
**UNIVERSITÄT
BERN**

Stable Neo-Hookean Flesh Simulation

Bachelor Thesis

submitted in fulfilment of the requirements for the degree of
Bachelor of Science (B.Sc.)

at the

University of Bern
Institute of Computer Science

1. Prüfer: Prof. Dr. David Bommes
2. Prüfer: Max Mustermann

Eingereicht von: Corina Danja Masanti
Matrikelnummer: 15-128-655
Datum der Abgabe: 01.09.2019

Vorwort

Dies ist ein Vorwort

Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

Contents

1	Introduction	1
1.1	Motivation	1
1.2	Structure	2
2	Background	3
2.1	Notation and Convention	3
2.1.1	General Notation	3
2.1.2	Tensor Notation	4
2.1.3	Summary	5
2.2	Mathematical Background	5
2.2.1	Matrices	5
2.2.2	Singular Value Decomposition	6
2.2.3	Polar Decomposition	6
2.3	Continuum Mechanics	7
2.4	Deformation	7
2.4.1	Deformation Gradient	8
2.4.2	Polar Decomposition of the Deformation Gradient	9
2.4.3	Material Constants	9
2.4.4	Deformation Energy	11
3	Paper	12
3.1	Deformation Gradient	12
3.2	Energy Formulation	13
3.2.1	Stability	13
3.2.2	Existing Neo-Hookean Energies	14
3.2.3	Rest Stabilization	16
3.2.4	Meta-Stability under Degeneracy	17
3.2.5	Lamé Reparametrization	18

3.3	Energy Analysis	18
3.3.1	First Piola-Kirchhoff Stress (PK1)	18
3.3.2	The Energy Hessian Terms	18
3.3.3	The Tikhonov, Mu, and Gradient Terms	18
3.3.4	The Volume Hessian	18
3.3.5	The Complete Eigensystem	18
3.4	Experiments with the Code	19
3.5	Discussion	20
List of Figures		A
List of Tables		B
Bibliography		D
Online Sources		E
Figure Sources		F

Chapter 1

Introduction

“Animation offers a medium of story telling and visual entertainment which can bring pleasure and information to people of all ages everywhere in the world.”

- Walt Disney

1.1 Motivation

With steadily increasing computational power the demand of better results is constantly growing. Especially in the field of animation and simulation we are no longer happy with mediocre results. In the entertainment sector gaming industries and animation studios like Pixar[©] or Disney[©] brought us games and movies of highest quality. Both of them have made groundbreaking progress over the years. This is easily observed when we compare today’s work with that from ten years ago.

As always we have different requirements for each use. In some cases we want to exaggerate a movement or a reaction in a certain way. We can for example create a massive explosion in a movie that would not be half as spectacular in the real world.

In other scenarios we want to come as close as possible to reality. For instance we want an animated character to move and physically interact with its environment as a real human being would. Otherwise our brain would immediately recognize that some things do not add up. The goal here is to bring characters quite literally to life. We can add small

details like visible breathing and small wrinkles to have an even more convincing effect. The goal is to create the illusion of a character with personality, thought and emotions. In order to achieve this effect we need the character to move and react nearly physically correct.

In the paper *Stable Neo-Hookean Flesh Simulation* [SGK18] the authors addressed exactly the problem of making an animated movement of a human-like character look as natural as possible. In order to animate a physical movement we first need to understand the physics behind it which lies in the field of continuum mechanics. Unfortunately for most of us it has yet to be learned. The goal of this thesis is to give the necessary physical and mathematical background for a regular computer science student to understand the field of animation.

1.2 Structure

Following up I will give a brief overview of the necessary mathematical background and deliver an introduction in continuum mechanics. Next I will go through the ideas made in the paper mentioned and include some calculations and visualisations that help for a better understanding.

TODO: Improve introduction (goals etc.). Adjust according to additions in text. Improve quote at beginning. Maybe add other applications as well (physical simulation) and how to go over to it?

Chapter 2

Background

The goal we are striving for is to animate human-like characters. In order to narrow it down even further we concentrate on the behaviour of the flesh of the character. For understanding the thematics of simulating human-like flesh it is necessary to have a basic mathematical background and knowledge of continuum mechanics. The goal of this chapter is to deliver an understanding in the topics mentioned.

2.1 Notation and Convention

At first we will declare the notation used in this thesis to avoid misunderstandings. We will use the common notation used in continuum mechanics taken from the book *Continuum Mechanics* [Spe80]. Additionally we will include some more specific declarations formulated and used in the paper *Stable Neo-Hookean Flesh Simulation* [SGK18].

2.1.1 General Notation

Scalars are represented by regular, normal-weight variables such as a whereas tensors and matrices are represented by upper-case bold letters as for example \mathbf{A} . Vectors will be denoted by bold lower-case variables like \mathbf{a} .

2.1.2 Tensor Notation

Furthermore we will use the tensor notation used in the paper *Stable Neo-Hookean Flesh Simulation*. They decided to define vectorization $\text{vec}(\cdot)$ as column-wise flattening of a matrix into a vector ([SGK18], 12:5) similar to Golub and Van Loan (2012) [GV12].

In order to indicate that we are dealing with a vectorized matrix we will use the symbol \checkmark as shown in the following equation:

$$\mathbf{A} = \begin{bmatrix} a & c \\ b & d \end{bmatrix} \quad \text{vec}(\mathbf{A}) = \check{\mathbf{a}} = \begin{bmatrix} a \\ b \\ c \\ d \end{bmatrix}.$$

Additionally we will have to deal with 4th order tensors in a form of matrix-of-matrices. These matrices are denoted by using blackboard bold:

$$\mathbb{A} = \begin{bmatrix} \begin{bmatrix} a & c \\ b & d \end{bmatrix} & \begin{bmatrix} a & c \\ b & d \end{bmatrix} \\ \begin{bmatrix} a & c \\ b & d \end{bmatrix} & \begin{bmatrix} a & c \\ b & d \end{bmatrix} \end{bmatrix} = \begin{bmatrix} [\mathbf{A}_{00}] & [\mathbf{A}_{01}] \\ [\mathbf{A}_{10}] & [\mathbf{A}_{11}] \end{bmatrix}$$

If we now vectorize \mathbb{A} we receive the form described in the following line:

$$\mathbb{A} = \text{vec}(\mathbb{A}) = [\text{vec}(\mathbf{A}_{00}) \mid \text{vec}(\mathbf{A}_{10}) \mid \text{vec}(\mathbf{A}_{01}) \mid \text{vec}(\mathbf{A}_{11})]$$

This term above is equivalent to the notation described here:

$$\mathbb{A} = \begin{bmatrix} a & e & i & m \\ b & f & j & n \\ c & g & k & o \\ d & h & l & p \end{bmatrix} = \check{\mathbf{A}}$$

The advantage of this form is that we can write several expressions as a cross product. We will need this property later to simplify complicated expressions and calculations.

2.1.3 Summary

A quick overview of the notation used so far:

a : Scalar

\mathbf{A} : Matrix or tensor

\mathbf{a} : Vector

$\text{vec}(\mathbf{A}) = \check{\mathbf{a}}$: Vectorized matrix

$\mathbb{A} = \check{\check{\mathbf{A}}}$: matrix-of-matrices

TODO: Check if all notations are declared when adding something.

2.2 Mathematical Background

Since mathematics play an important role in our field of interest we need to build a solid background before we go further into more complex calculations. This chapter should cover all the important concepts used later in the calculations. A basic understanding of linear algebra is assumed.

2.2.1 Matrices

At first we will discuss the physical or geometrical meaning of some common matrix properties.

A matrix \mathbf{A} is positive definite if $\mathbf{x}^T \mathbf{A} \mathbf{x}$ is positive for all of the non-zero values of the column matrix \mathbf{x} .

TODO: positive definite matrices definition and lemmas, orthogonal, etc.

2.2.2 Singular Value Decomposition

The singular value decomposition (SVD) will play an important role in formulating the deformation gradient. It is important for our application since it represents the best possible approximation of a given matrix by a matrix of low rank. This approximation can be looked at as a compression of the data given ([LM15], S. 295).

Definition 1 (Singular Values). *The singular values of a matrix $A \in \mathbb{R}^{m \times n}$ are the square roots of the eigenvalues of AA^T .*

The theorem of the singular value decomposition tells us that we can factor every m-by-n matrix into one orthogonal m-by-m, one diagonal m-by-n and one orthogonal n-by-n matrix. More formally:

Theorem 1 (The SVD Theorem). *Let $A \in \mathbb{R}^{m \times n}$ be a matrix having r positive singular values, $m \geq n$. Then there exist orthogonal matrices $U \in \mathbb{R}^{m \times m}$, $V \in \mathbb{R}^{n \times n}$ and a diagonal matrix $\tilde{\Sigma} \in \mathbb{R}^{m \times n}$ such that*

$$A = U\tilde{\Sigma}V^T$$

$$\tilde{\Sigma} = \begin{bmatrix} \Sigma & 0 \\ 0 & 0 \end{bmatrix}$$

where $\Sigma = \text{diag}(\sigma_1, \sigma_2, \dots, \sigma_r)$, and $\sigma_1 \geq \sigma_2 \geq \dots \geq \sigma_r > 0$ are the positive singular values of A .

The definition and theorem were taken from [For14] (def. 1 S.113, thm. 1 S.300).

TODO: Check reference. Make paragraphs work together. Add examples.

2.2.3 Polar Decomposition

Theorem 2 (The Polar Decomposition Theorem). *Let \mathbf{F} be a non-singular square matrix. Then \mathbf{F} can be decomposed uniquely into either*

of the following two products

$$\mathbf{F} = \mathbf{R}\mathbf{U}, \quad \mathbf{F} = \mathbf{V}\mathbf{R}$$

where \mathbf{R} is orthogonal and \mathbf{U} and \mathbf{V} are positive definite symmetric matrices.

The definition and theorem were taken from [Spe80] (thm. 2 S.12).

TODO: Complete this section. Add lemmas and theorems used afterwards in the calculations. Possible adjustments may come at the end.

2.3 Continuum Mechanics

In this section we will give a broad introduction into the field of Continuum Mechanics. In Continuum Mechanics we are less interested in small particles like atoms or molecules of an object but rather concentrate on pieces of matter which are in comparison very large. We are therefore concerned with the mechanical behavior of solids and fluids on the macroscopic scale ([Spe80], p. 1).

2.4 Deformation

When applying a force over an object naturally the object itself undergoes a deformation. In the following we will be consistent with most previous literature in continuum mechanics and use the term strain as a measure of deformation and stress as the force per unit area:

Strain = measure of deformation

Stress = force per unit area

TODO: Decide whether to include the above paragraph and how to connect it better to the paper.

Now let us have a look at a deformation in a rather mathematical sense. Graphically we can imagine a deformation with the help of a two dimensional deformation map as shown in Fig. 2.1. Here we have on the left side an ellipse that represents an object or material in its rest state. A function ϕ maps this rest state of the ellipse to a deformed state shown in Fig. 2.1 on the right side. Mathematically spoken this means that we can map each point of a chosen object from its rest state to a deformed one.

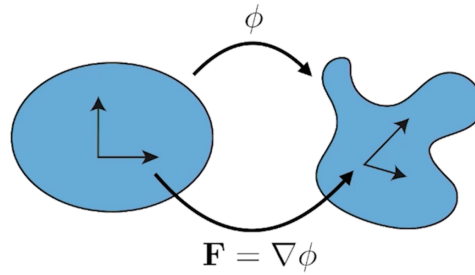


Figure 2.1: Deformation Map [Pix]

In conclusion the function ϕ describes our deformation. If we derive ϕ we can calculate the deformation gradient \mathbf{F} which serves as a measure of the deformation in the following sense:

$$\begin{aligned} \text{Deformation gradient: } \mathbf{F} &= \nabla \phi \\ \text{Length changes: } I_C &= \text{tr}(\mathbf{F}^T \mathbf{F}) \\ \text{Volume changes: } J &= \det(\mathbf{F}) \end{aligned}$$

TODO: Adjust so the equal sign is at the same place in each column.
Explain strain and stress and their meaning for later use in material constants (not explained in paper).

2.4.1 Deformation Gradient

The deformation gradient \mathbf{F} offers us as said previously a measurement of the deformation. With its help we can amongst other things calculate the volume and length change an object undergoes during a deformation. For our needs we define the deformation gradient exactly as the authors of the paper [SGK18] did:

$$\mathbf{F} = \left[f_0 \mid f_1 \mid f_2 \right] = \begin{bmatrix} f_0 & f_3 & f_6 \\ f_1 & f_4 & f_7 \\ f_2 & f_5 & f_8 \end{bmatrix}$$

TODO: Add some examples. Already include definitions of the paper?

Some more sources:

<http://www.continuummechanics.org/deformationgradient.html>

2.4.2 Polar Decomposition of the Deformation Gradient

With the help of mathematics we can decompose the deformation gradient in the following form:

$$F = RS$$

2.4.3 Material Constants

When we look at a deformation of an object we need to consider the material the object consists of. A material can be very stiff like steel or easily deformable like rubber. In order to measure the deformation in a specific material we need the *Poisson's Ratio* of said material. The poisson's ratio is a material constant that is defined as

$$\sigma = -\frac{\epsilon_{11}}{\epsilon_{22}} \in [-1, 0.5] \quad (2.1)$$

where ϵ_{11} is the lateral and ϵ_{22} the axial strain. The range in which σ lies in starts at -1 and goes up to 0.5 [MR09]. Usually the poisson's ratio of a material is positive. A negative value would mean that the material becomes wider in the cross section when it is stretched. This behaviour is very uncommon in nature. Examples of materials with a negative poisson's ratio are for instance discussed in *Foam structures with*

a *negative Poisson's ratio* [Lak87] or *Advances in negative Poisson's ratio materials* [Lak93].

Here are some examples of the poisson's ratio of various materials:

Material	Poisson's ratio
C (graphite)	0.31
Sn (metal)	0.357
Cu	0.355
Zn	0.25
Ag	0.36
Au	0.45
Concrete	0.20–0.37
Titanium (dental alloy)	0.30–0.31
Bronze	0.34
18–8 Stainless steel	0.305
Natural rubber	0.4999
B ₂ O ₃ glass	0.30
GeO ₂ glass	0.20

Table 2.1: Different materials with their poisson's ratio taken from [MR09]

In the context of flesh simulations we use the poisson's ratio as a characterization for the resistance to volume change of flesh. Biological tissues such as flesh, fat and muscles have one important property: Volume preservation. As a result the poisson's ratio is a higher value, meaning it is found in the range between 0.45 and 0.5 [SGK18].

The calculation of the poisson's ratio defined as in equation 2.1 is a challenge. Fortunately we can make use of the *Lamé Parameters*. These are the two constants μ and λ that are specific for a material. With the help of these two constants we can transform equation 2.1 into the following form:

$$\sigma = \frac{\lambda}{2(\lambda + \mu)} \quad (2.2)$$

This equation allows us to calculate the poisson's ratio much easier.

TODO: Topic generally covered, maybe adjust the following: Explain why volume preservation \Rightarrow high poisson's ratio. Explain how to get formula with lamé parameters, explain lamé parameters. Explain more on negative poisson's value?

Further reading: <http://silver.neep.wisc.edu/~lakes/PoissonIntro.html>

2.4.4 Deformation Energy

In order to get a convincing simulation of high quality we must choose an appropriate energy. In the case of modelling deformations on human-like characters we have to choose an elastic energy. The key property that makes an energy elastic is that if all the forces that are applied over an object add up to zero the object must come back into its rest shape. The energy then has to be minimized in order to get the results we want.

Definition 2. *This is a definition.*

TODO: Add some examples and visualisations. What exactly is it and what role does it play in a deformation process? Hyperelastic energy, connect with paper.

To include: Piola-Kirchhoff Stress, Cauchy Green invariant, polar decomposition, cauchy green tensor

Chapter 3

Paper

In this chapter we will examine the topic of the paper *Stable Neo-Hookean Flesh Simulation* [SGK18]. In the interest of understanding the thought process of the authors I will include some of their calculations a bit more detailed. In addition examples and visualisations should help for a better perception.

3.1 Deformation Gradient

Symbol	Definition
$\mathbf{F} = \mathbf{R}\mathbf{S}$	Polar decomposition
$J = \det(\mathbf{F})$	Relative volume change
$\mathbf{C} = \mathbf{F}^T\mathbf{F}$	Right Cauchy-Green
$I_C = \text{tr}(\mathbf{C})$	First right Cauchy-Green invariant

Table 3.1: Quantities Derived from the Deformation Gradient \mathbf{F} taken from [SGK18]

TODO: Add in Background? Explain more each entity

3.2 Energy Formulation

3.2.1 Stability

The core goal of the paper was to model deformations for virtual characters that have human-like features. They concentrated on the deformation energy. In order to achieve a convincing result as a first step we need to specify some requirements. For our needs in this case the stability of the energy is important. More precisely we need a hyperelastic energy that is stable in the following four important ways:

1. Inversion Stability: Given some arbitrary object it is possible that while deforming the object we can arrive at a zero volume state or even an entire inversion. Take for example the tetrahedron shown in figure 3.1a. In figure 3.1b we see a deformed state of this tetrahedron where the volume is scaled down to zero and we are left with a simple triangle. In figure 3.1c image we have an inversion of the object. The needed deformation energy has to be able to deal with both cases. That means that the energy has to be singularity-free and does not need any filters or threshold ([SGK18], 12:3).

TODO: Explain what last sentence means. Reference correct like this?

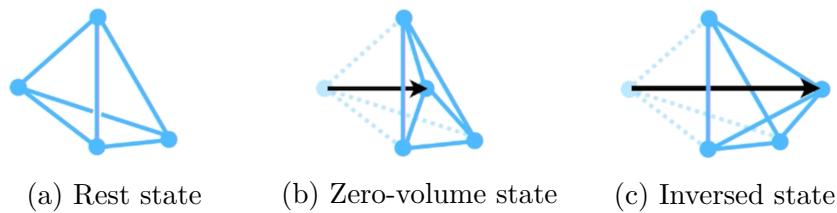


Figure 3.1: Inversion of a tetrahedron [Pix]

2. Reflection stability: A reflection is rotation around the coordinate origin. For the deformation energy we need it to be well behaved regardless of the reflection convention used in the singular value decomposition.

3. Rest stability: When deforming an object in a certain way we apply one or multiple forces over that object. With rest stability we want that

if the sum of forces is equal to zero the object must be back in its rest state.

4. Meta-stability under degeneracy: We can crush an object into an arbitrary shape like a plane, line or point. That process is illustrated for a cube in figure 3.2. The cube should now be able to recover to its actual shape after the deformation.

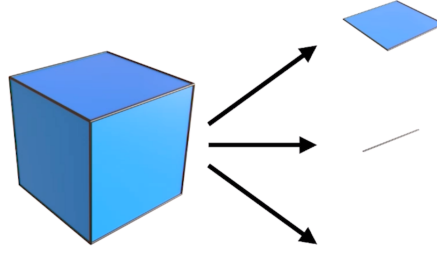


Figure 3.2: Illustration of meta stability [Pix]

Based on these four requirements we will in the following determine if a deformation energy is suited for our needs.

TODO: Finish reflection stability. Maybe add own images? Some more sources?

3.2.2 Existing Neo-Hookean Energies

In previous literature a few energies were proposed.

Energy	Author(s)
$\Psi_{Neo} = \frac{\mu}{2}(I_C - 3) - \mu \log J + \frac{\lambda}{2}(\log J)^2$	e.g. Bonet and Wood 2008
$\Psi_A = \frac{\mu}{2}(I_C - 3) - \mu \log J + \frac{\lambda}{2}(J - 1)^2$	Odgen 1997
$\Psi_B = \frac{\mu}{2}\left(J^{-2/3}I_C - 3\right) + \frac{\lambda}{2}(J - 1)^2$	Bower 2009
$\Psi_C = \frac{\mu}{2}\left(J^{-2/3}I_C - 3\right) + \frac{\lambda}{2}(J - 1)^2$	Wang and Yang 2016

Table 3.2: Summary of proposed energies taken from [SGK18]

Each energy formulation can be split up into a 1D length term and a 3D volume term.

Energy	1D length term	3D volume term
Ψ_{Neo}	$\frac{\mu}{2} (I_C - 3)$	$-\mu \log J + \frac{\lambda}{2} (\log J)^2$
Ψ_A	$\frac{\mu}{2} (I_C - 3)$	$-\mu \log J + \frac{\lambda}{2} (J - 1)^2$
Ψ_B	$\frac{\mu}{2} (J^{-2/3} I_C - 3)$	$\frac{\lambda}{2} (J - 1)^2$
Ψ_C	$\frac{\mu}{2} (J^{-2/3} I_C - 3)$	$\frac{\lambda}{2} (J - 1)^2$

Table 3.3: Energies split up into its 1D length and 3D volume term

1D Length Term: This term penalizes length changes. Mooney ([Moo40]) originally proposed the 1D length term

$$\Psi_M = \frac{\mu}{2} (I_C - 3)$$

that is used in Ψ_{Neo} and Ψ_A . If we expand the energy with the singular values of the deformation gradient \mathbf{F} we get the following term:

$$\Psi_M = \frac{\mu}{2} (\sigma_0^2 + \sigma_1^2 + \sigma_2^2 - 3)$$

The energy as it is formulated reaches its minimum at a zero volume change, meaning $I_C = 0$ which results in $\Psi_M = -3$. Mooney added the hard constraint that $J = 1$ so that the energy is minimized at the volume preserving configuration. Note that the energy is singularity free and well defined under inversion.

The second term

$$\Psi_R = \frac{\mu}{2} (J^{-2/3} I_C - 3)$$

is used in Ψ_B and Ψ_C was introduced by Rivlin in 1948. Using the singular values of \mathbf{F} we get the following term:

$$\Psi_R = \frac{\mu}{2} \left(\frac{\sigma_0^2 + \sigma_1^2 + \sigma_2^2}{(\sigma_0 \sigma_1 \sigma_2)^{2/3}} - 3 \right)$$

Unfortunately this term is not singularity free. If either σ_0 , σ_1 or σ_2 is equal to zero the result is not defined anymore.

3D Volume Term: Here we are dealing with a volume-preserving penalty term. The volume term of Ψ_{Neo} , meaning

$$\Psi_{Neo, volume} = -\mu \log J + \frac{\lambda}{2} (\log J)^2$$

results in some numerical problems since the logarithmic function is not defined for $J < 0$ and grows unbounded for $J \rightarrow 0$. In conclusion $\Psi_{Neo,volume}$ is not singularity free. The same applies for the 3D volume term of Ψ_A

$$\Psi_{A,volume} = -\mu \log J + \frac{\lambda}{2}(J - 1)^2.$$

The term of Ψ_A and Ψ_B

$$\Psi_M = \frac{\lambda}{2}(J - 1)^2$$

does not have these noted difficulties. It is bounded, well defined and invertible. After these observations we combine the robust length with the robust volume term

$$\Psi_D = \frac{\mu}{2}(I_C - 3) + \frac{\lambda}{2}(J - 1)^2$$

which is singularity free and well defined under inversion.

TODO: Bonet and Wood 2008 or 1997? Table looks ugly, improve and add resources. minimum at IC=0 or J=0? Overall okay?

3.2.3 Rest Stabilization

Although Ψ_D meets almost all of our requirements it is not rest stable. This can be shown with the Piola-Kirchhoff (PK1) stress tensor:

$$\begin{aligned} P_D(I) &= \frac{\partial \Psi_D}{\partial F}(I) = \frac{\partial \Psi_D}{\partial F} \left[\frac{\mu}{2}(I_C - 3) + \frac{\lambda}{2}(J - 1)^2 \right] \\ &= \frac{\partial \Psi_D}{\partial F} \frac{\mu}{2} (\text{tr}(\mathbf{I}^T \mathbf{I}) - 3) + \frac{\partial \Psi_D}{\partial F} \frac{\lambda}{2} (\text{tr}(\mathbf{I}) - 1)^2 \\ &= \mu \mathbf{I} + \lambda(\det(\mathbf{I}) - 1) \frac{\partial}{\partial F} \det(\mathbf{I}) = \mu \mathbf{I} \neq 0 \end{aligned}$$

If the energy had rest stability $P_D(I)$ would resolve to zero. Unfortunately this is not the case here. In order to solve that problem the authors modified $(J - 1)^2$ to $(J - \alpha)^2$:

$$\Psi_E = \frac{\mu}{2}(I_C - 3) + \frac{\lambda}{2}(J - \alpha)^2$$

therefore resulting to:

$$\begin{aligned} P_E(F) &= \frac{\partial \Psi_D}{\partial F} \left[\frac{\mu}{2} (I_C - 3) + \frac{\lambda}{2} (J - \alpha)^2 \right] \\ &= \mu F + \lambda (\det(F) - \alpha) \frac{\partial}{\partial F} \det(F) \end{aligned}$$

Solving for an alpha that satisfies $P_E(I) = 0$ gives us $\alpha = 1 + \frac{\mu}{\lambda}$. Now Ψ_E has to be changed accordingly:

$$\begin{aligned} \Psi_E &= \frac{\mu}{2} (I_C - 3) + \frac{\lambda}{2} \left(J - 1 - \frac{\mu}{\lambda} \right)^2 \\ &= \frac{\mu}{2} (I_C - 3) - \mu (J - 1) + \frac{\lambda}{2} (J - 1)^2 + \left(\frac{\mu}{\lambda} \right)^2 \end{aligned}$$

Since constant disappear under differentiation this expression is functionally equivalent to

$$\Psi_E = \frac{\mu}{2} (I_C - 3) - \mu (J - 1) + \frac{\lambda}{2} (J - 1)^2.$$

Now one can notice that Ψ_E looks very similar to Ψ_{Neo} . The difference is that we replaced $\log(J)$ with $(J - 1)$ in Ψ_E . Remember that $(J - 1)$ is the first term in the taylor approximation of $\log(J)$ at $J = 1$.

TODO: Add "Zwischenschritte"? Include all calculations? Do we need a bit of a better conclusion of what we did (taylor, neo, sing. free, rest stable)?

3.2.4 Meta-Stability under Degeneracy

The final energy is

$$\Psi_{new} = \frac{\mu}{2} (I_C - 3) + \frac{\lambda}{2} (J - \alpha)^2 - \frac{\mu}{2} (I_C + 1). \quad (3.1)$$

With that adjustment the rest stability term shifts to $\alpha = 1 + \frac{\mu}{\lambda} - \left(\frac{\mu}{4} \right) \lambda$.

TODO: How much needs to be explained here?

3.2.5 Lamé Reparametrization

TODO: How much needs to be explained here?

3.3 Energy Analysis

Calculations and Herleitungen In this chapter it is shown that one can perform a complete eigenanalysis on equation 3.1

3.3.1 First Piola-Kirchhoff Stress (PK1)

Explain.

3.3.2 The Energy Hessian Terms

Calculations

3.3.3 The Tikhonov, Mu, and Gradient Terms

Calculations

3.3.4 The Volume Hessian

Calculations

3.3.5 The Complete Eigensystem

Calculations

3.4 Experiments with the Code

The authors of the paper *Stable Neo-Hookean Flesh Simulation* [SGK18] kindly provided the implementation for an application of their formulated energy. In this code they implemented the stretch test on a cube. The outputs were 26 static images with show the deformation in 25 steps. The parameters the code expects are the two lamé parameters μ and λ and a value for defining the desired resolution the objects should have.

TODO: Explain how the code is implemented in simple words and how the energy is taken in account with the poisson's ratio. Make scheme with input - box / code - output. Do I have to reference code?

For starters let us take common values for μ and λ . We first start with $\mu = 1.0$, $\lambda = 10.0$ and a resolution of 10.0. For the poisson's ratio we get the value 0.4545:

$$\sigma = \frac{10.0}{2(10.0 + 1.0)} = 0.4545 \in [-1, 0.5]$$

The following images in figure 3.3 show the stretch test with $\mu = 1.0$, $\lambda = 10.0$ and a resolution of 10.0 on a tetrahedral and a hexahedral mesh.



(a) Stretch test on a hexahedral mesh



(b) Stretch test on a tetrahedral mesh

Figure 3.3: Stretch test performed on a cube with (a) a hexahedral mesh and (b) a tetrahedral mesh

TODO: Load into OpenFlipper and screenshot results. Include more examples and what went right and what went wrong.

3.5 Discussion

Stuff, Taylor approx.

List of Figures

2.1	Deformation Map [Pix]	8
3.1	Inversion of a tetrahedron [Pix]	13
3.2	Illustration of meta stability [Pix]	14
3.3	Stretch test performed on a cube with (a) a hexahedral mesh and (b) a tetrahedral mesh	19

List of Tables

2.1	Different materials with their poisson's ratio taken from [MR09]	10
3.1	Quantities Derived from the Deformation Gradient \mathbf{F} taken from [SGK18]	12
3.2	Summary of proposed energies taken from [SGK18] . . .	14
3.3	Energies split up into its 1D length and 3D volume term	15

Bibliography

- [BW97] Javier Bonet and Richard D Wood. *Nonlinear continuum mechanics for finite element analysis*. Cambridge university press, 1997.
- [For14] William Ford. *Numerical linear algebra with applications: Using MATLAB*. Academic Press, 2014.
- [GV12] H Golub Gene and F Van Loan Charles. *Matrix computations*. Vol. 3. 2012.
- [Lak87] Roderic Lakes. “Foam structures with a negative Poisson’s ratio”. In: *Science* 235 (1987), pp. 1038–1041.
- [Lak93] Roderic Lakes. “Advances in negative Poisson’s ratio materials”. In: *Advanced Materials* 5.4 (1993), pp. 293–296.
- [LM15] Joerg Liesen and Volker Mehrmann. *Linear algebra*. 1st ed. 2015. Springer International Publishing, Switzerland 2015: Springer, Cham, 2015. ISBN: 978-3-319-24344-3.
- [Moo40] Melvin Mooney. “A theory of large elastic deformation”. In: *Journal of applied physics* 11.9 (1940), pp. 582–592.
- [MR09] P. H. Mott and C. M. Roland. “Limits to Poisson’s ratio in isotropic materials”. In: *Phys. Rev. B* 80 (13 Oct. 2009), p. 132104. DOI: 10.1103/PhysRevB.80.132104. URL: <https://link.aps.org/doi/10.1103/PhysRevB.80.132104>.
- [SGK18] Breannan Smith, Fernando De Goes, and Theodore Kim. “Stable Neo-Hookean Flesh Simulation”. In: *ACM Trans. Graph.* 37.2 (Mar. 2018), 12:1–12:15. ISSN: 0730-0301. DOI: 10.1145/3180491. URL: <http://doi.acm.org/10.1145/3180491>.
- [Spe80] A. J. M. Spencer. *Continuum Mechanics*. 2004th ed. 31 East 2nd Street, Mineola, N.Y. 11501: Dover Publications, Inc., 1980. ISBN: 0-486-43594-6 (pbk.)

Online Sources

[Pix] Pixar. *Deformation Map*. URL: https://dl.acm.org/ft_gateway.cfm?id=3180491&ftid=2009597.

Figure Sources

[Pix] Pixar. *Deformation Map*. URL: https://dl.acm.org/ft_gateway.cfm?id=3180491&ftid=2009597.

Erklärung

gemäss Art. 28 Abs. 2 RSL 05

Name/Vorname:

Matrikelnummer:

Studiengang:

Bachelor ☐ Master ☐ Dissertation ☐

Titel der Arbeit:

.....

.....

LeiterIn der Arbeit:

.....

Ich erkläre hiermit, dass ich diese Arbeit selbständig verfasst und keine anderen als die angegebenen Quellen benutzt habe. Alle Stellen, die wörtlich oder sinngemäss aus Quellen entnommen wurden, habe ich als solche gekennzeichnet. Mir ist bekannt, dass andernfalls der Senat gemäss Artikel 36 Absatz 1 Buchstabe o des Gesetzes vom 5. September 1996 über die Universität zum Entzug des auf Grund dieser Arbeit verliehenen Titels berechtigt ist.

.....

Ort/Datum

.....

Unterschrift