



INNOVATION IN PERFORMANCE AND SUSTAINABILITY

WITH NEXT-GENERATION COMPOSITE TECHNOLOGY



INTRO

History & Mission



Founded

18 years ago

with vinyl sheet piling being the first product offering.



With composite decking becoming more popular, with several new competitors popping up, Shoreline pivoted to composite technologies to replace toxic CCA-treated timber pilings.

Goal



Create long-lasting, environmentally friendly, easy-to-install marine construction materials.



Mission



Modernize marine construction through sustainable composites that outlast and outperform wood, while sticking to a price point that makes the products attainable for residential and lighter commercial projects.



Problem

Why Now




Modern timber pilings are engineered to grow faster, making them much less dense than poles of the past, leading them to fail much more quickly



Treated-wood pilings rot, leach chemicals, and fail long before composite decks.



Contractors want drop-in composite solutions that install with standard tools, but existing composite systems are often priced beyond typical residential projects.



EPA/CCA scrutiny is growing — shift toward environmentally safe materials is inevitable.

Problem

Why Now- CCA and the EPA



Back in 2003, the EPA banned the use of CCA treatment all together due to human health impact and environmental issues.



Ultimately, a provision was allowed to continue the use of the Treatment for only Marine use, and on “non-contact” timbers



The primary reason for the decision was because no cost-effective viable alternatives were available, which is no longer the case.



Today, it is estimated roughly **2.5 MILLION** gallons of this treatment are put into the Florida waterways alone every year



In 2019, the EPA released a follow-up study linking CCA to toxicity levels well beyond the point the government should take action.



That's like dumping two tank trucks into a Florida water way, EVERYDAY!

EPA Study Link:

<https://www.regulations.gov/document?D=EPA-HQ-OPP-2015-0349-0008>

Shoreline's Product Platform



Locks around damaged pilings and is filled with cement to restore structure.



Restores full structural integrity without removing the deck.




Installed with basic tools — minimal downtime for contractors.



Transforms failing piles into permanent, maintenance-free supports.

SnapJacket®

Structural repair jacket for failing timber piles

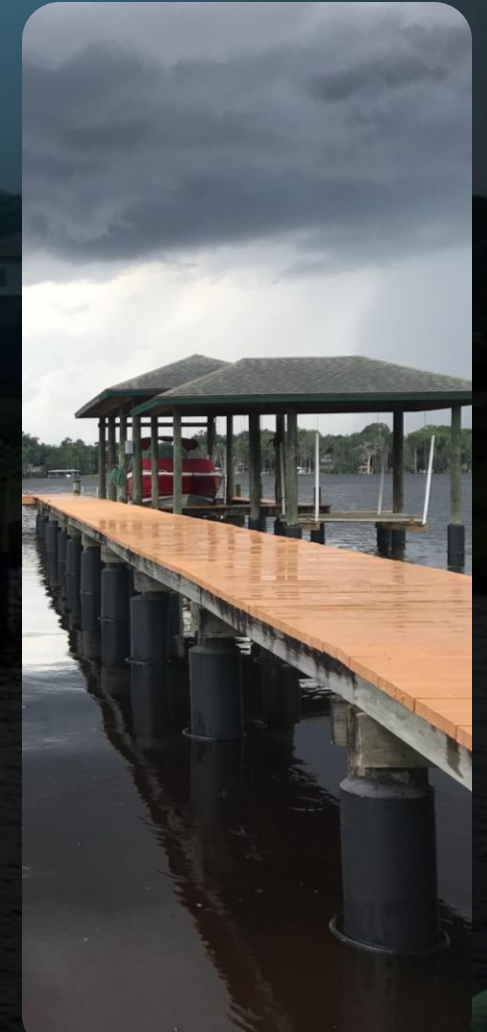

Shoreline's Product Platform

EcoPile®

Semi-hollow PVC + chopped-glass
piling with honeycomb webs



Usable with all standard tools used for wood
piles — true drop-in replacement.



High-end appearance that lasts a lifetime, even
in harsh saltwater conditions. *multiple national
building awards won on projects using EcoPile*



Absorbs impact and lateral loading during
severe storms — hurricane proven.



Only piling on the market with a warranty — 50
years of guaranteed performance.



Around half the cost of competing solid
fiberglass composites.



8+ years in the field with exceptional feedback
and repeat customers.



Shoreline's Product Platform



Utilize large quantities of our fiber-reinforced recycled material from development of other product lines over the years. Great candidate for using up our regrind pile, converting it into cash.



~70% stiffer than traditional vinyl sheets.



Our 0.25" profile equals or exceeds competitors' 0.375" strength but at the cost of a standard .25" profile



Provides durable, long-term shoreline protection — 100% recyclable at end of life.



In other words, being priced like the rest of the market, for the same cost, you can have a sheet that's 70% stronger.

EcoWall®

High-rigidity fiber-reinforced panels



ESP 3.1			EcoWall 24.250			SG-325		
Competitor Metric	Competitor	Difference	Metric	Ours	Difference	Competitor Metric	Competitor	
Allowable Moment (M_allow) [ft-lb/ft]	3129	91.1%	Allowable Moment (M_allow) [ft-lb/ft]	5979	102.0%	Allowable Moment (M_allow) [ft-lb/ft]	2960	
Section Modulus Z [in^3/ft]	11.4		Section Modulus Z [in^3/ft]	14.35		Section Modulus Z [in^3/ft]	11.1	
Moment of Inertia I [in^4/ft]	39.8		Moment of Inertia I [in^4/ft]	39		Moment of Inertia I [in^4/ft]	39	
Thickness t [in]	0.25		Thickness t [in]	0.25		Thickness t [in]	0.25	
Section Depth (rounded) [in]	7		Section Depth (rounded) [in]	9		Section Depth (rounded) [in]	7	
Section Width (rounded) [in]	20		Section Width (rounded) [in]	24		Section Width (rounded) [in]	24	

24" Comparison — Allowable Moment

