



Hybrid Composite Vinyl Sheet Pile

Best price-to-performance in its class

Up to 2x the strength at similar thickness and cost as standard vinyl

Installs and handles like traditional vinyl sheet pile

Backed by a 50-year limited warranty (UV-stable, corrosion-proof, marine-grade)

A Shoreline Plastics product



Overview

Built for contractors who want more strength for the money

EcoWall is a vinyl sheet pile made from Shoreline Plastics' proprietary PVC / fiberglass hybrid composite. The integrated reinforcement increases stiffness (flexural modulus), which means higher allowable moments without stepping up to thicker, heavier panels.

Why it matters on the job

- Higher panel strength at the same thickness
- Better performance per dollar than standard vinyl profiles
- Corrosion-proof and rot-proof (no coatings, no leaching chemicals)
- UV stabilized and co-extruded for long-term durability
- Available in two contractor-friendly box profiles

Typical applications

- Seawalls and bulkheads
- Shoreline stabilization
- Retaining walls and coastal protection
- Marine and freshwater environments




Price-to-Performance Advantage

Up to 2x the allowable moment vs 0.25" vinyl panels

Representative comparison (competitor names removed).

Allowable Moment (ft-lb/ft)

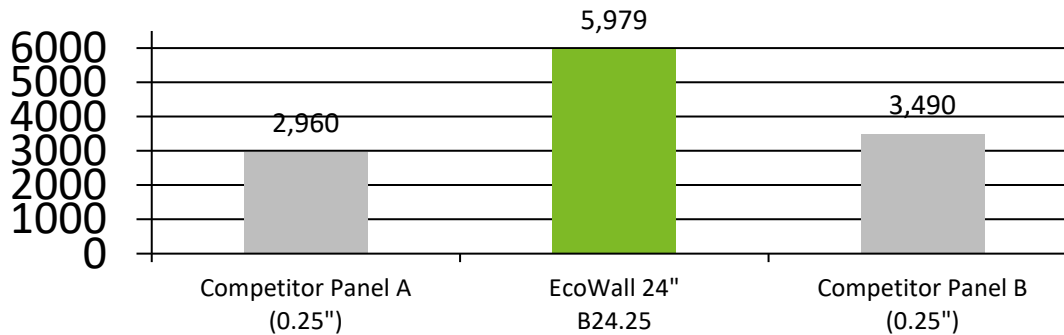

Comparable geometry (for context)

Panel	Width	Thickness	Allowable Moment
EcoWall B24.25	24"	0.25"	5,979 ft-lb/ft
Competitor Panel A	24"	0.25"	2,960 ft-lb/ft
Competitor Panel B	12"	0.25"	3,490 ft-lb/ft

Note: competitor examples are representative. Full engineering data available upon request.


What you get:

- More capacity without stepping up to heavier profiles
- Better value when you compare strength-per-dollar
- Vinyl durability (corrosion-proof, rot-proof, UV stabilized)
- Backed by a 50-year limited warranty

Installed with standard vinyl sheet pile methods!



Profile: EcoWall B24.25 (24" Wide Box)

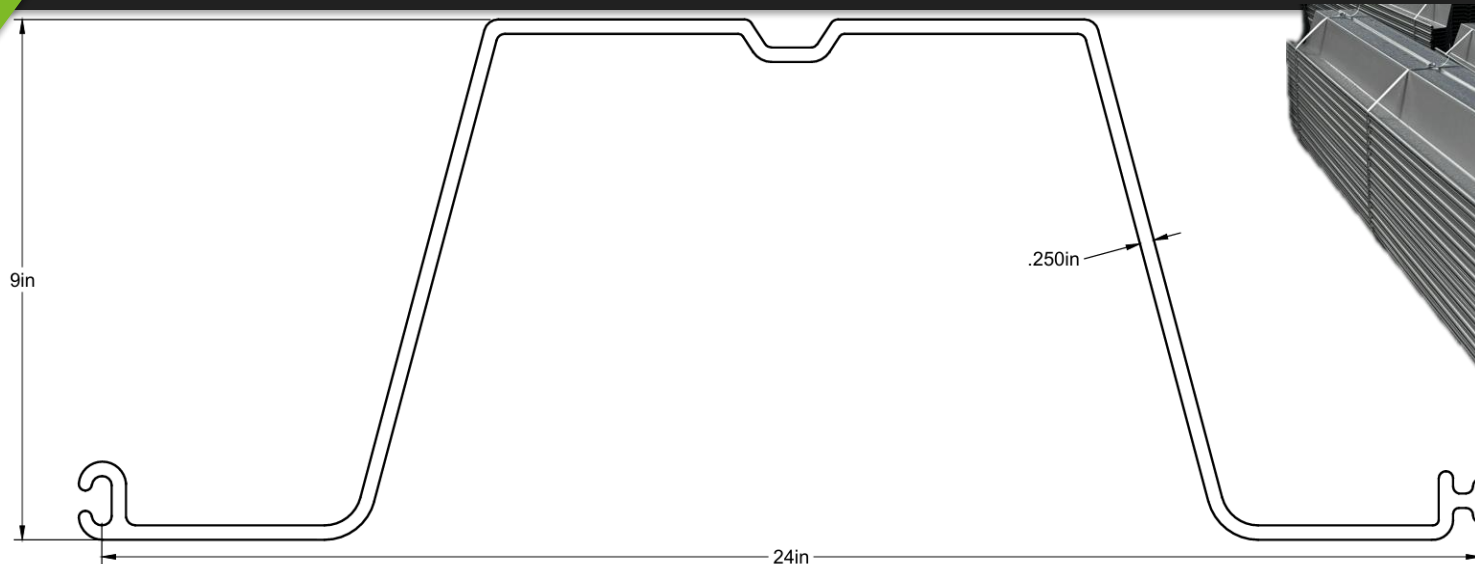

Attribute	Imperial		Metric	
	Value	Unit	Value	Unit
Allowable Moment (M_{allow})	5979.17	ft-lb/ft	8.11	kN·m/m
Section Modulus (Z)	14.35	in ³ /ft	235.15	cm ³ /m
Moment of Inertia (I)	39.00	in ⁴ /ft	1623.34	cm ⁴ /m
Span (L)	8.00	ft	2.44	m
Uniform Load (w)	250.00	plf	3648.48	N/m
Max Moment (M_{max})	24000.00	lb-in/ft	2712.00	N·m/m
Bending Stress (σ)	1672.47	psi	11.53	MPa
Stress Utilization	0.11		0.11	
Deflection (δ , E)	1.07	in	27.28	mm
L/ δ	89.38		89.38	
Thickness (t)	0.25	in	6.35	mm
Section Depth	9.00	in	228.60	mm
Section Width	24.00	in	609.60	mm
Ultimate Tensile Stress	9000.00	psi	62.05	MPa
Material	Engineered Fiber-reinforced Rigid PVC			
Profile	Box			
UV Stabilized	Yes			
Co-Extruded	Yes			

Highlights:

Allowable Moment (M_{allow})

5,979 ft-lb/ft

Section Modulus (Z)

14.35 in³/ft

Moment of Inertia (I)

39.00 in⁴/ft

Profile: EcoWall B18.225 (18" Wide Box)

Highlights:

Allowable Moment (M_{allow})


3,063 ft-lb/ft

Section Modulus (Z)

7.35 in³/ft

Moment of Inertia (I)

20.00 in⁴/ft

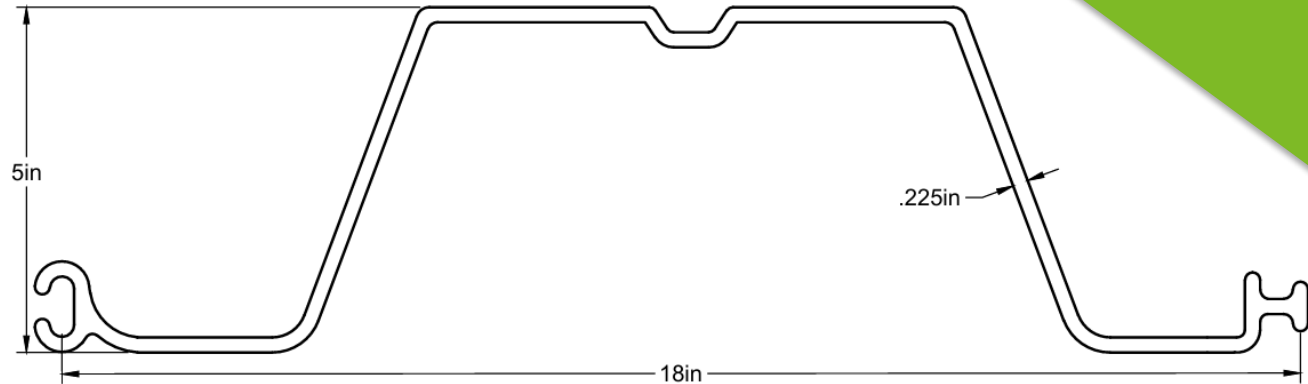

Attribute	Imperial		Metric	
	Value	Unit	Value	Unit
Allowable Moment (M_{allow})	3062.50	ft-lb/ft	4.15	kN·m/m
Section Modulus (Z)	7.35	in ³ /ft	120.44	cm ³ /m
Moment of Inertia (I)	20.00	in ⁴ /ft	832.48	cm ⁴ /m
Span (L)	8.00	ft	2.44	m
Uniform Load (w)	250.00	plf	3648.48	N/m
Max Moment (M_{max})	24000.00	lb-in/ft	2712.00	N·m/m
Bending Stress (σ)	3265.31	psi	22.51	MPa
Stress Utilization	0.22		0.22	
Deflection (δ , E)	2.09	in	53.20	mm
L/δ	45.83		45.83	
Thickness (t)	0.23	in	5.72	mm
Section Depth	5.00	in	127.00	mm
Section Width	18.00	in	457.20	mm
Ultimate Tensile Stress	9000.00	psi	62.05	MPa
Material	Engineered Fiber-reinforced Rigid PVC			
Profile	Box			
UV Stabilized	Yes			
Co-Extruded	Yes			