


EcoWall B18.225



Attribute	Imperial		Metric	
	Value	Unit	Value	Unit
Allowable Moment (M_{allow})	3062.50	ft-lb/ft	4.15	kN·m/m
Section Modulus (Z)	7.35	in ³ /ft	120.44	cm ³ /m
Moment of Inertia (I)	20.00	in ⁴ /ft	832.48	cm ⁴ /m
Span (L)	8.00	ft	2.44	m
Uniform Load (w)	250.00	plf	3648.48	N/m
Max Moment (M_{max})	24000.00	lb-in/ft	2712.00	N·m/m
Bending Stress (σ)	3265.31	psi	22.51	MPa
Stress Utilization	0.22		0.22	
Deflection (δ, E)	2.09	in	53.20	mm
L/δ	45.83		45.83	
Thickness (t)	0.23	in	5.72	mm
Section Depth	5.00	in	127.00	mm
Section Width	18.00	in	457.20	mm
Ultimate Tensile Stress	9000.00	psi	62.05	MPa
Material	Engineered Fiber-reinforced Rigid PVC			
Profile	Box			
UV Stabilized	Yes			
Co-Extruded	Yes			

*Safety factor = 3.00

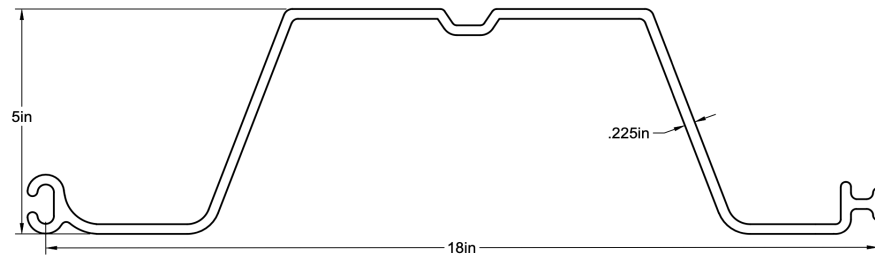