


EcoWall B24.25



Attribute	Imperial		Metric	
	Value	Unit	Value	Unit
Allowable Moment (M_{allow})	5979.17	ft-lb/ft	8.11	kN·m/m
Section Modulus (Z)	14.35	in ³ /ft	235.15	cm ³ /m
Moment of Inertia (I)	39.00	in ⁴ /ft	1623.34	cm ⁴ /m
Span (L)	8.00	ft	2.44	m
Uniform Load (w)	250.00	plf	3648.48	N/m
Max Moment (M_{max})	24000.00	lb-in/ft	2712.00	N·m/m
Bending Stress (σ)	1672.47	psi	11.53	MPa
Stress Utilization	0.11		0.11	
Deflection (δ, E)	1.07	in	27.28	mm
L/δ	89.38		89.38	
Thickness (t)	0.25	in	6.35	mm
Section Depth	9.00	in	228.60	mm
Section Width	24.00	in	609.60	mm
Ultimate Tensile Stress	9000.00	psi	62.05	MPa
Material	Engineered Fiber-reinforced Rigid PVC			
Profile	Box			
UV Stabilized	Yes			
Co-Extruded	Yes			

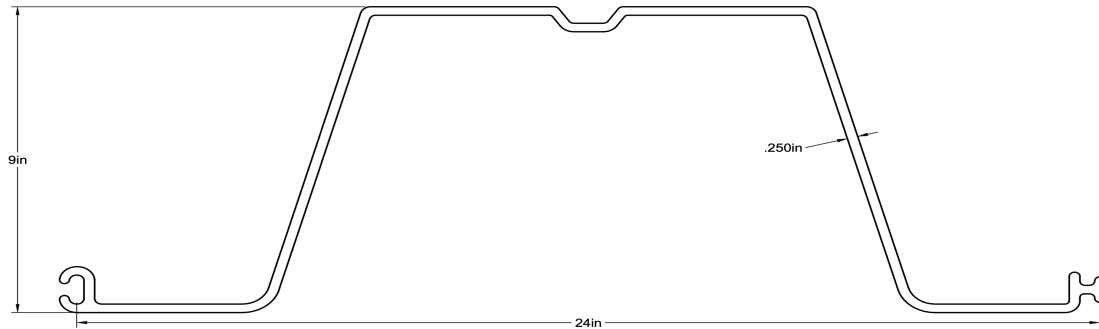