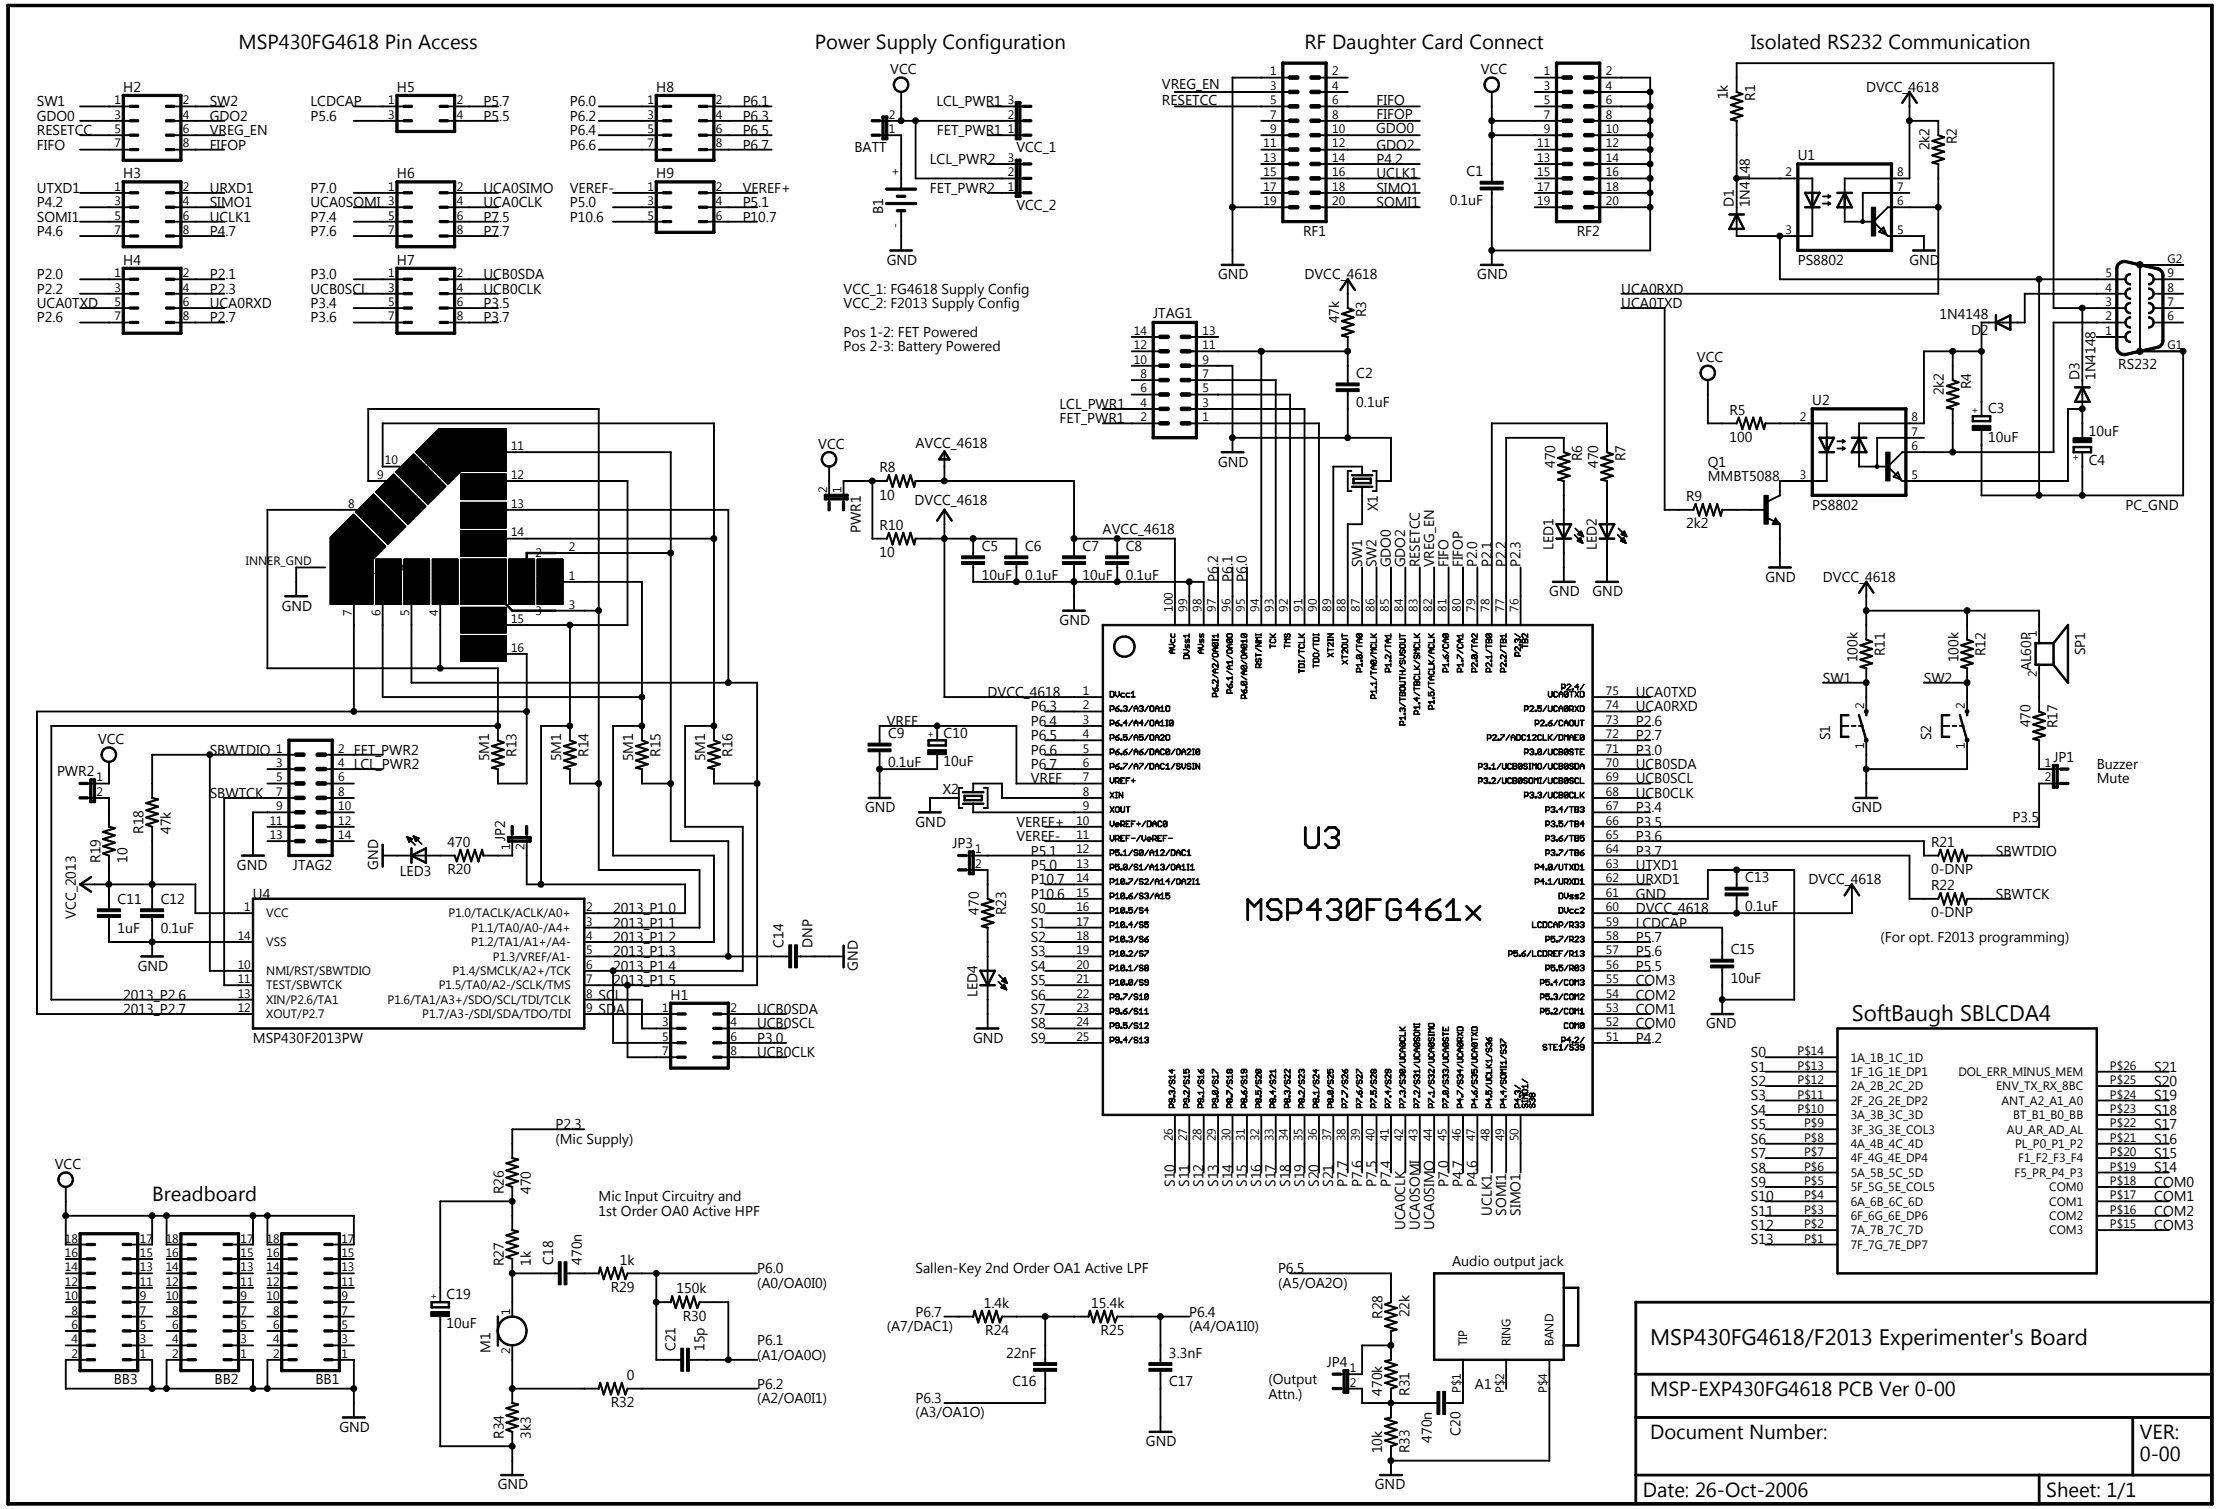
MSP430FG4618 Pin Access
Power Supply Configuration
RF Daughter Card Connect
Isolated RS232 Communication
VCC_1: FG4618 Supply Config
VCC_2: F2013 Supply Config
Pos 1-2: FET Powered
Pos 2-3: Battery Powered
U3
MSP430FG461x
MSP430FG2013PW
SoftBaugh SBLCDA4
Breadboard
Mic Input Circuitry and
1st Order OA0 Active HPF
Sallen-Key 2nd Order OA1 Active LPF
Audio output jack
(For opt. F2013 programming)
MSP430FG4618/F2013 Experimenter's Board
MSP-EXP430FG4618 PCB Ver 0-00
Document Number:
VER: 0-00
Date: 26-Oct-2006
Sheet: 1/1