

# An Introduction to Depth Sensors for Gesture Recognition

Marina von Steinkirch, steinkirch@gmail.com  
State University of New York at Stony Brook

May 22, 2013

## Abstract

We introduce the *Microsoft Kinect* depth sensor and show how to developing applications on Linux, discussing the options for frameworks and drivers. We explain the calibration and we introduce some tools to manipulate the depth data. We then expose two projects using gesture recognition with depth sensors: a hands-free controlled LEGO Mindstorms NXT robot and a hands-free controlled robot arm with an *Arduino* board.

**Natural User Interaction** (NUI) [1], which do not require mediated interaction with specialized devices. Modern research have provided a variety of input channels, for instance speech based control and interactive desktop.

One of the applications of NUI is the control of objects by gestures. To this end, we use **Microsoft Kinect** with a joint tracking feature to allow users to interact with computers using (i) whole-body gestures to control a LEGO Mindstorms NXT robot, and (ii) arm gestures to control a robot arm coupled to an *Arduino* board.

## Contents

1	Introduction
2	Camera-Sensor Calibration
3	Gesture Recognition
4	Kinect + LEGO Mindstorms NXT
5	Kinect + Arduino + Robot Arm
6	Outline
A	Appendix

## 1 Introduction

There is an increasing interest in interaction devices that go beyond the keyboard and mouse, the so called

### 1 The Microsoft Kinect

Microsoft released the **Kinect for Xbox 360** input-device in November of 2010 [2], as the first large-scale, commercial release of a **depth camera device** (a camera that can see in 3D!). A very similar sensor, the **Kinect for Windows** (which is specific for developing), was released in February of 2012 [3]. A third similar depth sensor, the **ASUS Xtion** [4], was developed and released by the same company that created **Kinect's** technology, **PrimeSense Ltd** [6], also in 2012.

These sensors come with proprietary algorithms for **feature selection**, **scene analysis**, **motion tracking**, **skeleton tracking**, and **gesture recognition** [5]. However, some open source efforts have been made, as we will discuss in the following sections. The **Kinect** sensor outputs the video at a frame rate of 30 Hz (*i.e.* each second outputs 30 images). The RGB

video stream uses 8-bit VGA resolution (640x480 pixels) with a Bayer color filter. The monochrome depth sensing video stream is in VGA resolution (640x480 pixels) with 11-bit depth. Finally, the Kinect has a practical ranging limit of 1.2m-3.5m for the Xbox 360 model and 0.4m-3.5m for Windows model.

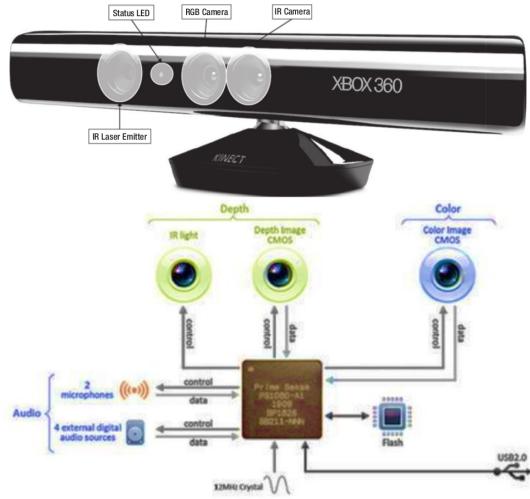


Figure 1: The Kinect hardware (Xbox model).

## The Depth Sensor

The Kinect depth measurement system consists of two parts, the **IR laser emitter** and the **IR camera**. The emitter creates a known noisy pattern of structure IR light at 830 nm [7]. The output of the emitter has a pattern of nine bright dots, caused by the imperfect filtering of light<sup>1</sup>, Fig. 2. The dots are recorded by the IR camera and then compared to a known pattern, where any disturbances are to be the variations in the surface, detected as closer or further away. The field of view is 58° horizontal and 45° vertical, and the operational range is between 0.8-3.5m. The sensor has roughly 1 cm depth (z) resolution.

<sup>1</sup>This scattering innovation, allowing a higher powered laser diode to be used and being eye safe was developed by **PrimeSense**, which owns the patent on this process [7].

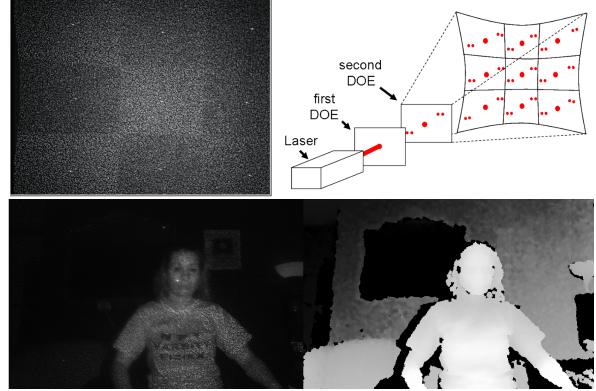


Figure 2: (top, left) The structured light pattern from the IR emitter. (top, right) How Kinect projector works: a laser beam is projected at the first diffractive optical elements (DOE) that splits the beam into a pattern, the second DOE duplicates the pattern [24]. (bottom, left) The IR emitter. (bottom, right) The depth image.

The depth sensing works with the principle of **structured light**, which is the process of projecting a known pattern of pixels on to a scene, looking to the way they deform when meeting surfaces. This allows the vision systems to calculate the depth and surface information of the objects [7] (reference to Fig. 3, for many techniques for depth measurement [6]).

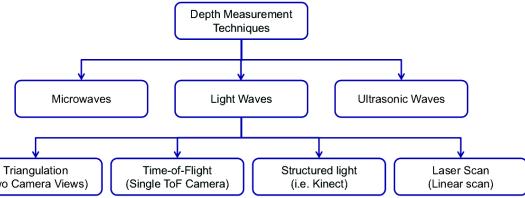


Figure 3: Classification of Depth Measurement Techniques, where, for instance, Kinect use structure light.

In the Fig. 2, we can see that there's a known pseudorandom pattern of dots being pushed out from the camera. These dots are recorded by the IR camera and then compared to the known pattern. Any disturbances are known to be variations in the surface and can be detected as closer or further away. This approach creates three problems:

- **The wavelength must be constant:** within the sensor, a small heater/cooler keeps the laser diode at a constant temperature, ensuring that the output wavelength remains as constant as possible (given variations in temperature and power).
- **Ambient light can cause issues:** the IR-pass filter at 830 nm over the IR camera prevents stray IR in other ranges (such as from TV remotes) from blinding the sensor. In addition, the Kinect does not work well in places lit by sunlight (which has wide band IR emission with enough power in the 830 nm range).
- **Distance is limited by the emitter strength:** limited by the power of the laser diode, which power is limited by what is eye safe. Without the inclusion of the scattering filter, the laser diode is not eye safe (about 70 mW). This is why the scattering innovation by PrimeSense is important: the extremely bright center dot is distributed among the 9 dots, allowing a higher powered laser diode to be used.

## Available Framework and Drivers

Up to the date, there are two frameworks for the Kinect sensor available for Linux<sup>2</sup>:

### OpenNI (Open Natural Interaction) [10]:

A middleware delivered from a collaboration of PrimeSense to develop “natural interaction” software and devices. It has skeleton tracking and gesture recognition. However, the OpenNI’s features on user tracking (in which an algorithm processes the depth image to determine the position of all of the joints of any users within the camera’s range) is not covered by the OpenNI LGPL license. Instead, it is provided by an external module, called NITE [11] which is not available under an open source license [8].

---

<sup>2</sup>The Microsoft SDK is only available for Microsoft Windows [5].

### OpenKinect [12]:

This driver is known by its library name `libfreenect` and was the first Kinect driver available for general use and is fully open-source (dual Apache 2.0/GPL 2.0 license), cross-platform, and derived purely from reverse-engineering efforts. `libfreenect` implements low-level access to the hardware by directly communicating with the Kinect’s USB endpoints.

We have tested both options for this work (see appendix A). For the LEGO Mindstorms project we chose to use the OpenNI platform, which was compatible to wrappers for the LEGO hardware. However, the OpenKinect driver was chosen for the electronic arm project and for future related works and applications on computer vision. This choice was based upon its simple software interface, low-level hardware access, cross-platform support, support for multiple languages, and to give a more “hands-on” in this study. In addition, `libfreenect` has the ability to retrieve **uncalibrated** depth images from the Kinect, which we need for the camera’s calibration.

## Depth Data as 2D and 3D Arrays

A first analysis of the depth data is made by treating it as if it were two-dimensional. For each pixel in the depth image, we think of its position within the image as its (x,y) coordinates plus a grayscale value. This last value corresponds to the depth of the image in front of it, *e.g.* this value will represent the pixel’s z-coordinate. The depth map returns a flat array that contains 307,200 (or 640 times 480) integers arranged in a single linear stack, Fig. 4.

Once we convert all the two-dimensional grayscale pixels into three-dimensional points in space, we have a *point cloud*, *i.e.* many disconnected points floating near each other in three-dimensional space in a way that corresponds to the arrangement of the objects and people in front of the Kinect, Fig. 5.

Pixels in the image								
row 1	1	2	3	4	5	6	7	8
row 3	9	10	11	12	13	14	15	16
row 2	17	18	19	20	21	22	23	24
row 4	25	26	27	28	29	30	31	32

Pixels in an array																	
row 1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

Figure 4: Depth data as a flat array.

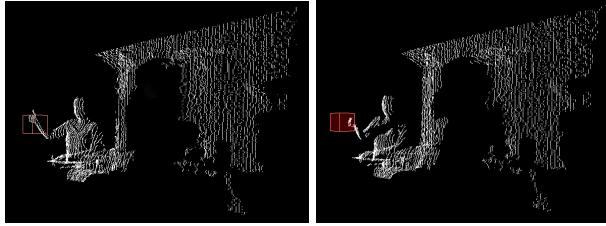


Figure 5: My bedroom mapped by the Kinect IR sensor: depth data by point cloud. In this example, the “imaginary” red cube becomes redder when I am insert my hand into its space.

## 2 Camera-Sensor Calibration

### Introduction

Without calibration, the color and depth outputs from the cameras are useless data. The camera’s intrinsic and extrinsic parameters are factory set and it is necessary to determine a translation from the camera frame to the world frame. The goal of the calibration is to find the extrinsic and intrinsic parameters for both Kinect’s cameras.

### Methods

The **intrinsic parameters** are: **focal length**, **camera sensor size**, **lens distortion** measured as a radial distortion, and **image plane displacement** measured as displacement from the optical axis. The **extrinsic parameters** are: the **camera location** (vector) and the **camera rotation** (as Euler angles). The cameras are calibrated using the **pinhole model**, where the view of the scene is created by projecting a set of 3D points onto the image plane via

perspective transformation.

OpenNI comes with a predefined calibration stored in the firmware that can directly output aligned depth and color images with a virtual constant focal length. Most applications consider this calibration enough, however, for some computer vision applications such as robotics, we need a more accurate calibration. In addition, OpenKinect requires this additional step too.

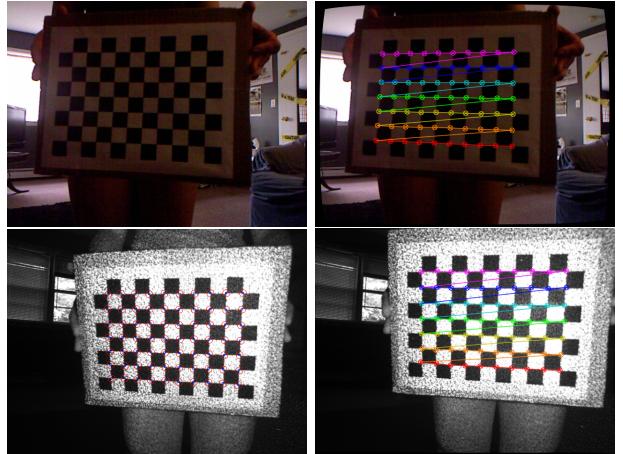


Figure 6: My calibration board. (top) Here we see the process with the IR emitter blocked, with the corners. (bottom) calibration process for the IR image.

We calibrate the depth and RGB cameras by creating a depth annotation of a chessboard by physically offsetting the chessboard from its background [16]. The offset creates sharp edges in depth along the perimeter of the chessboard mounting which remain fixed with respect to the chessboard’s interior corners. By coinciding the chessboard’s exterior corners with the sharp edges in depth, there is no need to measure the positioning of the chessboard with respect to the mounting; only the dimension of a single chessboard square is needed (in our case 0.023mm). To this end, we proceed with the following steps:

1. We created a calibration target: a chessboard printed on a4.pdf, where each square is  $0.023\text{ m}^2$ , as in Fig. 6.
2. We took 20 with the IR emitter blocked (for the stereo camera calibration) and 20 with none of

the cameras blocked, making sure the corners of the target are always in the image and getting different angles and placements.

- We ran a code written with the OpenCV's calibration functions (see git repository [13]) for all the images. The OpenCV library contains built-in support for locating the interior corners of a chess-board calibration rig (*e.g.* `findChessboardCorners`). The set of pairings between raw depth values and object depths obtained this way does the calibration of raw depth values to meters.

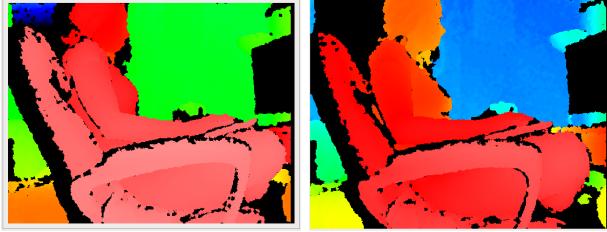


Figure 7: Depth image results from the cameras calibration (left) me in my desk in an uncalibrated camera and (right) much happier and calibrated after.

## Results

As a result, we were able to generate an `yml` calibration file, that can be used in applications (*e.g.* OpenCV). When we open the camera's viewer with this file we see the calibrated image which are not distorted at the edges and having the distances accurate, Fig. 7. The calibration file contains the following matrices, as in Fig. 8:

- rgb-intrinsics** and **depth-s**: the camera's intrinsic parameters in pixel units, a matrix with the principle point (usually the image center),  $c_{x,y}$  and the focal length,  $f_{1,2}$
- rgb-distortion** and **depth-distortion**: lenses also have some distortion (radial,  $k_{1,2,3}$ , and tangential,  $P_{1,2}$ ).

$$\begin{bmatrix} f_x & 0 & c_x \\ 0 & f_y & c_y \\ 0 & 0 & 1 \end{bmatrix}, \begin{bmatrix} r_11 & r_12 & r_13 & t_1 \\ r_21 & r_22 & r_23 & t_2 \\ r_31 & r_32 & r_33 & t_3 \end{bmatrix}$$

Figure 8: (left) The camera intrinsic matrix with values for `rgb-intrinsics`, where  $f_{x,y}$  are the focal lengths expressed in pixel-units and  $c_{x,y}$  are the principal point coordinates, which is usually at the center of the image. (middle) The combined R-T matrix. (right) The pinhole model. [7].

$$\begin{pmatrix} x \\ y \\ w \end{pmatrix} = \begin{pmatrix} f_x & 0 & c_x & 0 \\ 0 & f_y & c_y & 0 \\ 0 & 0 & 1 & 0 \end{pmatrix} \begin{pmatrix} X \\ Y \\ Z \\ W \end{pmatrix} = \begin{pmatrix} f_x X + c_x Z \\ f_y Y + c_y Z \\ Z \\ W \end{pmatrix}$$

Camera projection 3D to 2D

$$X = \frac{(x - c_x)Z}{f_x} \quad Y = \frac{(y - c_y)Z}{f_y}$$

Inverse relation for X and Y

Figure 9: Transformations between 2D and 3D data, where  $Z$  is the distance  $d$  (homogeneous coordinates).

- R and T: the translation and rotation of the projected point from the world into a coordinate frame in reference to the camera, *i.e.* the geometric relationship between the two cameras.

To summarize the process above, let's consider a pixel  $p_{\text{IR}}$  in the IR image. After calibration the intrinsic camera matrices  $K_{\text{IR}}$  and  $K_{\text{RGB}}$  and the distortion parameters of the two cameras are obtained:

- The 3D point  $P_{\text{IR}}$  (3D point in the IR camera's coordinate system) corresponding to the  $p_{\text{IR}}$  can be computed by back-projecting  $p_{\text{IR}}$  in the IR camera's coordinate system:

$$P_{\text{IR}} = K^{-1} \times p_{\text{IR}}.$$

- $P_{\text{IR}}$  can be transformed to the RGB camera's coordinate system through relative transformation  $R$  and  $T$ , where  $P_{\text{RGB}}$  is the 3D point in the RGB camera's coordinate system :

$$P_{\text{RGB}} = R \times P_{\text{IR}} + T.$$

- Then we project  $P_{\text{RGB}}$  onto the RGB camera image and we obtain a 2D point  $p_{\text{RGB}}$  (the projection of  $P_{\text{RGB}}$  onto the RGB image):

$$p_{\text{RGB}} = K_{\text{RGB}} \times P_{\text{RGB}}.$$

- Finally, the depth value corresponding to the location  $p_{\text{RGB}}$  in RGB images is  $P_{\text{RGB}}$ 's Z axis value:

$$\text{depth of } p_{\text{RGB}} = \text{Z axis value of } P_{\text{RGB}}.$$

The Kinect's built-in RGB camera has low image quality compared to DSLR cameras. A future project (not covered by this paper) involves calibrating an external higher resolution DSLR camera to the IR-depth sensor to create an overlaid image for higher resolution 3D images and scene reconstruction.

### 3 Gesture Recognition

#### Introduction

A *gesture* is made of parts. Each part is a specific movement that when combined with other gestures parts, make up the whole gesture. There is a problem when you need to identify multiple gestures at once. A gesture such as a hand wave or a fist pump should be modelled as a sequence of states. Statistical models can be used to infer truth from observed data.

The hand-point tracking code implemented by the OpenNI framework<sup>3</sup> for Kinect-like sensors makes it possible to reduce the observation data to sequential 3D points ( $x, y, z$ ) and focus on the recognition task without processing all the pixels. Considering we are running the Kinect with the OpenNI hand-tracking code at 30 frames per second. We would capture a two second gesture in 60 observations (with  $x, y$ , and  $z$ ). To determine whether a given set of 60 observations contains a circle gesture, we would have to determine the likelihood that the hand passed through the states of the *canonical gesture* in an expected sequence.

*Gesture recognition* is a large field in machine learning and computer vision, with many algorithms solutions such as *section algorithm*, *dynamic time warping* or *hidden Markov models* [17]. It is a very exciting subject, however these studies are outside of the scope of this work.

<sup>3</sup>The OpenKinect framework for hand-point tracking is still in the way.

#### Gesture Tracking Studies

To start building interactive applications with the Kinect, we need to write a *code that respond to the scene in a way that is intuitive and clear*. We have an inherent instinct for the spaces and objects around them and for this reason, physical interfaces are easier to understand than abstract, screen-based ones. Therefore, we want physical interfaces that provide simple and direct feedback where the user's movements immediately translate into action. Having a depth camera we can give the user the feeling of directly controlling something on the screen [7].

#### Tracking the Closest Pixel

The simplest way to achieve this effect is by supposing that the user has her or his hand as the closest point to the sensor, so we track this point from the available depth data, as we can see in the Fig. 10. To track these gestures as a "Invisible Pen" in the space, some manipulations are needed beyond just tracking the closest pixel, such as *smoothing* by interpolating sequential points and limiting the range of access.

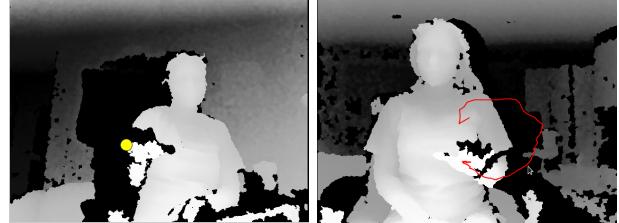


Figure 10: (left) Tracking the closest pixel as the simplest way of tracking gesture: here we draw a yellow ball where we meet this point. (right) Gesture tracking as a trace given by connecting the points, resembling a "invisible pen".

#### Using the Skeleton Information

OpenNI+NITE have a skeleton tracking option that it is still not very well implemented in the OpenKinect framework (this is something I would like to help with in the future). We can see the implementation in the Fig. 11.

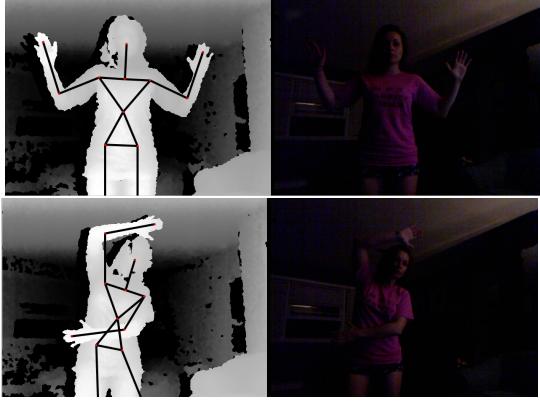


Figure 11: Skeleton tracking with `OpenNI+NITE` framework. The calibration allows to get information about the position of specific body parts and joints.

Using that information creates several possibilities for gesture tracking. One example is, once we have the skeleton calibrated, to write a finger-tracking for the user’s hands. One can also separate some of the body parts and use it for some specific application. We’ve tested both cases, see Fig. 12.

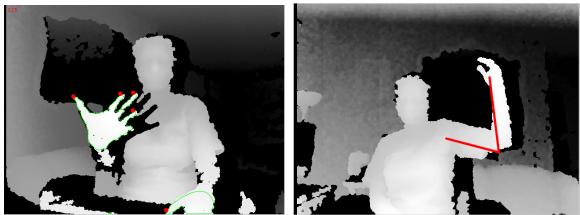


Figure 12: Using the skeleton tracking feature with the `OpenNI+NITE` framework to track fingers (left) or any body party or joints, which will be used in our robot arm project (right).

We can go ahead and perform a background subtraction from the tracked user, write a slight better “Invisible Pen” application, as in Fig 13.



Figure 13: (left) Background removed. (right) Project II: an “Invisible Pen” application.

tors to build personal robots. We’ve built a model with two independent motors to control left and right wheels/caterpillar, with a core that allows the `NXT` to communicate with a computer through a *serial connection* (`Bluetooth` in this case), Fig. 14.

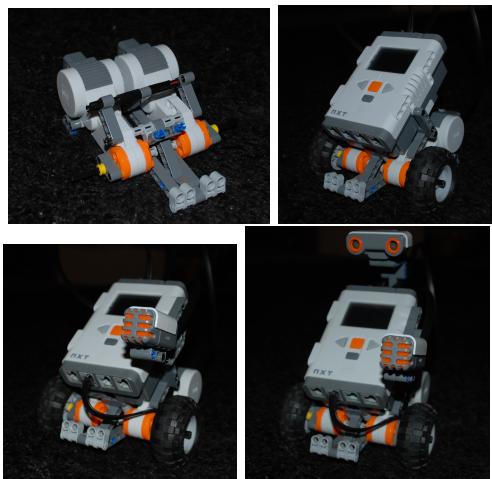


Figure 14: Steps of the LEGO Mindstorms `NXT` robot assembling for this project.

In order for `OpenNI`’s algorithm to begin tracking the person’s joint, it needs the person to be standing in a “psi” pose, Fig. 15.

## 4 Kinect + LEGO Mindstorms NXT

### Introduction and Methods

LEGO Mindstorms `NXT` [18] is a robotics kit that allows the combination of different parts and *actuator*

### Results

The gesture tracking information was implemented with C/C++ code, using open libraries to acquire Kinect input (`OpenNI+NITE`), for body tracking (by `PrimeSense`) and for controlling the LEGO




Figure 15: The calibration pose “psi” for OpenNI’s skeleton tracking.

Mindstorms NXT kit (OpenNI + Fantom). The following gestures were defined, Fig. 16 :

- move forward;
- move backward;
- rotate counter-clock-wise;
- rotate clock-wise;
- stop.

A demo video can be seen in [19] and the source code is in a git repository [20].



Figure 16: The defined gestures: move forward, move backward, rotate, and stop, respectively.

## 5 Kinect + Arduino + Robot Arm

### Introduction

This project was proposed with the intention of learning about *kinematics*, which has important applications in robotics and computer animation. Kinematics describes the relationship between position of a joint and the angles of the other joints along the same limb [22].

*Forward kinematics* is the approach when we start with the joint at the base of the limb and work forward toward to the *end effector* (which is what we care about positioning). However, forward kinematics is not the way we usually think when we are moving our bodies. Rather, we do not treat the position of the end effector as a side effect of the angle of the joints, but we start with the position of the end effector and figure out the necessary joint angles to achieve that. This alternative approach is called *inverse kinematics*.

### Methods



Figure 17: Supplies to build the robot arm: an Arduino, a breadboard, two servos, two popsicle sticks, a USB A/B, and a hot glue gun.

In this project we have built a two-joint robot arm controlled by an Arduino [21] board which uses the Kinect to capture the user’s arm movements. The

robot arm has two RC servos<sup>4</sup> that reproduce the angles of the user's shoulder (between her or his torso and the plane of the upper arm) and the user's elbow (between her or his upper and lower arm). Both angles vary from zero to  $\pi$  (180° degrees). The robot arm can only move along a surface plane: there are only two degrees of freedom (the two axes). The material for this project is shown in the Fig. 17.

The gesture tracking information was implemented with Java [25], wrappers for Arduino in the Processing platform [26], and the libraries to acquire Kinect input (OpenNI+NITE). A final demo video can be seen at [27] and the source code is in a git repository [20].

## Results

We started our project using forward kinematics (FK) to control the robot arm with the Kinect joint data from our (right) arm. This allowed us to test each part of the system independently. We implement a code for a graphical arm consisting of two lines and three circles [7]. From this we calculate the angles of each part of our arm: the angle between the upper arm and the (vertical) torso and the angle between the (moving) upper arm and the lower arm, Fig. 18.

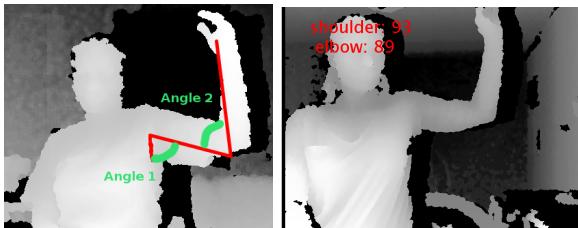


Figure 18: (left) The angles between the joints to be calculated to control the robot arm (the text was added my the picture). (right) A snapshot of the way the program calculates the angles.

The angles are then sent to the Arduino microcontroller, which is the brain of the project. The Arduino consists of a small computer that can control simple electronics and sensors. The closed Arduino

<sup>4</sup>RC servos permit to control the angles, not only the speed. Also, each servo has a circuit on-board that uses reverse feedback for positing itself at some angle over their control wire.

circuit and the assembled robot arm can be seen in the Fig. 19.

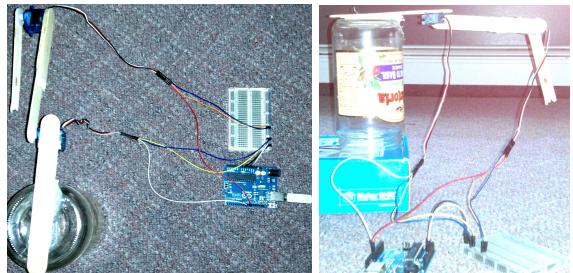


Figure 19: (left) The closed circuit with the Arduino and the robot arm. (right) the lateral view of this circuit.

The final program performs the following sequential steps:

1. gets Kinect's depth data,
2. calibrates the user to find her or his skeleton, then extract the positions of the user's right hand, elbow, shoulder and hip.
3. loops over the calculation of the two angles from her or his arm (in this process the data is reduced to the user's plane, *i.e.* from 3D to 2D),
4. serially send the angles array to the Arduino, which sends the amount of displacement to each of the servos.

We use this system to calibrate the initial positions of the arm (when we assembled them) so we have a reference from where to make an angular movement from. We calibrate for the positions zero, 90°, and 180°.

We then move to inverse kinematics (IK), which demands some extra matrix calculations. The reason is that we want our arm to be able to follow a single point (for example, the user's head). This demands an automated way of calculating the angles based only on *where we want the robot to move to*. The calculations can be made if we impose the following constrains: (i) the place where we "fixed the shoulder", (ii) the length of two limbs (fixed and identical), and (iii) the maximum range for the angles. To test

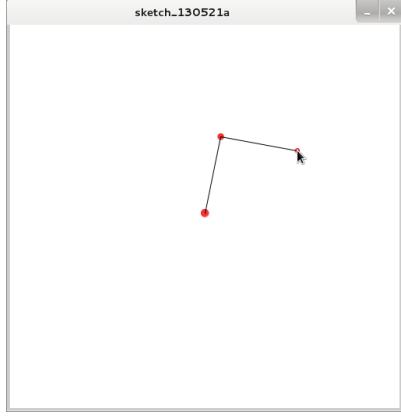


Figure 20: A program that calculates the positions of the arm segments when we move the “hand”.

the IK process, we first wrote a program that simulates the robot arm, Fig. 20, which performs the following sequential steps:

1. starting with the position of the fixed shoulder, the position of the target and the lengths of the limbs, defines the *segment length* as one fifth of the width of the screen,
2. gets the user’s depth data and calibrate her or his skeleton to track her or his head position, converts it to 2D,
3. gets the vectors with the positions for the user’s right shoulder (which stay fixed), elbow, and to the final target,
4. finds the *distance* as the magnitude (length) of the longest side of the triangle between the target position and the shoulder, *i.e.* their differences, Fig 21,
5. defines a main triangle where the two small sides are one unit of the defined segment length and the largest side is the smaller value between the above distance and two units of segment length,
6. calculate the stwo distinct angles of this triangle using the *Law of Cosines*, Fig. 21:

$$B_{1,2} = \cos \left( \frac{a_{1,2}^2 + b_{2,1}^2 - b_{1,2}^2}{2a_{1,2} \cdot b_{2,1}} \right),$$

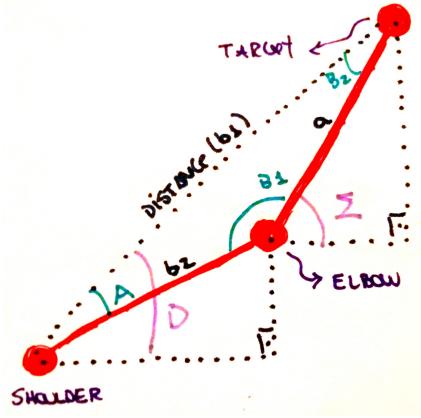


Figure 21: The inverse kinematic scheme to calculate the robot arm’s angles for a given final target.

7. calculates the angle of the shoulder joint as

$$D = \tan(\text{distance}),$$

8. define  $\Sigma = B_1 + B_2 + D - \pi$ ,
9. The final angle for the robot arm’s “shoulder” is given by  $\pi/2 - \Sigma$ . The final angle of the “elbow” is given by the largest  $B_{1,2}$ .
10. Finally, a 2-byte array is created to store with each of the values and send it to the Arduino, which will make the robot arms to go the target position.

## 6 Outline

This paper intended to be an introduction to Kinect-like depth sensors for robotics, and how to calibrate them in Linux. We have showed two projects using the **Kinect** framework with: (i) **LEGO Mindstorms NTX**, and (ii) **Arduino**. All the referenced projects have their source code available in a git repository [20]. The simple theory studied here may be extended to many applications in the fields of robotics and computer vision.

The LEGO project may be improved to get a better neutral position (where the robot can be still). A straightforward improvement in the robot arm project is to add the  $z$ -axis to the robot arms (which is the natural way our arms work). In other words, each of the servos only has a range of motion of  $180^\circ$ , when the ideal is the full  $360^\circ$ .

## A Appendix

### Hardware Requirement

All that is needed to install the Kinect to a computer is a USB 2.0 hub (Kinect will take 70% of it to transmit data), a graphic card capable of handing OpenGL, and a machine that can handle 20MB/second of data. An additional power supply is needed for the Kinect Xbox 360 [7].

### Installing the OpenNI+NITE Framework on Fedora

1. Install all the library dependencies from last section.
  2. Install the last Sun Java JDK.
  3. Do `git clone //github.com/OpenNI/OpenNI.git` and then `sudo git checkout unstable`.
  4. Go to `cd OpenNI/Platform/Linux/Build/` and type `sudo ./RedistMaker`.
  5. Leave that folder and get `SensorKinect: sudo git clone https://github.com/avin2/SensorKinect`.
  6. Inside `cd SensorKinect/Platform/Linux/CreateRedist/` run `sudo ./Redistmaker`.
  7. Inside `cd ../Build/Redist` run `sudo ./install.sh`.
  8. Inside `cd SensorKinect/Platform/Linux/Build/` run `sudo make` and `sudo make install`.
  9. Download the PrimeSense NITE Middleware from [11] for 32- or 64-bit, and in `NITE/` type `./sudo install.sh`.
  10. Finally, you can test the installation by doing `NITE/Samples/Bin/Release/Sample-PointViewer`. This should show the depth camera capture.
- [1] <http://research.microsoft.com/en-us/collaboration/focus/nui/default.aspx>  
[2] <http://gizmodo.com/5563148/microsoft-xbox-360-kinect-launches-november-4>  
[3] <http://blogs.msdn.com/b/kinectforwindows/archive/2012/01/09/kinect-for-windows-commercial-program-announced.aspx>  
[4] [http://www.asus.com/Multimedia/Xtion\\_PRO/](http://www.asus.com/Multimedia/Xtion_PRO/)  
[5] <http://www.microsoft.com/en-us/kinectforwindows/>  
[6] <http://www.primesense.com/>  
[7] *Hacking the Kinect*, Apress, 2012  
[8] *Making Things See*, 2012  
[9] *Kinect Hacks*, 2012  
[10] <http://www.openni.org/>  
[11] <http://www.primesense.com/solutions/nite-middleware/>  
[12] <http://openkinect.org>  
[13] <https://bitbucket.org/steinkirch/kinect-hacks-and-projects>  
[14] <http://opencv.org/>  
[15] <http://pointclouds.org/>  
[16] <http://opencv.willowgarage.com/documentation/cpp/camera-calibration.html>  
[17] [http://en.wikipedia.org/wiki/Gesture\\_recognition](http://en.wikipedia.org/wiki/Gesture_recognition)  
[18] <http://www.legoeducation.us/eng/characteristics/ProductLine LEGO>  
[19] <https://www.youtube.com/watch?v=wvUqFxSj54w>  
[20] <https://bitbucket.org/steinkirch/kinect-hacks-and-projects>  
[21] <http://arduino.cc/>  
[22] *Introduction to Robotics: Mechanics and Control*, Craig, 1989  
[23] <http://astro.sunysb.edu/steinkirch/>  
[24] *Kinect 3D Mapping*, Anton Nordmark, 2012  
[25] <http://www.java.com/en/>  
[26] <http://www.processing.org/>

### Additional Libraries

#### OpenCV (Open Source Computer Vision) [14]:

Pre-built library of real-time computer vision functions developed by Intel in the 1999. The library has over 500 functions in different areas of vision and image analysis including: gesture recognition, facial recognition, motion tracking, and 3D vision. It's the base of my cameras' calibration.

### References

- [1] <http://research.microsoft.com/en-us/collaboration/focus/nui/default.aspx>
- [2] <http://gizmodo.com/5563148/microsoft-xbox-360-kinect-launches-november-4>
- [3] <http://blogs.msdn.com/b/kinectforwindows/archive/2012/01/09/kinect-for-windows-commercial-program-announced.aspx>
- [4] [http://www.asus.com/Multimedia/Xtion\\_PRO/](http://www.asus.com/Multimedia/Xtion_PRO/)
- [5] <http://www.microsoft.com/en-us/kinectforwindows/>
- [6] <http://www.primesense.com/>
- [7] *Hacking the Kinect*, Apress, 2012
- [8] *Making Things See*, 2012
- [9] *Kinect Hacks*, 2012
- [10] <http://www.openni.org/>
- [11] <http://www.primesense.com/solutions/nite-middleware/>
- [12] <http://openkinect.org>
- [13] <https://bitbucket.org/steinkirch/kinect-hacks-and-projects>
- [14] <http://opencv.org/>
- [15] <http://pointclouds.org/>
- [16] <http://opencv.willowgarage.com/documentation/cpp/camera-calibration.html>
- [17] [http://en.wikipedia.org/wiki/Gesture\\_recognition](http://en.wikipedia.org/wiki/Gesture_recognition)
- [18] <http://www.legoeducation.us/eng/characteristics/ProductLine LEGO>
- [19] <https://www.youtube.com/watch?v=wvUqFxSj54w>
- [20] <https://bitbucket.org/steinkirch/kinect-hacks-and-projects>
- [21] <http://arduino.cc/>
- [22] *Introduction to Robotics: Mechanics and Control*, Craig, 1989
- [23] <http://astro.sunysb.edu/steinkirch/>
- [24] *Kinect 3D Mapping*, Anton Nordmark, 2012
- [25] <http://www.java.com/en/>
- [26] <http://www.processing.org/>