
VEHICLE POWERTRAIN


Combustion engine — comparison configuration
ICE / Powertrain 0.8.5 · A1

1 / AVAILABLE TRACTION

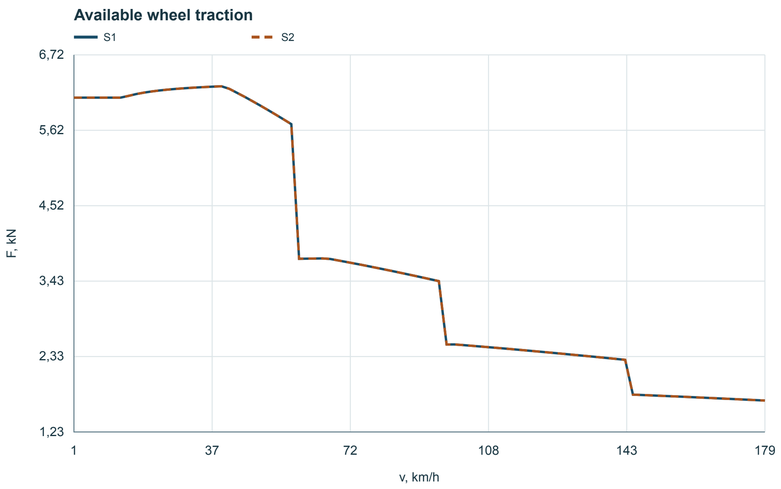


Available wheel traction at initial SOC and the selected limits. S2 is not a continuous characteristic.

2 / WHEEL POWER

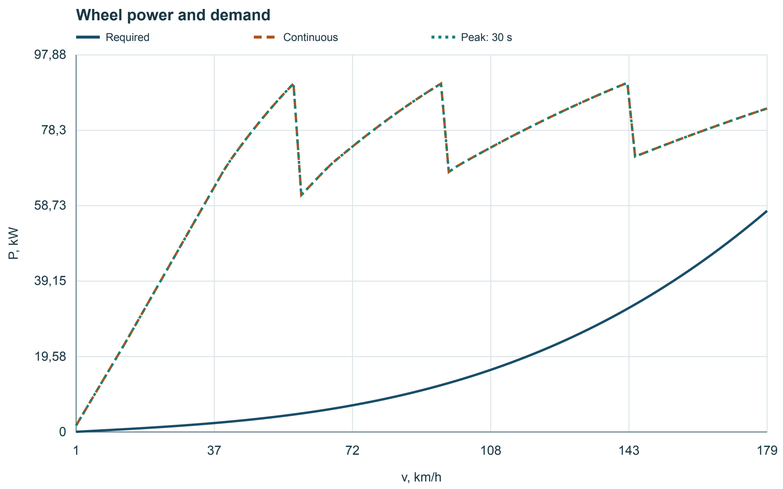


Wheel demand and available power. Initial SOC; peak is short-term, not continuous.

3 / ENGINE: OPERATING POINTS

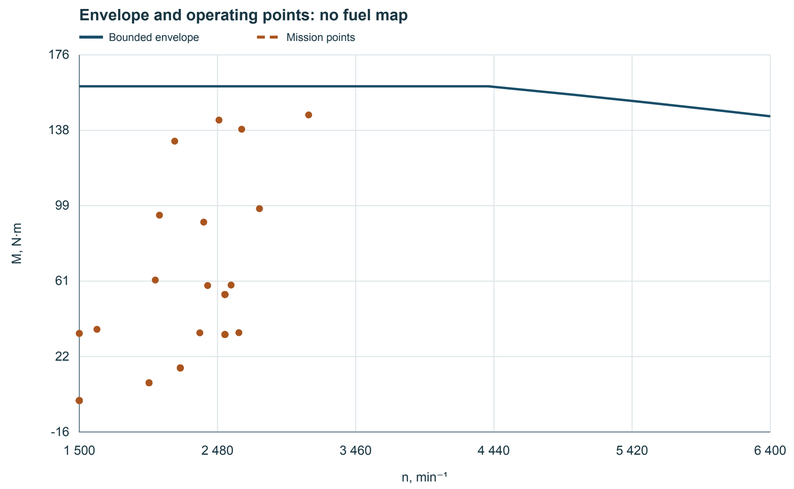


Envelope and mission points. 1ZR has no fuel map; GG2W is a power-based approximation, not a measured 2D map.

4 / FORWARD ACCELERATION

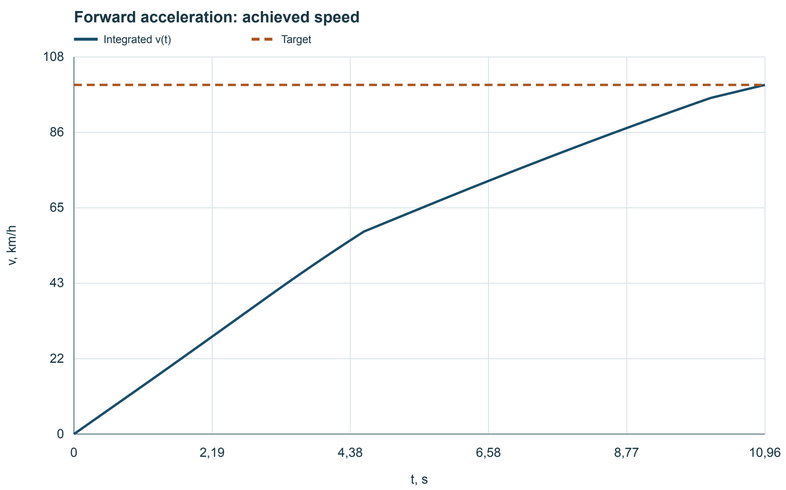


Achieved speed in forward acceleration, not a prescribed cycle. Peak duration is limited, followed by S1; shifts are instantaneous.

5 / POWER FLOWS

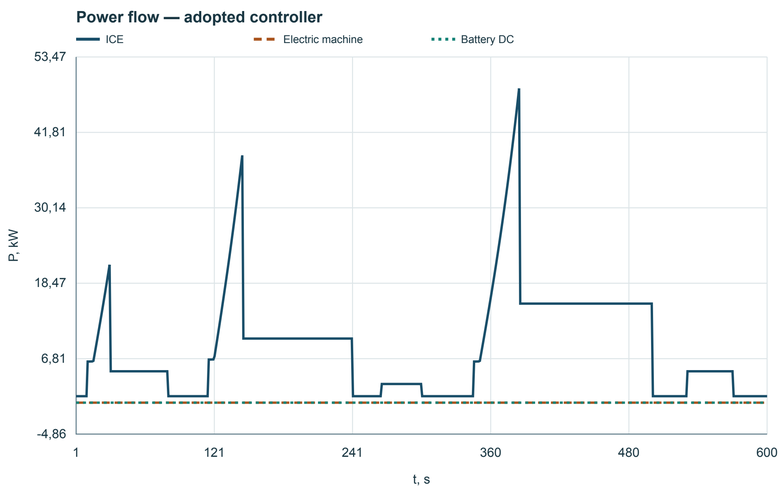

Mission power flows; positive battery sign means discharge, negative means charging.

6 / PRESCRIBED CYCLE

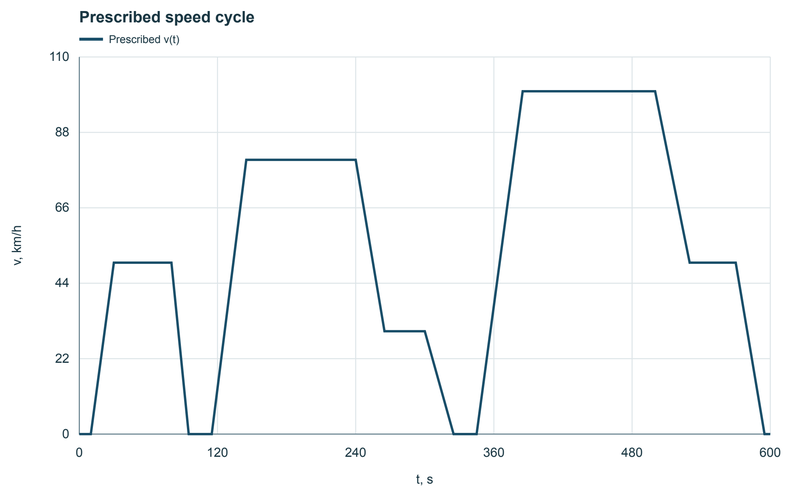

Prescribed mission speed. This is an author-defined example or imported cycle, not a verified achieved speed when a deficit exists.

Prescribed cycle supplied within the adopted model · 9,264 km · SOC 85 → 85% · Mass 1 600 kg.
Requirements met in the model. Preliminary engineering calculation, not OEM/certification performance. Outside contour fit / generating assumptions: 0 s. Sources, units and conditions appear in the report. The peak envelope is not a continuous characteristic.