



VIEW FROM BELOW 1:10

X = +X, Y = -Y (pod axes); looking up (toward +Z)

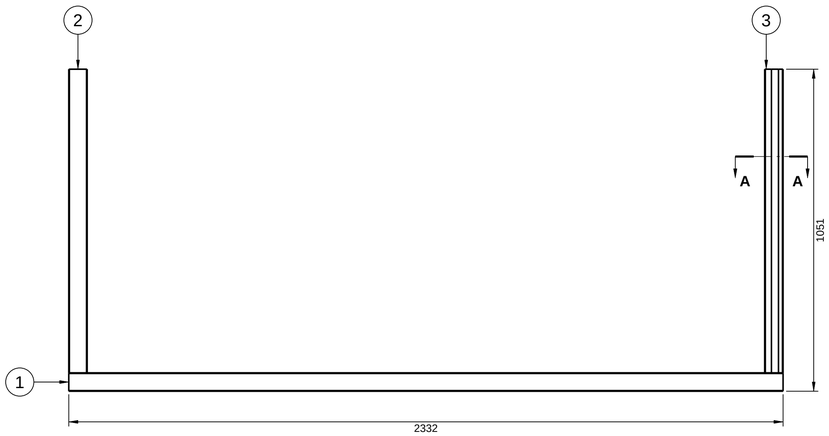


FRONT VIEW 1:10

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION A-A 1:2

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION B-B 1:2

X = +X, Y = -Y (pod axes); looking up (toward +Z)

PARTS LIST: 810201 INTERIOR - LIGHT SHELF ASSY

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	811201	INTERIOR - LIGHT SHELF - BACK	1	Aluminium 5052-H32 sheet (alloy HOLD)	powder coat, charcoal (RAL HOLD)
2	811202	INTERIOR - LIGHT SHELF - SIDE LH	1	Aluminium 5052-H32 sheet (alloy HOLD)	powder coat, charcoal (RAL HOLD)
3	811203	INTERIOR - LIGHT SHELF - SIDE RH	1	Aluminium 5052-H32 sheet (alloy HOLD)	powder coat, charcoal (RAL HOLD)
4	718101	ELECTRICAL - LED PROFILE - LIGHT SHELF - SURFACE 23 X 12.5	1	aluminium	anodised as supplied; colour to match the shelf (HOLD)
5*	718102	ELECTRICAL - LED PROFILE COVER - SATIN - CLIP-IN	1	polycarbonate, satin (grade HOLD)	satin, as supplied: at least 86 % light transmission (ASTM D1003)
6*	718103	ELECTRICAL - LED PROFILE END CAP	2	plastic, as supplied	as supplied
7*	718104	ELECTRICAL - LED PROFILE MOUNTING CLIP	3	steel, as supplied	as supplied

NOTES

1. Parts, quantities, materials and finishes as the parts lists 810000_P01_INTERIOR-PARTS-LIST_BOM.csv and 710000_P01_ELECTRICAL-PARTS-LIST_BOM.csv (their rows under 810201, in that order), word for word; each part's own drawing holds its sizes and tolerances.
2. Items marked * (5 718102, 6 718103, 7 718104) are not in the STEP 810000_P01_INTERIOR_STEP.step P01: they have no balloon; their places are in their rows and the joints register.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Fitted on site, after the ceiling cassettes, along the tops of the side and back walls (assembly guide, step 19): the back run 811201 on the back wall's lining (Y 766), full width (X -1166 to 1166); the side runs 811202 LH and 811203 RH on the side walls' linings, from the soffit's back face (Y -285) to the back run, which they butt (INTERIOR feature rationale F-8102-03, F-8102-04). The underside at Z 2230, the back flange's top at Z 2270 (F-8102-02).
5. HOLD: each run's back flange is screwed to the wall cassettes; the fixing and its spacing are on hold with WALL's cassette tray (F-8102-07), and the parts list names no fixing yet.
6. ELECTRICAL's up-light strip runs on each run's bottom, inside the U, aimed at the felt ceiling; the U is its wiring channel (F-8102-01). ELECTRICAL's down-light LED profile 718101 clips under the right run (F-8102-05). The feed comes through the back run's Ø10 hole at X 355 and the call light's drop through the right run's at Y -209.5, both at Z 2250 (F-8102-06); the feed is plugged in at step 19.
7. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **INTERIOR - LIGHT SHELF ASSY** Kệ đèn hất (cụm)			
PART NUMBER: **810201**	REV: **P01**	DRAWING NUMBER (FILE): **810201_P01_INTERIOR-LIGHT-SHELF-ASSY_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:10	SIZE: A1	UNITS: **UNITS: mm**	MASS: 1.359 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			