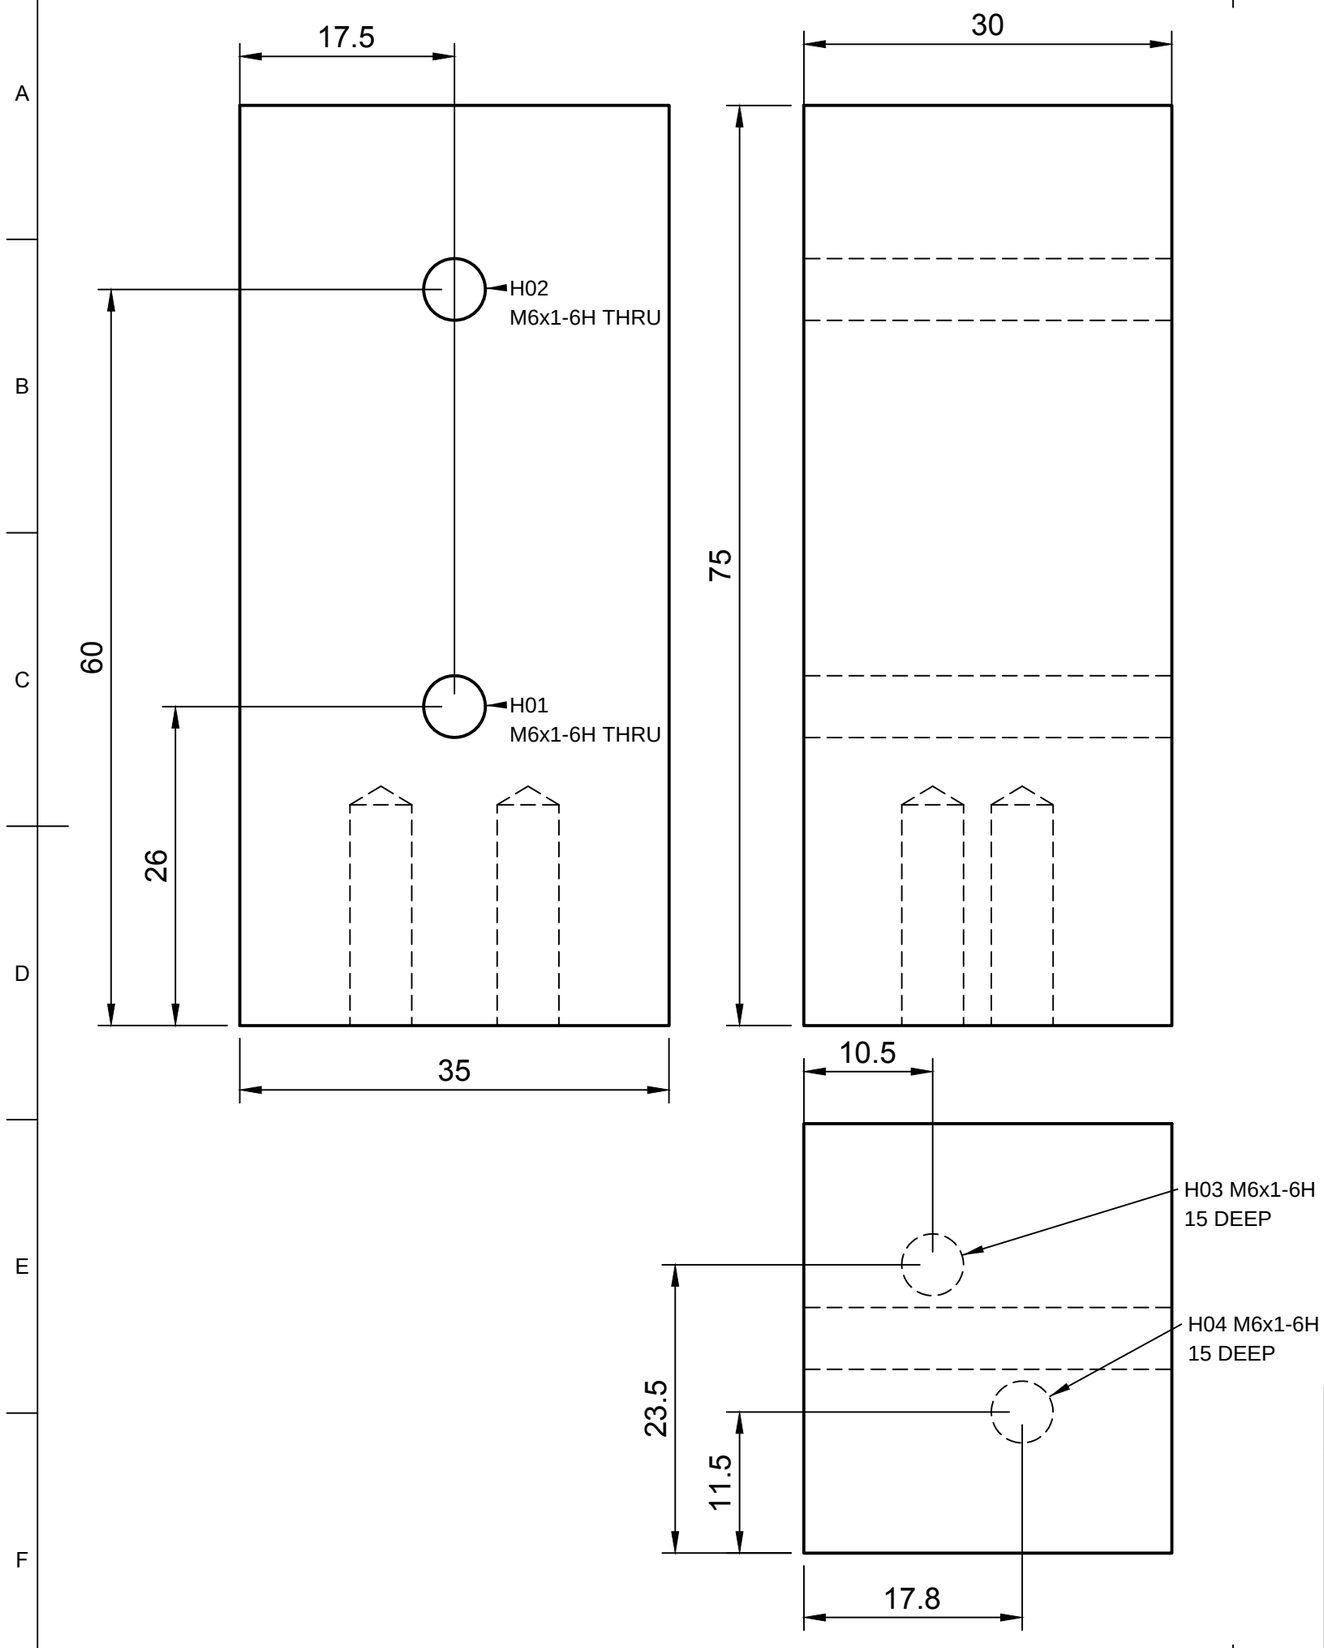



NOTES (111211 TO 111215 P01, PROPOSED) - TABULATED

1. UNITS MM. SCALE 2:1, VIEW B TOO. ISO FIRST-ANGLE PROJECTION. GENERAL TOLERANCE ISO 2768-m UNLESS STATED.
2. MATERIAL EN AW-6061-T6. FINISH MILL FINISH, DEBURRED, NO SHARP EDGES.
3. ONE BLOCK 35 x 75, 30 LONG ON ITS CENTRE LINE. THE STUD FACE IS CUT AT ANGLE A ABOUT ITS CENTRE LINE, LONG SIDE ON THE OUTSIDE OF THE TURN. THE THREE VIEWS SHOW 111211 (A=0); VIEW B SHOWS 111212 FROM ABOVE; 111213 IS ITS OPPOSITE HAND, AT ITS OWN A.

PART	A	HAND	LONG	SHORT	H03, H04 (X, Y)	POD	WHERE
111211	0°	-	30.00	30.00	10.5, +6; 17.8, -6	2	BACK CORNERS
111212	24.14°	LH	37.84	22.16	10.5, ±7	1	FRONT LEFT
111213	24.02°	RH	37.80	22.20	10.5, ±7	1	FRONT RIGHT
111214	7.25°	LH	32.23	27.77	10.5, ±7	1	LEFT KNEE
111215	0°	-	30.00	30.00	10.5, ±7	1	FR1 INLINE

4. H01, H02: M6x1-6H THROUGH, SQUARE TO THE STUD FACE ON ITS CENTRE LINE, 26 AND 60 ABOVE THE BOTTOM; ±0.1 TO THE CENTRE LINE AND THE BOTTOM. CUT ANGLE ±0.25°. TAPPED HOLES ARE DRAWN AT THE MINOR DIAMETER; THE CALLOUTS GIVE THE SIZE.
5. H03, H04: M6x1-6H, THREAD 15 DEEP, DRILL Ø5.0 x 18, FROM THE BOTTOM, AT THE TABLE'S X (FROM THE BACK FACE) AND Y (FROM THE CENTRE LINE, +Y UP IN THE TOP VIEW). THE TOP VIEW GIVES Y FROM THE -Y SIDE FACE (17.5 + Y). ±0.1 TO THE BACK FACE AND THAT SIDE FACE (D-144).
6. JOINTS REGISTER J-BASE-02; POSITIONS v2/01-CAD-Native/joints/corner-keys.csv; ONE STEP PER PART NUMBER IN v2/03-Manufacturing/joints/.

VIEW B, 2:1: 111212 (LH, FRONT LEFT CORNER) FROM ABOVE

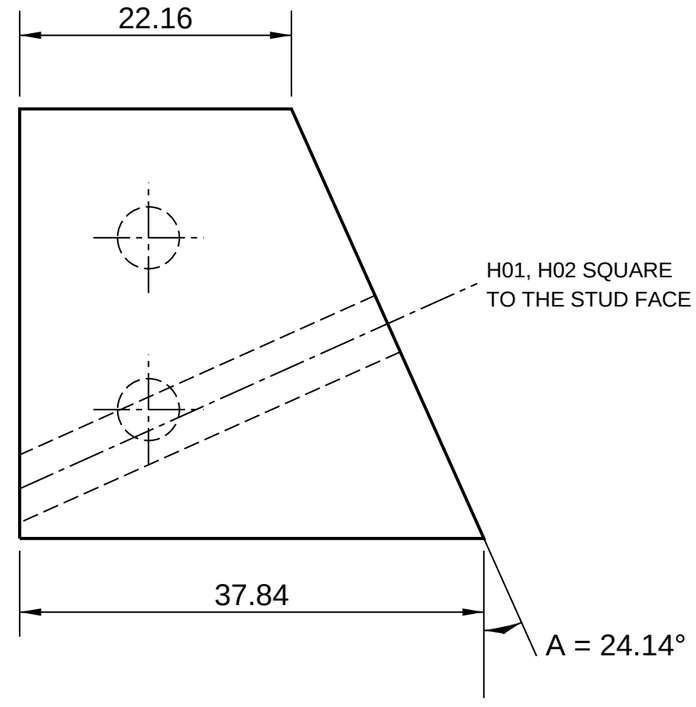

Dept.	Technical reference	Created by	Approved by
		Autonomous 1/11/26	
		Document type	Document status: DRAFT
		Title: BASE - CORNER KEY - TABULATED: 111211, 111212, 111213, 111214, 111215	DWG No.: 111211
			Rev.: P01 · Date of issue · Sheet: 1/1