

FACE OF THE POWER UNIT, seen from inside the pod (looking toward +Y), 1:3

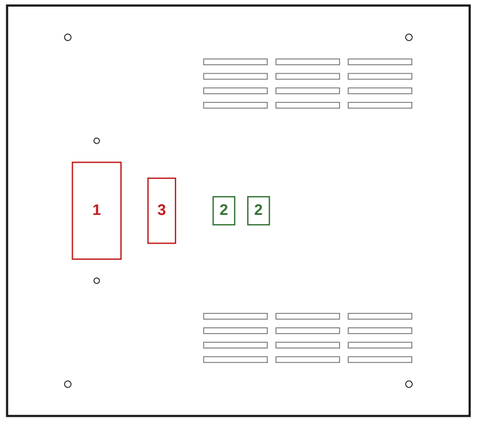

1 GFCI receptacle, tamper-resistant duplex NEMA 5-15R, UL 943 Class A (718007, P&S 1597TRW) in a decorator opening 33.6 x 67, two 6-32 plate screws 96.8 apart (718054)
2 LAN keystone jacks, Cat6, snapped into 14.9 x 19.4 openings (718040, PANDUIT NK688MWH)
3 breaker 1P 15 A, UL 489, through its 19 x 45 window (718003, EATON FAZ-C15/1-NA-L)
US 120 V 60 Hz, UL-listed parts (D-133)


Plate 320 x 284 over the unit (X 95-391, Z 870-1130 in the pod), 2 mm off the felt; 4 x M4 at 42 / 22 from the plate's edges.

INSIDE, plate off, 1:4 (solid: on the back wall; dashed: on the plate)



1 PS1 CLG-100-24, 39 deep
2 PS2 LPV-60-24, 32 deep
3 PS3 LPV-60-12, 32 deep
4 controller LT-995, 39 deep
5 breaker, DIN rail, 70 deep
6 lever connectors L, N, 19 deep
7 GFCI receptacle, 29 deep
8 LAN jacks, 30 deep

DEPTH SECTION THROUGH B2, 2:1 (toward the skin to the right)

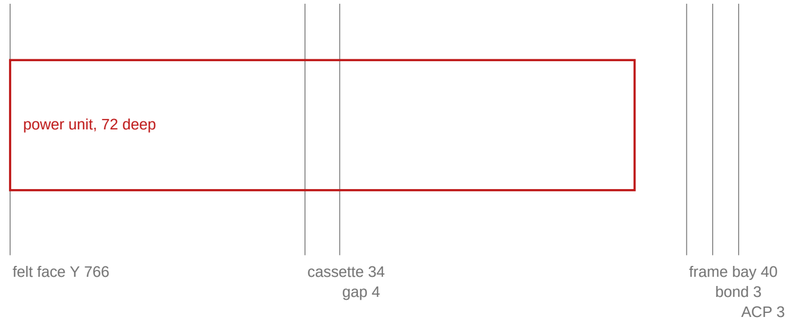

Unit fixed to B2's frame (fixing HOLD, WALL IF-12); cassette cut-out 4 mm clear all round (floating lining).

ISO first angle

PARTS OF 710001

ITEM	PART NO.	NAME	QTY	UNIT	MATERIAL / FINISH	STATUS
1	711001	ELECTRICAL - POWER UNIT - ENCLOSURE BODY	1	pc	aluminium 5052-H32 1.0 mm, mill finish (hidden, D-79)	DRAFT; HOLD feature: the fixing to B2's frame (WALL, IF-12)
2	711002	ELECTRICAL - POWER UNIT - FRONT PLATE	1	pc	aluminium 5052-H32 1.5 mm, black anodised AA20 (visible aluminium, D-67)	DRAFT; HOLD features: the GFCI receptacle's decorator opening and the two keystone openings, set by the picked parts' drawings (D-133)
3	718001	ELECTRICAL - 12 V SUPPLY - 60 W CLASS 2 - MEAN WELL LPV-60-12	1	pc	potted plastic case, IP67	source (datasheet); not ordered (guideline 4.3)
4	718081	ELECTRICAL - 24 V SUPPLY - 60 W CLASS 2 - MEAN WELL LPV-60-24	1	pc	potted plastic case, IP67	source (datasheet); not ordered (guideline 4.3)
5	718082	ELECTRICAL - 24 V SUPPLY - 96 W CLASS 2 - VOICE KIT - MEAN WELL CLG-100-24	1	pc	aluminium case, potted, IP67	source (datasheet); not ordered (guideline 4.3)
6	718002	ELECTRICAL - LED CONTROLLER - 5 CHANNEL 12-24 V PWM - DMX512 - LTECH LT-995	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
7	718003	ELECTRICAL - CIRCUIT BREAKER - 1P 15 A C - UL 489 - EATON FAZ-C15/1-NA-L	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
8	718004	ELECTRICAL - APPLIANCE INLET - POWERCON TRUE1 TOP - NEUTRIK NAC3MPX-TOP	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
9	718005	ELECTRICAL - INLET SEALING CAP - NEUTRIK SCNAC-01	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
10	718006	ELECTRICAL - LAN JACK - ETHERCON CAT6 - IDC - NEUTRIK NE8FDY-C6-B	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
11	718007	ELECTRICAL - RECEPTACLE - GFCI TR DUPLEX 15 A - NEMA 5-15R - P&S 1597TRW	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
12	718010	ELECTRICAL - DIN RAIL - TS35 X 7.5 - 100 MM - PHOENIX CONTACT NS 35/7,5 PERF 2000MM	1	pc	steel, zinc plated	source (datasheet); not ordered (guideline 4.3)
13	718011	ELECTRICAL - FUSE HOLDER - ATO BLADE - INLINE - LITTELFUSE FHAC0001ZXJ	2	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
14	718012	ELECTRICAL - FUSE - ATO 5 A 32 V - LITTELFUSE 0287005.PXCN	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
15	718013	ELECTRICAL - FUSE - ATO 5 A 32 V - LIGHTS - LITTELFUSE 0287005.PXCN	1	pc	as supplied	source (datasheet); not ordered (guideline 4.3)
16	718019	ELECTRICAL - SCREW - M4 X 8 - ISO 7045 A2 PAN HEAD - FABORY 51340.040.008 DIN 7985-H	4	pc	stainless steel, plain (A2 stainless)	source (datasheet); not ordered (guideline 4.3)
17	718049	ELECTRICAL - SPACER - M4 X 2 MM - NYLON, BLACK	4	pc	nylon 6/6, black, as supplied	HOLD: the reason is in the parts list 710000
18	718054	ELECTRICAL - SCREW - 6-32 X 1/2 - OVAL HEAD, BLACK	2	pc	steel, black oxide	HOLD: the reason is in the parts list 710000
19	718047	ELECTRICAL - CLINCH NUT - M4 - FOR 1.0 MM ALUMINIUM - PEM CLA-M4-1	4	pc	aluminium, plain, as supplied	source (datasheet); not ordered (guideline 4.3)
20	718014	ELECTRICAL - EARTH STUD - M5 SELF-CLINCHING - PEM FHA-M5-12	1	pc	aluminium, plain, as supplied	source (datasheet); not ordered (guideline 4.3)
21	718079	ELECTRICAL - NUT - M5 - SERRATED FLANGE - A2 - FABORY 51119.050.001	1	pc	stainless A2, plain	source (datasheet); not ordered (guideline 4.3)
22	718080	ELECTRICAL - LEVER CONNECTOR - 5 CONDUCTOR - UL 486C - WAGO 221-415	2	pc	polycarbonate, transparent	source (datasheet); not ordered (guideline 4.3)
23	718083	ELECTRICAL - BONDING WASHER - SERRATED M4 A2 - FABORY 51460.040.001 DIN 6798 A	1	pc	stainless A2	source (datasheet); not ordered (guideline 4.3)
24	718015	ELECTRICAL - BONDING WASHER - SERRATED M6 A2 - FABORY 51460.060.001 DIN 6798 A	1	pc	stainless A2	source (datasheet); not ordered (guideline 4.3)
25	718016	ELECTRICAL - RING TERMINAL - INSULATED 16-14 AWG - PANDUIT PV14-10R-C/PV14-14R-C	5	pc	tinned copper	source (datasheet); not ordered (guideline 4.3)
26	718017	ELECTRICAL - CONDUIT - FLEXIBLE NONMETALLIC 1/2 IN - ELECTRI-FLEX LIQUATITE NM-11	0.6	m	PVC, UL 1660 liquidtight flexible nonmetallic (LFNC-B)	source (datasheet); not ordered (guideline 4.3)
27	838001	HARDWARE - SOCKET HEAD BOLT - M6 X 16 - ISO 4762 8.8 ZINC	4	pc	steel, zinc plated	source (joints register, D-63); not ordered (guideline 4.3)
28	838004	HARDWARE - WASHER - M6 LARGE - ISO 7093-1 6.4 X 18 A2	4	pc	stainless steel, plain (A2 stainless)	source (joints register, D-63); not ordered (guideline 4.3)
29	838003	HARDWARE - RIVET NUT - M6 - STEEL ZINC - SHEREX CAL2-610-4.2	4	pc	steel 1008/1010 (maker), zinc plated, trivalent passivation (maker)	source (joints register, D-63); not ordered (guideline 4.3)
30	718020	ELECTRICAL - WIRE - UL 1015 14 AWG (BLACK, WHITE, GREEN) - ALPHA WIRE 461419 BK005/WH005/GR005	2.76	m	as supplied	source (datasheet); not ordered (guideline 4.3)
31	718021	ELECTRICAL - WIRE - UL 1015 14 AWG (BLACK, WHITE) - ALPHA WIRE 461419 BK005/WH005	1.5	m	as supplied	source (datasheet); not ordered (guideline 4.3)
32	718022	ELECTRICAL - WIRE - UL 1015 14 AWG GREEN - ALPHA WIRE 461419 GR005	0.3	m	as supplied	source (datasheet); not ordered (guideline 4.3)
33	718087	ELECTRICAL - WIRE - UL 1015 18 AWG - LEADS IN THE POWER UNIT - ALPHA WIRE 3075	3.4	m	as supplied	source (datasheet); not ordered (guideline 4.3)
34	718073	ELECTRICAL - ISOLATED SENSE MODULE - 24 V RAILS AND LIGHT CURRENT	1	pc	as supplied	HOLD: the reason is in the parts list 710000
35	718074	ELECTRICAL - FEMALE DISCONNECT - 0.250 IN - 16-14 AWG - INSULATED - PANDUIT DNF14-250FIB-C	3	pc	tin-plated brass, nylon insulation	source (datasheet); not ordered (guideline 4.3)
36	718075	ELECTRICAL - CONDUIT CONNECTOR - LFNC 1/2 IN - STRAIGHT - ELECTRI-FLEX NMLT-11	2	pc	nylon 6, as supplied, as supplied	source (datasheet); not ordered (guideline 4.3)

NOTES
Wiring inside the unit: wiring diagram sheet 1 (710000). Leads out: W10a top (6-way), W20a/W24a/W30a/W31a right side.
Factory test of the unit before B2 ships (US 120 V, D-133): ground continuity <= 0.1 ohm; dielectric withstand 1240 V AC for 1 min, mains to ground (1000 V + 2 x 120 V); the GFCI's TEST button trips it; rails 24 V (PS1, PS2) and 12 V (PS3) +/-3 %.
UNITS: mm. GENERAL TOLERANCE: harness segment lengths +20/-0 mm; positions taken from the route model +/-5 mm;
sheet-metal parts ISO 2768-m (their DXF or drawing rules). Status of every number: parts list and harness list.
Every harness segment is tested in the factory before it ships (D-87): continuity, polarity, no shorts, latch pull,
label with its ID. Cables clip to the cassette tray only (D-26). Supply side = receptacle (female contacts).
Bought parts are named from their datasheets (those still on HOLD give their reason in the parts list 710000); no order, no supplier contact. From the electrical model and parts data.

PROJECT	FocusPod v2 - Spaceship
TITLE	**ELECTRICAL - POWER UNIT - B2: ASSEMBLY**
DWG / PART NO.	710001 (assembly)
REV / STATUS	P01 / DRAFT - not for production
UNITS / SCALE	mm / 1:3 face, 2:1 section (schematic)
SHEET	1 of 1 (A2)
DATE / BY	2026-11-01 / Autonomous
SOURCE	electrical_model.py, electrical_parts.py