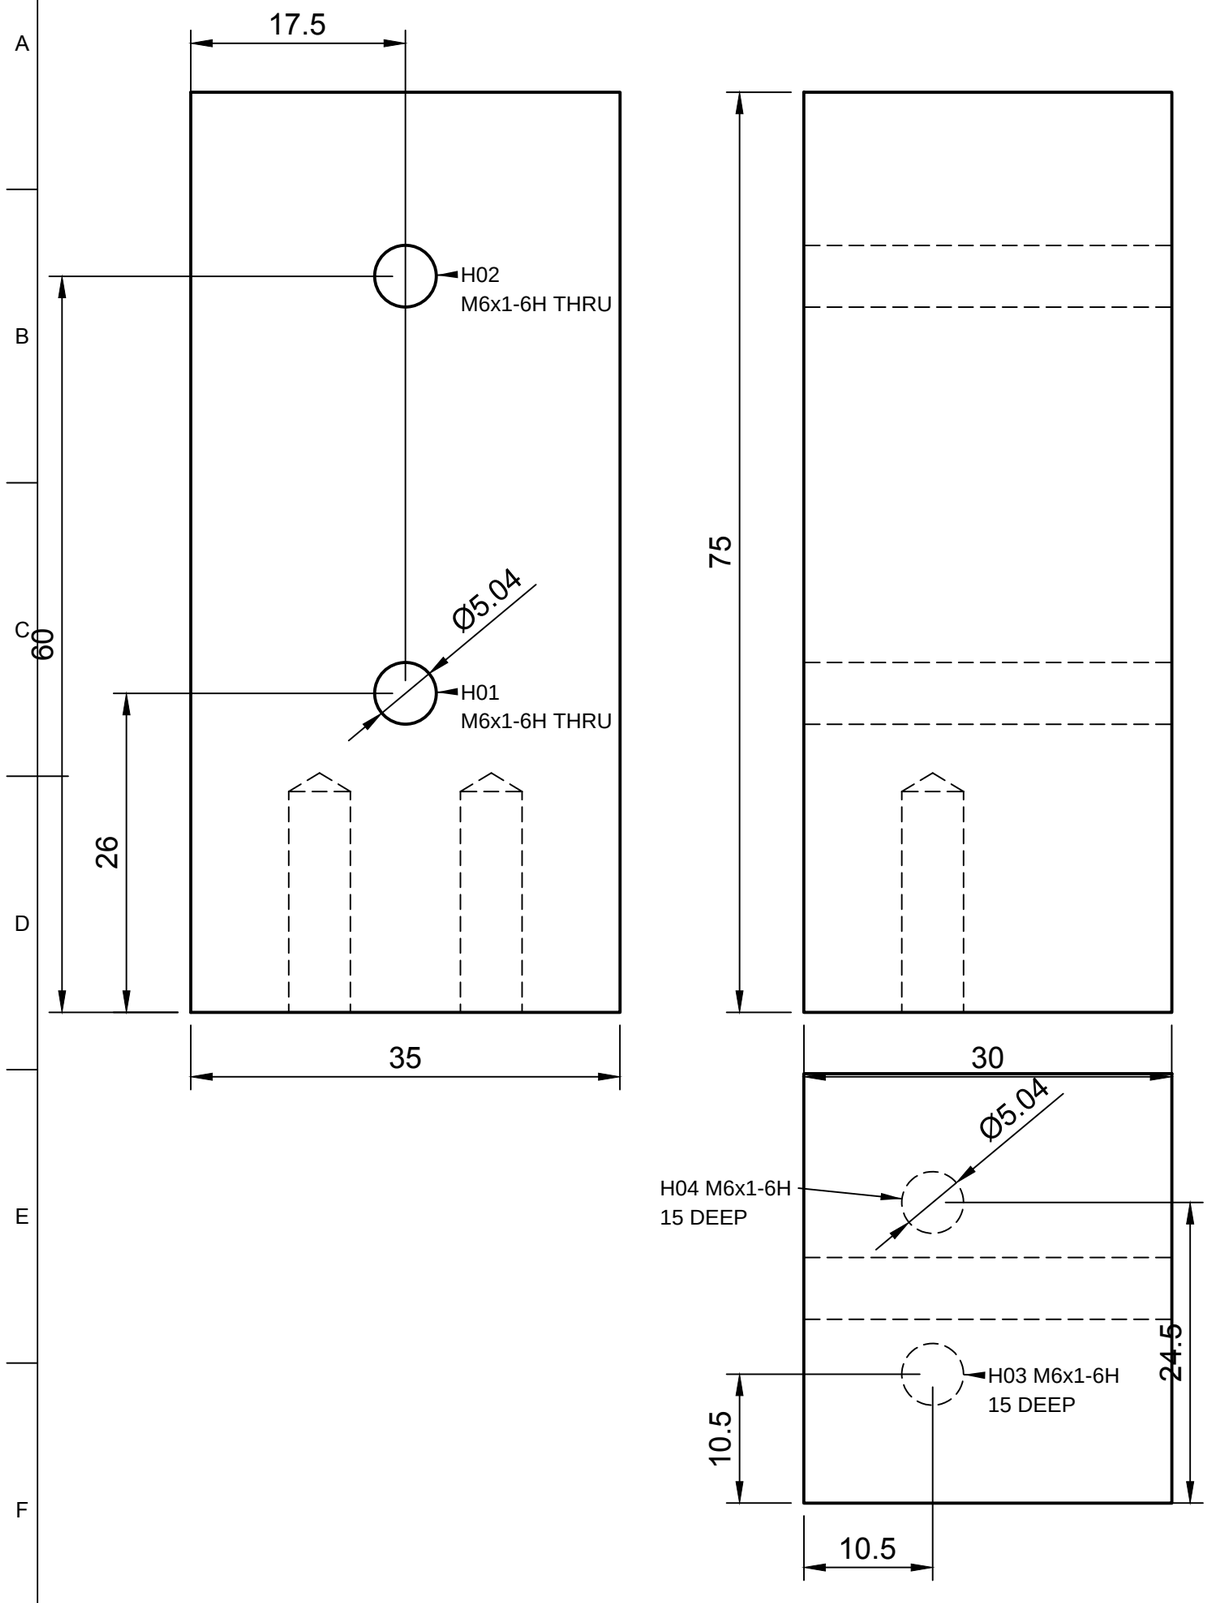



NOTES (111211 TO 111214 P01, PROPOSED) - TABULATED

1. UNITS MM. ISO FIRST-ANGLE PROJECTION. GENERAL TOLERANCE ISO 2768-m UNLESS STATED.
2. MATERIAL EN AW-6061-T6. FINISH MILL FINISH, DEBURRED, NO SHARP EDGES.
3. ONE BLOCK 35 x 75, 30 LONG ON ITS CENTRE LINE. THE STUD FACE IS CUT AT ANGLE A ABOUT ITS CENTRE LINE, LONG SIDE ON THE OUTSIDE OF THE TURN. THE THREE VIEWS SHOW 111211 (A = 0); VIEW B SHOWS 111212 FROM ABOVE; 111213 IS 111212'S OPPOSITE HAND (MIRRORED ABOUT THE CENTRE LINE).

PART	A	HAND	LONG SIDE	SHORT SIDE	PER POD	WHERE
111211	0°	-	30.00	30.00	3	BACK CORNERS, FR1 INLINE
111212	24.14°	LH	37.84	22.16	1	FRONT LEFT CORNER
111213	24.02°	RH	37.80	22.20	1	FRONT RIGHT CORNER
111214	7.25°	LH	32.23	27.77	1	LEFT KNEE

4. H01, H02: M6x1-6H THROUGH, SQUARE TO THE STUD FACE ON ITS CENTRE LINE, 26 AND 60 ABOVE THE BOTTOM; ±0.1 TO THE CENTRE LINE AND THE BOTTOM. CUT ANGLE ±0.25°. THE VIEWS SHOW THE TAPPED HOLES AT THE 6H MEAN MINOR Ø5.04 (TAP DRILL Ø5.0).
5. H03, H04: M6x1-6H, THREAD 15 DEEP, DRILL Ø5.0 x 18, FROM THE BOTTOM, 10.5 FROM THE BACK FACE, 7.0 EITHER SIDE OF THE CENTRE LINE.
6. JOINTS REGISTER J-BASE-02; POSITIONS v2/01-CAD-Native/joints/corner-keys.csv; ONE STEP PER PART NUMBER IN v2/03-Manufacturing/joints/.

VIEW B, 2:1: 111212 (LH, FRONT LEFT CORNER) FROM ABOVE

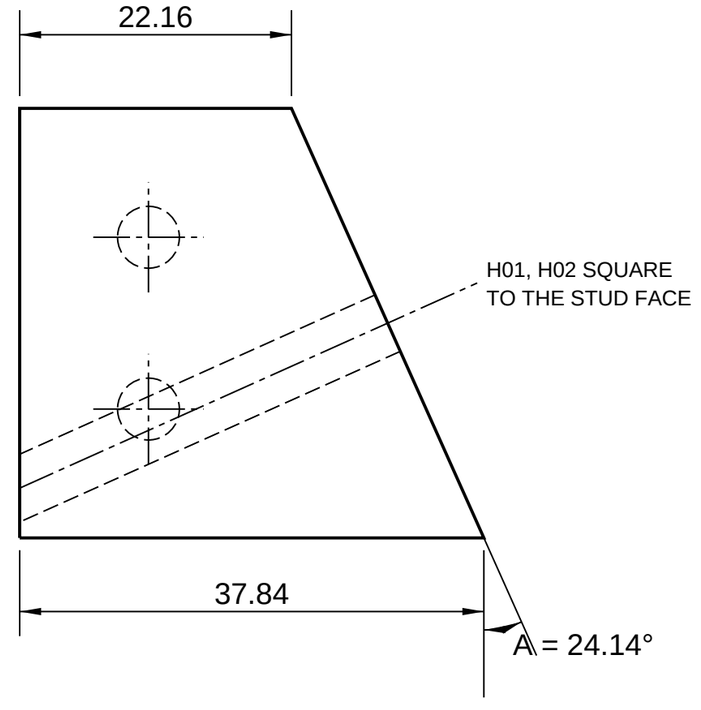

Dept. / Technical reference		Created by: Autonomous 1/11/26	Approved by
		Document type	Document status: DRAFT
		Title: BASE - CORNER KEY - TABULATED: 111211, 111212, 111213, 111214	DWG No.: 111211
			Rev.: P01 / Date of issue / Sheet: 1/1