

NOTES

1. Glass: 4+4 laminated safety glass, two toughened, heat-soaked panes (EN 12150, EN 14179) with 0.76 mm grey PVB, 8.76 nominal (D-27, D-46); it stays 4+4 (PM ruling 2026-10-31). Product HOLD until named (ISS-074).
2. Outline 1:1 in 361003_P01_FRONT-FIXED-GLASS-4-4-LAMINATED_DXF.dxf. The visible outline is the skeleton's measured v1 pentagon; the four held edges run 11.5 past it into hidden channels in the base band, DR and DT; the free edge runs parallel to the door's latch edge, 4.0 off (PM rulings).
3. No holes. Edges ground and arrised before toughening. Tolerances (PROPOSED, the supplier confirms): sizes and diagonals +/-1; corners at the knee and bottom right to the DXF.
4. Fit order (PM ruling 2026-11-01): the bottom channel comes factory-fitted on BASE's sill; on site the pane drops into it, then DR from the side, then DT from above.
5. UNITS: mm. Angles in degrees. Mass in kg.
6. Projection: first angle (ISO 5456-2). The front view looks toward +Y, at the door from outside the pod; the iso view is for reading only. 2D axes: front X(2D)=X, Y(2D)=Z (guideline 3.3). Coordinates are the pod's (conventions 4).
7. No ISO 2768 class on glass, seals or sandwich parts (conventions 3). Tolerances given here are PROPOSED from function until the maker confirms what it holds.
8. Status DRAFT P01: for the prototype and the factory's door sample only, not released (conventions 8).
9. Why each feature is where it is: v2/02-Drawings/front/FEATURE-RATIONALE.md. Parts list: v2/03-Manufacturing/front/*_BOM.csv.

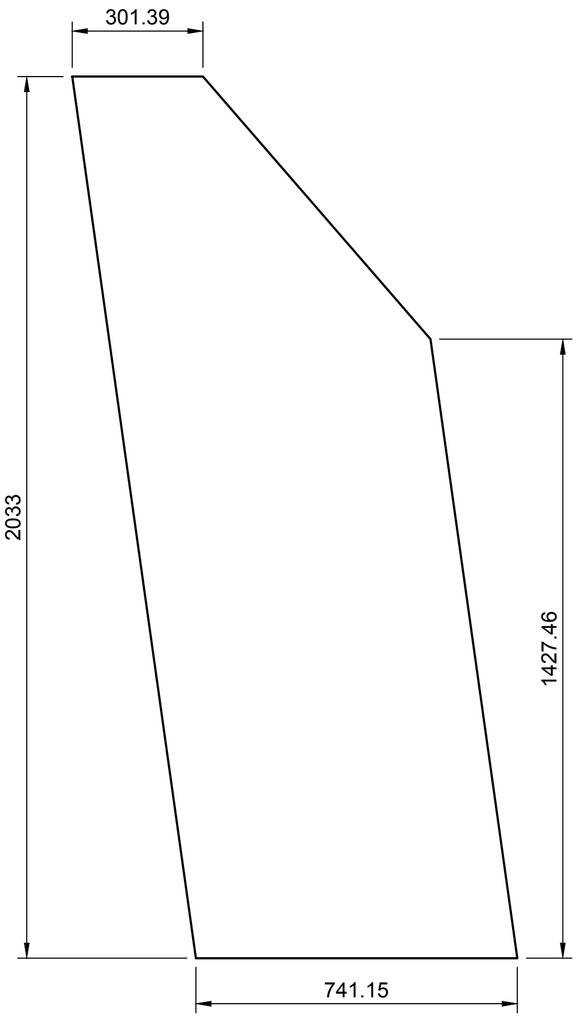

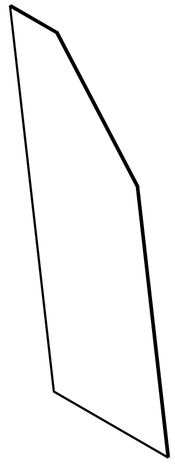

TITLE DATA	
PART NO.	361003
NAME	FRONT - FIXED GLASS - 4+4 LAMINATED
TÊN	Tấm kính cố định 4+4
REV / STATUS	P01 / DRAFT
MATERIAL	4+4 laminated toughened heat-soaked glass, grey PVB
FINISH	edges ground and arrised
SCALE	1:10
UNITS	mm
PROJECTION	first angle
SHEET	A2
MASS	28.6 kg (calculation)

Dept.	Technical reference	Created by	Approved by
		Autonomous 1/11/26	
		Document type	Document status: DRAFT
		Title: FRONT - FIXED GLASS - 4+4 LAMINATED	DWG No.: 361003
			Rev.: P01 / Date of issue / Sheet: 1/1