
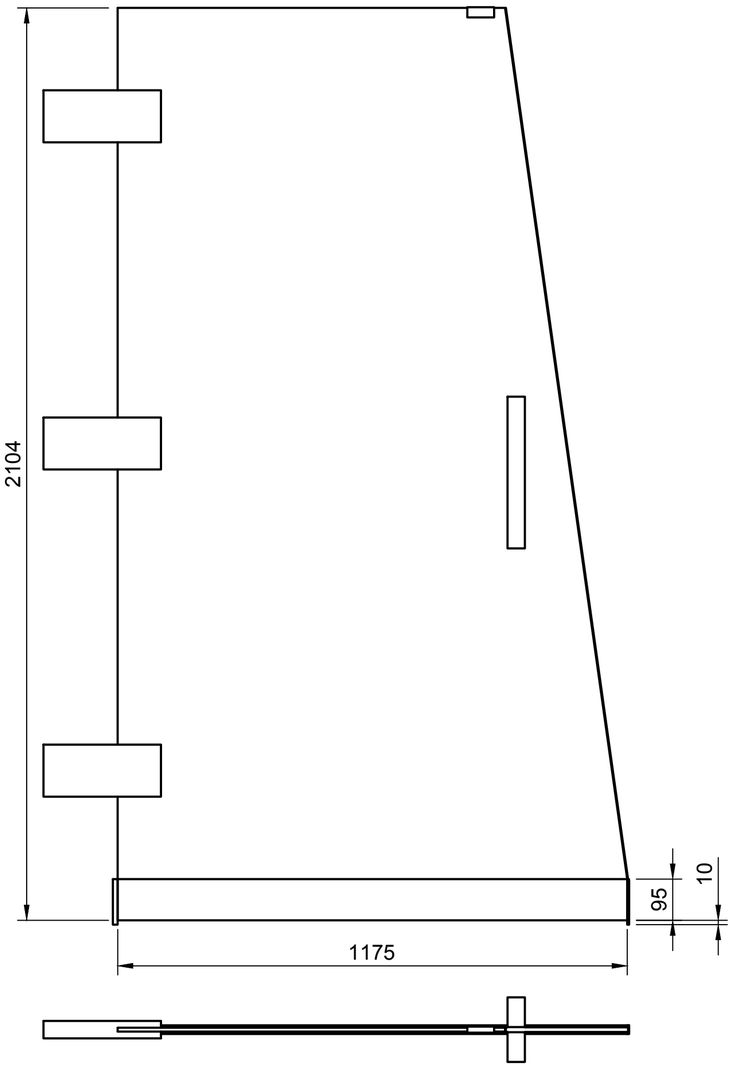



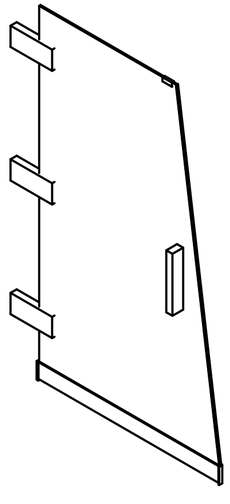

NOTES

1. Door unit (D-56): leaf 361001, kick strip 361002 with the drop seal 368001 in its cavity and the U-seal 368002 in its pocket; the strike 368102 (Sugatsune HT-MSG62-U10) of the magnetic catch in DT, packed to the 8.76 laminate by the 1.2 stainless shim 361004 behind its liner; the door's half 368006 of the 180 deg magnetic seal, from Z 105; three hinges 368101 (HOLD) and the pull 368103 as reserved spaces (red).
2. No latch on the glass (PM ruling): the 35 N magnetic door-stop catch (Sugatsune HT-MSG62) in DT's underside holds the door at its top latch corner; the hinges hold it at its closed position; the 180 deg magnetic seal pulls edge to edge in the glass plane, so the fixed pane's free edge carries no closing load.
3. Hinges (HOLD): rated for the 8.76 laminate, at least 60 kg and the 1176 width; two-part lift-off, set in the factory (frame halves fitted in DL, leaf halves on the door), so on site the door lifts on with no adjustment (D-138); the 5 mm key only where the named set has a locking screw. Pivot on or outside the kick strip's outer face (Y -709 over the glass, further out in the gap or in DL), so the strip's hinge end and its brush only move away from BASE's plate. No holes in the glass until named; the hinge is a question in the owner's quote request, dormakaba first (D-46).
4. Brush seal 368008 (D-150) on the kick strip's end, from the floor to Z 105: it closes the slot to BASE's sill end plate (X 218.5). Ultrafab ULTRA PLUG pile on 3M VHB LSE-110WF tape, 6.0 overall; fitted on site at 10 deg C or warmer after an IPA wipe (3M's sheet), once the glides are set and the door hangs, pressed down onto the real floor; it ships in the door's kit bag (PM rulings 2026-11-01).
5. Brush seal 368009 (D-154) on the kick strip's hinge end, the same pile and tape 13.0 overall on the 11 mm slot to BASE's FL2 end plate (X -972), from the floor to Z 105, open over the drop seal's cavity end so its release button reaches the plate; fitted on site as 368008.
6. Pull pair 368103: Häfele 903.10.390 with fixing set 909.00.900 (PM ruling 2026-11-01), centred 1042.5 above the floor, its bar 867.5 to 1217.5, inside the US band 865 to 1220. US supply, overall length, projection and the laminate are questions in the owner's quote request; no holes in the glass until they are answered.
7. Mass of the unit as it hangs: 48.76 kg (calculation; parts list).
8. Gaps: 6 to DT (the catch), 4 to the fixed glass (the seal), 10 under the strip to the room floor (D-132).
9. UNITS: mm. Angles in degrees. Mass in kg.
10. Projection: first angle (ISO 5456-2). The front view looks toward +Y, at the door from outside the pod; the view from above is below it; the view from the left is to its right; the iso view is for reading only. 2D axes: front X(2D)=X, Y(2D)=Z; above X(2D)=X, Y(2D)=Y; left X(2D)=-Y, Y(2D)=Z (guideline 3.3). Coordinates are the pod's (conventions 4).
11. No ISO 2768 class on glass, seals or sandwich parts (conventions 3). Tolerances given here are PROPOSED from function until the maker confirms what it holds.
12. Status DRAFT P01: for the prototype and the factory's door sample only, not released (conventions 8).
13. Why each feature is where it is: v2/02-Drawings/front/FEATURE-RATIONALE.md. Parts list: v2/03-Manufacturing/front/*_BOM.csv.

| TITLE DATA | |
|---|---|
| PART NO. | 360001 |
| NAME | FRONT - DOOR UNIT |
| TÊN | Cụm cửa kính |
| REV / STATUS | P01 / DRAFT |
| MATERIAL | see the parts list |
| FINISH | see the parts list |
| SCALE | 1:10 |
| UNITS | mm |
| PROJECTION | first angle |
| SHEET | A2 |
| DOC TYPE | ASSEMBLY DRAWING |

| Dept. | Technical reference | Created by | Approved by |
|---|---|---|---|
| | | Autonomous 1/11/26 | |
| | | Document type | Document status: DRAFT |
| | | Title: FRONT - DOOR UNIT | DWG No.: 360001 |
| | | | Rev.: P01 / Date of issue / Sheet: 1/1 |