


FRONT VIEW 1:10

X = +X, Y = +Z (pod axes); looking toward +Y

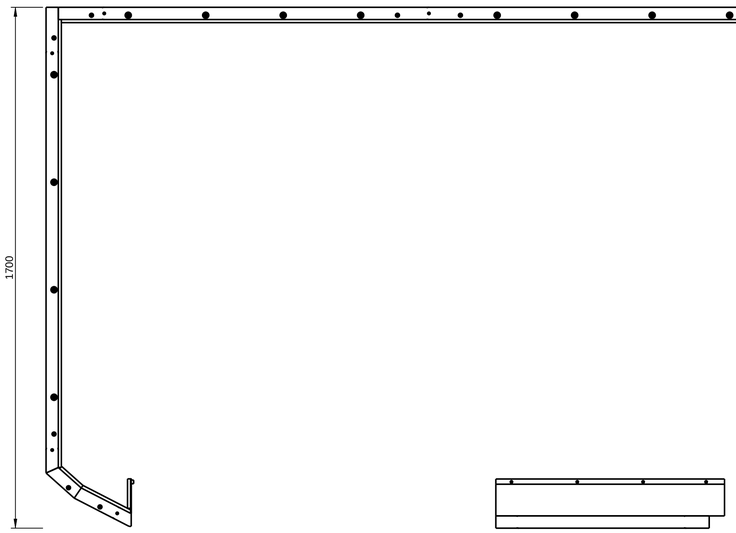

VIEW FROM ABOVE 1:10

X = +X, Y = +Y (pod axes); looking down (toward -Z)

PARTS LIST: 110000 BASE

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	110101	BASE - BAND ASSY - SIDE - LH	1	assembly: band tube with its corner keys, rivnuts, stop washers, spigots, glides and back end cap fitted at the factory	-
2	110102	BASE - BAND ASSY - SIDE - RH	1	assembly: band tube with its rivnuts, stop washers, spigots and glides fitted at the factory	-
3	110103	BASE - BAND ASSY - BACK	1	assembly: band tube with its welded end plates, and its rivnuts, stop washers, spigots and glides fitted at the factory	-
4	110104	BASE - BAND ASSY - FRONT - LH	1	assembly: FL1 and FL2 (with its welded door-end block), the knee key 111214 in FL1's knee end with its 2 fixing screws and 2 hook studs, DL's 2 spigots in rivnuts and FL2's glide, fitted at the factory	-
5	110106	BASE - BAND ASSY - FRONT - FIXED GLASS	1	assembly: FR1 with its sill, FRONT's bottom U-channel screwed on, and the glides, fitted at the factory	-

NOTES

1. Parts, quantities, materials and finishes as the parts list 110000_P01_BASE_BOM.csv (its rows under 110000), word for word; each part's own drawing holds its sizes and tolerances.
2. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
3. Put together on site on the room floor, before the walls (D-87; joints register J-BASE-02): the side bands 110101 and 110102 first; the back band 110103 lowered between them onto their back corner keys' studs; DL's band assembly 110104 next, FL1 along the LH side band's front key studs and FL2 along the knee key's studs, each then down 10; FR1's assembly 110106 last, down onto the intake's inline key studs (the intake comes with P02 batch 3) (BASE feature rationale FB-25, FB-28).
4. The glides are preset at the factory (D-87). On site the ring is levelled from above with a 5 mm hex key through the band tops, up from the highest floor spot, never below 8.5 (FR1's glides by turning their base, FB-24); then its diagonals and the door opening (1190.5 ±2 at the floor) are checked before the walls go on (BASE feature rationale FE-04; test BT-05).
5. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **BASE** Đế / sàn			
PART NUMBER: **110000**	REV: **P01**	DRAWING NUMBER (FILE): **110000_P01_BASE_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:10	SIZE: A1	UNITS: **UNITS: mm**	MASS: 11.5931 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			