
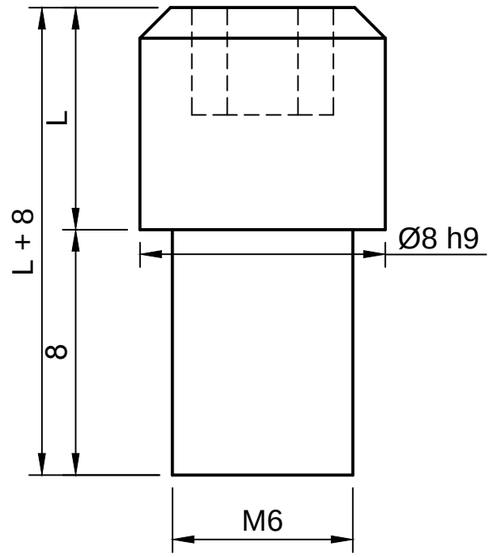




NOTES (831001, 831010 P01, PROPOSED) - TABULATED

1. UNITS MM. SCALE 5:1. ISO FIRST-ANGLE PROJECTION. GENERAL TOLERANCE ISO 2768-m UNLESS STATED.
2. MATERIAL STAINLESS STEEL A2 (1.4301 OR 1.4305). FINISH PASSIVATED, DEBURRED.
3. PIN Ø8 h9 (0 / -0.036), LEAD-IN 1 x 45°. THE FRONT VIEW'S L IS THE PIN ABOVE ITS SHOULDER AND L + 8 IS ITS OVERALL LENGTH; THE TABLE GIVES BOTH FOR EACH PART.

PART	L	PROUD	OVERALL	POD	WHERE
831001	7.24	8.00	15.24	24	BAND, SEAMS, CEILING, DL, DR
831010	10.24	11.00	18.24	2	DR'S LEDGE, UNDER DT

4. STUD M6x1-6g, 8 LONG (SHOWN AT THE 6g MEAN MAJOR Ø5.88). HEX SOCKET 4 AF x 3.5 DEEP.
5. FITTED AT THE FACTORY INTO RIVNUT 838003 WITH THREADLOCKER; THE SHOULDER SITS ON THE RIVNUT'S 0.76 HEAD, SO THE PIN'S TOP STANDS THE TABLE'S PROUD ABOVE THE FACE THE RIVNUT IS SET IN.
6. JOINTS REGISTER H-05, H-45. ONE STEP PER PART NUMBER IN v2/03-Manufacturing/joints/.

Dept.	Technical reference	Created by	Approved by
		Autonomous 31/10/26	
		Document type	Document status: DRAFT
		Title: HARDWARE - LOCATING SPIGOT - TABULATED: 831001, 831010	DWG No.: 831001
			Rev.: P01 · Date of issue: · Sheet: 1/1