
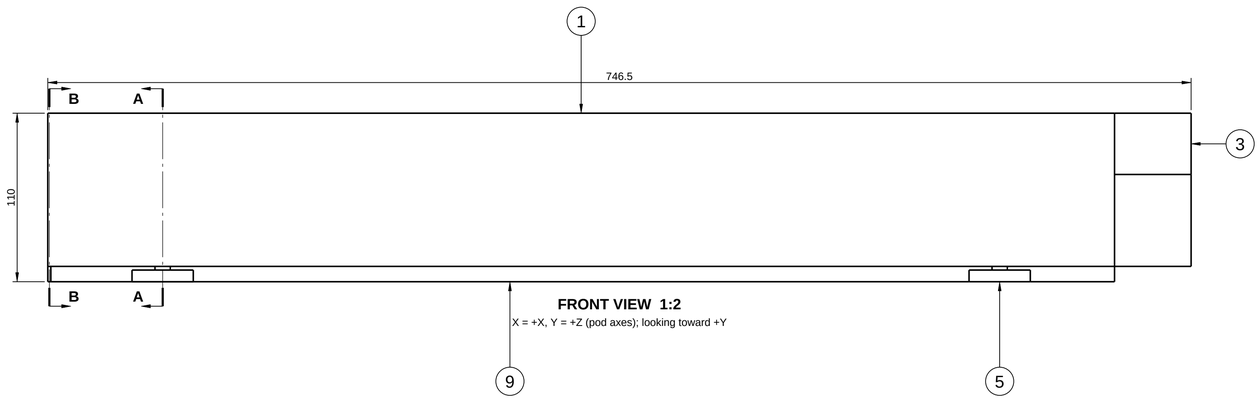



FRONT VIEW 1:2

X = +X, Y = +Z (pod axes); looking toward +Y

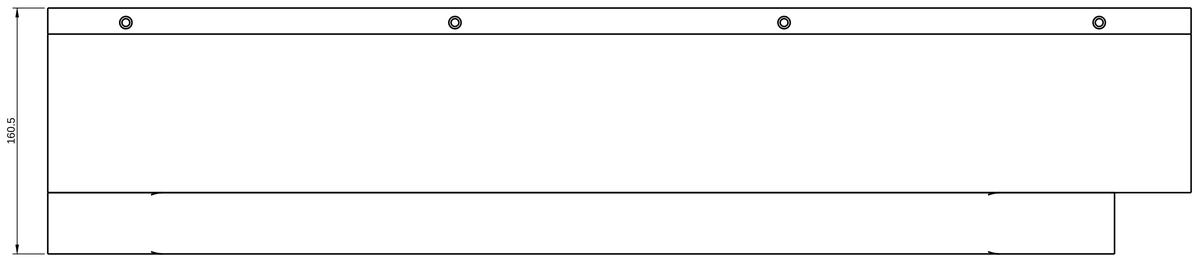


VIEW FROM ABOVE 1:2

X = +X, Y = +Y (pod axes); looking down (toward -Z)

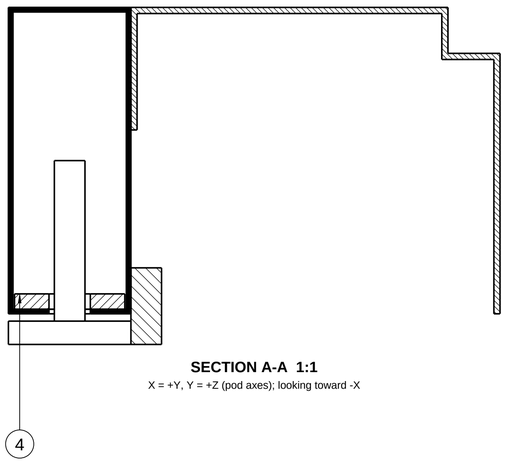

SECTION A-A 1:1

X = +Y, Y = +Z (pod axes); looking toward -X

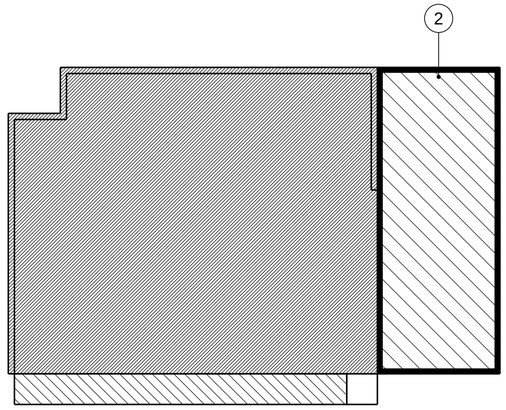

SECTION B-B 1:1

X = -Y, Y = +Z (pod axes); looking toward +X

PARTS LIST: 110106 BASE - BAND ASSY - FRONT - FIXED GLASS

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	111106	BASE - BAND TUBE - FRONT - FIXED GLASS	1	aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 with a welded 1.5 mm end plate (alloy: assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
2	111111	BASE - TUBE END CAP - 97 X 37 X 2 - AL BLACK	1	aluminium sheet EN AW-5005 H14, 2 mm (assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
3	111301	BASE - SILL - FIXED GLASS	1	welded: the bent profile and the door-end plate (D-120 members, below)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
4	111601	BASE - GLIDE DOUBLER - COMMON	2	aluminium plate EN AW-6082 T6, 5 mm thick (PM ruling 2026-11-01)	mill finish (hidden inside the band, D-79)
5	111602	BASE - LEVELLING GLIDE - M10 - D40	2	zinc-plated free-cutting steel without lead (11SMn30 / AISI 1215 or similar, assumption), turned in one piece: an M10 x 1.5 stem and a base 40 across, 7.6 tall	zinc plated, clear passivated (assumption)
6*	838006	HARDWARE - RIVET NUT - M10 - FOR THE LEVELLING GLIDE - HOLD	2	steel C1008/1010 (maker)	zinc plated with yellow trivalent chromate, SFS-01-001 SC2 (maker)
7*	838007	HARDWARE - COUNTERSUNK SCREW - M3 X 8 - ISO 10642 A2	4	stainless steel A2-70	plain stainless, as supplied
8*	838008	HARDWARE - RIVET NUT - M3 - COUNTERSUNK HEAD - HOLD	4	aluminium or steel (HOLD)	zinc plated steel or plain aluminium, with the product (HOLD)
9	118001	BASE - BASE SEAL - LIP - ROOM FLOOR - HOLD	0.803 m	soft lip (sweep) seal, EPDM or TPE, black: a leg bonded to the band's inner face and a fin reaching seal_reach (21.5) below the band's bottom, so it presses on the room floor across the glides' range. Candidate: Trim-Lok X2248, dense EPDM flap 19 to 20 long on a 14.2 x 2.3 leg with 3M acrylic tape, the leg set about 4 below the band's edge so the flap reaches about 23.5; BT-06 decides, an extrusion to BASE's drawing if it fails	black

NOTES

1. Parts, quantities, materials and finishes as the parts list 110000_P01_BASE_BOM.csv (its rows under 110106), word for word; each part's own drawing holds its sizes and tolerances.
2. Items marked * (6 838006, 7 838007, 8 838008) are not in the STEP 110000_P01_BASE_STEP.step P01: they have no balloon; their places are in their rows and the joints register.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Fitted at the factory (D-87), in this order: the M10 rivnuts 838006 set through FR1's bottom face and the 5 mm load blocks 111601 (grip 6.5, PM ruling 2026-11-01); the glides 111602 preset; the welded sill 111301 riveted to FR1's inner face by its flange (rivets HOLD); the 4 M3 rivnuts 838008 set flush in the sill's seat; the end cap 111111 bonded flush in FR1's door end; the lip 118001 bonded along FR1's inner face and the sill's door-end plate (D-132, D-150) (BASE parts list notes).
5. FRONT's bottom U-channel is screwed to the seat with the 4 M3 countersunk screws 838007 when the fixed glass goes in (joints register J-FRONT-04).
6. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **BASE - BAND ASSY - FRONT - FIXED GLASS** Viền chân trước - dưới kính cố định (cụm)			
PART NUMBER: **110106**	REV: **P01**	DRAWING NUMBER (FILE): **110106_P01_BASE-BAND-ASSY-FRONT-FIXED-GLASS_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:2	SIZE: A1	UNITS: **UNITS: mm**	MASS: 2.2463 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			